



(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(22) Date de dépôt/Filing Date: 2021/06/30

(41) Mise à la disp. pub./Open to Public Insp.: 2022/01/14

(30) Priorité/Priority: 2020/07/14 (US16/928,961)

(51) Cl.Int./Int.Cl. *A63C 9/06* (2012.01),
A63C 9/12 (2012.01)


(71) Demandeur/Applicant:
MILLER, THOMAS, US

(72) Inventeur/Inventor:
MILLER, THOMAS, US

(74) Agent: NA

(54) Titre : ATTACHE DE SKI AVEC RACCORD DE TELEMARQUE SANS TALON

(54) Title: SKI BINDING WITH HEELESS TELEMARQUE COUPLING

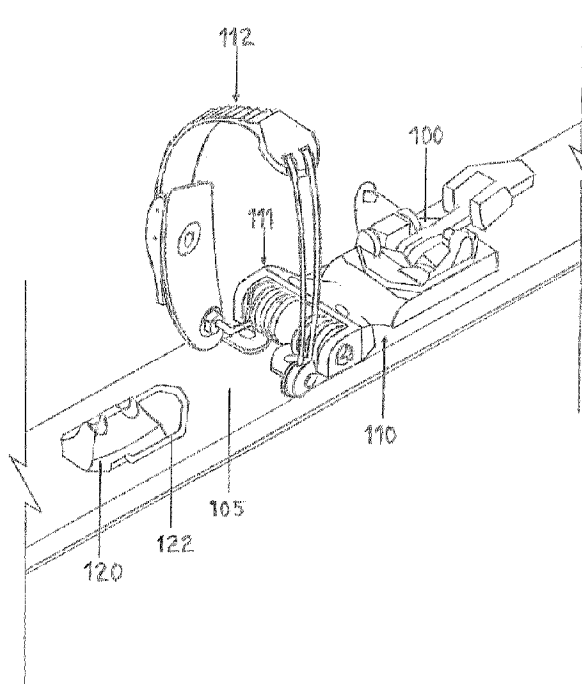

(57) **Abrégé/Abstract:**

Presented is one embodiment of a telemark-capable ski binding system which combines the conventional tech style toe piece or front coupling with a telemark tension assembly (110) that provides the necessary rotational resistance to a ski boot (300) but still allows the ski boot heel to be raised for a telemark style turn upon descent. Telemark tension assembly (110) can be adjusted to alter the engagement of telemark tension assembly (110) according to user preference and conditions for descent. Telemark tension assembly (110) can also be loosened to the point that adjustable restraint (112) can be rotated forward and rest unengaged in front of ski boot (300) for free rotation in toe coupling (100) during ascent or touring. This embodiment provides a lightweight telemark ski binding system that has improved resistance to undesirable snow gathering. Other embodiments are described that have adjustability features and alpine descent mode.



Abstract:

Presented is one embodiment of a telemark-capable ski binding system which combines the conventional tech style toe piece or front coupling with a telemark tension assembly (**110**) that provides the necessary rotational resistance to a ski boot (**300**) but still allows the ski boot heel to be raised for a telemark style turn upon descent. Telemark tension assembly (**110**) can be adjusted to alter the engagement of telemark tension assembly (**110**) according to user preference and conditions for descent. Telemark tension assembly (**110**) can also be loosened to the point that adjustable restraint (**112**) can be rotated forward and rest unengaged in front of ski boot (**300**) for free rotation in toe coupling (**100**) during ascent or touring. This embodiment provides a lightweight telemark ski binding system that has improved resistance to undesirable snow gathering. Other embodiments are described that have adjustability features and alpine descent mode.

Patent Application of Thomas Miller for

SKI BINDING WITH HEELLESS TELEMARK COUPLING

Background and Prior Art

The table below is a tabulation of relevant prior art:

US Patents

Patent Number	Kind Code	Issue Date	Patantee
5499838	A	1996-03-19	Hauglin
7216888	B1	2007-05-15	Walker
8534697	B2	2013-09-07	Lengel
9233295	B2	2016-01-12	Indulti

Other Patent Documents

Document No.	Country Code	Kind Code	Pub. Date	App or Patentee
3096845	EP	B1	2016-01-26	Mouyade

Telemark-capable ski bindings historically employed a means to retain the toe of a ski boot with a “duckbill”. The “duckbill” is a portion of boot sole jutting out from the front of the boot that is inserted into the toe piece of the binding meant to retain the boot laterally and in a forward direction longitudinally. A means to retain the boot in the rearward longitudinal direction was typically in the form of a heel clamp and a cable or rod assembly in combination with some form of compression or extension spring. An example of this is the ski binding in patent US5499838A Hauglin, 1996 March 19. This arrangement binds the boot to the ski laterally and longitudinally but allows the heel of the boot to rotate upward off of the ski facilitating the telemark style turn and touring capability. The toe box portion of the boot is semi-rigidly held. While the “duckbill” is held firmly, the rear of the toe box is allowed some upward movement through a bellows in the toe box and a flexible soled boot. The heel

retention hardware cannot be released or removed for ascent since it is needed to bind the boot in the rearward longitudinal direction.

When alpine touring bindings became popular it was clear that this type of telemark binding was not as efficient in climbing or touring mode due to the resistance of the heel retention system as well as the resistance to flex the sole of the boot at the toe box since it is rigidly held at the “duckbill”. Many bindings are available that attempt to address this problem. Some of these keep the same retention system and but simply add a means for the “duckbill” cage to rotate freely when touring and be held down when descending. An example of this is patent US7216888B1 Walker, 2007 May 15. This adds considerable complexity and weight to the binding. In my experience these arrangements are prone to having snow build up and pack in under the rotating binding while climbing, especially in wet snow conditions. The mechanisms for switching from ascent to descent modes are also prone to icing making them difficult to manage in certain conditions. Another approach has been to take advantage of the benefits of alpine touring technology. A combination of an alpine touring toe piece of the type commonly known as a tech binding with a traditional rod and compression spring rear or heel retention system in patent 8354697B2 Lengel, 2013 September 17, is an example of this. While this approach is straight forward, I have found that the heel retention hardware which rests on the ski during ascent, collects snow to an extreme degree while climbing in deep and sticky snow conditions. While the heel retention hardware can be removed to alleviate this, that adds removing and replacing the heel retention hardware on every ascent to descent change. I have also found that this setup has a different telemark turn dynamic than traditional telemark bindings. This is due to the immediate engagement of the heel retention hardware upon raising the heel. Another example is a tech binding toe piece combined with a boot sole coupling for retention and telemark turn tension as in patent EP3096845B1 Mouyade, 2016 January 26. This also adds complexity, snow packing issues, and a different telemark turn dynamic in addition to requiring the boot to have a special sole to cooperate with the retention and tensioning system. Another attempt to make a tech style toe piece work in combination with an additional coupling device can be seen in patent US9233925B2 Indulti, 2016 January 12. Here a sole retaining device is added to the tech toe coupling to simulate the boot sole retention characteristics of a traditional telemark binding for descent. This arrangement restricts the

range of motion of the heel portion of boot and also results in different telemark turn dynamic in comparison to traditional telemark bindings.

Summary of the Invention

One embodiment of my ski binding system combines the conventional tech alpine touring toe piece with an over the toe box adjustable restraint and a rotational tensioner that provides the necessary rotational resistance for a telemark turn. The adjustable restraint can be loosened or released for ascent when the rotational tension is not needed. Prior to descent the heelless toe box coupling can be tightened to provide the needed tension to execute telemark style turns. The design and shape of the presented embodiment reduces snow compaction problems under the ski boot. Other embodiments are described that have alternate designs for adjustability and alpine turn capability for descent.

Several advantages of one or more aspects are as follows: a lightweight telemark ski binding system that has no heel coupling that can collect snow while climbing, that has no heel coupling that has to be removed to prevent snow collecting while climbing, has a coupling in the front to eliminate having to reach behind the boot to release, provides a skiing dynamic or feel that is more like traditional telemark bindings, that does not require any specific heel or sole type of the ski boot, and can rotate freely without tension while ascending. Other advantages of one or more aspects will become apparent upon examination of detailed description and drawings.

Brief Description of the Drawings

Fig 1 is a perspective view of one embodiment.

Fig 2 is an exploded perspective view of one embodiment of the heelless telemark coupling or telemark tension assembly.

Fig 3 is a side view of the inside side of one embodiment in descent or telemark turn mode.

Fig 4 is a side view of the outside side of one embodiment in descent or telemark turn mode.

Fig 5 is a side view of the inside side of one embodiment in ascent or climbing mode.

Fig 6 is a side view of the outside side of one embodiment in ascent or climbing mode.

Fig 7 is a perspective view of an additional embodiment that can be adjusted when mounted to accommodate a range of boot sizes and has alpine descent mode.

Fig 8 is an exploded perspective view of a modified rotational tensioner shown first in Fig 7

Drawings- Reference Numerals

100 toe coupling	105 ski
110 telemark tension assembly	111 rotational tensioner
112 adjustable restraint	120 elevator block
122 climbing wire	200 spring mount
201 outer mount holes	202 mandrel bolt
203 inner mount holes	204 outside mount bracket
206 outside spring	208 mandrel
209 spring spacer	210 inside spring
212 inner mount bracket	214 mandrel nut
216 strap washer	218 wire rope loop
220 ladder strap	222 outside strap nut
223 outside strap washer	224 strap bushing
226 inside strap nut	227 inside strap washer
228 ladder strap buckle	229 buckle extension
230 outside buckle nut	231 outside buckle washer
232 buckle bushing	233 buckle extension mount hole
234 inside buckle nut	235 inside buckle washer
300 ski boot	302 ski boot bellows
700 heel coupling	702 toe shim
703 boot shim	711 adjustable tensioner

720 heel shim	801 shim mount holes
803 toe coupling mount holes	804 modified outside mount bracket
805 bracket mount holes	812 modified inside mount bracket

Detailed Description of First Embodiment Figs 1-2

One embodiment of my ski binding system is shown in Fig 1. A toe coupling **100** is mounted to a telemark tension assembly **110** which is mounted to a ski **105**. The toe coupling shown is of the conventional tech type wherein the coupling clamps to a boot with pins designed to engage sockets on the toe portion of the boot. Telemark tension assembly **110** is a combination of an adjustable restraint **112** joined to a rotational tensioner **111**. An elevator block **120** is mounted to ski **105** behind telemark tension assembly **110**. Elevator block **120** holds a rotatable climbing wire **122** in place.

Fig 2 is an exploded view of telemark tension assembly **110**. A spring mount **200** is mounted to ski **105** through a set of outer mount holes **201**. Toe coupling **100** is mounted to the spring mount **200** through a set of inner mount holes **203** which can be threaded to accept screws. Spring mount **200** can be made from rigid, impact resistant plastic such as nylon or acrylonitrile butadiene styrene. This embodiment is shown with an outside mount bracket **204** and an inside mount bracket **212** of steel, aluminum, titanium or other suitable rigid material to add support to spring mount **200**. Spring mount **200** could also be made of a metal such as aluminum or other material of sufficient rigidity and strength to render outside mount bracket **204** and inside mount bracket **212** unnecessary. An outside torsion spring **206** and an inside torsion spring **210** are held in place on spring mount **200**, outside mount bracket **204** and inside mount bracket **212** with a mandrel bolt **202** and a mandrel nut **214**. Outside spring **206** and inside spring **210** are wound in opposite directions. Outside spring **206** and inside spring **210** otherwise have the same spring characteristics. The spring parameters such as, but not limited to, number of coils, diameter of coils and spring wire thickness, determine these characteristics. These spring parameters can be adjusted to produce sets of springs to accommodate different skier weight ranges and preferences with regards to desired tension while executing a telemark style turn. The springs may be made of typical torsion spring

materials such as music wire or stainless steel among other possibilities. A mandrel **208** made of nylon, polyurethane or other suitable semi-flexible material is fitted over mandrel bolt **202** and inside the coils of outside spring **206** and inside spring **210**. The inside diameter of mandrel **208** is such that it fits tightly over mandrel bolt **202**. The outside diameter of mandrel **208** is sufficiently smaller than the inside diameter of outside spring **206** and inside spring **210** to accommodate outside spring **206** and inside spring **210** smaller inside diameter when they are under tension. A spring spacer **209** is placed over mandrel **208** to position outside spring **206** and inside spring **210** on the ends of mandrel **208**. The inside diameter of spring spacer **209** is such that it fits tightly over mandrel **208**. The outside diameter of spring spacer **209** is such that it closely matches the outside diameter of outside spring **206** and inside spring **210**. The outside leg of outside spring **206** and the outside leg of inside spring **210** are threaded to accept nuts. Rotational tensioner **111** comprises spring mount **200** mandrel bolt **202**, outside mount bracket **204**, outside torsion spring **206**, mandrel **208**, spring spacer **209**, inside torsion spring **210**, inside mount bracket **212**, and mandrel nut **214**. An inside buckle nut **234**, an inside buckle washer **235**, a buckle bushing **232**, a ladder strap buckle **228**, a buckle extension **229**, an outside buckle washer **231**, and an outside buckle nut **230** are assembled in that order onto the outside leg of outside torsion spring **206**. Outside buckle nut **230** is tightened to hold buckle bushing **232** snugly between inside buckle washer **235** and outside buckle washer **231**. Buckle bushing **232** can be made of polyurethane, nylon, rubber or other suitable semi flexible material. The inside diameter of buckle bushing **232** is such that it fits tightly over the outside leg of outside torsion spring **206**. The buckle extension mount hole **233** diameter is such that it fits tightly over buckle bushing **232** but it can still rotate freely. Buckle extension **229** can be made of polyurethane, nylon, rubber or other suitable semi flexible material. An inside strap nut **226**, an inside strap washer **227**, a strap bushing **224**, a strap washer **216**, an outside strap washer **223**, and an outside strap nut **222** are assembled in that order onto the outside leg of inside spring **210**. A wire rope loop **218** is inserted into the groove in strap washer **216**. Inside strap washer **227** has the same outside diameter as strap washer **216** to hold wire rope loop **218** in the groove provided in strap washer **216**. Wire rope loop **218** is built onto or swaged around a ladder strap **220**. Ladder strap **220** has a closed groove to accept wire rope loop **218**. Wire rope loop **218** is coated with vinyl or another suitable material. Strap washer **216** can be made of nylon, aluminum, or other light weight rigid materials. Strap bushing **224** has an inside

diameter such that it fits tightly over the outside leg of inside spring **210** or alternately can be threaded to thread onto the outside leg of inside spring **210**. Strap bushing **224** can be made of aluminum, steel or another rigid material. The length of strap bushing **224** is slightly greater than the width of strap washer **216** so that when outside strap nut **222** is tightened against outside strap washer **223** and strap bushing **224**, strap washer **216** can rotate freely while still containing wire rope loop **218**. Adjustable restraint **112** comprises ladder strap buckle **228**, buckle extension **229**, ladder strap **220**, and wire rope loop **218**.

Operation for descent or telemark turns Figs 3-4

Figs 3 and 4 show both sides of a ski boot **300** and one embodiment of the ski binding system in descent or telemark turn configuration. A left leg or left side ski **105** and ski boot **300** are depicted here and it is noted that the right leg or right side telemark tension assembly **110** is a mirror image of the left side. Ski boot **300** is shown with a ski boot bellows **302** necessary for the skier to bend their metatarsophalangeal joints and make telemark style turns while descending. Fig 3 is a side view of wire rope loop **218** side or ski inside side of one embodiment in descent or telemark turn mode. Toe coupling **100** is mounted to spring mount **200**. Ski boot **300** is shown engaged with toe coupling **100** and telemark tension assembly **110** in descent mode. Climbing wire **122** is also in descent mode. Wire rope loop **218** is shown engaged with ski boot **300** at ski boot bellows **302**. In this configuration or mode, the skier can lift the heel of ski boot **300** in a manner that facilitates a telemark style turn. Telemark tension assembly **110** is coupled tightly to ski boot **300** with wire rope loop **218** engaged in ski boot bellows **302**. Telemark tension assembly **110** provides the necessary resistance for a telemark style turn while facilitating the bending of ski boot **300** at ski boot bellows **302** consistent with traditional telemark bindings.

Fig 4 is a side view of ladder strap buckle **228** side or ski outside side of one embodiment in descent or telemark turn mode. Ski boot **300** is shown engaged with toe coupling **100** and telemark tension assembly **110** in descent mode. Ladder strap buckle **228** is closed so that wire rope loop **218** is engaged with ski boot **300** at ski boot bellows **302** on the opposite side of ski boot **300**. Climbing wire **122** is also in descent mode. In this configuration or mode, as in Fig 3, the skier can lift the heel of ski boot **300** in a manner that facilitates a telemark style turn. Telemark tension assembly **110** is coupled tightly to ski boot **300** with wire rope loop **218**

engaged in ski boot bellows **302**. Telemark tension assembly **110** provides the necessary resistance for a telemark style turn while facilitating the bending of ski boot **300** at ski boot bellows **302** consistent with traditional telemark bindings. Ladder strap **220** can be inserted more or less into ladder strap buckle **228** prior to closing ladder strap buckle **228** to adjust when telemark tension assembly **110** engages ski boot **300**. This provides a convenient and easy way for the skier to adjust the engagement of the ski binding system for telemark turns according to skier preference and conditions.

Operation for ascent or climbing Figs 5-6

Figs 5 and 6 show both sides of ski boot **300** and the ski binding system in ascent, touring or climbing configuration. Fig 5 is a side view of wire rope loop **218** side of one embodiment in climbing configuration. Toe coupling **100** is mounted to spring mount **200**. Ski boot **300** is shown engaged with toe coupling **100** and telemark tension assembly **110** in ascent mode. Climbing wire **122** is also in ascent mode. Wire rope loop **218** is shown resting inactive, loose on toe coupling **100**. In this configuration the skier can freely lift the heel of ski boot **300** with no resistance from telemark tension assembly **110**. This facilitates walking or striding for touring or climbing. Wire rope loop **218**, ladder strap **220** and ladder strap buckle **228** combination, or adjustable restraint **112**, are adjusted to rest in front of ski boot **300** where it will not interfere with ski boot **300** rotating in toe coupling **100**.

Fig 6 is a side view of ladder strap buckle **228** side of one embodiment in climbing mode. Ski boot **300** is shown engaged with toe coupling **100** and telemark tension assembly **110** in ascent mode. Climbing wire **122** is also in ascent mode. Ladder strap buckle **228** and ladder strap **220** are shown resting inactive, loose on toe coupling **100**. Ladder strap buckle **228** is closed while ladder strap **220** has been loosened to allow ladder strap buckle **228**, ladder strap **220** and wire rope loop **218** to extend around the front of ski boot **300**. In this configuration the skier can freely lift the heel of ski boot **300** with no resistance from telemark tension assembly **110**. This facilitates walking or striding for touring or climbing.

Additional Embodiments Figs 7-8

Figs 7 and 8 show additional embodiments of the binding system. Fig 7 is a perspective view of an embodiment that can be adjusted when mounted to accommodate a range of boot sizes.

The perspective view in Fig 7 also shows the binding system combined with a conventional tech style alpine touring heel coupling **700**. Heel coupling **700** is mounted to ski **105** through a riser or a heel shim **720** for adjusting the height of heel coupling **700** to engage the ski boot heel in the same manner as a conventional alpine touring tech type heel coupling. The ski boot heel pin receptors are also of the conventional tech type (not shown). This allows this embodiment to be used for alpine style turns during descent if desired. Heel coupling **700** can be left in ascent or climbing mode during descent so that telemark style turns can be executed. Alternately, heel coupling **700** can be placed in descent mode for descent if it is desired to execute alpine style turns. Operation of heel coupling **700** is not further discussed since it is well known. This adjustable embodiment includes a modified rotational tensioner or adjustable tensioner **711** that allows adjusting the relative position of toe coupling **100** and adjustable tensioner **711** to accommodate boots of differing lengths. This embodiment includes a riser or toe shim **702** for height adjustment of toe coupling **100** that is separate from the spring mount hardware. Toe coupling **100** is mounted to toe shim **702** which is mounted to ski **105**. Toe coupling **100** is of the conventional tech type. Adjustable tensioner **711** is mounted to ski **105** behind toe shim **702**. A boot support or boot shim **703** is provided to add support to the flexible sole of telemark ski boots. The shape of boot shim **703** is such that it aids in shedding snow in sticky snow conditions to help prevent snow packing problems. Specifically, I have found that the top surface of boot shim **703** should be rounded with sides that slope away from the center of ski **105** for the best snow shedding characteristics. Boot shim **703** should also have a gloss finish to help prevent snow from sticking. A recess is provided on the bottom of boot shim **703** for the inside legs of outside spring **206** and inside spring **210**. The operation and design of adjustable restraint **112** is the same as the first embodiment.

Fig 8 is an exploded view of adjustable tensioner **711**. Toe shim **702** has four outside mount holes or shim mount holes **801** for mounting toe shim **702** to ski **105** and four inside mount holes or toe coupling mount holes **803** for mounting toe coupling **100** to toe shim **702**. A modified outside mount bracket **804** and a modified inside mount bracket **812** each have an additional mount hole or bracket mount hole **805** for additional mount strength. Boot shim **703** is mounted to ski **105** through bracket mount holes **805**. Outside mount bracket **804** and inside mount bracket **812** can be mounted independently to accommodate boots of differing widths. The lengths of mandrel bolt **202**, mandrel **208**, and spring spacer **209** can be adjusted to match

with the mounting position of outside mount bracket **804** and inside mount bracket **812**. Boot shim **703** can be made in various sizes to accommodate different mounting positions of outside mount bracket **804** and inside mount bracket **812**. Adjustable restraint **112** is not shown since the operation and design of adjustable restraint **112** is the same as the first embodiment.

Alternative Embodiments

While the toe coupling shown is an alpine touring tech toe, there are other conventional toe couplings that would cooperate with the independent telemark tension assembly, for example a traditional three pin 75mm cross country toe coupling. Like the tech toe, some have releasability features to enhance safety. Since these are already well known the details of their operation is not discussed. Likewise, there are many types of heel elevator assemblies that are well known and would cooperate with the independent telemark tension assembly. The adjustable restraint could be made with many types of strap and buckle combinations. The ladder strap with a buckle closure is just one of many possible adjustable retaining systems.

There are other ways to make the binding system accommodate different boot sizes as well. One embodiment was presented that would allow adjustment for boot size when the binding system is mounted to a ski but there are other possibilities. For example, mounting slots could be used on the mounting brackets and other spring mount parts in place of holes. Alternately, mounting hardware could be fitted with multiple sets of mounting holes for various mounting positions.

There are many variations possible with regards to mounting the mandrel and mandrel bolt including but not limited to integrating the boot shim with the mandrel bolt brackets and the toe piece shim. Another variation would be to replace the boot shim with a removable crampon for climbing on firm or icy snow pack surfaces.

The description above makes evident some advantages of some embodiments of this ski binding system in addition to those stated above:

- (a) Simplicity
- (b) Cost
- (c) Adjustability
- (d) Boot compatibility

Conclusion, Ramifications, and Scope

The Ski Binding with Heelless Telemark coupling provides an embodiment of a lightweight, simple binding system that reduces the problems caused by undesirable snow collection under the boot and in the bindings' mechanisms. Additionally, the binding system embodiment is easy to use with only a single buckle on top of the boot toe box to change from ascent to descent mode. The telemark tensioner can be easily adjusted with the ladder strap and buckle assembly on the fly for skier preference and conditions. The telemark tensioners' simplicity will make it cost competitive to produce. The lack of a rear or heel coupling makes this embodiment compatible with some ski boots that have ski and walk mode mechanisms on the rear of the boot where a rear coupling can interfere.

While a detailed and specific description of one embodiment has been presented, there are many possible variations and alternatives for component design, shape and materials. For example, the boot and toe piece shims could be made of many kinds of plastic or aluminum in many different shapes. The buckle system could be replaced by another style of buckle system and the wire rope loop could be replaced with webbing that would conform to the shape of the boot bellows. Also contemplated is a method for blocking the torsion spring leg movement to provide an alternate alpine descent mode. These potential variations in size, shape, materials, form, assembly, and use can be made without altering the concept set forth in this specification.

**The Embodiments Of The Invention In Which An Exclusive Property Or Privilege Is Claimed
Are Defined As Follows:**

1. A ski binding system, comprising:
 - a. a toe coupling that retains a ski boot to a ski near the toe of said ski boot and also allows rotational motion of said ski boot in a plane perpendicular to the base of said ski for climbing or touring purposes, and
 - b. a telemark tension assembly that is fixed to the surface of the ski having an adjustable restraint that is flexible and can conform to the shape of said ski boot, that can be disengaged from said ski boot such that said toe coupling still retains said ski boot, and that extends over the toe box portion of said ski boot on or near the ski boot bellows connected to a rotational tensioner to apply resistance to the rotational motion of said ski boot through said adjustable restraint around the toe box portion of said ski boot substantially above the metatarsal joints of the skier where said rotational tensioner contains a device selected from the group consisting of springs and elastic materials,

whereby said ski boot is allowed rotational movement with resistance needed for descending in the telemark style when said adjustable restraint is tightened and said ski boot is allowed free rotational movement for ascent when said adjustable restraint is loosened or disengaged.
2. The ski binding system of claim 1, wherein said rotational tensioner comprises one or more torsion springs.
3. The ski binding system of claim 1, further comprising a boot shim to support the front portion of the ski boot sole substantially under the metatarsal joints of the skier while climbing or touring.

4. The ski binding system of claim 3, wherein said boot shim is shaped in a way that reduces snow packing under the ski boot.
5. The ski binding system of claim 1, further comprising a toe shim to adjust the height of said ski boot when engaged in said toe coupling such that said ski boot rests at the desired position over said telemark tension assembly.
6. The ski binding system of claim 1, further comprising an elevator block to adjust the height of the ski boot heel when engaged in said toe coupling such that the ski boot heel rests at the desired position over said telemark tension assembly.
7. The ski binding system of claim 6, further comprising a climbing wire to adjust the height of the ski boot heel when ascending a slope of substantial angle.
8. The ski binding system of claim 1, further comprising a conventional tech heel coupling that can be engaged to prevent rotational movement of the ski boot heel and facilitate alpine style turns on descent.
9. The ski binding system of claim 1, wherein said adjustable restraint comprises a ladder strap and a ladder strap buckle.
- 10.** A ski binding system, comprising:
 - a. a toe coupling that retains a ski boot to a ski near the toe of said ski boot and also allows rotational motion of said ski boot in a plane perpendicular to the base of said ski for climbing or touring purposes,
 - b. an adjustable restraint that is flexible and can conform to the shape of said ski boot, that can be disengaged from said ski boot such that said toe coupling still

retains said ski boot, and that extends over the toe box portion of said ski boot on or near the ski boot bellows, and

- c. a means to provide a predetermined amount of tension to the rotational motion of said ski boot through said adjustable restraint around the toe box portion of said ski boot substantially above the metatarsal joints of the skier, whereby said ski boot is allowed rotational movement with the resistance needed for descending in the telemark style when said adjustable restraint is tightened and said ski boot is allowed free rotational movement for ascent when said adjustable restraint is loosened or disengaged.

11. The ski binding system of claim 10, wherein the tension to the rotational motion of said ski boot through said adjustable restraint is provided by one or more torsion springs.

12. The ski binding system of claim 10, further comprising a boot shim to support the front portion of said ski boot sole substantially under the metatarsal joints of the skier while climbing or touring.

13. The ski binding system of claim 12, wherein said boot shim is shaped in a way that reduces snow packing under said ski boot.

14. The ski binding system of claim 10, further comprising a conventional tech heel coupling that can be engaged to prevent rotational movement of the ski boot heel and facilitate alpine style turns on descent.

15. The ski binding system of claim 10, wherein said adjustable restraint comprises a ladder strap and a ladder strap buckle.

16. A method for providing the necessary rotational resistance to a ski boot engaged in a touring toe coupling to the toe box portion of said ski boot substantially above the metatarsal joints of the skier to perform a telemark style turn comprising:

- a. providing an adjustable restraint that is flexible and can conform to the shape of said ski boot, that can be disengaged from said ski boot such that said toe coupling still retains said ski boot, and that extends over the toe box portion of said ski boot on or near the ski boot bellows, and
- b. connecting said adjustable restraint to a rotational tensioner to provide resistance to the rotational motion of said ski boot through said adjustable restraint where said rotational tensioner contains a device selected from the group consisting of springs and elastic materials,

whereby said ski boot is allowed rotational movement with resistance needed for descending in the telemark style when said adjustable restraint is tightened and said ski boot is allowed free rotational movement for ascent when said adjustable restraint is loosened or disengaged.

17. The method of claim 16 wherein the tension to the rotational motion of said ski boot through said adjustable restraint is provided by one or more torsion springs.

18. The method of claim 16 further providing a boot shim to support the front portion of the ski boot sole substantially under the metatarsal joints of the skier while climbing or touring wherein said boot shim is shaped in a way that reduces snow packing under the ski boot.

19. The method of claim 16 wherein said adjustable restraint comprises a ladder strap and a ladder strap buckle.

2/8

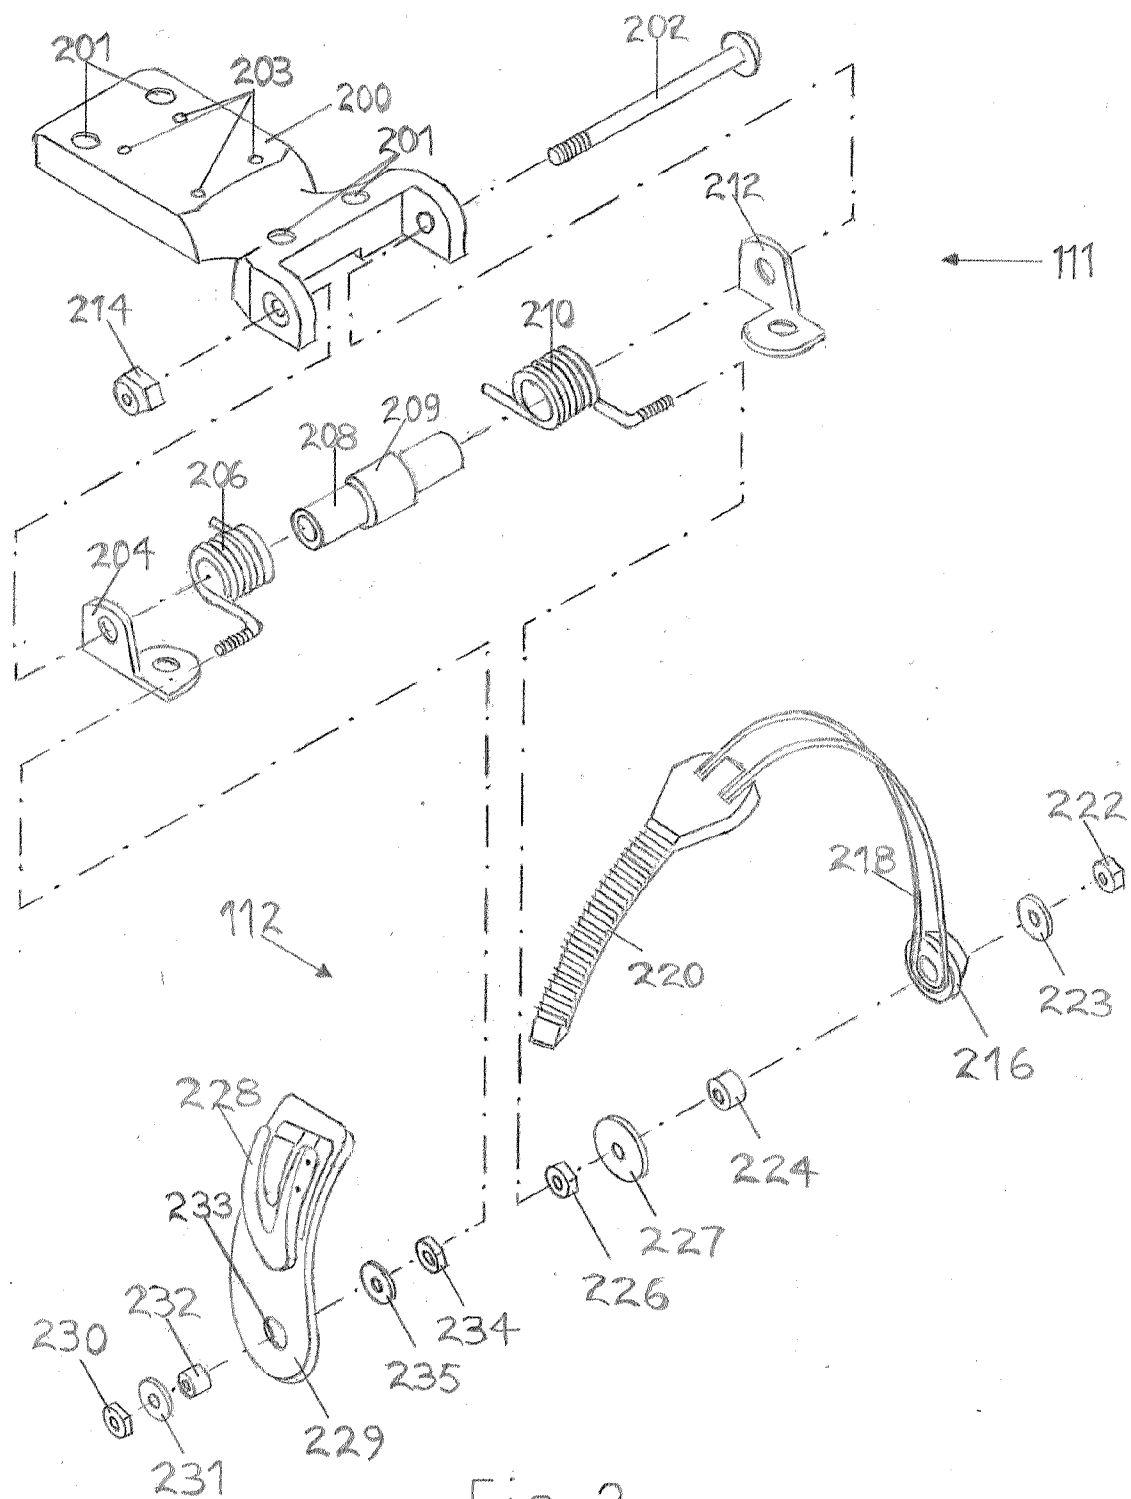


Fig. 2

7/8

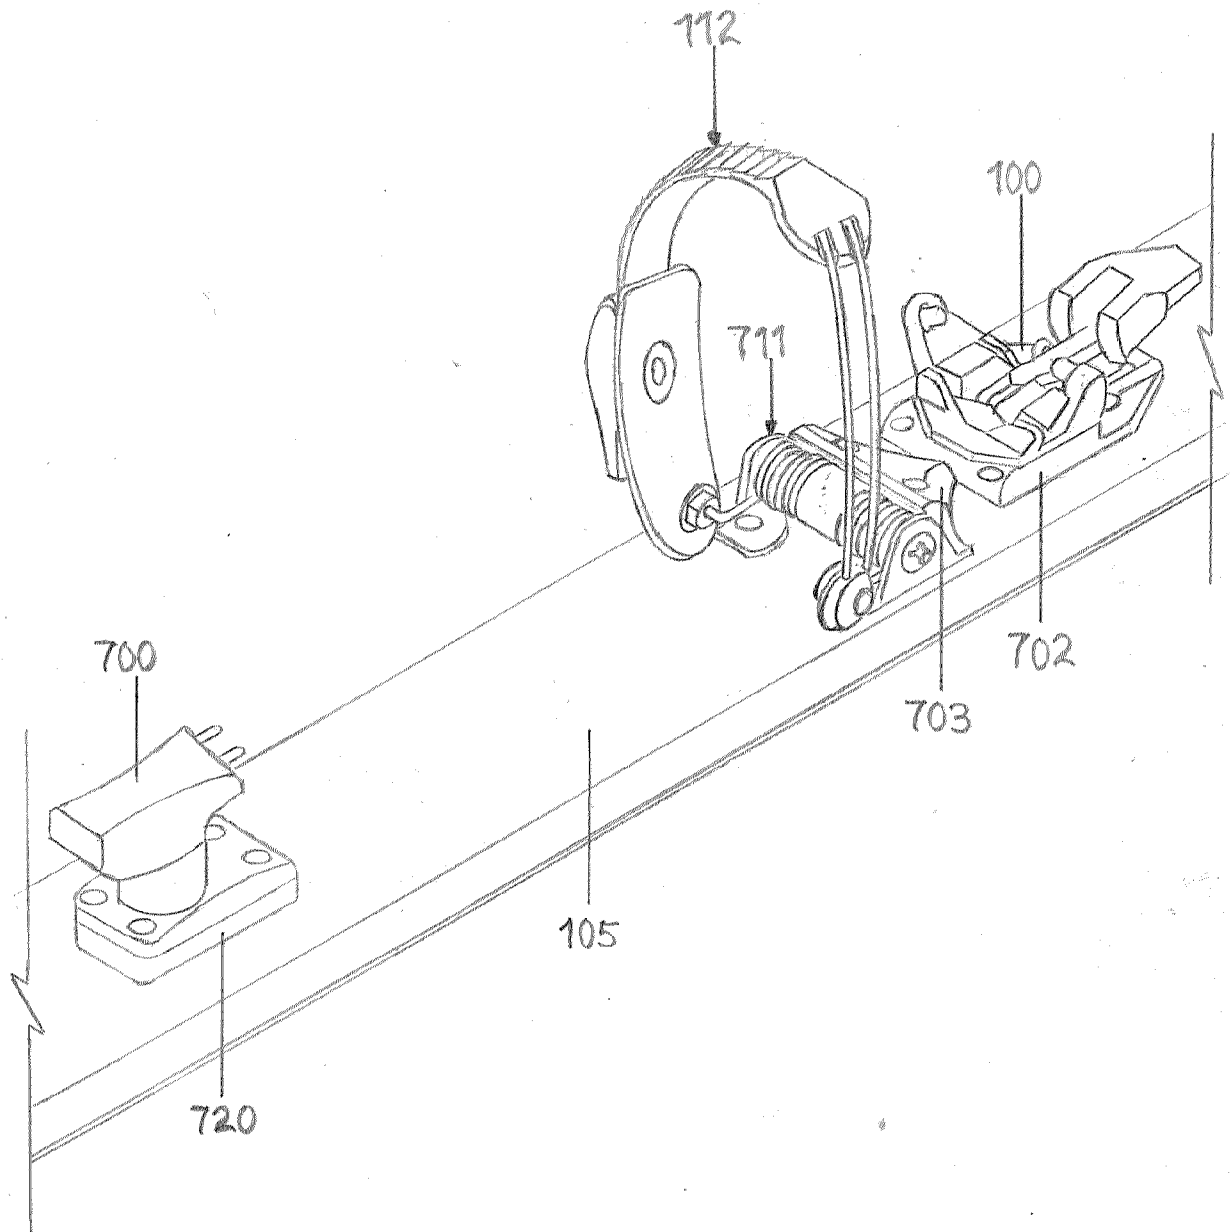


Fig.7

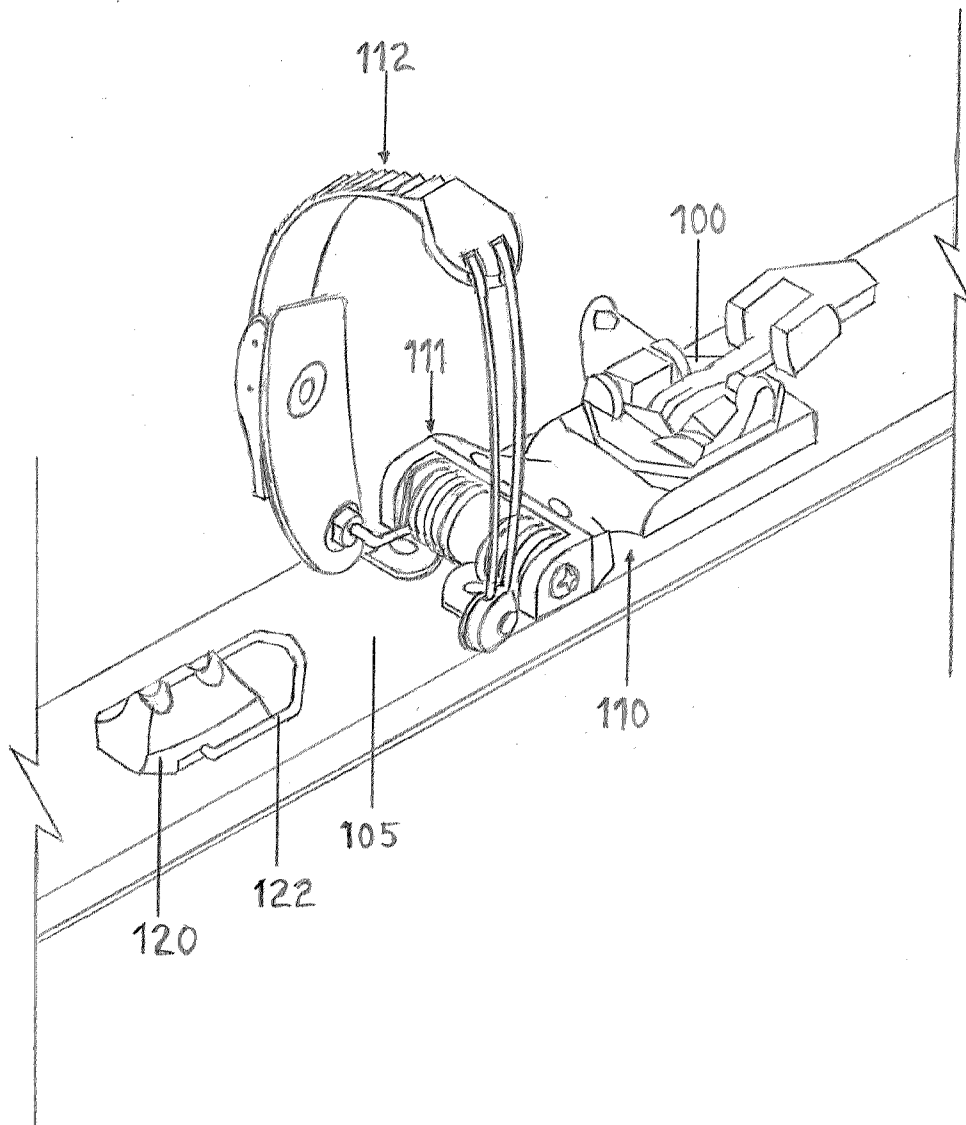


Fig. 1

5/8

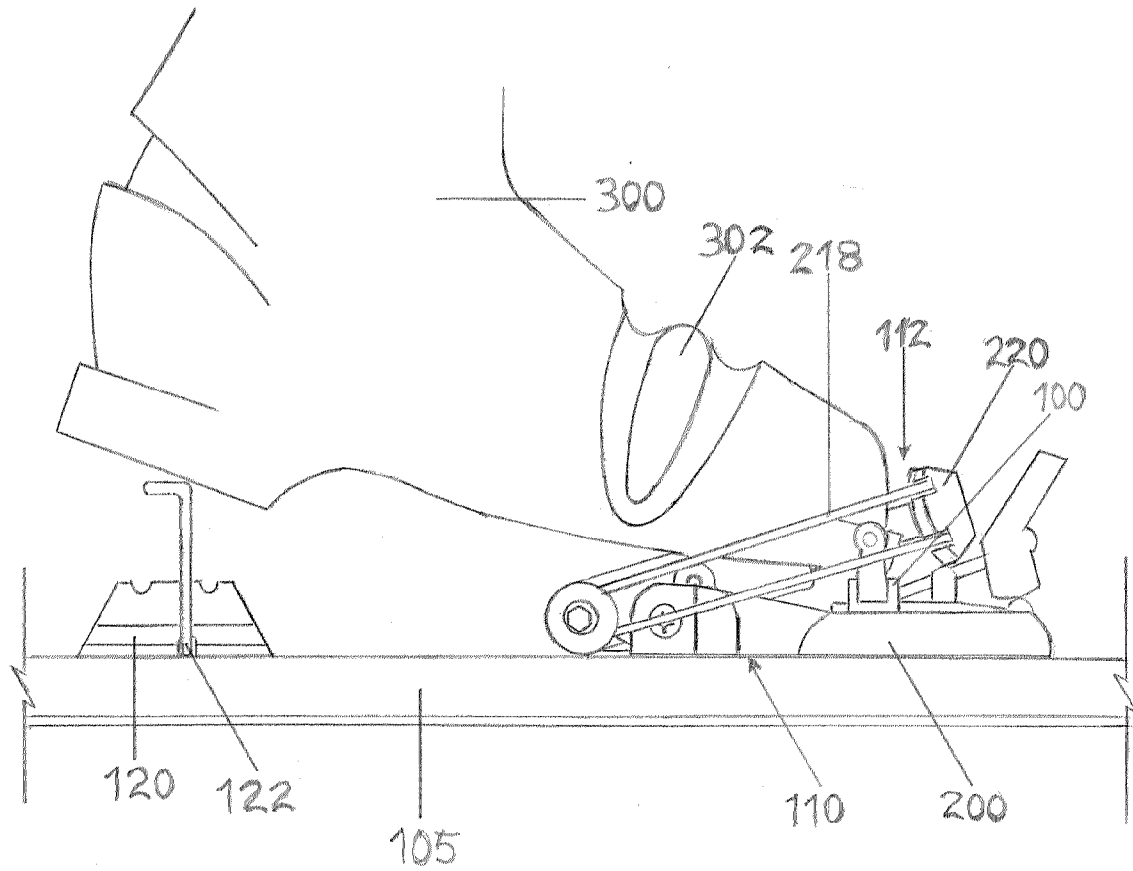


Fig. 5

4/8

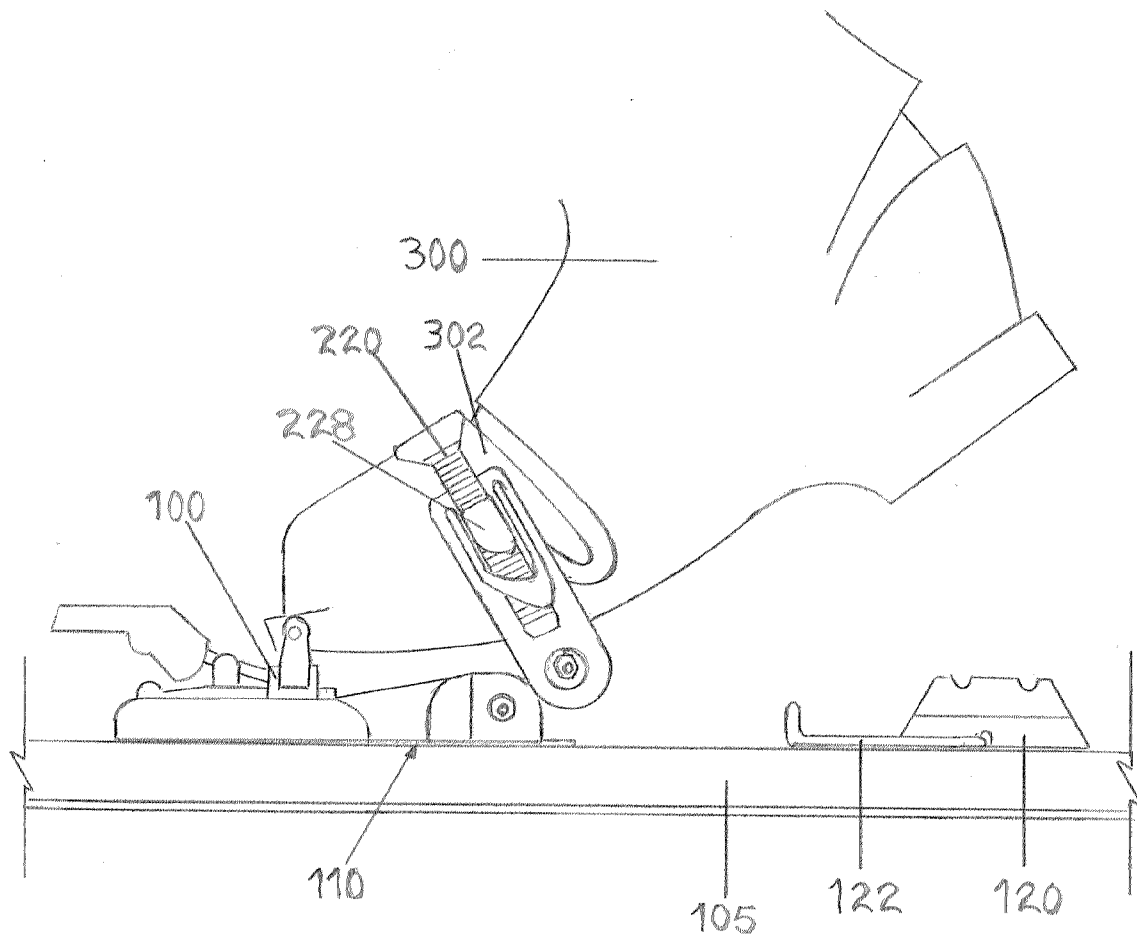


Fig.4

8/8

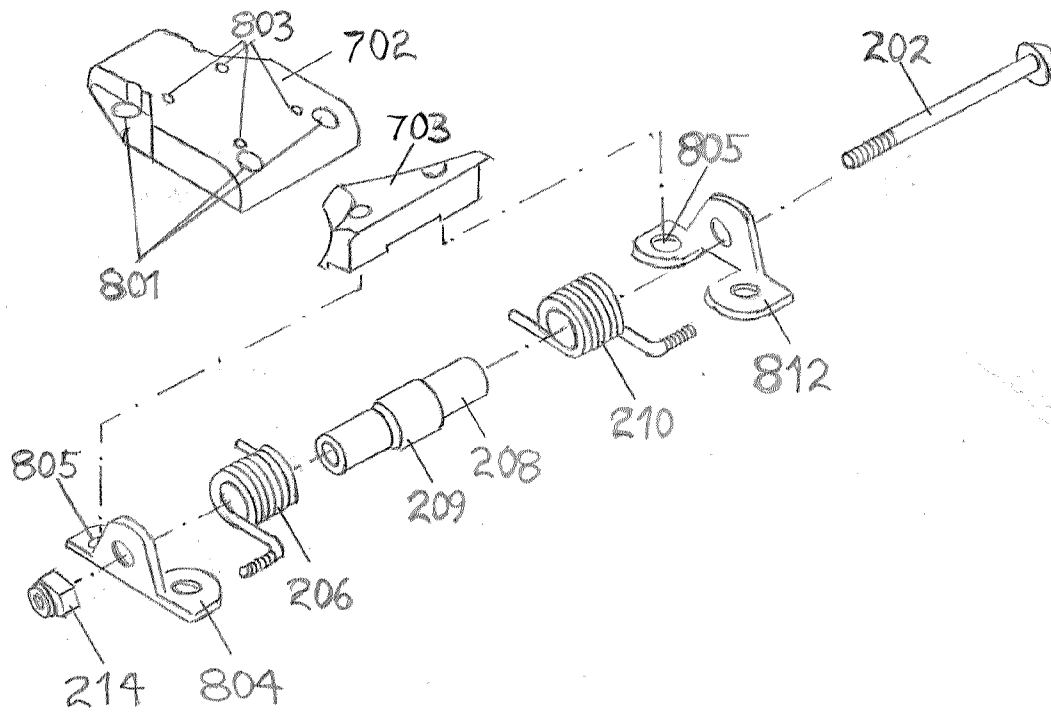


Fig. 8

6/8

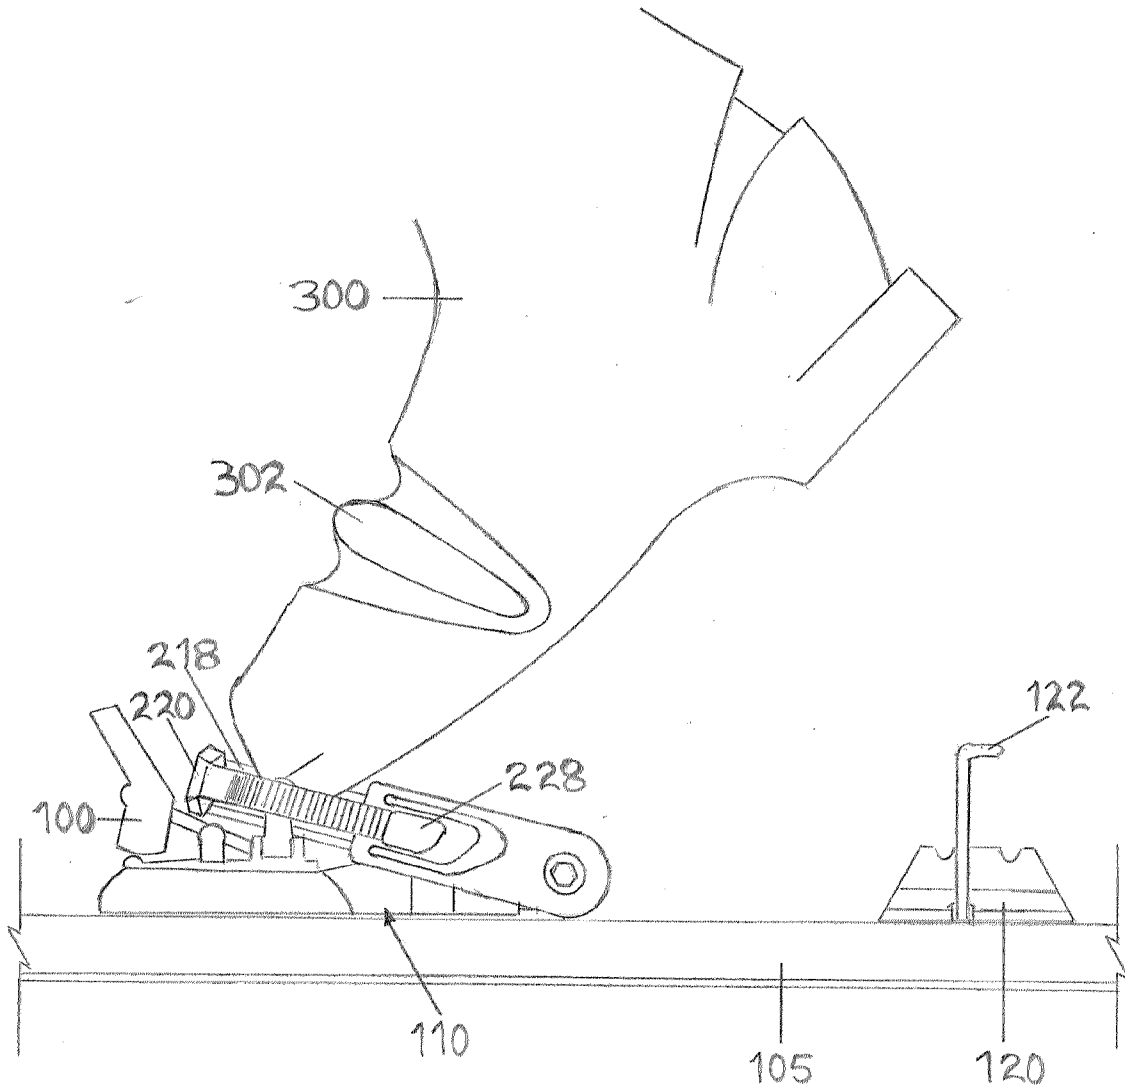


Fig.6

3/8

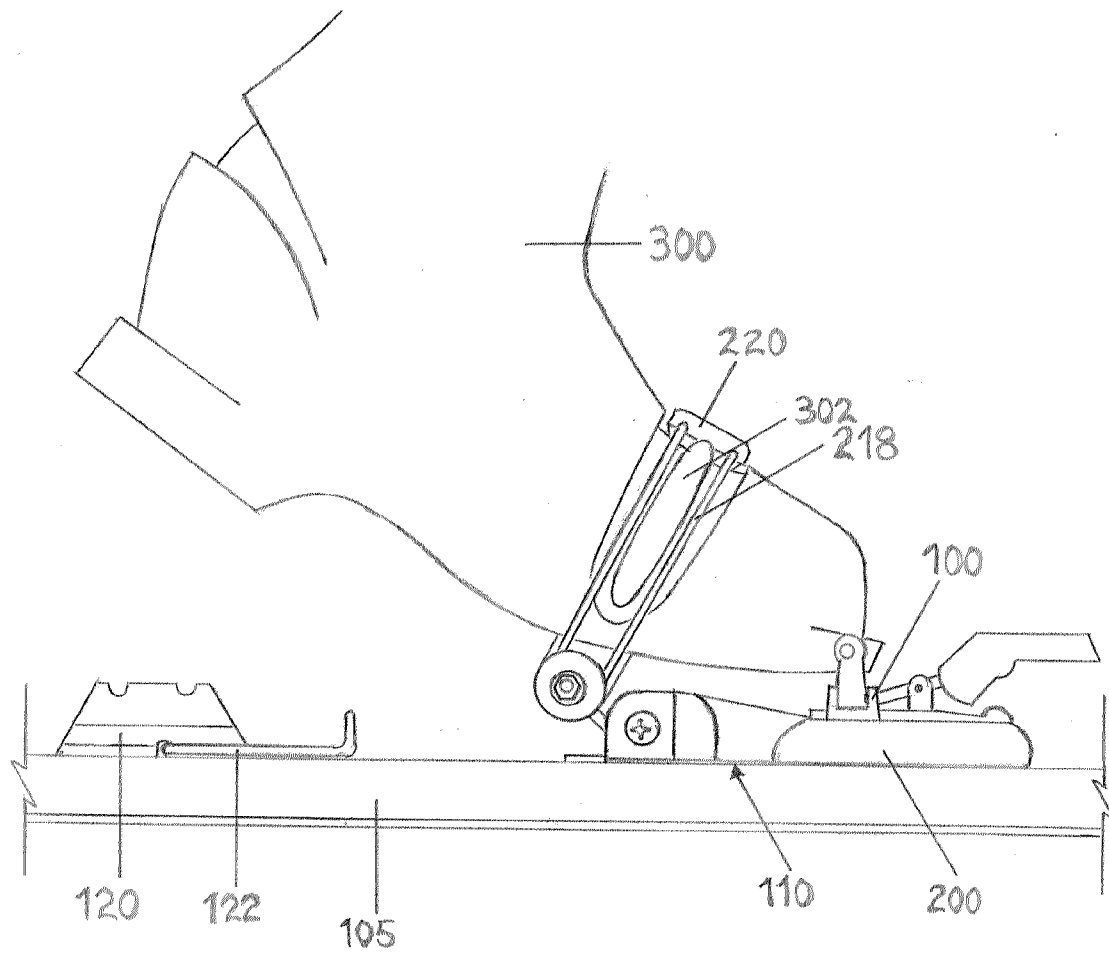


Fig.3

