



(86) Date de dépôt PCT/PCT Filing Date: 2001/09/07
 (87) Date publication PCT/PCT Publication Date: 2002/03/14
 (45) Date de délivrance/Issue Date: 2010/01/26
 (85) Entrée phase nationale/National Entry: 2003/02/27
 (86) N° demande PCT/PCT Application No.: US 2001/028025
 (87) N° publication PCT/PCT Publication No.: 2002/020703
 (30) Priorités/Priorities: 2000/09/07 (US60/230,765);
 2000/12/01 (US09/728,405)

(51) Cl.Int./Int.Cl. *C10L 1/18* (2006.01),
C10L 1/22 (2006.01), *C10L 10/00* (2006.01),
C10L 10/04 (2006.01)

(72) Inventeurs/Inventors:
 DE ROSA, THOMAS F., US;
 KAUFMAN, BENJAMIN J., US;
 DEBLASE, FRANK J., US;
 KETCHAM, JAMES R., US;
 RAWDON, MICHAEL G., US;
 CESAR, MAX R., US

(73) Propriétaire/Owner:
 TEXACO DEVELOPMENT CORPORATION, US

(74) Agent: SIM & MCBURNEY

(54) Titre : RENFORCEMENT DE LA SOLUBILITE A BASSE TEMPERATURE DE LA CHARGE MODIFIANT LE
 COEFFICIENT DE FROTTEMENT DE L'ESSENCE
 (54) Title: METHOD OF ENHANCING THE LOW TEMPERATURE SOLUTION PROPERTIES OF A GASOLINE
 FRICTION MODIFIER

(57) **Abrégé/Abstract:**

A fuel additive composition composed of the reaction product of (a) mixed fatty acid esters: (b) a mono or di-(hydroxy alkyl amine) or mixtures thereof; and (c) a low temperature property enhancing effective amount of a low molecular weight ester, wherein the reaction mixture has a molar ratio of amine to total ester content in the range from 10.0 to 1.0. The fuel additive exhibits detergent and friction reducing properties when added to a fuel thereto and further exhibits good low temperature stability properties. Methods for making the inventive composition and fuel compositions containing the additive are also disclosed.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 March 2002 (14.03.2002)

PCT

(10) International Publication Number
WO 02/20703 A1

(51) International Patent Classification⁷: C10L 1/18, 1/22

c/o Texaco Inc., P.O. Box 506, Beacon, NY 12508-0509 (US).

(21) International Application Number: PCT/US01/28025

(74) Agent: GOLDBERG, Jules, E.; Reed Smith LLP, 375 Park Avenue, New York, NY 10152 (US).

(22) International Filing Date:
7 September 2001 (07.09.2001)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/230,765 7 September 2000 (07.09.2000) US
09/728,405 1 December 2000 (01.12.2000) US

(71) Applicant (*for all designated States except US*): TEXACO DEVELOPMENT CORPORATION [US/US]; 2000 Westchester Avenue, White Plains, NY 10650-0001 (US).

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): DE ROSA, Thomas, F. [US/US]; c/o Texaco Inc., P.O. Box 506, Beacon, NY 12508-0509 (US). KAUFMAN, Benjamin, J. [US/US]; c/o Texaco Inc., P.O. Box 506, Beacon, NY 12508-0509 (US). DEBLASE, Frank, J. [US/US]; c/o Texaco Inc., P.O. Box 506, Beacon, NY 12508-0509 (US). KETCHAM, James, R. [US/US]; c/o Texaco Inc., P.O. Box 506, Beacon, NY 12508-0509 (US). RAWDON, Michael, G. [US/US]; c/o Texaco Inc., P.O. Box 506, Beacon, NY 12508-0509 (US). CESAR, Max, R. [US/US];

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF ENHANCING THE LOW TEMPERATURE SOLUTION PROPERTIES OF A GASOLINE FRICTION MODIFIER

(57) Abstract: A fuel additive composition composed of the reaction product of (a) mixed fatty acid esters: (b) a mono or di-(hydroxy alkyl amine) or mixtures thereof; and (c) a low temperature property enhancing effective amount of a low molecular weight ester, wherein the reaction mixture has a molar ratio of amine to total ester content in the range from 10.0 to 1.0. The fuel additive exhibits detergent and friction reducing properties when added to a fuel thereto and further exhibits good low temperature stability properties. Methods for making the inventive composition and fuel compositions containing the additive are also disclosed.



WO 02/20703 A1

**METHOD OF ENHANCING THE LOW TEMPERATURE SOLUTION
PROPERTIES OF A GASOLINE FRICTION MODIFIER**

CROSS REFERENCE TO RELATED APPLICATIONS

5 This application corresponds to U. S. Patent No. 6,524,353.

BACKGROUND OF THE INVENTION

1. Field of Invention

The invention relates to an engine fuel additive and fuels containing the
10 inventive additive. This additive is characterized in that it exhibits improved low
temperature solution properties as well as improving fuel economy.

2. Background of the Invention

Government legislated fuel economy standards have resulted in efforts being
15 made by both automotive and additive suppliers to enhance the fuel economy of
motor vehicles. One approach to achieve greater fuel efficiency is by lubricant
formulation. Fuel consumption can be reduced either by decreasing the crank case oil
viscosity or by reducing friction at specific, strategic areas of an engine. For example,
inside an engine, about 18% of the fuel's heat value is dissipated through internal
20 friction (bearings, valve train, pistons, rings, water and oil pumps) while only about
25% is actually converted to (useful) work at the crankshaft. The piston rings and
part of the valve train account for over 50% of the friction and operate at least part of
the time in the boundary lubrication mode during which a friction modifier (FM) may

be effective. If a friction modifier reduces friction of these components by a third, the friction reduction corresponds to about a 3.0% improvement in the use of the fuel's heat of combustion and will be reflected in a corresponding fuel economy improvement.

5

A chemical additive designed to improve engine fuel economy is disclosed in U. S. Patent 4,729,769. This Patent discloses an additive which is obtained by the reaction of a C₆-C₂₀ fatty acid ester and a mono- or di-hydroxy hydrocarbon amine. Specifically, the additive is obtained by the reaction of 0.8 moles of coconut oil with 10 1.44 moles of diethanolamine (representing a molar ratio of coconut oil to diethanolamine of 0.555) by heating it at 120°C to 150°C for between 2 and 4 hours. Fuel economy is improved when this reaction product mixture is used as a gasoline or diesel fuel additive.

15

However, the limited temperature solution stability of this product is not as advantageous as desired. Thus, a problem encountered with such additives is due to their poor low temperature stability. Such additives are typically produced at a chemical plant which is remote from the petroleum terminal where the additive is blended with the fuel, e.g., gasoline or diesel fuel, prior to delivery to service stations. 20 The additive must therefore be shipped from the manufacturing facility to a terminal by tank, truck or rail car. Once the additive arrives at the terminal, it is typically stored in a tank from which it is pumped and blended with gasoline stocks. The duration of shipment and storage of the additive can last several days to a year during which time the temperature of the fuel can

reach very low temperatures, e.g., 10°F or lower. It has been observed that prior art additives often precipitate or produce a flocculent sediment while stored at such low temperatures. This instability at lower temperatures is highly adverse to the quality and efficiency of the additive and thus impairs the ability to use the additive.

5

SUMMARY OF THE INVENTION

We have discovered a novel fuel additive which exhibits substantially improved low temperature solution properties and yet performs at least as well as presently known friction modifier additives.

10

More particularly, we have discovered that the foregoing improvements can be achieved by utilizing as a fuel additive, a composition comprising the reaction product of a reaction mixture composed of:

15

- a) mixed fatty acid esters;
- b) a mono or di-(hydroxy alkyl amine) or mixtures thereof; and
- c) a low temperature property enhancing effective amount of a low molecular weight ester;

20

wherein the reaction mixture has a molar ratio of amine to total ester content in the range from 10.0 to 1.0.

In addition, we have found that the inventive composition is obtained by heating:

- a) mixed fatty acid esters;

- b) a mono or di-(hydroxy alkyl amine) or mixtures thereof; and
- c) a low temperature property enhancing effective amount of a low molecular weight ester;

5 The amounts of each component and the temperature and the time period of heating being sufficient to produce an amide to ester absorbance ratio in the composition of at least 2.0 as measured by transmission infrared spectroscopy.

According to an aspect of the present invention, there is provided a fuel
10 additive composition comprising the reaction product of a mixture of:

- a) mixed fatty acid tri-esters, wherein the fatty acids contain from 6 to 20 carbon atoms;
- b) a mono or di-(hydroxy alkyl amine) or mixtures thereof; and
- c) a low temperature property enhancing effective amount of a low
15 molecular weight ester wherein the low molecular weight ester has an acid moiety represented by the formula $R''''CO-$, wherein R'''' is an alkyl or alkenol hydrocarbon containing from 3 to 10 carbon atoms;

wherein the reaction mixture has a molar ratio of amine to total ester content in the range from 10.0 to 1.0.

20

According to another aspect of the present invention, there is provided a method for preparing a fuel additive composition comprising the steps of heating a mixture of:


- a) mixed fatty acid tri-esters, wherein the fatty acids contain from 6 to 20 carbon atoms;
- b) a mono or di-(hydroxyl alkyl amine) or mixtures thereof; and
- c) a low temperature property enhancing effective amount of a low molecular weight ester wherein the low molecular weight ester has an acid moiety represented by the formula $R''''CO-$, wherein R'''' is an alkyl or alkenol hydrocarbon having from 3 to 10 carbon atoms;
- at a temperature and for a time sufficient to produce a product having an amide to ester absorbance ratio of at least 2.0 measured by transmission infrared spectroscopy, the mixture having a ratio of amine to total ester content in the range from 10.0 to 1.0.

DESCRIPTION OF THE PREFERRED EMBODIMENT

The first component used to produce the inventive composition may be a mixed ester of fatty acids containing 6 to 20, preferably 8 to 16 carbon atoms. These acids may be characterized by the formula $RCOOH$ wherein R is an alkyl hydrocarbon group containing 7-15, and preferably 11-13 carbon atoms.

The mixed ester may be a tri-ester, such as, a glycerol tri-ester of structural formula I:

(I)

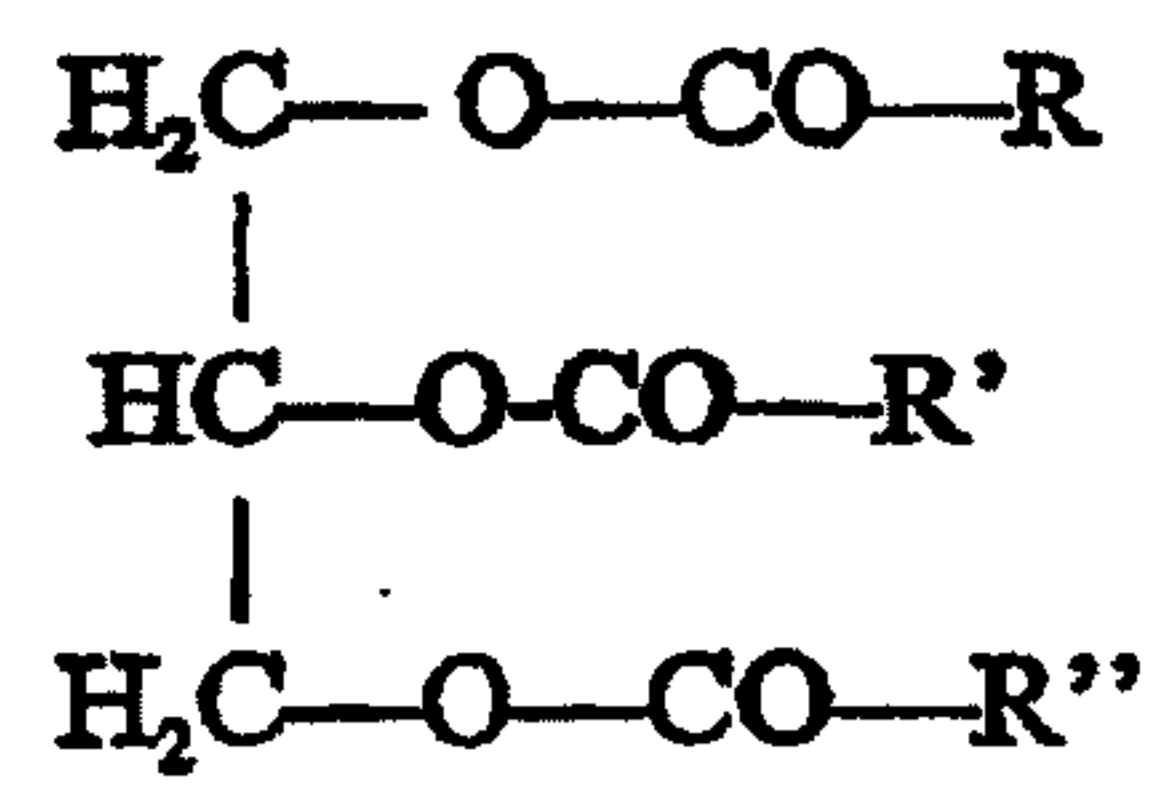

wherein R, R', and R'' are mixtures of aliphatic, olefins, or polyolefins.

Typical of the mixed fatty acid esters which may be employed may be the following:

5

glyceryl tri-laurate

	glyceryl tri-stearate
	glyceryl tri-palmitate
	glyceryl di-laurate
	glyceryl mono-stearate
5	ethylene glycol di-laurate
	pentaerythritol tetra-stearate
	pentaerythritol tri-laurate
	sorbitol mono-palmitate
	sorbitol penta-stearate
10	propylene glycol mono-stearate

These esters may include those wherein the acid moiety is a mixture such as is found in natural oils typified by the following oils:

	Coconut
15	Babassu
	Palm kernel
	Palm
	Olive
	Caster
20	Peanut
	Rape
	Beef Tallow
	Lard (leaf)
	Lard Oil

Whale blubber

The preferred mixed ester is coconut oil which contains the acid moieties summarized Tables 1 and 2.

5

Table 1. Saturated acid components of coconut oil

Acid	Chemical Name	Content (mol%)
Caproic	Hexanoic Acid	0.5
Caprylic	Octanoic Acid	7.1
Capric	Decanoic Acid	6.0
Lauric	Dodecanoic Acid	47.1
Myristic	Tetradecanoic Acid	18.5
Palmitic	Hexadecanoic Acid	9.1
Margaric	Heptadecanoic Acid	0
Stearic	Octadecanoic Acid	2.8
Arachidi	Eicosanic Acid	0.1
Behenic	Behenic Acid	0

10

Table 2. Mono- and poly-unsaturated acid components of coconut oil.

Acid	Chemical Name	Double Bonds	Content (mol%)
Palmitoleic	cis-9-hexadecenoic Acid	1	0
Oleic	cis-9-octadecenoic Acid	1	6.8
Linolenic	Linolenic Acid	3	1.9
Linoleic	Linoleic Acid	2	0.1

The second component used to produce the inventive composition may be a primary or a secondary amine which possesses a hydroxy group characterized by formula

II:




5

wherein R''' is a divalent alkylene hydrocarbon group containing 1-10 carbon atoms, and a is 0 or 1.

Typically amines may include ethanolamine, diethanolamine, propanolamine, isopropanolamine, dipropanolamine, di-isopropanolamine, butanolamines, and the like. Preferred is diethanolamine, CAS Number (111-42-2) which is a basic alkanolamine containing reactive appendages at each of its three termini. Its structural formula is shown as III.

15

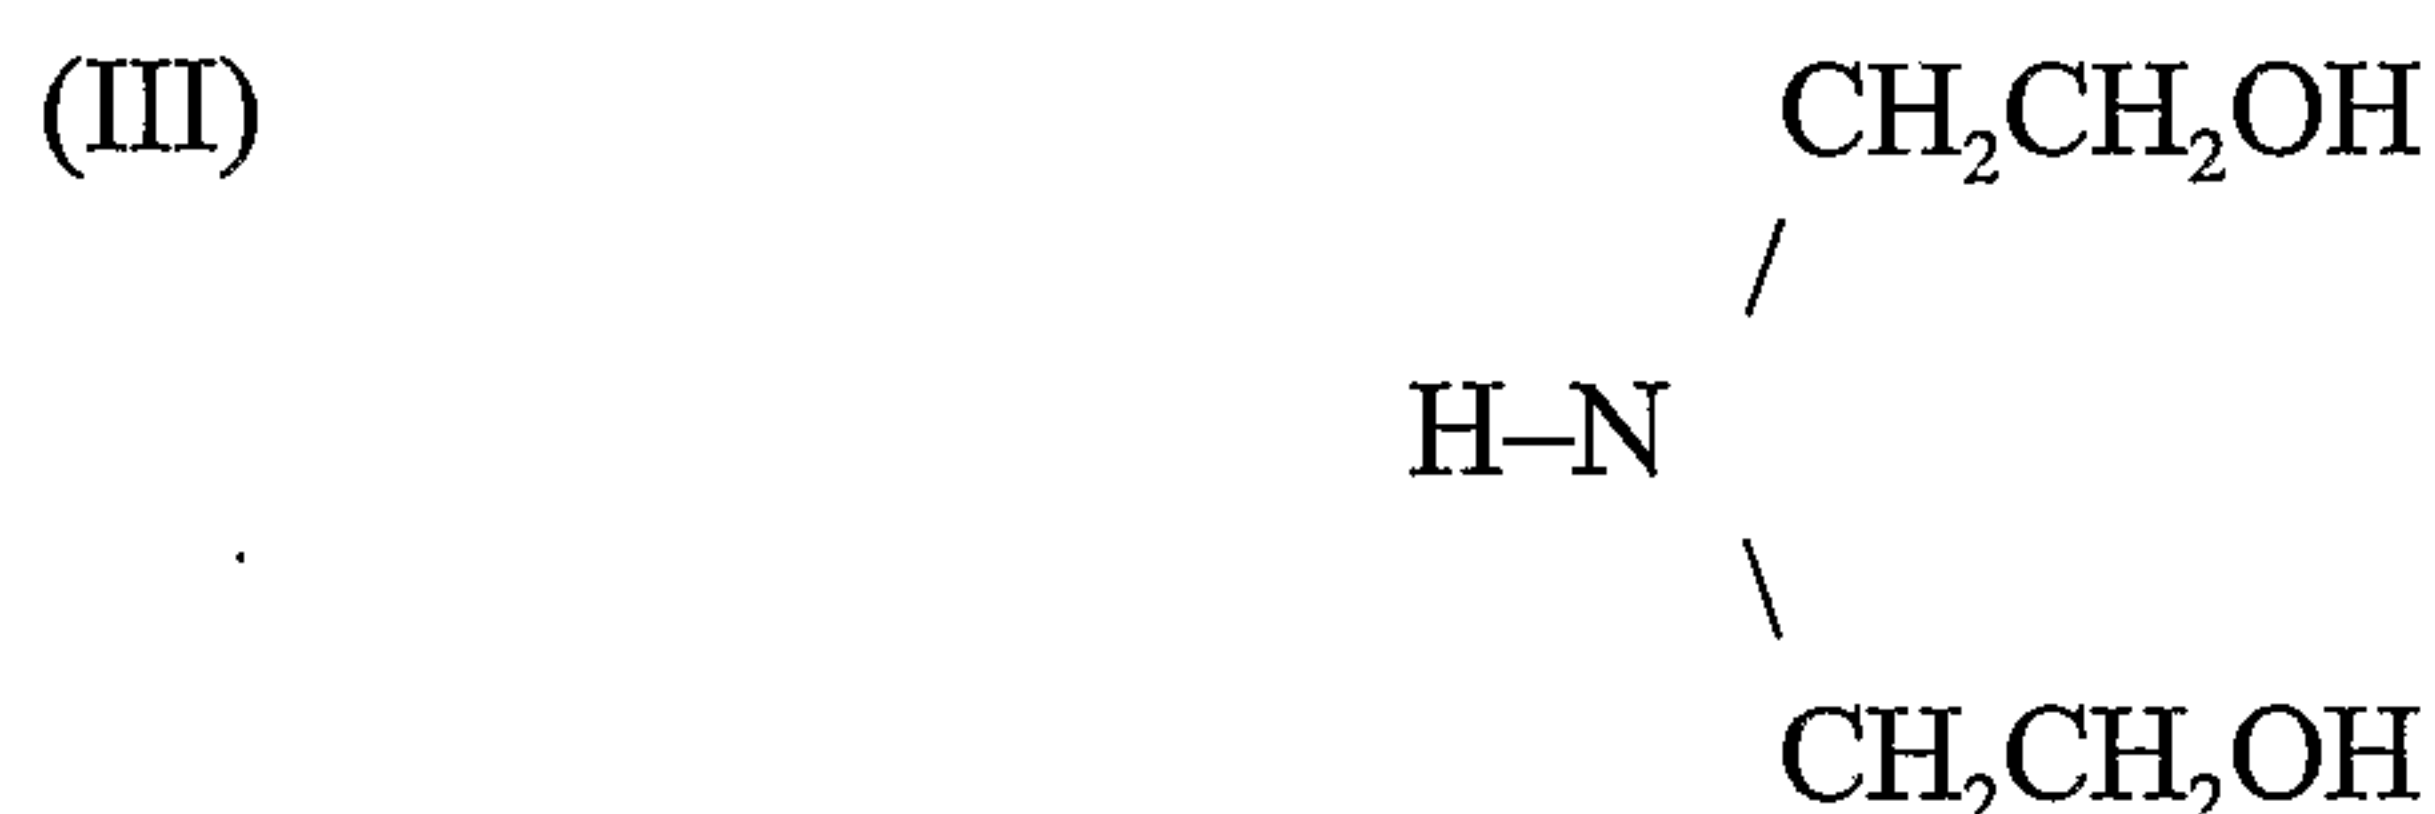


20


Diethanolamine (DEA)

The third component used to produce the inventive composition is a low molecular weight ester which imparts the enhanced low temperature properties of the resultant composition. The low molecular weight ester has an acid moiety represented by the formula:

25

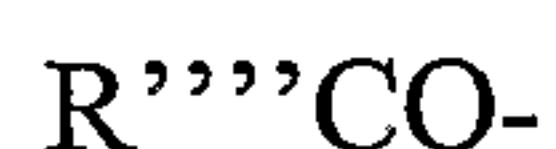

wherein R'''' is an alkyl or alkenol hydrocarbon group containing from about 3 to 10 carbon atoms. Preferably, the acid moiety of the low molecular weight ester is selected from the group consisting of acrylic, caproic, capric and mixtures thereof. Most preferably, the low molecular weight ester is methyl caprylate, also known as methyl octanoate, CAS Number (111-11-5). It is the ester obtained from the reaction of octanoic acid and methyl alcohol and has the structural formula depicted as IV:

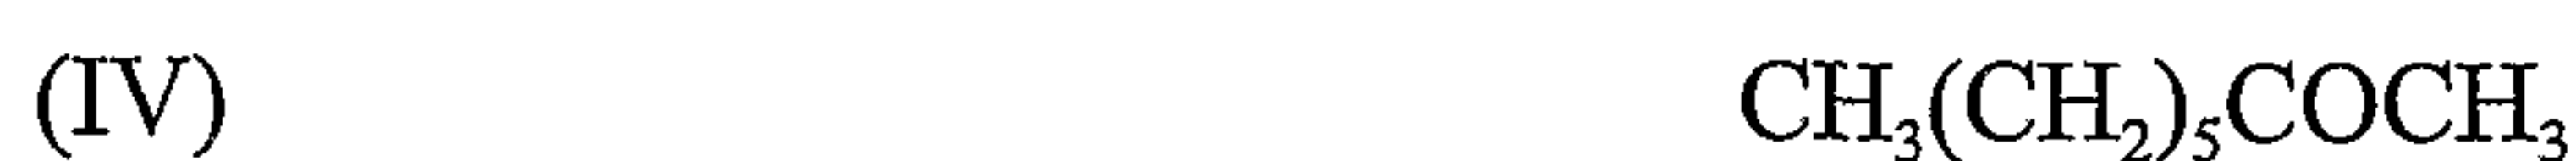

Methyl Caprylate

10

Preferably the inventive composition is prepared from a reaction mixture in which the molar ratio of amine to total ester is in the range from about 8.0 to 2.0. The amide to ester absorbance ratio of the inventive composition is in the range from at least about 2 as measured by transmission infrared spectroscopy.

15

The mixture is heated for a time period of about from 0.5 to 10.0 hours and at a temperature at from about 60°C to about 250°C to produce the inventive composition which exhibits enhanced properties. Typically, the mixture is heated at a temperature of from about 60°C to about 200°C for a time period of from about 0.5 to 10 hours. Preferably, the mixture is heated for a time period of from about 1.5 to about 6.0 hours, and most preferably at a temperature in the range from about 110°C to about 180°C.

20

A preferred reaction mixture is composed of from about 0.1 to about 0.8 moles of the mixed fatty acid ester, from about 1.0 to about 4.5 moles of the amine and from about

0.01 to about 0.60 moles of the low molecular weight ester. Most preferably, in the reaction mixture, the amount of fatty acid ester mixture is in the range of from about 0.5 to 0.8 moles, the amount of the low molecular weight ester is in the range of from about 0.1 to about 0.5 moles, and the amount of the amine is in the range of from about 1.2 to about
5 3.2 moles.

In the final fuel additive composition, the molar ratio of the amine to total ester content is in the range of from about 5.0 to 2.2, wherein the term "total ester content" means the combined molar amounts of the mixed fatty acid ester and the low molecular
10 weight ester.

When added to a fuel, the inventive composition exhibits friction modifying and detergent properties at least as good as those exhibited by prior art compositions, such as the composition exemplified in U.S. Patent 4,729,769. However, in addition, it exhibits
15 improved stability at low temperatures, such as, those temperatures that may be encountered during shipping of the composition.

When used in a fuel composition, the base fuel in which the inventive fuel additive composition may be used may be a motor fuel composition composed of a mixture of
20 hydrocarbons boiling in the gasoline boiling range or the diesel fuel boiling range. This base fuel may contain straight chain or branch chain paraffins, cycloparaffins, olefins and aromatic hydrocarbons as well as mixtures of these. The base fuel may be derived from straight-chained naphtha, polymer gasoline, natural gasoline, catalytically cracked or thermally cracked hydrocarbons as well as catalytically reformed stocks. It may typically

boil in the range of about 80° to 450°F and any conventional motor fuel base may be employed in the practice of the invention.

The fuel composition of the invention may also contain any of the additives normally employed in a motor fuel. For example, the base fuel may be blended with anti-knock compounds, such as tetraalkyl lead compounds, including tetraethyl lead, tetramethyl lead, tetrabutyl lead, and/or cyclopentadienyl manganese tricarbonyl, generally in a concentration from about 0.05 to 4.0 cc. per gallon of gasoline. The tetraethyl lead mixture which is commercially available for automotive use contains an ethylene chloride-ethylene bromide mixture as a scavenger for removing lead from the combustion chamber in the form of a volatile lead halide. The motor fuel composition may also be fortified with any of the conventional additives including anti-icing additives, corrosion-inhibitors, dyes, etc.

The fuel additive composition may be added to the base fuel in minor amounts sufficient or effective to produce a detergent and friction reducing property to the mixture. The additive is particularly effective in an amount of about 0.002 to 0.2 wt. % (ca. 0.6 to 64 PTB) (PTB stands for pounds per thousand barrels). The preferred range is from about 0.008 to 0.1 wt.% (ca. 2.7 to 34 PTB), and most preferably, about 0.02 to 0.08 wt. % (ca. 6.4 to 27 PTB). (All wt. % is based on the total weight of the fuel composition.

Experimental Section.

Example 1

Friction modifiers were prepared in accordance with the present invention and the method of Schlicht *et al* as set forth in U. S. Patent 4,729,769. Specifically, for the present invention, 0.7 mole of coconut oil and 0.3 mole of methyl caprylate were mixed and reacted with 2.50 moles of diethanolamine by heating at 150 °C for three hours. For the method of USP 4,729,769, 1.0 mole of coconut oil and 1.8 mole of diethanolamine amine diethanolamine (representing a molar ratio of coconut oil to diethanolamine of 0.555) were reacted together at a temperature from 130 °C and 150 °C for about 2 to 4 hours. A reference composition was prepared from coconut oil and soybean oil for comparison purposes.

Preparation of the condensation product of the present invention.

At ambient temperature, a 1-liter 3-neck glass round bottom flask containing a thermometer, condenser with a nitrogen egress tube, a mechanical stirrer with a 2 inch teflon propeller, was charged with 157.5 g (2.5 mole) of diethanolamine, 276.36 g (0.7 mole) of coconut oil (Cochin) and 28.44 g (0.3 mole) methyl caprylate. The mixture was nitrogen sparged for 10 minutes and then heated to a reaction temperature of 150°C in 1 hour and 20 minutes. The temperature was maintained at 150°C for approximately 3 hours. The extent of the reaction was monitored by analyzing aliquots of the reaction mixture for the amide:ester ratio using infrared spectroscopy. Once the desired amide:ester ratio was achieved, heat was removed and the mixture allowed to cool to ambient temperature over a period of 2.0 hours. After cooling to 25°C, the amide:ester

ratio was re-measured since it moderately increases. A typical total reaction time from charging the kettle to obtaining cooled product is approximately 4.5 hours.

Product Analysis.

5 Transmission Method Monitoring Product by Infrared Spectroscopy Method.

Scope

The product performance and low temperature properties are affected by the concentration of amide-to-ester ratio. In order to optimize material performance, an
10 amide-to-ester absorbance ratio range of at least 2.0 at the end of the reaction as measured by Transmission IR, must be achieved. As noted, this ratio increases somewhat with time after the end of the reaction procedure. However, it is important that at the very end of the reaction, it be at least about 2.0. Accordingly, the progress for the reaction is monitored as detailed below.:

15

Procedure for monitoring the reaction.

Transmission Infrared spectroscopy is to measure a thin smear of a sample of the reaction mixture between two NaCl transmission windows

- 1) Run absorbance sample at 25°C at 8 cm⁻¹ resolution or better
- 20 2) Baseline correct the spectrum at 1900 cm⁻¹
- 3) Measure the absorbance at 1621.5 cm⁻¹
- 4) Measure the absorbance at 1739.7 cm⁻¹ and then calculate the absorbance ratio as Abs (1621.5 cm⁻¹)/Abs (1739.7 cm⁻¹)
- 5) Once the amide-to-ester ratio is at least about 2.0 - 5.0 the reaction should

be cooled

- 6) When the reaction is cooled to ambient temperature re-measure the absorbance ratio of the reaction since it will slightly increase. If, however, the ratio decreases, the reaction went too far and ester is being made.

5

Material Testing.

10 Part I Lubricity Testing of Experimental Friction Modifiers

Lubricity testing of Experimental Friction Modifiers was performed using a modified High Frequency Reciprocating Rig (HFRR) method described in ASTM method D 6079-97. The modification was that a gasoline fuel was evaluated at a temperature of 25°C. Wear Scar Diameter (WSD) of Experimental Friction Modifiers is calculated using

15 Equation (I): Eq. (I) $WSD=(M+N)/2$

WSD=wear scar diameter, mm

M=Major Axis, mm

N=Minor Axis

20 HFRR test results are summarized in Table 3.

25

Table 3. HFRR test results conducted at 25 deg C for Experimental Modifiers and Reference Materials using gasoline fuel.

Friction Modifier	Ester Composition	Fuel Treatment (ppm)	Scar Diameter (mm)	Notes
Reference-3	75 mole% coconut oil 25 mole% soybean oil	100	0.356	Schlicht analogue with good low temp solution properties
Schlicht Product	100 mole% coconut oil	100	0.366	Prepared using Schlicht method
Inventive Product	0.7 mole% coconut oil and 0.3 mole% Methyl caprylate	60	0.332	Prepared using 2.5 moles DEA

5

Part II Low Temperature Solution Properties of Experimental Friction Modifiers.

Low temperature solution properties of the Experimental Friction Modifier were determined at -10, -15, and -20 °C using a 50 wt% sample concentrate in Aromatic-100 solvent. The samples were kept at the temperatures and for the time periods indicated in Tables 4, 5, and 6. The samples were then evaluated by visual inspection as to whether they were clear, slightly hazy, hazy or contained a precipitate. The desired result is that the samples remain clear which means that the additive remains soluble.

Low temperature solution test results at -10, -15, and -20 deg C are summarized in Tables 4, 5, and 6, respectively.

Table 4. Solution properties for Experimental Friction Modifiers at -10°C.

50 wt% Friction Modifier in Aromatic-100	Day-4	Day-8	Day-12
Reference-3	Soluble	Soluble	Hazy
Schlicht Product	Ppt.	Ppt.	Ppt.
Inventive Product	Soluble	Soluble	Soluble

Table 5. Solution properties for Experimental Friction Modifiers at -15°C.

50 wt% Friction Modifier in Aromatic-100	Day-3	Day-6	Day-9
Reference-3	Soluble	Slightly Hazy	Hazy
Schlicht Product	Ppt.	Ppt.	Ppt.
Inventive Product	Soluble	Soluble	Soluble

5

Table 6. Solution properties for Experimental Friction Modifiers at -20°C.

50 wt% Friction Modifier in Aromatic-100	Day-2	Day-4	Day-6
Reference-3	Soluble	Hazy	HPpt.
Schlicht Product	Ppt.	Ppt.	Ppt.
Inventive Product	Soluble	Soluble	Soluble

Part III Engine Testing Experimental Friction Modifiers.

The purpose of engine testing was to determine the effect upon engine cleanliness from fuel additized with experimental friction modifiers. The Honda Generator engine was used as the test engine.

5

Test Description.

The Honda Generator was developed to evaluate the effect of additives on intake valve deposits and their ability to prevent intake valves from sticking.

10

The Honda Generator consists of a 4-stroke, overhead cam, 2-cylinder water cooled engine. The Honda Generator Test is run for 80 hours at which point the cylinder head, cam shaft, intake valve keepers, springs and valve guide seals are disassembled. The intake valves are disturbed as little as possible. The cylinder head with intake valves in place is placed into a freezer at approximately 2 deg F for a period of 12-
15 24 hours. The amount of force in pounds to push open the valve is then determined. In addition, the intake system is then rated.

20

To ascertain the effects these friction modifiers had upon engine cleanliness, each friction modifier was added to base fuel with a commercial fuel detergent. Table 7 summarizes Honda Generator Testing.

Table 7. Summary of Honda Generator Engine Testing using fuel additized with friction modifier prepared according to Schlicht et al and as prepared in this Application.

Friction Modifier	Detergent (PTB)	Friction Modifier (PTB)	Intake Valve Rating (a)	Deposit Weight (mg)	Valve Stickiness
Base Fuel	0	0	6.3	429	Moderate Push
Base Fuel	100	0	9.7	3	Light Push
Schlicht Product	100	52	9.3	102	Light Push
Inventive Product	100	52	9.3	81	Light Push

- 5 (a) is a visual numerical rating of the intake valve deposition between 10 and 0 wherein 10 indicates a deposit free intake valve and 0 indicates extremely excessive deposition on the intake valve.

10

15

WHAT IS CLAIMED IS:

1. A fuel additive composition comprising the reaction product of a mixture of:
- 5 a) mixed fatty acid tri-esters, wherein the fatty acids contain from 6 to 20 carbon atoms;
- b) a mono or di-(hydroxy alkyl amine) or mixtures thereof; and
- c) a low temperature property enhancing effective amount of a low molecular weight ester wherein the low molecular weight ester has an acid moiety represented by the formula R'''CO-, wherein R''' is an alkyl or alkenol hydrocarbon containing from 3 to 10 carbon atoms;
- 10 wherein the reaction mixture has a molar ratio of amine to total ester content in the range from 10.0 to 1.0.
- 15 2. The composition of claim 1 wherein the mixed fatty acid tri-esters comprise a glycerol tri-ester.
3. The composition of claim 1 wherein the mixed fatty acid tri-esters are selected from the group containing babassu oil, palm kernel oil, palm oil, olive oil, 20 castor oil, peanut oil, rape oil, beef tallow oil, lard oil, whale blubber oil and sunflower oil.
4. The composition of claim 1 wherein the amine has the formula:
- 25
$$\text{HN}(\text{R}'''\text{OH})_{2-a}\text{H}_a$$
- wherein R''' is a divalent alkylene hydrocarbon group containing 1-10 carbon atoms, and a is 0 or 1.
- 30 5. The composition of claim 4 wherein the amine is selected from the group consisting of ethanolamine, diethanolamine, propanolamine, isopropanolamine, dipropanolamine, di-isopropanolamine, butanolamine, and mixtures thereof.

6. The composition of claim 1 wherein the acid moiety of the low molecular weight ester is selected from the group consisting of caprylic, caproic, capric and mixtures thereof.

5 7. The composition of claim 1 wherein the molar ratio of amine to total ester in the reaction mixtures is in the range from 8.0 to 2.0.

8. The composition of claim 1 having an amide to ester absorbance ratio in the range of from at least 2.0 as measured by transmission infrared spectroscopy.

10

9. The fuel additive composition of claim 1 wherein the mixture comprises from 0.1 to 0.8 moles of the mixed fatty acid tri-ester, from 1.0 to 4.5 moles of amine and from 0.01 to 0.60 moles of the low molecular weight ester.

15 10. The fuel additive composition of claim 1 wherein the mixture is heated at a temperature of from 60°C to 250°C for a time period from 0.5 to 10 hours.

11. The fuel additive composition of claim 1 wherein the amount of the fatty acid tri-ester is in the range from 0.5 to 0.8 moles.

20

12. The fuel additive composition of claim 1 wherein the amount of the low molecular weight ester is in the range from 0.1 to 0.5 moles.

25 13. The fuel additive composition of claim 1 wherein the amount of amine is in the range from 1.2 to 3.2 moles.

14. The fuel additive composition of claim 1 wherein the mixture is heated for a time period from 1.5 hours to 6.0 hours.

30 15. The fuel additive composition of claim 1 wherein the mixture is heated at a temperature in the range from 110°C to 180°C.

16. The fuel additive composition of claim 1 wherein the ratio of amine to total ester content is in the range from 5.0 to 2.2, the total ester content represented by the amount of the mixed fatty acid tri-ester and the amount of the low molecular weight ester.

5

17. A method for preparing a fuel additive composition comprising the steps of heating a mixture of:

a) mixed fatty acid tri-esters, wherein the fatty acids contain from 6 to 20 carbon atoms;

10 b) a mono or di-(hydroxyl alkyl amine) or mixtures thereof; and

c) a low temperature property enhancing effective amount of a low molecular weight ester wherein the low molecular weight ester has an acid moiety represented by the formula R''''CO-, wherein R'''' is an alkyl or alkenol hydrocarbon having from 3 to 10 carbon atoms;

15 at a temperature and for a time sufficient to produce a product having an amide to ester absorbance ratio of at least 2.0 measured by transmission infrared spectroscopy, the mixture having a ratio of amine to total ester content in the range from 10.0 to 1.0.


20 18. The method of claim 17 wherein the mixture comprises from 0.5 to 0.8 moles of the mixed fatty acid tri-esters, from 1.2 to 3.2 of the amine and, from 0.10 to 0.50 moles of low molecular weight ester.

25 19. The method of claim 17 wherein the mixed fatty acid tri-esters comprise a glycerol tri-ester.

20. The method of claim 17 wherein the mixed fatty acid tri-esters are selected from the group consisting babassu oil, palm kernel oil, palm oil, olive oil, castor oil, peanut oil, rape oil, beef tallow oil, whale blubber oil and sunflower oil.

30

21. The method of claim 17 wherein the amine has the formula:

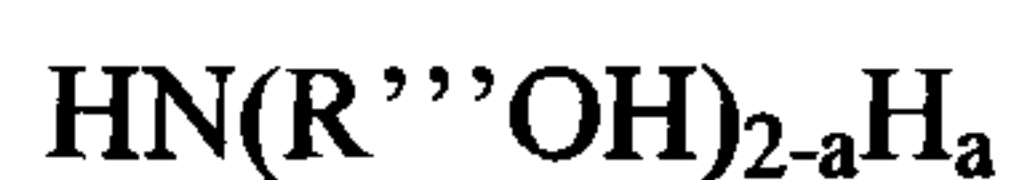

wherein R''' is a divalent alkylene hydrocarbon group containing 1-10 carbon atoms, and a is 0 or 1.

22. The method of claim 21 wherein the amine is selected from the group consisting of ethanolamine, diethanolamine, propanolamine, isopropanolamine, dipropanolamine, di-isopropanolamine, butanolamine, and mixtures thereof.

23. The method of claim 17 wherein the acid moiety of the low molecular weight ester is selected from the group consisting of caprylic, caprioc, capric, and mixtures thereof.

24. The method of claim 17 wherein the mixture is heated at a temperature of from 60°C to 250°C for a time period of from 0.5 to 10 hours.

25. The method of claim 17 wherein the mixture is heated at a temperature of from 110°C to 180°C.

26. The method of claim 17 wherein the mixture is heated for a time period of from 1.5 to about 6 hours.

27. An engine fuel composition comprising a major portion of a mixture of hydrocarbons and a fuel economy improving effective amount of the fuel additive obtained by the method of any one of claims 17 to 26.

28. A method for improving the fuel economy of an engine fuel comprising a major portion of hydrocarbons adding to the mixture of hydrocarbons, a fuel economy improving effective amount of the fuel additive composition of any one of claims 1 to 16.