

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2013/169305 A8

(43) International Publication Date
14 November 2013 (14.11.2013)

- (51) International Patent Classification:
G06F 3/01 (2006.01) *G06F 3/041* (2006.01)
- (21) International Application Number:
PCT/US2013/000089
- (22) International Filing Date:
15 March 2013 (15.03.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/645,033 9 May 2012 (09.05.2012) US
61/665,603 28 June 2012 (28.06.2012) US
61/681,098 8 August 2012 (08.08.2012) US
- (71) Applicant (for all designated States except): **YKNOTS INDUSTRIES LLC** [US/US]; Corporation Trust Center, 1209 Orange Street, Wilmington, DE 19801 (US).
- (74) Agents: **HEMENWAY, S., Craig et al.**; Brownstein Hyatt Farber Schreck, LLP, 410 Seventeenth Street, Suite 2200, Denver, Colorado 80202 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AL, AT, AU, BG,

BH, BR, BW, CA, CH, CN, CO, CZ, DE, DK, EC, EE, ES, FI, GB, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KR, LR, LS, LT, LU, LY, MA, MK, MN, MW, MX, MY, MZ, NA, NO, NZ, PE, PG, PH, PL, PT, QA, RO, RS, RW, SD, SE, SG, SK, SL, SM, SV, SY, TN, TR, TZ, UG, US, VC, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR).

Published:


— with international search report (Art. 21(3))

(48) Date of publication of this corrected version:

1 May 2014

(15) Information about Correction:
see Notice of 1 May 2014

(54) Title: HAPTIC FEEDBACK WITH IMPROVED OUTPUT RESPONSE

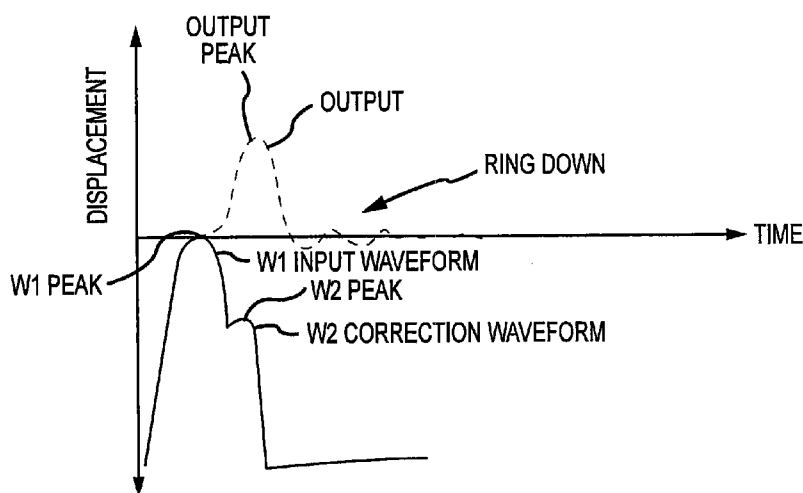

(57) Abstract: The application is directed to a computing that enhances the output experienced by a user. The computer includes a processor, a feedback component, and an actuator in communication with the processor and connected to the feedback component. The actuator is configured to selectively move the feedback component. The processor provides an initial waveform to the actuator too move the feedback component and provides a correction waveform to the actuator to reduce oscillations of the feedback component due to movement caused by the initial waveform.