

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2007201882 B2**

(54) Title
Foam cushion molding system and method

(51) International Patent Classification(s)
B29C 33/40 (2006.01) **B29C 44/02** (2006.01)

(21) Application No: **2007201882** (22) Date of Filing: **2007.04.27**

(30) Priority Data

(31) Number (32) Date (33) Country
11414972 **2006.05.01** **US**

(43) Publication Date: **2007.11.22**

(43) Publication Journal Date: **2007.11.22**

(44) Accepted Journal Date: **2009.11.19**

(71) Applicant(s)
Sealed Air Corporation (US)

(72) Inventor(s)
Piucci Jr, Vincent A.;Schamel, Michael J.;Sperry, Charles R.

(74) Agent / Attorney
Davies Collison Cave, 1 Nicholson Street, Melbourne, VIC, 3000

(56) Related Art
US 4781569
US 5776510
EP 1156247

ABSTRACT OF THE DISCLOSURE

A molding system for foam-in-bag cushions comprises a mold defining a mold cavity, an air plenum separate from the mold cavity, a plurality of air passages that connect the mold cavity to the air plenum, and at least one port connected to the air plenum. The mold cavity has an open side and the mold includes a door that is movable between a closed position closing the open side of the mold cavity and an open position allowing a cushion to enter and exit through the open side. The system further comprises a pneumatic vacuum/blowout system connected with the at least one port. The vacuum/blowout system comprises a vacuum source, an air tank containing pressurized air, and a vacuum/blowout valve structured and arranged to alternately couple the at least one port either to the vacuum source or to the air tank.

12/19

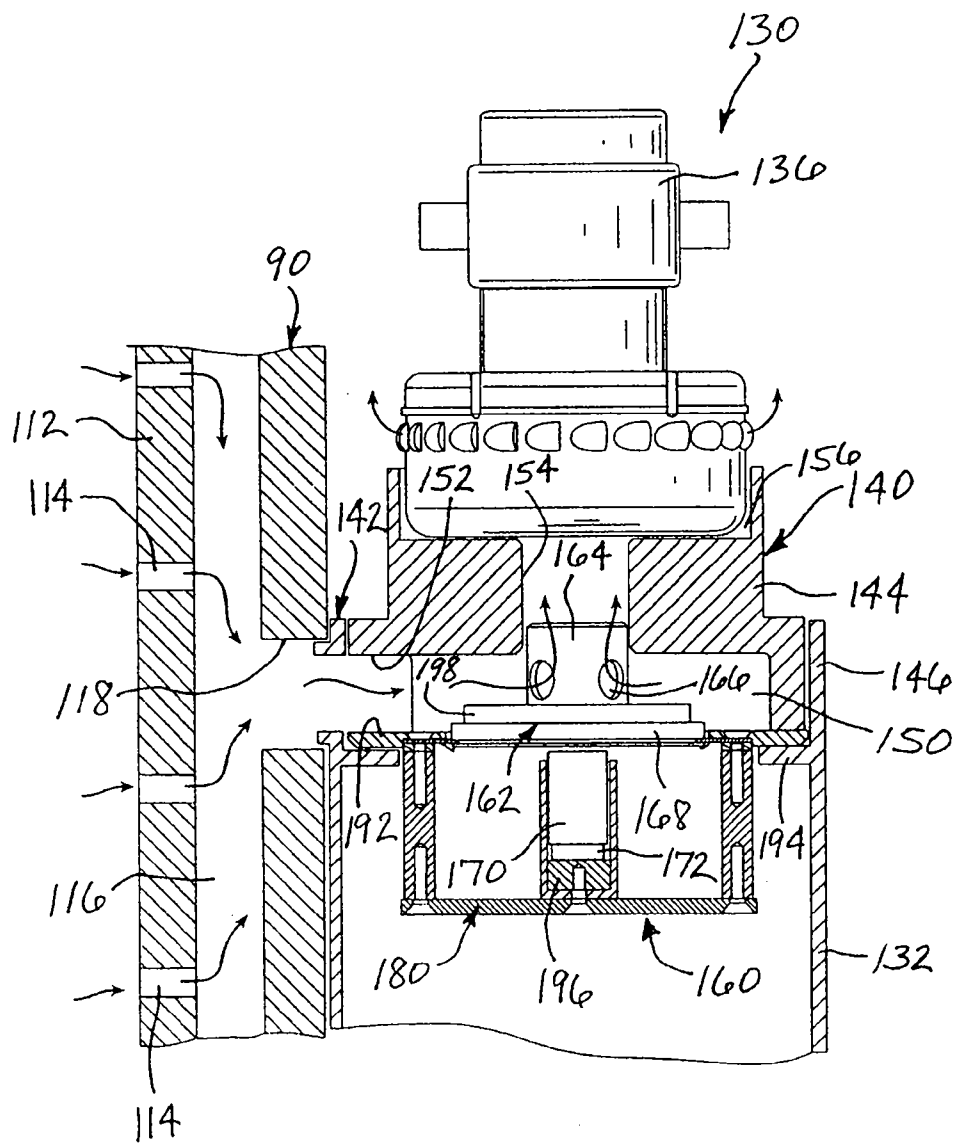


FIG. 12

2007201882 27 Apr 2007

AUSTRALIA
PATENTS ACT 1990
COMPLETE SPECIFICATION

NAME OF APPLICANT(S)::

Sealed Air Corporation (US)

ADDRESS FOR SERVICE:

DAVIES COLLISON CAVE
Patent Attorneys
1 Nicholson Street, Melbourne, 3000, Australia

INVENTION TITLE:

Foam cushion molding system and method

The following statement is a full description of this invention, including the best method of performing it known to me/us:-

The present invention relates generally to foam-in-place or foam-in-bag cushions used as protective cushioning materials for product packaging. The invention relates more particularly to a system and method for molding such foam cushions into desired shapes.

Foam-in-place packaging is a highly useful technique for on-demand protection of packaged objects. In its most basic form, foam-in-place packaging comprises injecting a foam-forming composition from a dispenser into a container that holds an object to be cushioned. Typically, the object is wrapped in plastic to keep it from direct contact with the rising (expanding) foam. As the foam rises, it expands into the void space between the object and its container (e.g., a corrugated board box), thus forming a custom cushion for the object.

A common foam-forming composition is formed by mixing an isocyanate compound with a hydroxyl-containing material, such as a polyol (i.e., a compound that contains multiple hydroxyl groups), typically in the presence of water and a catalyst. The isocyanate and polyol precursors react to form polyurethane. At the same time, the water reacts with the isocyanate compound to produce carbon dioxide. The carbon dioxide causes the polyurethane to expand into a foamed cellular structure, i.e., a polyurethane foam, which serves to protect the packaged object.

In other types of foam-in-place packaging, an automated apparatus produces foam-in-bag cushions by making bags from flexible plastic film and dispensing a foam-forming composition into the bags as they are being formed. As the composition expands into a foam within a bag, the bag is sealed shut and

typically is then dropped into a container holding the object to be cushioned. The rising foam again tends to expand into the available space, but does so inside the bag. Because the bags are formed of flexible plastic, they form individual custom foam cushions around the packaged objects. Exemplary types of such packaging apparatus are assigned to the assignee of the present application, and are illustrated, for example, in U.S. Patent Nos. 4,800,708, 4,854,109, 5,027,583, 5,376,219, and 6,003,288, the entire disclosures of each of which are incorporated herein by reference.

In some applications, it is desirable for the foam cushions to have a certain predetermined shape. For example, it may be desirable for the cushions to be made in advance of a packaged object being placed into a carton. In such instances, it is desirable for the cushions to fit properly about the object and/or against the inner walls of the carton, and therefore it is necessary to mold the cushions to have the correct shape. Accordingly, a molding system and method are needed.

Current systems for molding foam cushions generally comprise a mold defining a mold cavity that is a negative impression of the desired shape of the cushions to be produced. The mold has a door that is closed after the expanding foam cushion is placed inside the mold cavity. The cushion is allowed to substantially fully expand within the mold cavity, and the door is then opened and the molded foam cushion is removed. In some molding systems, some or all of these actions are performed manually by a worker. In other cases, fully automatic molding systems have been developed employing a foam-in-bag cushion-making apparatus and a plurality of molds that are sequentially supplied with expanding cushions from the apparatus, wherein the cushions are automatically placed into the molds and then are automatically removed from the molds using mechanical devices such as rods that push the molded cushions out of the molds. The mechanical devices can cause distortion of the molded cushions.

It is desirable to automate the molding process to as great an extent as possible and to improve upon existing automated systems.

Additionally, in current cushion-molding processes, it is often difficult to ensure that the cushion settles fully into the mold cavity when placed therein. If the cushion does not properly settle into the cavity, the expanding cushion may not completely fill out all regions of the cavity, and the resulting molded cushion may have defects in shape that can render the cushion unusable for its intended purpose.

Thus, it is desirable for an automated system and method to ensure proper settling of the expanding cushion into the mold cavity.

BRIEF SUMMARY OF THE INVENTION

The present invention seeks to address the above-noted needs.

In accordance with the invention, a molding system for molding foam-in-bag cushions comprises a mold defining a mold cavity configured for imparting a desired shape to a cushion placed in the mold cavity and allowed to expand to substantially fill the mold cavity, an air plenum separate from the mold cavity, a plurality of air passages that connect the mold cavity to the air plenum, and at least one part connected to the air plenum, the mold cavity having an open side to permit a cushion to enter the mold cavity and subsequently to exit the mold cavity after expansion of the cushion, the mold further comprising a door that is movable between a closed position the open side of the mold cavity and an open position allowing a cushion to enter and exit through the open side; and

a pneumatic vacuum/blowout system connected with the at least one port, the vacuum/blowout system comprising a vacuum source, and air tank containing pressurized air, and a vacuum/blowout valve structured and arranged to alternately couple the at least one port either to the vacuum source such that air is evacuated from the mold cavity via the air passages and air plenum so as to such a newly formed cushion into the mold cavity whereupon the door is closed and the cushion is allowed to expand to substantially fill the mold cavity, or to the air tank such that pressurized air is supplied from the air tank to the mold cavity via the air plenum and air passages to expel an expanded cushion from the mold cavity after the door is opened.

The system can include an air compressor coupled with the air tank for pressurizing the air tank. In one embodiment, the system includes a pneumatic cylinder connected with the door for opening and closing the door, the pneumatic cylinder being coupled with the air compressor via a controllable valve system.

The vacuum/blowout system in one embodiment of the invention comprises an air chamber connected to the at least one port and having a first passage connected to the air tank and a second passage connected to the vacuum source. The vacuum/blowout valve comprises a shuttle valve having a valve member that shuttles between a vacuum position closing the first passage and opening the second passage such that the at least one port is coupled to the vacuum source, and a blowout position opening the first passage and closing the second passage such that the at least one port is coupled to the air tank.

In one embodiment, the shuttle valve comprises a magnetic shuttle valve. The shuttle valve includes a magnet arranged for exerting a magnetic attraction force on the valve member urging the valve member toward the vacuum position, and the valve member is arranged such that air pressure within the air tank acts on the valve member to urge the valve member toward the blowout position. Accordingly, when sufficient pressure builds up in the air tank, the air pressure overcomes the magnetic attraction force to move the valve member to the blowout position.

In one embodiment, the valve member is movable in a shuttle guide between the vacuum and blowout positions, the magnet is affixed to the shuttle guide, and at least a portion of the valve member is a magnetically permeable material attracted by the magnet.

In accordance with another embodiment, the air tank includes a valve cap that comprises the magnetic shuttle valve and defines at least part of the air chamber.

The valve member of the shuttle valve can include a tubular portion, and the valve cap can define a guide passage connected to the second passage in the air chamber, the guide passage receiving the tubular portion of the valve member at least in the blowout position. In one embodiment, the tubular portion of the valve

member has one or more apertures through a side wall of the tubular portion into an interior thereof. The valve member in the blowout position is disposed in the guide passage so as to substantially isolate the one or more apertures from the air chamber. The valve member in the vacuum position is withdrawn sufficiently from the guide passage to expose the one or more apertures to the air chamber so as to conduct air from the air chamber through the one or more apertures into the guide passage.

The molding system in accordance with a further embodiment of the invention includes a latch mechanism for latching the door in the closed position, the latch mechanism being movable between latched and unlatched positions. In one embodiment, the latch mechanism comprises a latch mounted on the door adjacent one edge thereof such that the latch is pivotable relative to the door, and a catch affixed to the mold for being engaged by the latch in the latched position of the latch mechanism. The latch mechanism further comprises a lever having one end connected to the latch and an opposite end connected to an actuator such as a pneumatic cylinder for opening and closing the door. The lever is moved by the actuator to pivot the latch to the unlatched position disengaged from the catch in order to open the door.

In one embodiment, the latch is pivotally connected to the lever and is biased by a spring to pivot in a first direction toward a latching position of the latch relative to the lever, and the catch is arranged such that as the door is moved to the closed position thereof, the catch urges the latch to pivot in a second direction, opposite to the first direction, out of the latching position until the latch clears the catch and then the spring urges the latch to pivot in the first direction back to the latching position to engage the catch and prevent the door from opening.

The latch mechanism can be configured such that the latch at all times is prevented from pivoting in the first direction past the latching position, and such that when the actuator begins to move the lever to open the door, the lever and latch pivot as a unit to disengage the latch from the catch before the door begins to open.

The molding system in accordance with another embodiment of the invention includes a frame supporting the mold and the pneumatic vacuum/blowout system. The system can also include a cushion-making apparatus supported on the frame and arranged to supply a cushion to the mold.

In one embodiment, the mold is releasably attached to the frame. Accordingly, molds of different configurations can be mounted to the frame for making cushions of different shapes and/or different sizes.

In accordance with a further aspect of the invention, a method for molding foam-in-bag cushions comprises the steps of: (1) providing a mold defining a mold cavity configured for imparting a desired shape to a cushion placed in the mold cavity, the mold cavity having an open side to permit a cushion to enter the mold cavity and subsequently to exit the mold cavity after expansion of the cushion, the mold further comprising a door that is movable between a closed position closing the open side of the mold cavity and an open position allowing a cushion to enter and exit through the open side; (2) providing an air plenum separate from the mold cavity, a plurality of air passages that connect the mold cavity to the air plenum, and at least one port connected to the air plenum;

(3) positioning the door in the open position and disposing a cushion adjacent the open side of the mold cavity; (4) operating an automated pneumatic vacuum/blowout system connected with the at least one port to exert vacuum through the at least one port so as to create a sub-atmospheric pressure within the mold cavity to suction the cushion into the mold cavity, the vacuum/blowout system including a vacuum source, an air compressor coupled with an air tank for accumulating pressurized air, and a valve mechanism provided between the air tank and the at least one port for controlling the supply of pressurized air from the air tank to the at least one port; (5) moving the door to the closed position to enclose the cushion in the mold cavity until the cushion has expanded to substantially fill the mold cavity, and then opening the door; and (6) causing the valve mechanism to be actuated so as to supply pressurized air from the air tank through the at least one port to expel the cushion out the open side of the mold cavity solely by air pressure.

BRIEF DESCRIPTION OF THE SEVERAL VIEW OF THE DRAWING(S)

Having thus described the invention in general terms, reference will now be made to the accompanying drawings, which are not necessarily drawn to scale, and wherein:

FIG.1 is a perspective view, generally from a front side, of a molding system in accordance with one embodiment of the invention;

FIG. 2 is a perspective view, generally from a rear side, of the molding system;

FIG. 3 is a perspective view, generally from a front side, of a mold in accordance with one embodiment;

FIG. 4 is a perspective view, generally from a rear side, of the mold;

FIG. 5 is a cross-sectional view through the mold;

FIG. 6 is a side elevation of the mold connected with a vacuum/blowout system in accordance with one embodiment;

FIG. 7 is a perspective view of the vacuum/blowout system;

FIG. 8 is an exploded perspective view the vacuum/blowout system;

FIG. 9 is a perspective view of a valve member of a magnetic shuttle valve included in the vacuum/blowout system in accordance with one embodiment;

FIG. 10 is an exploded perspective view of a magnet and seal assembly of the magnetic shuttle valve;

FIG. 11 is a cross-sectional view through the magnet and seal assembly;

FIG. 12 is a side view, partly in section, of the mold and vacuum/blowout system in a vacuum mode of operation;

FIG. 13 is a view similar to FIG. 13, showing a blowout mode;

FIG. 14 is an oscilloscope trace of the pressure within the air tank of the vacuum/blowout system and the pressure within the air plenum of the mold as a function of time during a blowout cycle of operation;

FIG. 15 is a perspective view of a door and hinge assembly for the mold in accordance with one embodiment of the invention;

FIG. 16 is a top elevation, partly in section, showing the mold and the actuator and associate linkage for the mold door, with the door closed and latched by a latch mechanism;

FIG. 17 is a view similar to FIG. 16, showing the latch mechanism being unlatched to permit the door to open;

FIG. 18 shows the mold having been opened by the actuator and linkage; and

FIG. 19 is a diagrammatic illustration of the system in accordance with one embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

The present inventions now will be described more fully hereinafter with reference to the accompanying drawings in which some but not all embodiments of the inventions are shown. Indeed, these inventions may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will satisfy applicable legal requirements. Like numbers refer to like elements throughout.

With initial reference to FIGS. 1 and 2, a molding system **40** in accordance with one embodiment of the invention is depicted. The molding system has a base **42** that supports an upwardly extending frame **44**. The frame includes a pair of spaced parallel side walls **46, 48** that are vertical in orientation, and a vertical front wall **50** that is joined to and extends between front edges of the side walls **46, 48**. The frame **44** thus forms a three-sided structure that is open at the rear side (FIG. 2) of the system. Affixed to an upper end of the frame **44** is a foam cushion-making apparatus **60** operable for forming a generally closed bag of plastic film material containing a volume of a foam-forming composition. Various types and configurations of cushion-making apparatus can be used, the invention not being limited to any particular type or configuration. However, an advantageous cushion-making apparatus for use in the system **40** is described in commonly owned, co-pending U.S. Patent Application Serial No. 11/411,708, filed on April

26, 2006, entitled "METHOD AND APPARATUS FOR MAKING FOAM-IN-PLACE CUSHIONS WITH SELECTIVE DISTRIBUTION OF FOAM", the entire disclosure of which is hereby incorporated herein by reference. With reference to FIG. 1, the apparatus includes structure for rotatably mounting a supply roll 62 of a two-ply plastic film comprising two separate polymer film plies laid one upon the other and then wound about a hollow tubular core to form a roll of the two-ply film material. One ply of the two-ply film material unwinds from the supply roll 62 and proceeds downwardly past an idler roller 64, guided by one or more guide rods 66. The other ply of the two-ply film material unwinds from the supply roll and through a nip between the roll and another idler roller (not visible in FIG. 1), and then proceeds downwardly and is guided by another rod (not visible).

The cushion-making apparatus 60 includes a drive roller 68 that is rotatably mounted and is driven by a motor 70. The apparatus further includes a pair of transversely spaced, freely rotating driven rollers 72, 74 mounted on a shaft. The driven rollers 72, 74 form nips with the drive roller 68. The film plies are threaded through the nips between the driven rollers and the drive roller. The drive roller 68 includes an outer surface that is resiliently compressible and frictionally grips the film so that the film is driven by the drive roller substantially without slipping. For example, the drive roller can be formed of a rigid cylindrical roller covered with a sleeve of foam material such as silicone foam having a durometer hardness of 70 Shore A and having a thickness of about 0.25 inch. As illustrated, the driven rollers 72, 74 can have circumferential ridges that are spaced apart along the lengthwise direction of the rollers for imparting longitudinal ridges in the edges of the film plies, which gives rigidity to the film edges and also helps ensure that the film is driven straight out from the rollers and does not wrap around the drive roller 68.

The cushion-making apparatus further comprises a foam dispenser 76 that is mounted on a carriage 78 disposed between the two film plies. The carriage 78 is slidably mounted on a guide rail 80 that extends transversely. A rotatable feed screw 82 is rotatably mounted in the apparatus and is driven by a reversible motor 84. The feed screw engages a nut (not shown) on the carriage 78. Thus, rotation

of the feed screw **82** in one direction causes the carriage **78** and dispenser **76** to move to the left along guide rail **80** in FIG. 1, and rotation of the feed screw in the opposite direction moves the carriage and dispenser to the right in FIG. 1. Variation in the rotational speed of the screw causes the speed of movement of the dispenser to be varied. The foam dispenser is fed by feed hoses (not shown) that feed two precursor chemicals to the dispenser, where the precursor chemicals mix (either internally within a mixing chamber of the dispenser, or externally upon being dispensed from the dispenser), to form a foam-forming composition. The composition is dispensed between the two plies of the polymer film material at a location just above (upstream of) the drive roller **68** and driven rollers **72, 74**.

By controlling the movement (i.e., positioning and, optionally, speed) of the dispenser **76** in the transverse direction it is possible to dispense the foam-forming composition in any of various patterns. The possible patterns are further multiplied by driving the film plies while the composition is being dispensed (and optionally varying the speed of the film movement), and/or by momentarily interrupting the flow of the composition one or more times during the traversing of the dispenser **76** and/or during the movement of the film plies.

The cushion-making apparatus **60** also includes longitudinal sealing devices (not shown) for sealing the two film plies together along their longitudinal edges, and a transverse sealing and cut-off device (not shown) for sealing the plies together along transverse lines and severing a completed cushion from the continuous film material. Additionally, as described in the above-referenced co-pending patent application, the apparatus advantageously also includes a dispersion device structured and arranged to apply pressure on predetermined areas of the film portions towards each other so as to cause the foam-forming composition to be to be redistributed while the foam-forming composition is in a less than fully expanded state.

When the apparatus **60** is operated to form a cushion, the cushion is advanced downwardly from a lower end of the apparatus and hangs downwardly therefrom in front of a mold **90** for molding the cushion into a desired shape. The mold **90** is releasably mounted to a mold plate **92** fastened to the front wall **50** of the frame **44**. More particularly, the mold plate **92** includes side flanges **94**

projecting forwardly (generally perpendicular to the front wall **50**) from its opposite longitudinal vertical edges, and slots **96** are defined in the flanges at vertically spaced locations along the height of the flanges. The mold **90** includes pins **91** (FIGS. 3 and 4) affixed to its lower end, which engage a selected pair of the slots **96** for restraining the mold in the vertical direction, and the upper end of the mold is provided with quick-release latches **98** that engage corresponding members on the mold plate to secure the mold in the apparatus. This releasable mounting system for the mold **90** allows the mold to be removed and replaced with another mold (possibly of different configuration) quickly and easily. The provision of multiple slots **96** at different heights allows molds of different vertical length to be mounted in the apparatus.

The mold **90** comprises a box of generally rectangular outer configuration. As further described below, the mold includes a door **100** that can be opened and closed by an actuator **102** such as a pneumatic cylinder as shown. The door is connected to the mold by long strap hinges **104** or the like. When the door is open, a cushion advanced downwardly from the cushion-making apparatus **60** is positioned in front of the mold so that the cushion can be received into the mold.

With reference to FIGS. 3 through 5, the mold **90** defines a mold cavity **110** configured as a negative impression of the desired shape of the cushion to be produced. The mold cavity has an open side at the front of the mold adjacent the door **100** (FIG. 1). As used herein, a "door" comprises any structure or device capable of closing the open side of the mold to constrain an expanding cushion in the mold to remain in the mold cavity. In a bottom wall **112** of the mold cavity, a plurality of air passages **114** are provided, spaced apart along the bottom wall. On an opposite side of the bottom wall **112** from the cavity **110**, the mold defines an air plenum **116** that extends the length and width of the cavity **110**. The air passages **114** extend between the cavity **110** and the air plenum **116**. A port **118** extends from the air plenum **116** to an exterior rear face **120** of the mold **90**. Thus, there is fluid communication between the mold cavity **110** and the air plenum **116** via the air passages **114**, and there is fluid communication between the air plenum **116** and the exterior of the mold via the port **118**. A single port **118** is shown, but alternatively the mold can employ more than one port.

With reference to FIGS. 2 and 6, the system **40** includes a vacuum/blowout system **130** mounted within the open rear side of the frame **44**. The vacuum/blowout system is connected with the port of the mold **90** for alternately either exerting a vacuum through the port for suctioning a cushion into the mold cavity, or supplying pressurized air through the port for expelling a completed cushion from the mold cavity. The mold plate **92** and the front wall **50** of the frame **44** include openings (not shown) to accommodate the connection of the vacuum/blowout system to the port of the mold. The vacuum/blowout system **130** includes an air tank **132** for holding pressurized air supplied by an air compressor **134**. The air compressor is connected to the air tank by a suitable air line (not shown) and a controllable valve (not shown) so that the valve can be opened when the air compressor is running in order to supply compressed air into the air tank, and then the valve can be closed and the compressor can be turned off. The vacuum/blowout system **130** further comprises a vacuum motor **136** for exerting suction through the port of the mold.

FIG. 7 shows the vacuum/blowout system **130** in isolated perspective view, and FIG. 8 shows the system in exploded view. The air tank **132** includes a valve cap assembly **140**. The vacuum motor **136** is releasably mounted to the valve cap assembly **140** by wire bails **138** or the like. The valve cap assembly defines a mating structure **142** for engaging the port of the mold in a substantially sealed manner so as to establish a flow path between the mold port and an air chamber defined within the valve cap assembly as further described below.

With primary reference to FIGS. 6, 8, 12, and 13, the valve cap assembly **140** includes a cap **144** that engages the air tank **132** and closes an open end of the tank. The tank includes a mounting collar **146** comprising a structural part of the tank weldment and defining L-shaped slots **147** engaged by pins **145** on the cap **144** (as best seen in FIG. 6) and a hand wheel nut **148** is provided for securing the cap **144** to the collar **146**. Other "quick-release" mounting mechanisms for attaching the cap to the tank can be used instead of the illustrated L-shaped slots, pins, and hand wheel. Referring particularly to FIGS. 12 and 13, the cap **144** defines an air chamber **150**. The air chamber has an inlet/outlet passage **152** that is coupled via the mating structure **142** to the port **118** of the mold **90**. The lower end

of the cap **144** defines an opening or port that is arranged to be connected to the interior of the air tank **132** when the shuttle valve **160** (to be described below) is in a blowout position as in FIG. 13, and this port is connected to the air chamber **150**. The upper end of the cap defines a second port **154** as a cylindrical passage extending from the air chamber **150** to a recess formed in the upper surface of the cap for receiving a lower end of the vacuum motor **136**. Accordingly, the vacuum motor is in communication with the port **154** and thus with the air chamber **150** when the shuttle valve is in a vacuum position as in FIG. 12.

The shuttle valve **160** is now described in detail. The shuttle valve includes a valve member **162** (shown in isolation in FIG. 9) having an upper tubular portion **164** defining a plurality of apertures **166** through the side wall thereof into the interior of the tubular portion. The tubular portion **164** is received in the cylindrical passage **154** of the cap **144**, which forms a guide for movement of the tubular portion along the axis of the passage. The tubular portion **164** forms a loose fit with the inner surface of the passage **154** so that air is generally discouraged from flowing between the outer surface of the tubular portion and the inner surface of the passage and the tubular portion slides freely within the passage. The lower end of the tubular portion **164** is affixed to an annular portion **168** of larger diameter than the tubular portion that is configured to engage a valve seat (described below) for blocking the connection between the air tank and the chamber **150** of the cap **144** when the valve member is in the vacuum position (FIG. 12). When the valve member **162** is moved to the blowout position (FIG. 13), the annular portion **168** disengages the valve seat to place the air tank in communication with the chamber **150**.

The valve member **162** further comprises a lower guide portion **170** that extends downwardly from the annular portion **168** and is generally cylindrical in outer shape. A magnetically permeable portion or member **172** is disposed on the bottom end of the guide portion **170**. For example, the portion or member **172** can be a disk of a ferrous metal. The guide portion **170** is slidably received in a cylindrical guide passage of a valve guide/seat assembly **180** that is mounted to the air tank **132**. The valve guide/seat assembly **180**, shown in isolation in FIGS. 10 and 11, comprises a tubular guide member **182** for receiving the guide portion **170**

of the valve member **162**. The tubular guide member **182** is mounted generally at a midpoint of a cross bar **184** and projects upwardly from the cross bar. Vertical support posts **186** are affixed to the opposite ends of the cross bar and project upwardly therefrom. An upper support ring **188** is affixed atop the support posts **186** and is substantially coaxial with the tubular guide member **182**. A ring-shaped valve seat **190** is affixed to the support ring **188** by way of a mounting ring **192** that sandwiches the valve seat between the mounting ring and the support ring. The mounting ring **192** has a larger outer diameter than the support ring **188** and valve seat **190**. The inner diameter of the valve seat **190** is smaller than that of the mounting ring **192** and support ring **188**. The inner diameter of the mounting ring **192** is slightly larger than the outer diameter of the annular portion **168** of the valve member **162**. Accordingly, the annular portion **168** can engage the part of the valve seat **190** that extends radially inwardly beyond the inner edge of the mounting ring **192**, so as to form a seal against the valve seat.

The outer peripheral portion of the mounting ring **192** that extends radially outwardly beyond the support ring **188** engages a radially inwardly extending annular flange **194** on the air tank **132**, as best seen in FIGS. 12 and 13. The mounting ring **192** is captured between this flange **192** and the cap **144** secured to the tank as previously noted, thereby securing the valve guide/seat assembly **180** to the air tank.

Mounted in the lower end of the guide passage of the tubular guide member **182** is a magnet **196**. The guide member **182** and magnet **196** are configured and positioned such that when the annular portion **168** of the valve member **162** is seated against the valve seat **190**, the magnetically permeable portion or member **172** of the guide portion **170** either is in contact with the magnet **196** or is spaced by a small gap distance from the magnet (see FIG. 12, which shows contact with the magnet). The magnetic attraction force of the magnet **196** on the magnetically permeable portion **172** of the valve member pulls the annular portion **168** of the valve member against the valve seat **190**, sealing the air tank, as in FIG. 12. This is the vacuum position of the magnetic shuttle valve. In this position, the port **118** of the mold **90** is in fluid communication with the air chamber **150** in the cap **144**, and thus with the port **154** that connects with the vacuum motor **136**, by virtue of

the apertures **166** in the tubular portion **164** of the valve member. Accordingly, operation of the vacuum motor **136** exerts a vacuum through the port **118** so as to subject the air plenum **116** of the mold to a sub-atmospheric pressure. This sub-atmospheric pressure is exerted on the mold cavity via the air passages **114** in the mold. Therefore, a cushion placed in front of the open side of the mold cavity will be drawn by suction into the mold cavity.

FIG. 13 shows the magnetic shuttle valve in the blowout position. The valve member **162** is moved to this position when air pressure within the air tank **132** exerts a greater force on the valve member **162** than the magnetic attraction force of the magnet **196**. When the air pressure becomes sufficiently high, the valve member is urged upwardly until the annular portion **168** abuts an inner surface of the air chamber **150** surrounding the air passage **154**. The valve member **162** can include a bumper or cushioning member **198** on the upper surface of the annular portion **168** for cushioning the impact between the valve member and the inner surface of the air chamber, since the movement of the valve member to the blowout position can be rapid.

The operation of the vacuum/blowout system **130** is now described with reference to FIGS. 12 through 14. FIG. 14 shows the pressure **200** within the air tank **132** as measured by a pressure sensor, as a function of time during one blowout cycle of the system. Also shown is the pressure **202** within the air plenum **116** of the mold **90** as a function of time. When the pressure in the air tank builds to a predetermined value **204**, the air pressure overcomes the magnetic attraction force on the valve member **162** and urges the valve member to the blowout position as in FIG. 13. It can be seen from the pressure traces in FIG. 14 that the pressure within the air tank then begins to drop as air rushes from the air tank, through the air chamber **150** of the cap **144** and out the passage **152** into the port **118** of the mold. Correspondingly, the air pressure within the air plenum **116** of the mold rapidly increases up to a peak pressure **206**, which is less than the pressure **204** in the air tank required for opening the valve. This increase of pressure in the air plenum occurs rapidly; the oscilloscope trace indicates approximately 5 ms elapses between the opening of the valve and the peak pressure condition in the air plenum. This quick burst of air pressure in the air

plenum is communicated to the mold cavity via the air passages **114**, which results in the cushion being expelled from the open side of the mold cavity. After the blowout, the valve **160** closes on its own by virtue of gravity, which causes the valve member **162** to fall back down such that the magnet **196** again engages the portion **172** on the valve member and holds the valve member closed for the next blowout operation.

The air pressure pulse must be rapid to expel the cushion from the mold. A longer, slower pulse is ineffective to expel the cushion completely because as the cushion begins to exit the mold it loses contact with the side walls of the mold cavity and air can pass around the cushion, leaving the cushion partially in the mold. With a rapid pressure pulse, the cushion's inertia causes it to eject completely before leaking air can have any deleterious effect. For a given configuration of air passages, air plenum, and mold cavity, the required volume of air in the air tank **132** to achieve the desired rapid pressure pulse is dependent on the pressure in the tank when the magnetic shuttle valve opens. The magnetic shuttle valve **160** can be designed to open at any of a range of pressures, by selecting the area of the valve exposed to the air pressure in the tank and the magnetic attraction force provided by the magnet **196** such that a desired air pressure will open the valve. The magnetic attraction force can be varied by varying the diameter of the magnet **196** and/or its thickness, and/or by varying the diameter of the magnetically permeable portion **172** of the valve member, and/or by varying a gap distance between the magnet and the magnetically permeable portion.

In one embodiment of the invention, an air pressure of approximately 4 psi for opening the valve is selected. In this embodiment, a 6-gallon air tank **132** has been found to be effective. Alternatively, however, the system could be designed with a 3-gallon tank at 8 psi opening pressure, with a 12-gallon tank at 2 psi opening pressure, etc. A smaller tank (e.g., 6 gallons or less) generally is preferred for reasons of compactness of the apparatus. On the other hand, there are advantages to keeping the opening pressure low. For instance, if the opening pressure is less than 7.2 psi, the air pressure tank is generally not deemed to be a "pressure vessel" subject to certain governmental regulations for pressure vessels.

Another advantage of low opening pressure is that the air tank can be pressurized with a low-pressure onboard compressor **134** (FIG. 2), thereby eliminating the need to use high-pressure shop air at a user's facility. One suitable low-pressure compressor that is useful in this regard is the HP Series linear compressor from Hiblow USA of Saline, Michigan.

For the blowout operation to work efficiently, pressure losses between the air tank **132** and the mold cavity **110** must be minimized. Pressure losses generally result from restrictions in the system that create flow resistance, as well as from expansion of the air. Flow restrictions can be reduced by making all air flow passages larger, but this increases the overall volume that must be filled by air from the air tank before the cushion can be ejected. Thus, the flow restriction losses and the expansion losses generally work against each other—a design change that favors one will typically hurt the other. These factors must be selected to reach a suitable compromise. In one embodiment of the invention, employing a 6-gallon air tank at an opening pressure of about 4 psi as noted above, it has been found that a suitable compromise is provided by configuring the system such that no portion of the air passages between the air tank and the air plenum is smaller than 3.5 square inches in flow area. Efficiency rapidly decreases as the flow area falls below 3.5 square inches. The flow area through the shuttle valve opening at the air tank discharge can be about 11 square inches. Making this flow area large does not adversely affect the total volume of the system because the length of this large flow area is very small and the air then transitions immediately into the air chamber **150** of substantially smaller flow area.

The total flow area of the air passages **114** connecting the air plenum **116** to the mold cavity **110** should also be at least 3.5 square inches in this embodiment.

The system for opening and closing the mold **90** is now described with reference to FIGS. 15 through 18. FIG. 15 shows the mold door **100** and its associated strap hinges **104**. The door can comprise a rectangular frame **210** formed of square metal tube, and a backing panel **212** affixed to the frame. The backing panel can comprise a plastic such as polyethylene or the like. Each of the strap hinges **104** has one end rigidly affixed to the frame **210** at one edge of the door, and an opposite end of the hinge receives a hinge pin **105** affixed either to the

mold adjacent its rear side or to the mold mounting plate 92 (FIG. 1). An advantage of mounting the door to the mold mounting plate is that the mold can be removed without removing the door. In either case, the strap hinges rotate about the hinge pins. The door also includes a latch mechanism 220 for latching the door in the closed position.

The structure and operation of the latch mechanism 220 are described with particular reference to FIGS. 16 through 18. FIG. 16 shows the door 100 in its closed position against the mold 90. The latch mechanism includes a lever 222 having one end pivotally connected to the end of the rod 103 of the pneumatic cylinder 102 for opening and closing the door. The opposite end of the lever 222 is pivotally connected to a hinge pin 224 affixed within a hollow support member 226 fastened to a front side of the door 100. The lever 222 passes through the central passage of the hollow support member 226. A latch 228 is also pivotally connected to the hinge pin 224 and projects rearwardly from the end of the lever 222 at a generally perpendicular angle relative to the lever. The latch 228 can pivot independently of the lever 222. A torsion spring 230 urges the latch in a first rotational direction (clockwise in FIG. 16) about the hinge pin 224, but the latch mechanism is configured such that the rotation of the latch relative to the lever is limited in this first direction, and in particular the latch cannot rotate in the first direction past a perpendicular orientation relative to the lever. A suitable stop is provided for this purpose.

The latch mechanism includes a catch 232 affixed to the mold 90 on an exterior side surface thereof opposite from the side near the strap hinges 104. The catch is positioned adjacent a front side of the mold so that it can be engaged by the latch 228. The latch 228 includes a detent or recess configured to receive the catch, as shown in FIG. 16. In this latched position of the latch mechanism, internal pressure in the mold exerted on the door 100 cannot open the door.

To open the door at the completion of a molding operation, the pneumatic cylinder 102 is actuated to retract the cylinder rod 103, thereby pulling on the lever 222 and causing it to pivot about the hinge pin 224 (counterclockwise in FIG. 16). Because of the stop provided between the latch 228 and the lever 222, the latch 228 therefore also pivots counterclockwise about the hinge pin and thus is

disengaged from the catch **232**, as shown in FIG. 17. The door **100** is now free to open. Further retraction of the cylinder rod **103** does not result in further pivoting of the lever **222** because the hollow support member **226** limits the pivoting of the lever. Accordingly, the continued retraction of the cylinder rod causes the door to pivot about the hinge pins **105** for the strap hinges **104**, thereby opening the door as shown in FIG. 18. Advantageously, the location of the hinge pins **105** remote from the open side of the mold causes the door **100** to be moved completely clear of the open side of the mold in its open position. This allows a clear path for the advancement of a cushion from the cushion-making apparatus **60** (FIG. 1) into a position in front of the open side of the mold in preparation for operation of the vacuum/blowout system to suck the cushion into the mold to start another molding cycle.

To close the door after the cushion is sucked into the mold cavity, the cylinder rod **103** is extended to move the door toward the closed position. With reference to FIG. 16, as the latch **228** engages the catch **232** just before the door fully closes, the latch is pivoted in a second direction (counterclockwise in FIG. 16) relative to the lever **222**, against the moment provided by the torsion spring **230**. This pivoting action is caused by the ramped exterior surface of the catch, which acts as a cam as the latch rides along it. Once the latch has moved far enough to fall off the rear end of the ramped surface, the latch **228** is urged by the torsion spring **230** back to its limiting perpendicular position and the catch **232** enters the recess in the latch, thus latching the door closed. An advantage of using such a latching mechanism is that the actuator **102** for the door does not have to provide the force for keeping the door closed against the pressure of the expanding cushion in the mold cavity.

Advantageously, the pneumatic cylinder **102** for opening and closing the door and operating the latch mechanism is powered by the same onboard compressor **134** used for pressurizing the air tank **132**. This arrangement is simple and cost-effective. Alternatively, other types of actuators could be used for opening and closing the door. As noted, the latching mechanism keeps the door closed against the pressure of the expanding cushion. Accordingly, the door actuator **102** need provide only enough force to open and close the door, and

therefore the compressor **134** can operate at low pressure and can be part of the system **40**, as opposed to having to use high-pressure shop air from a central air supply separate from the system. Additionally, the door opening and closing forces are low and thus there is no safety hazard associated with the door.

With reference to FIG. 19, the system **40** includes a controller **236** for controlling the operation of the various components of the system. The controller can be installed in an enclosure **240** mounted atop the frame **44** (FIG. 2). The controller is connected to the motor **84** for traversing the carriage that carries the dispenser **76** of the cushion-making apparatus, and is connected to the dispenser **76** for controlling its on/off functionality and optionally the foam flow rate. The controller is also connected to the drive motor **70** for driving the drive roller that advances the film through the cushion-making apparatus, and to the film sealing and cut-off device **86** for sealing the film plies along a transverse line and severing a completed cushion from the rest of the film material. The controller is further connected to the vacuum motor **136** of the vacuum/blowout system, and to the air compressor **134** and its associated valve that is operable to allow compressed air to charge the air tank. The controller is also connected to the mold door actuator **102**.

The controller can be connected to various sensors and detectors for sensing conditions associated with the various components. As previously described in connection with FIG. 1, the system **40** can employ a mold **90** that is releasably mounted in the frame **44** so that molds can be changed easily. In one embodiment, when a mold is selected and installed in the frame, a method of identification can be employed to recognize the particular mold and adjust the machine settings automatically. The method of recognition can be with a mold identifier **241** (FIG. 4) such as a bar code, RFID tag, or other similar mold identifier device. In this manner operating parameters such as the film length for a given cushion, amount of foam to be dispensed for the cushion, the foam dispersion pattern to be used, the cycle time (i.e., how long the mold is to be kept closed to allow the cushion to expand fully), and others can be predetermined at the time that a mold is manufactured. Therefore, when a mold is installed or replaced, the system can automatically recognize the particular mold and set the operating parameters, eliminating the need for an operator to re-program the

system. In this regard, as represented in FIG. 19, the controller **236** can be connected with a mold identification detector **242** (e.g., a hand-held reader, or a detector mounted in the frame of the system, for reading a bar code, RFID tag, or the like) that detects the mold identifier and enables the controller to select a set of predetermined values for the operating parameters. The set of predetermined values associated with the mold type indicated by the mold identifier can be programmed in the controller's memory or can be stored in the mold identifier itself and communicated to the controller via the mold identification detector **242**. When the controller stores the predetermined values, the controller's memory can store multiple sets of values for multiple mold types.

The actuator **102** controlling the door can have limit switches **244** or other types of sensors to insure that the door is in the correct position. If the actuator **102** comprises an air cylinder, magnetic Hall effect switches are suitable. The controller **236** is connected with the door sensor or limit switch **244** and is operable to wait until the door sensor indicates the door is fully open (FIG. 18) before starting a molding cycle, and to ensure that the door has closed completely (FIG. 16) when the cushion is expanding.

A sensor **246** can be employed to insure that the cushion has been fully ejected from the mold prior to beginning another cycle. There are many ways that this can be accomplished. The sensor can comprise a photo eye or ultrasonic sensor installed into the mold to inspect the cavity. More preferably, the sensor is attached to the frame **44** (FIG. 1) rather than the mold so that the mold can be removed and replaced without the need to detach and reattach sensors or sensor leads. One drawback with the frame-mounted sensor is that it can be difficult to look inside the cavity since each mold can be different and the sensor may need to be adjusted for each mold. In this case, a sensor can be used that is mounted in a manner to scan just forward of the opening of the mold, i.e., looking vertically across the front open side of the mold. This could comprise an ultrasonic sensor or a laser sensor that can detect the motion of the cushion as it is ejected. When the door opens, the sensor will see the space in front of the mold. When the blowout occurs, the sensor must first see the cushion as it passes by, then see that the

cushion is no longer there to ensure that the cushion has been ejected. In this way, the system will never attempt to make a cushion if one is stuck in the mold.

When the blowout system is actuated, a solenoid or the like is energized to couple the air compressor **134** to the air tank **132** long enough to charge the tank and open the magnetic shuttle valve **160**, and then the solenoid must shut off. This can be done simply by turning the solenoid on for a particular period of time, since the tank charging time is generally consistent; however a more reliable way is to monitor the blowout and ensure its occurrence. A preferred method is to use a pressure transducer or pressure switch **248** (FIG. 19) connected with the controller **236** to monitor the pressure inside the tank. During a blowout cycle, the pressure inside the tank will rise, then drop rapidly when blowout occurs, as previously described in connection with FIG. 14. The controller is able to recognize that blowout has occurred based on the output from the pressure sensor **248**. When the controller sees a pressure rise followed by a rapid pressure drop, it can de-energize the solenoid until it is time to start another cycle.

In use, the system **40** and method of the invention in accordance with one embodiment entail the following operations:

- The controller instructs the cushion-making apparatus **60** to produce a cushion of a particular length and foam distribution as described in the aforementioned co-pending application.
- Once the less than fully expanded cushion has reached a length that places it in front of the open mold **90**, the vacuum motor **136** is energized, pulling the cushion into the mold as previously described, and a solenoid controlling the pneumatic cylinder **102** is energized to cause the cylinder to close the mold door **100**, trapping the expanding cushion inside the mold. The vacuum motor is de-energized.
- The cushion-making apparatus **60** is then instructed to perform its cut-off sequence. In this manner, the cushion is secured in the mold before it is severed from the continuous film material.
- The expanding cushion is held in the mold for a period of time so that it can expand to fill the mold and become firm. This can take

from 20 seconds to about one minute depending upon the type of foam used and the size and shape of the cushion.

- The cylinder **102** is actuated to cause the door **100** to be opened and a solenoid is energized to cause the compressor **134** to charge the air tank **132** and perform the blowout operation as previously described.
- The sequence then restarts.

The system **40** can be operated in a "manual" mode in which the operator requests one, two, or some other predetermined number of cushions to be made, after which the system will automatically stop. Alternatively, the system can be run in a fully automatic mode in which cushions are continuously made and ejected onto a conveyor or other device, until such time as the system is stopped by the operator or otherwise.

Many modifications and other embodiments of the inventions set forth herein will come to mind to one skilled in the art to which these inventions pertain having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is to be understood that the inventions are not to be limited to the specific embodiments disclosed and that modifications and other embodiments are intended to be included within the scope of the appended claims. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

The reference in this specification to any prior publication (or information derived from it), or to any matter which is known, is not, and should not be taken as an acknowledgment or admission or any form of suggestion that that prior publication (or information derived from it) or known matter forms part of the common general knowledge in the field of endeavour to which this specification relates.

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A molding system for molding foam-in-bag cushions each formed by dispensing a foam-forming composition into a bag of flexible film material, the molding system comprising:

a mold defining a mold cavity configured for imparting a desired shape to a cushion placed in the mold cavity and allowed to expand to substantially fill the mold cavity, an air plenum separate from the mold cavity, a plurality of air passages that connect the mold cavity to the air plenum, and at least one part connected to the air plenum, the mold cavity having an open side to permit a cushion to enter the mold cavity and subsequently to exit the mold cavity after expansion of the cushion, the mold further comprising a door that is movable between a closed position the open side of the mold cavity and an open position allowing a cushion to enter and exit through the open side; and

a pneumatic vacuum/blowout system connected with the at least one port, the vacuum/blowout system comprising a vacuum source, and air tank containing pressurized air, and a vacuum/blowout valve structured and arranged to alternately couple the at least one port either to the vacuum source such that air is evacuated from the mold cavity via the air passages and air plenum so as to such a newly formed cushion into the mold cavity whereupon the door is closed and the cushion is allowed to expand to substantially fill the mold cavity, or to the air tank such that pressurized air is supplied from the air tank to the mold cavity via the air plenum and air passages to expel an expanded cushion from the mold cavity after the door is opened.

2. The molding system of claim 1, further comprising an air compressor coupled with the air tank for pressurizing the air tank.

3. The molding system of claim 2, further comprising a pneumatic cylinder connected with the door for opening and closing the door, the pneumatic cylinder being coupled with the air compressor via a controllable valve system.

4. The molding system of claim 2 or 3, wherein the vacuum/blowout system

comprises an air chamber connected to the at least one port and having a first passage connected to the air tank and a second passage connected to the vacuum source, and wherein the vacuum/blowout valve comprises a shuttle valve having a valve member that shuttles between a vacuum position closing the first passage and opening the second passage such that the at least one port is coupled to the vacuum source, and a blowout position opening the first passage and closing the second passage such that the at least one port is coupled to the air tank.

5. The molding system of claim 4, wherein the shuttle valve comprises a magnetic shuttle valve.

6. The molding system of claim 5, wherein a magnet is arranged to exerting a magnetic attraction force on the valve member urging the valve member toward the vacuum position, and wherein the valve member is arranged such that air pressure within the air tank acts on the valve member to urge the valve member toward the blowout position, such that when sufficient pressure builds up in the air tank the air pressure overcomes the magnetic attraction force to move the valve member to the blowout position.

7. The molding system of any preceding claim, further comprising a latch mechanism for latching the door in the closed position, the door being connected to the mold so as to pivot relative to the mold about a pivot axis remotely spaced from the open side of the mold cavity such that in the open position the door is remotely spaced from the open side of the mold cavity, the latch mechanism being movable between latched and unlatched positions, and further including a controllable actuator for moving the latch mechanism between latched and unlatched positions and moving the door between the closed and open positions.

8. A method for molding foam-in-bag cushions each formed by dispensing a foam-forming composition into a bag of flexible film material, the method comprising the steps of:

providing a mold defining a mold cavity configured for imparting a desired shape to a cushion placed in the mold cavity, the mold cavity having an open side to permit a cushion to enter the mold cavity and subsequently to exit the mold cavity after expansion of the cushion, the mold further comprising a door that is movable between a closed position closing the open side of the mold cavity and an open position allowing a cushion to enter and exit through the open side;

providing an air plenum separate from the mold cavity, a plurality of air passages that connect the mold cavity to the air plenum, and at least one port connected to the air plenum;

positioning the door in the open position and disposing a cushion adjacent the open side of the mold cavity;

operating an automated pneumatic vacuum/blowout system connected with the at least one port to exert vacuum through the at least one port so as to create a sub-atmospheric pressure within the mold cavity to suction the cushion into the mold cavity, the vacuum/blowout system including a vacuum source, an air compressor coupled with an air tank for accumulating pressurized air, and a valve mechanism provided between the air tank and the at least one port for controlling the supply of pressurized air from the air tank to the at least one port;

moving the door to the closed position to enclose the cushion in the mold cavity until the cushion has expanded to substantially fill the mold cavity, and then opening the door; and

causing the valve mechanism to be actuated so as to supply pressurized air from the air tank through the at least one port to expel the cushion out the open side of the mold cavity solely by air pressure.

9. The method of claim 8, wherein the pressurized air for expelling the cushion is accumulated in an air tank and a valve mechanism is provided between the air tank and the at least one port for controlling the supply of the pressurized air to the at least

one port, wherein the valve mechanism being arranged to be moved to an open position by air pressure within the air tank overcoming a biasing force holding the valve mechanism in a closed position, and wherein the air compressor is operated to supply air into the air tank to cause the valve mechanism to be moved to the open position to supply pressurized air from the air tank to the at least one port.

10. The method of claim 8 or 9, wherein the mold is releasably installed in a frame, and a cushion-making apparatus is mounted on the frame adjacent the mold, the method further comprising the steps of:

controlling operation of the cushion-making apparatus with a programmed controller that employs operating parameters having predetermined values for controlling said operation;

providing an identifier on the mold identifying the mold to the controller, the identifier being associated with a set of predetermined values for said operating parameters; and

detecting the identifier using a detector connected with the controller;

the controller controlling said operation based on the predetermined values.

11. The method of claim 10, wherein the set of predetermined values associated with the mold identifier are stored in the controller.

12. The method of claim 10, wherein the set of predetermined values associated with the mold identifier are stored in the mold identifier and are communicated to the controller via the detector.

13. The method of claim 10, 11 or 12, wherein the operating parameters associated with the identifier include at least a length of the cushion to be produced.

14. The method of claim 13, wherein the operating parameters further include at least an amount of foam to be dispensed into the cushion to be produced.

15. The method of any one of claims 10 to 14, wherein the door is opened and closed by an actuator controlled by the controller, and wherein the operating parameters associated with the identifier on the mold include at least a period of time during which the door is to be held closed while the cushion expands to fill the mold.

16. The method of any one of claims 10 to 15, wherein the operating parameters associated with the identifier include at least a foam dispersion pattern to be produced within the cushion by the cushion-making apparatus.

17. The method of any one of claims 8 to 16, wherein the mold is installed in a frame, and a cushion-making apparatus is mounted on the frame adjacent the mold, the method further comprising the steps of:

controlling operation of the cushion-making apparatus with a programmed controller;

the controller detecting whether a cushion remains in the mold cavity and refraining from operating the vacuum/blowout system to suction a cushion into the mold cavity if a cushion is detected in the mold cavity.

18. The method of claim 17, wherein the valve mechanism is operable to open so as to connect the air tank with the at least one port when the pressure in the air tank rises to a predetermined value, and a pressure sensor arranged to sense the pressure in the tank, wherein the controller receives an output signal from the pressure sensor and determines whether the valve has opened to supply pressurized air to the at least one port based on the signal from the pressure sensor.

19. A molding system substantially as described with reference to the accompanying drawings.

20. The method of any one of claims 8 to 18, substantially as hereinbefore described.

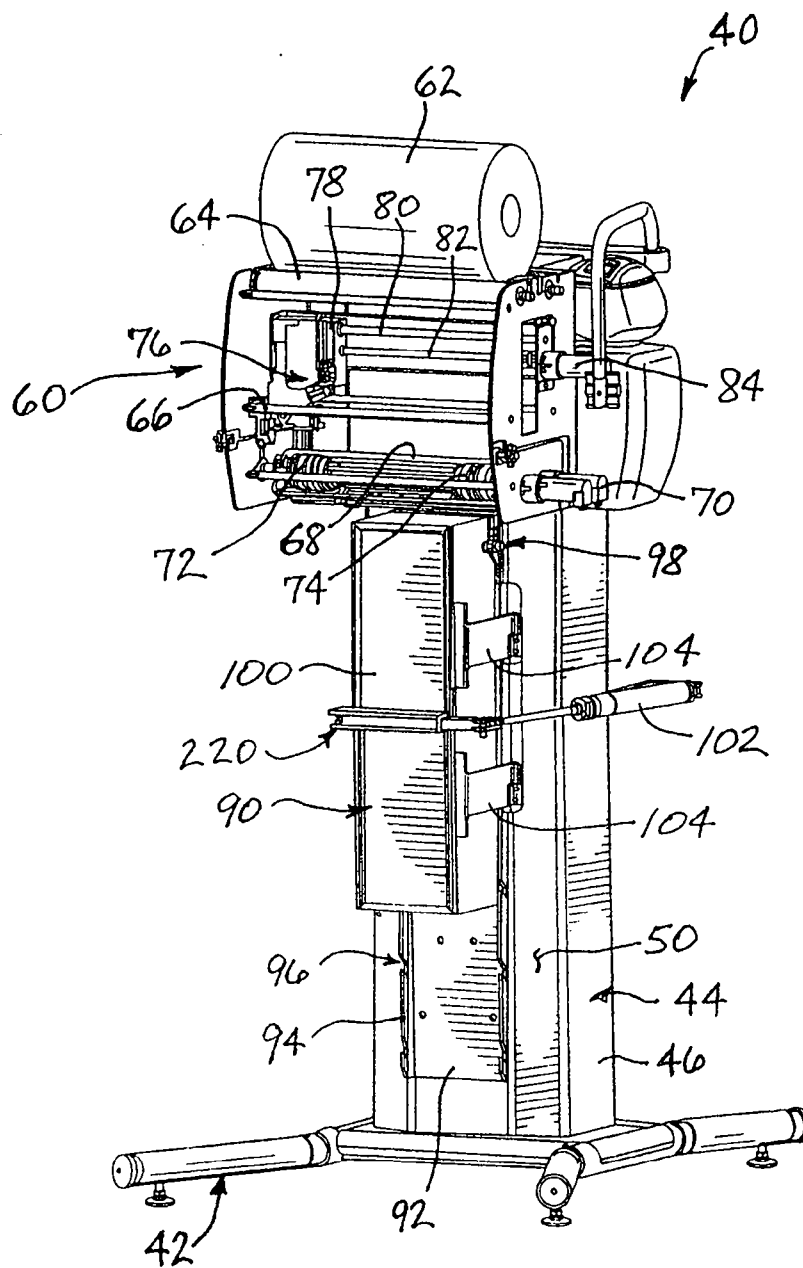


FIG. 1

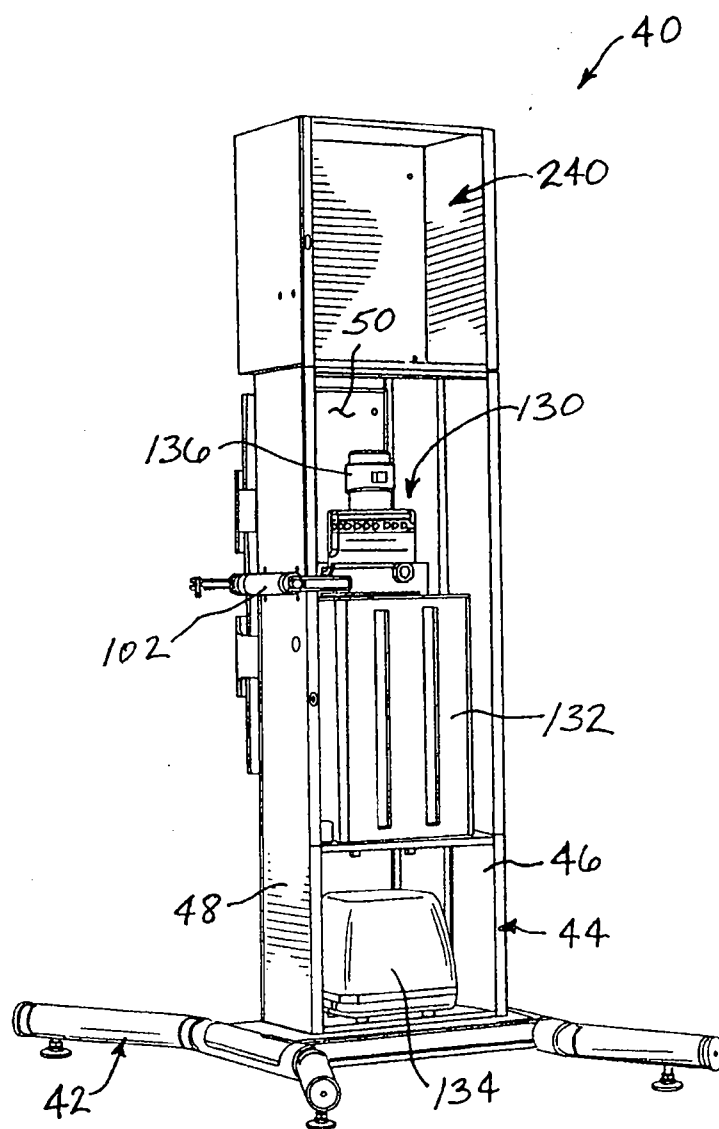


FIG. 2

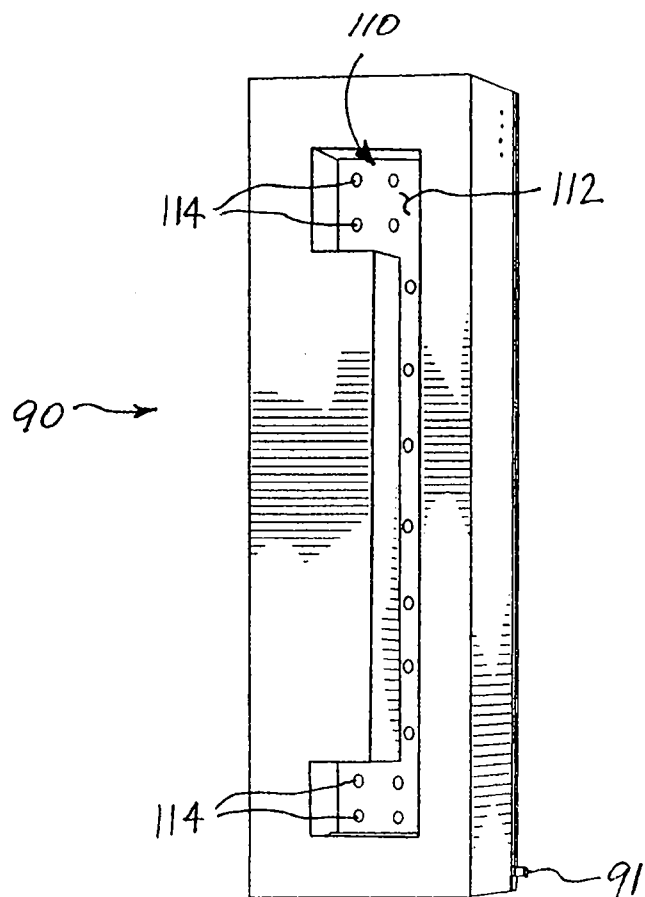


FIG. 3

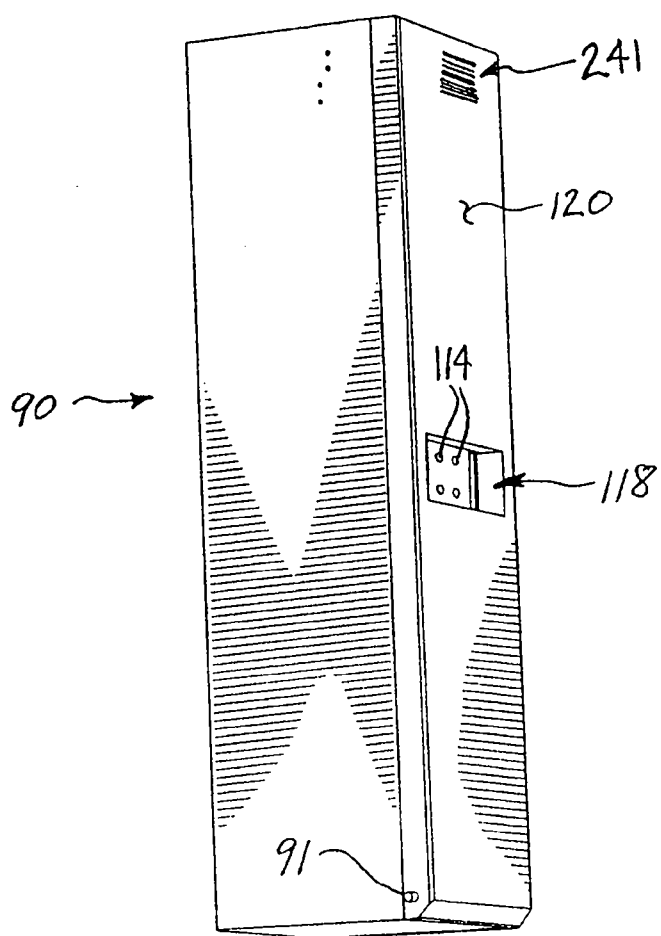


FIG. 4

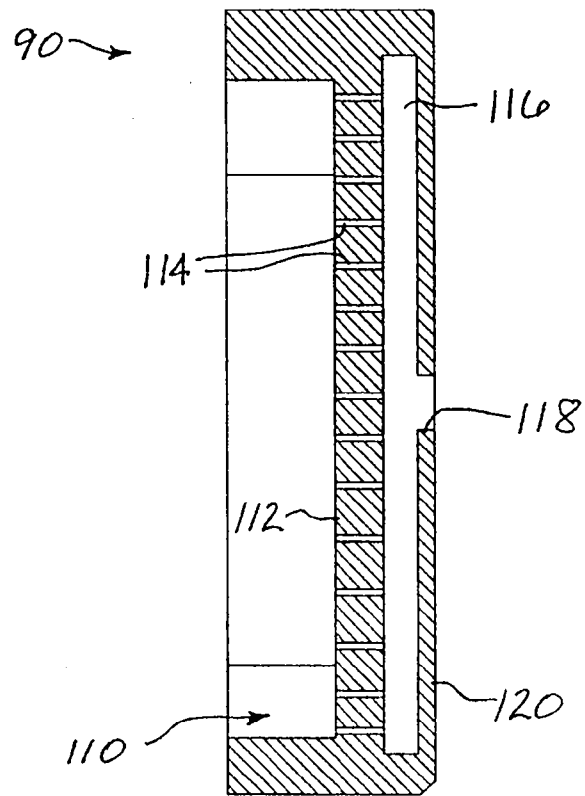


FIG. 5

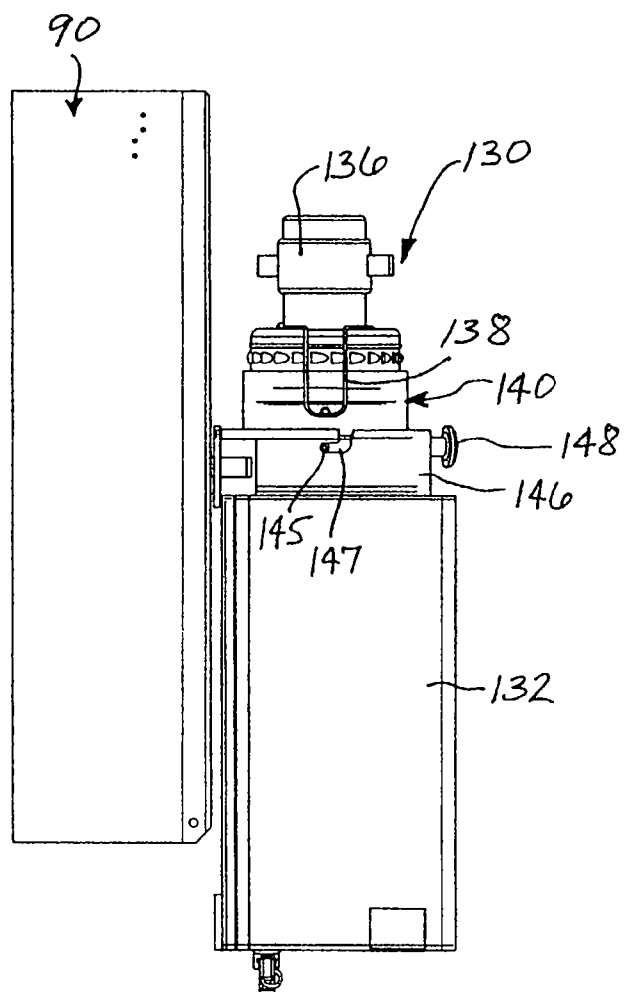


FIG. 6

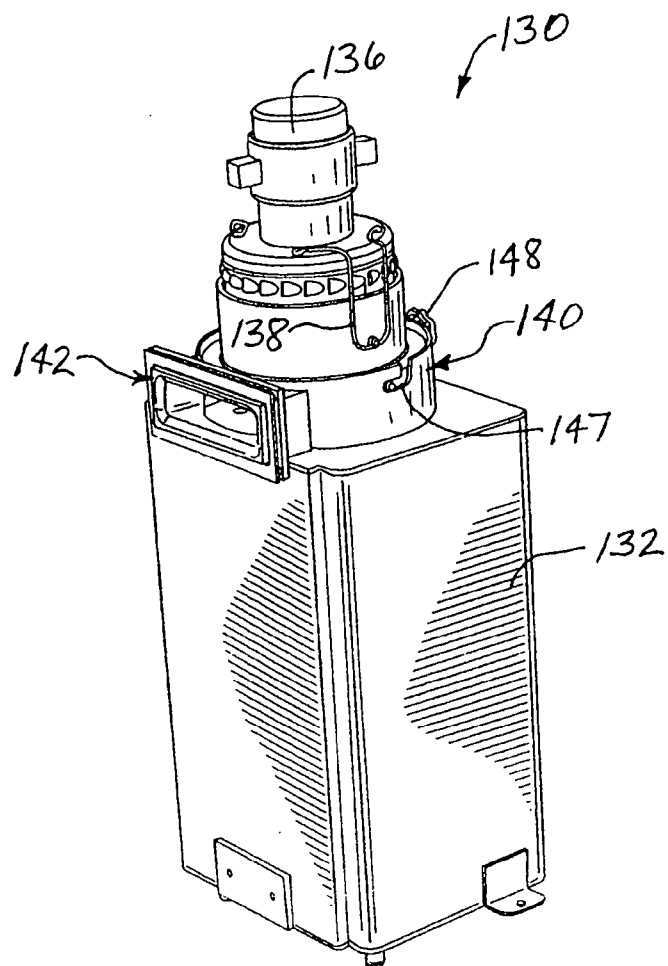


FIG. 7

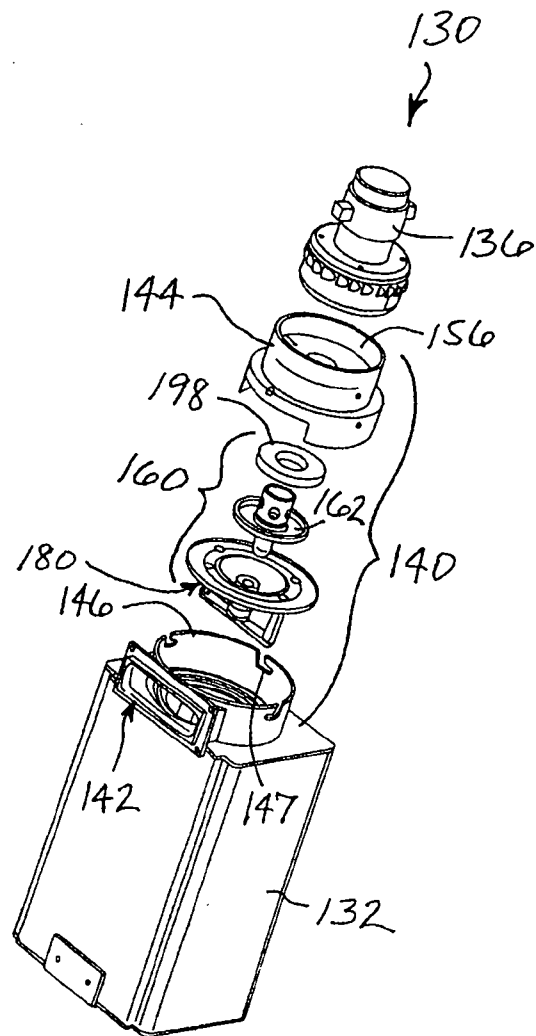


FIG. 8

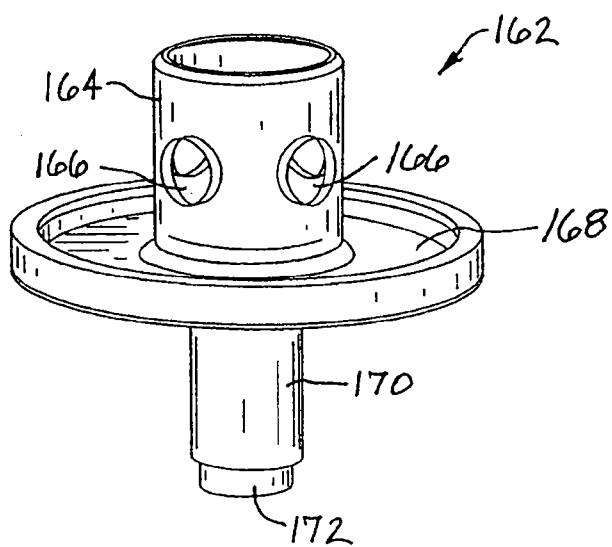


FIG. 9

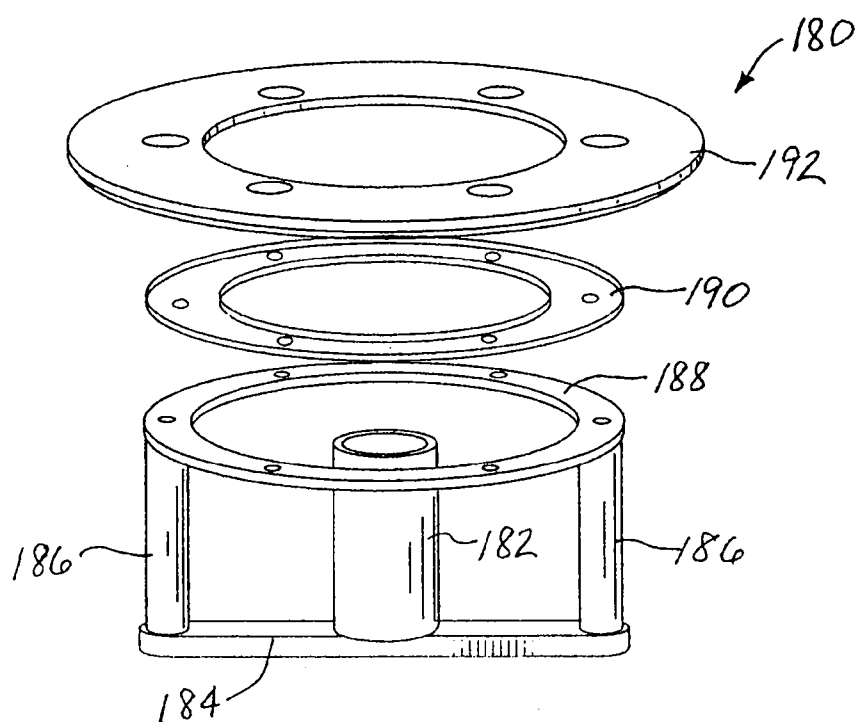


FIG. 10

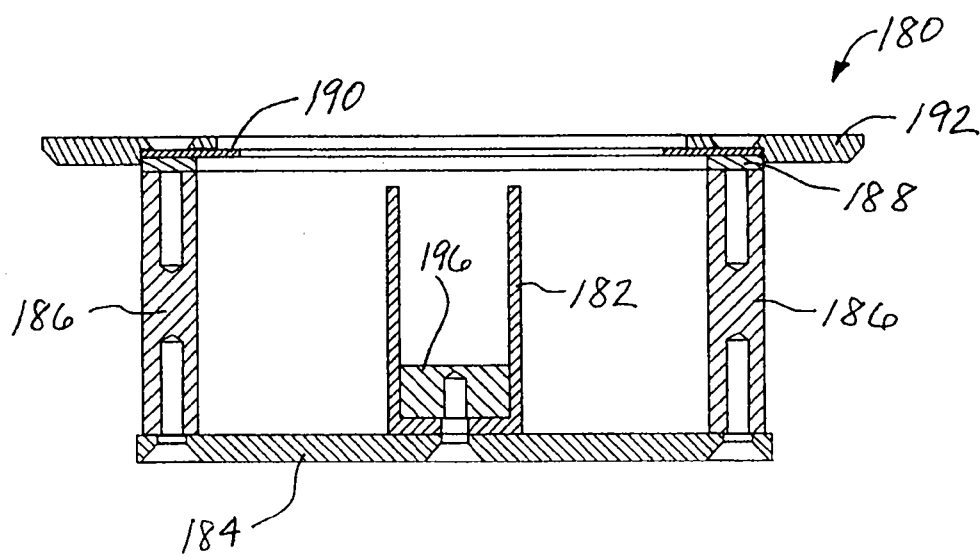


FIG. 11

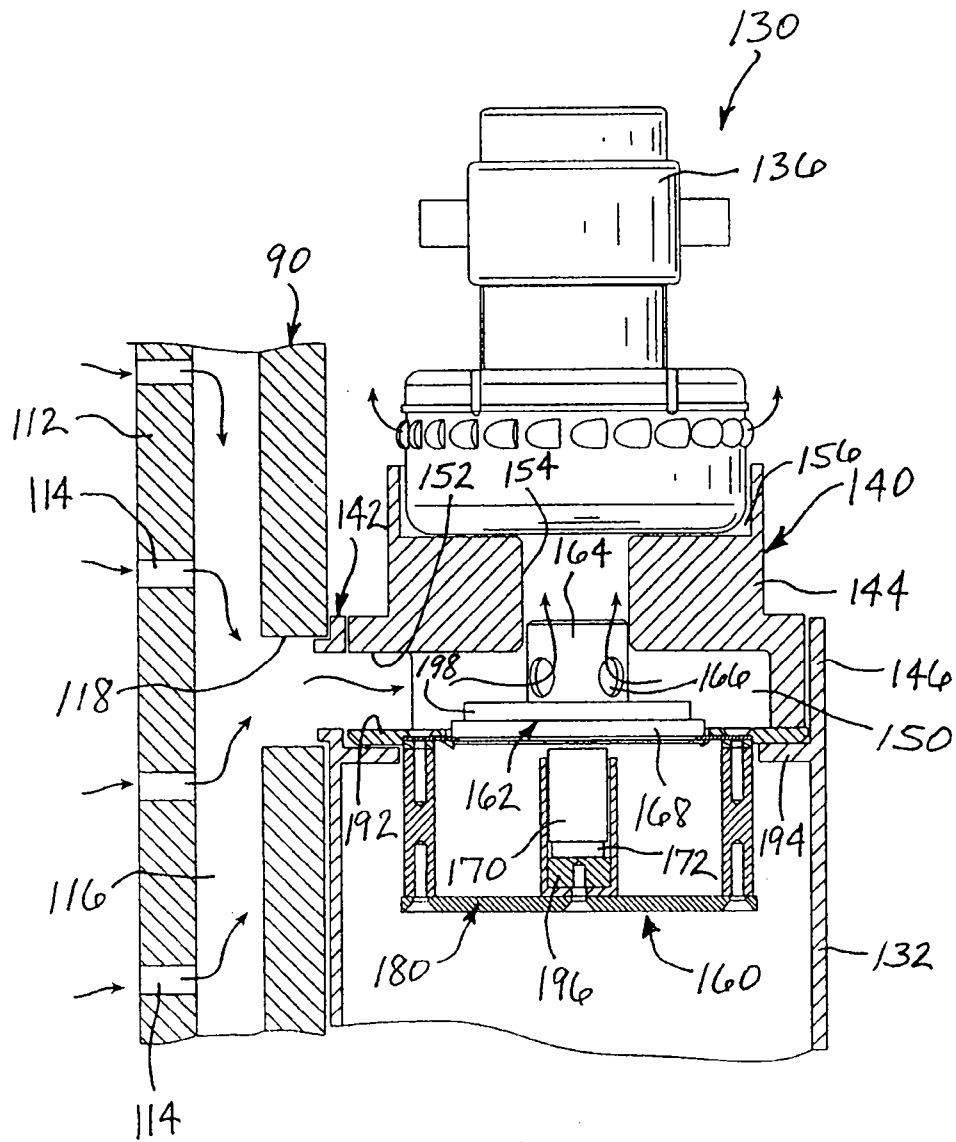


FIG. 12

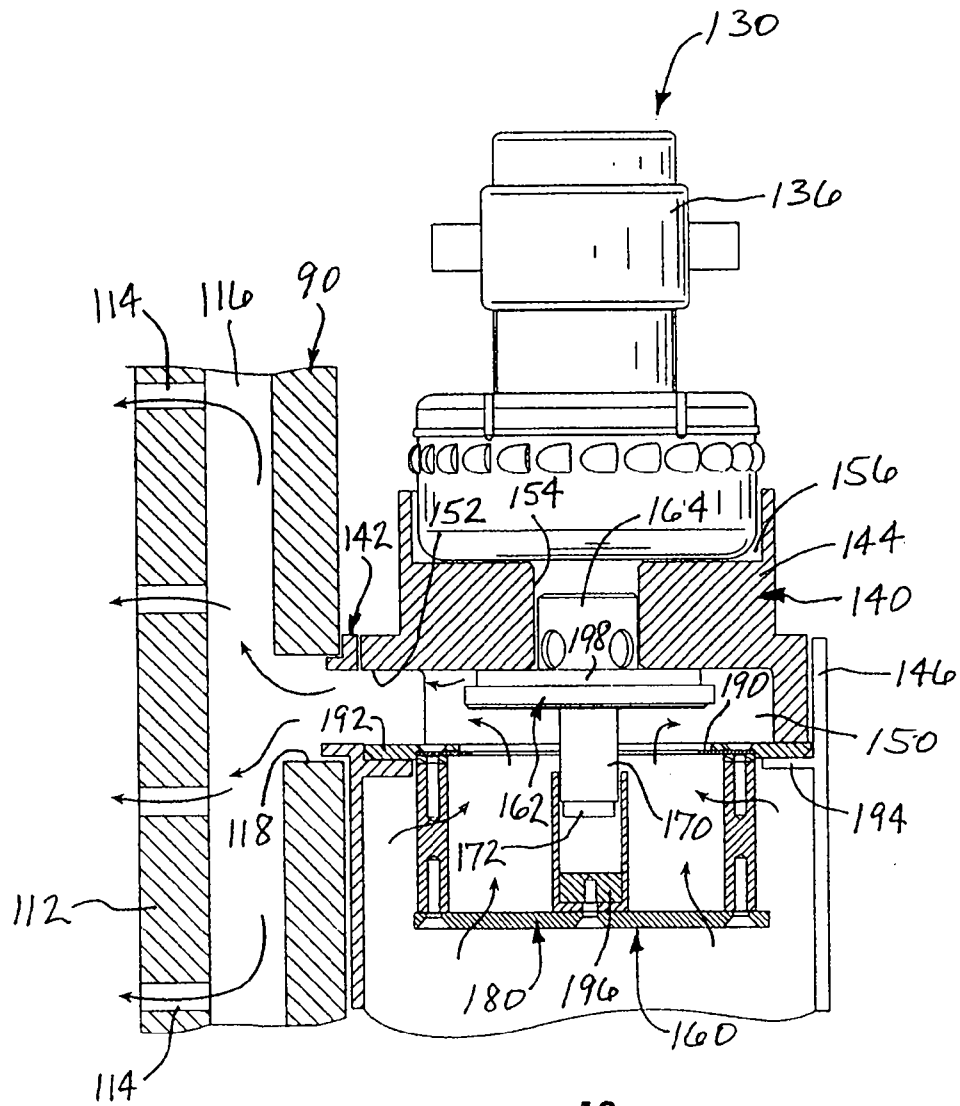


FIG. 13

14/19

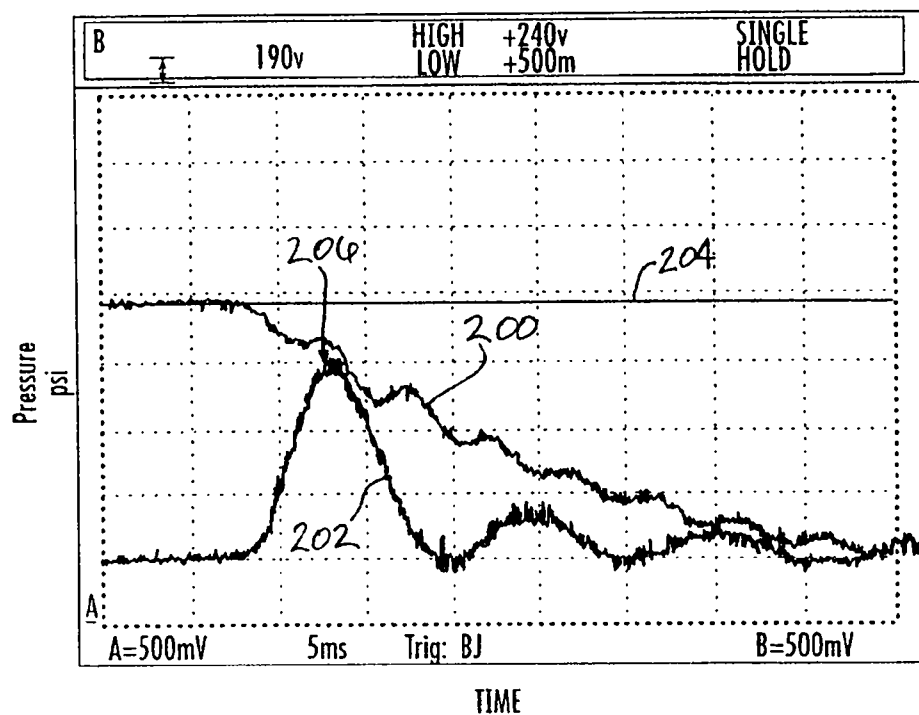


FIG. 14

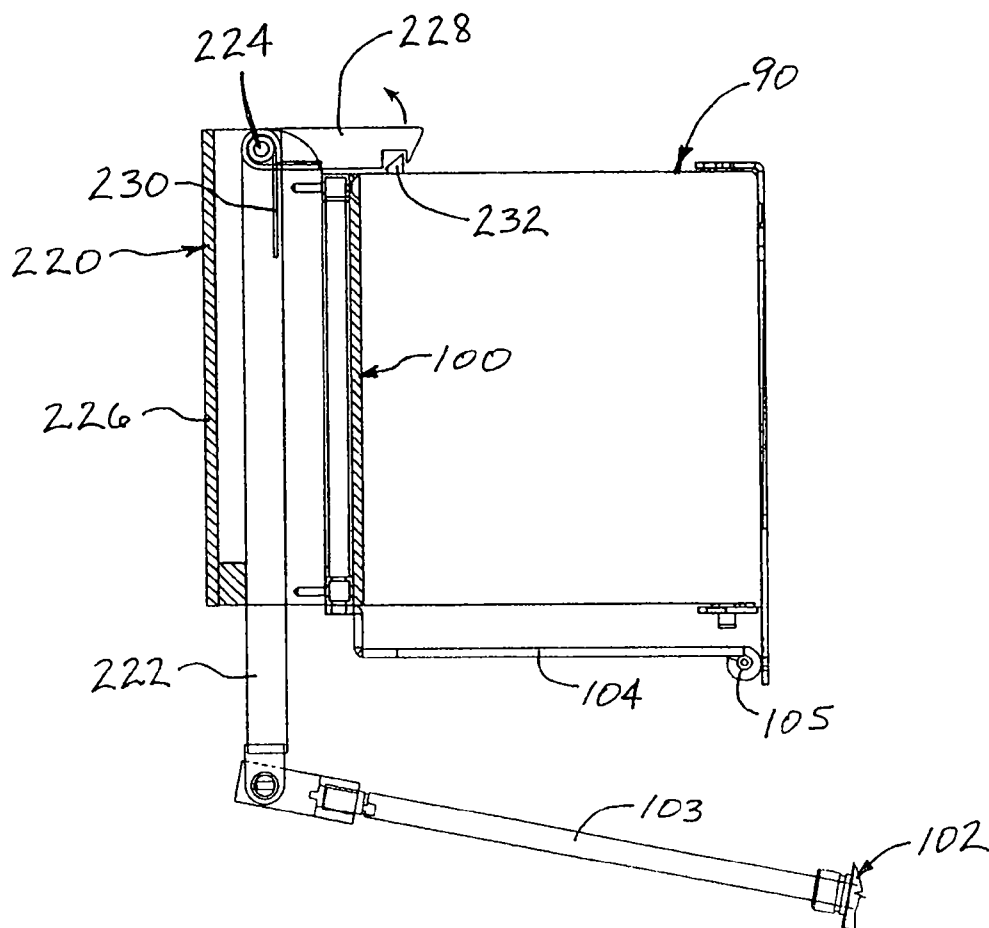


FIG. 16

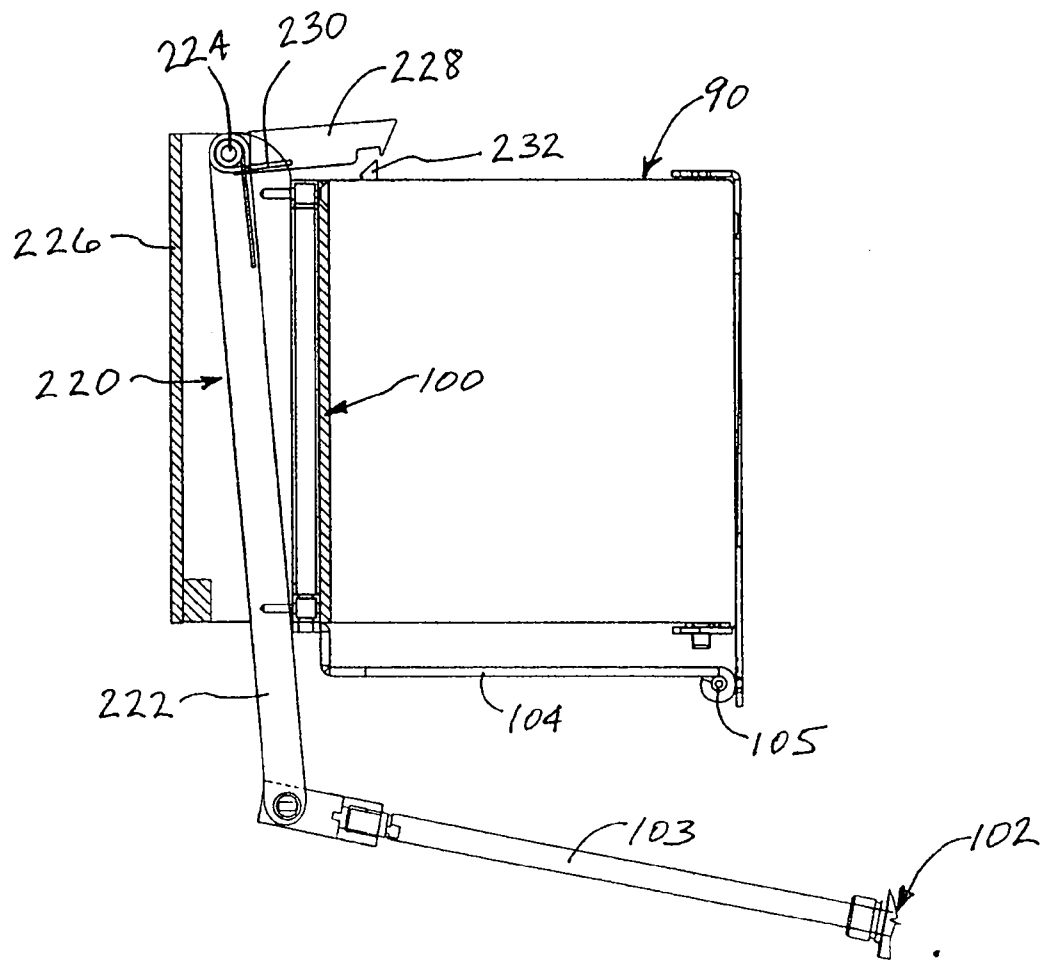


FIG. 17

18/19

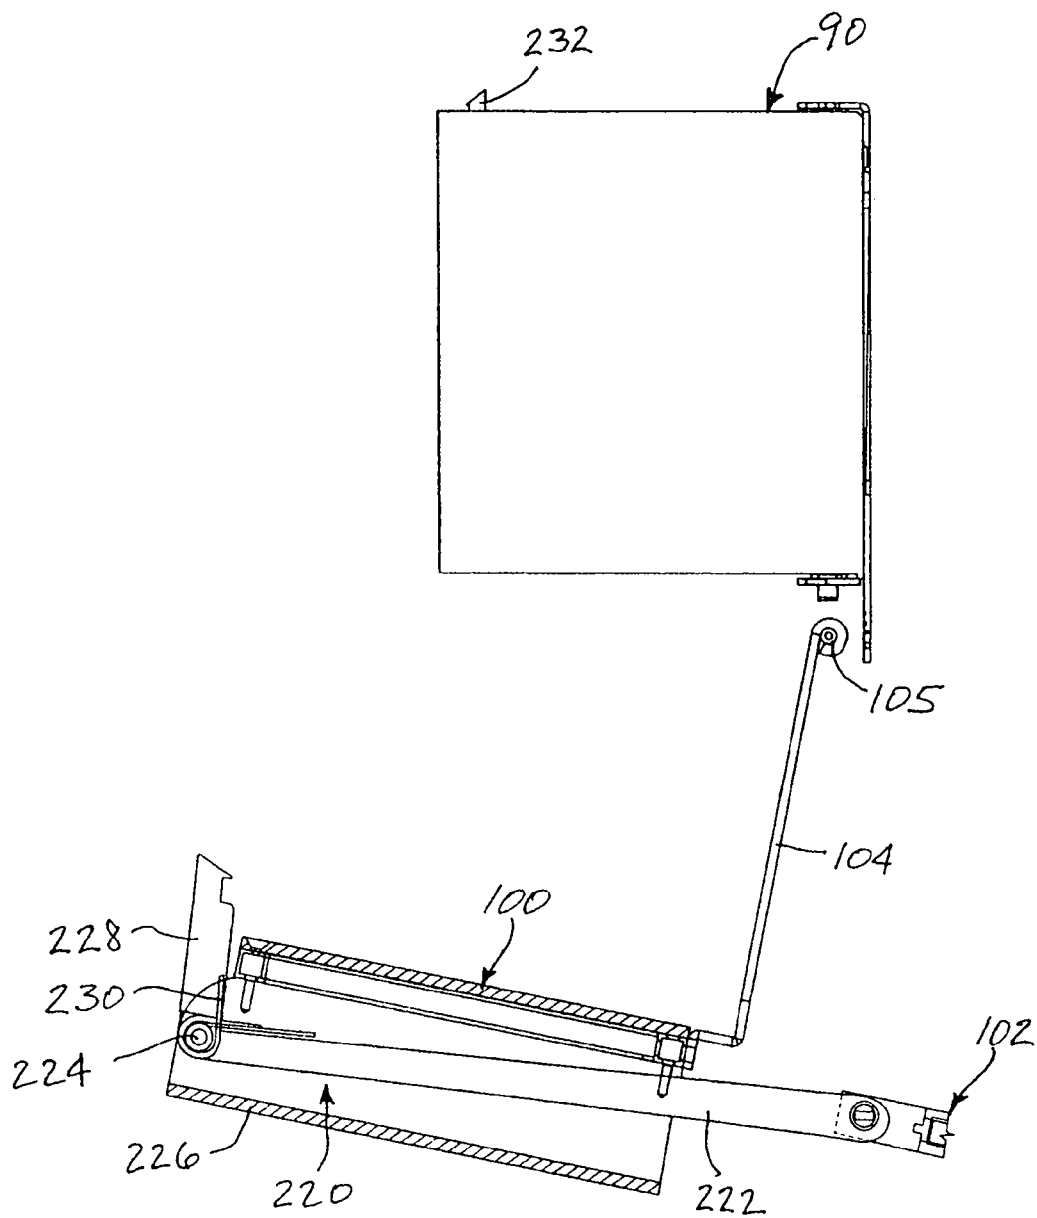


FIG. 18

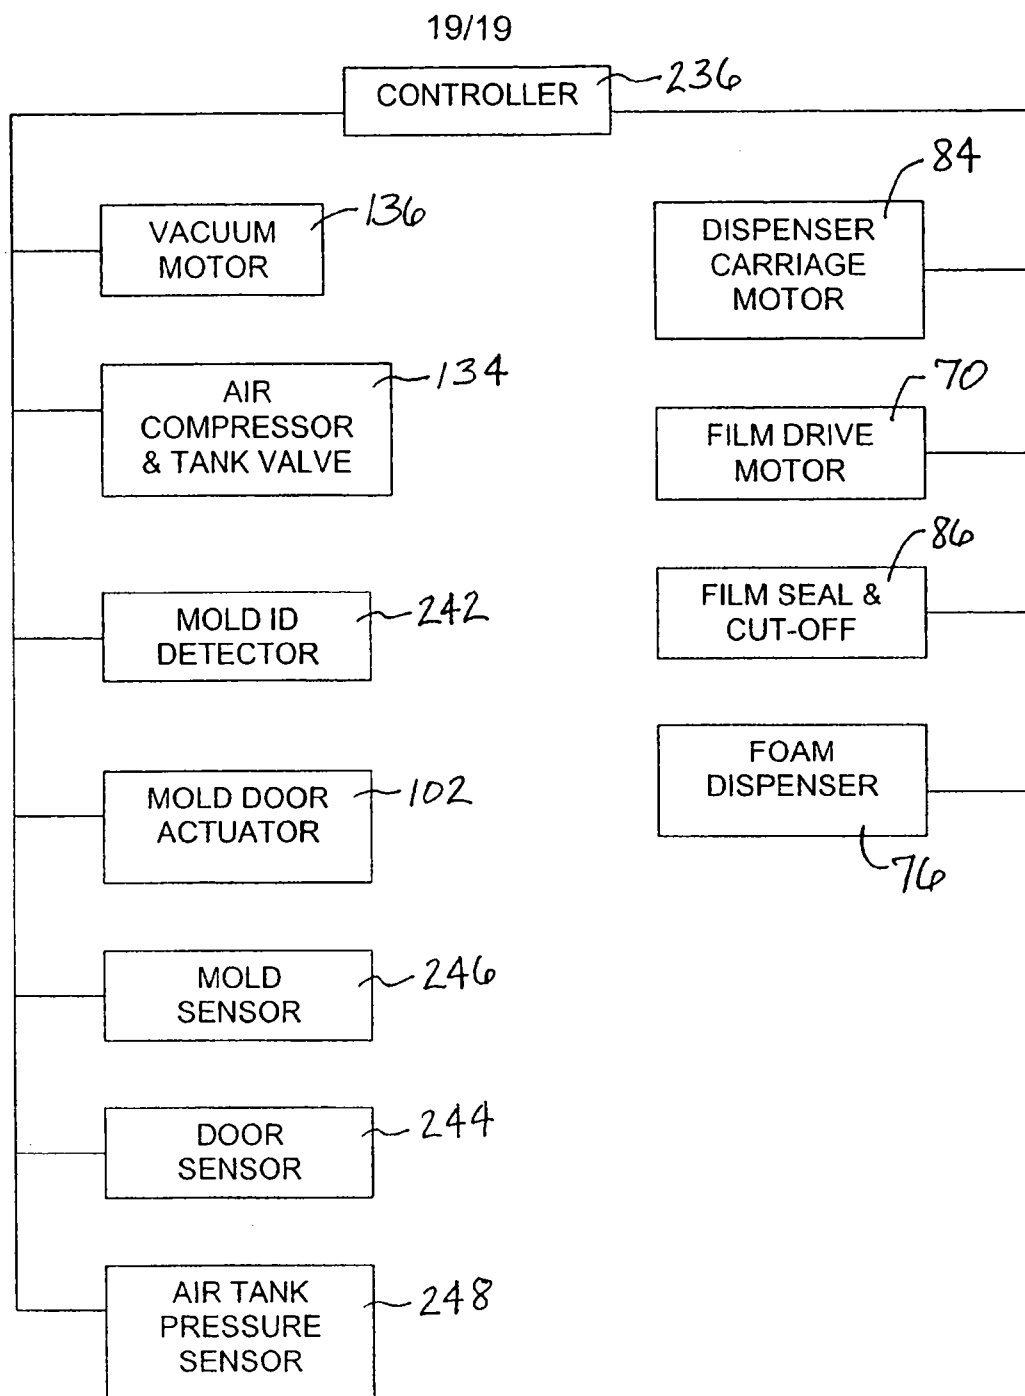


FIG. 19