



(51) International Patent Classification:

D21H 27/40 (2006.01) **D21H 21/16** (2006.01)
B32B 29/08 (2006.01) **D21H 21/18** (2006.01)
D21H 11/18 (2006.01) **D21H 27/10** (2006.01)
D21H 17/25 (2006.01) **D21H 27/38** (2006.01)

(21) International Application Number:

PCT/IB2017/051623

(22) International Filing Date:

21 March 2017 (21.03.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1650390-6 23 March 2016 (23.03.2016) SE

(71) Applicant: **STORA ENSO OYJ** [FI/FI]; P.O. Box 309, 00101 Helsinki (FI).(72) Inventors: **HEISKANEN, Isto**; Kanava-aukio 10 as 13-14, 55100 Imatra (FI). **LAMPAINEN, Seppo**; Kolkankatu 23 A 9, 15140 Lahti (FI). **KANKKUNEN, Jukka**; Vuoksenmiskantie 103 b7, 55800 Imatra (FI).(74) Agent: **LINNÉ, Nina**; Stora Enso AB, Group IP, Box 9090, 65009 Karlstad (SE).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: BOARD WITH IMPROVED COMPRESSION STRENGTH



(57) Abstract: A corrugated fiberboard comprising cellulosic fibers, wherein said corrugated fiberboard has at least one of a geometrical tensile index in the range of from 32 to 65 Nm/g, a fracture toughness index in the range of from 4 to 24 Jm/kg, and a ring crush index in the range of from 5 to 10 Nm/g5 measured at relative humidity of 85% RH; wherein the cellulosic fibers comprises a mixture of less refined fibers having a Schopper-Riegler (SR) value in the range of 15 to 28 and microfibrillated cellulose fibers, wherein mixture comprises said microfibrillated cellulose in a range of from 1% to 5% by weight of the dry content of the cellulosic fibers.

BOARD WITH IMPROVED COMPRESSION STRENGTH

Technical field

The present document relates to a board having improved compression strength at a high relative humidity. More particularly, the present disclosure relates to a corrugated fiberboard having improved compression strength and improved compression creep, in particular when subjected to high cyclic moisture humidity variations.

Background

Boxes made from board and corrugated fiberboard, produced from fluting and/or liner, are commonly used in demanding conditions and environments in which the moisture content in air changes both from low to high and also at various speeds. In addition to the moisture changes, the temperature may also shift from very low to quite high. These changes all affect the compression strength and dimensional stability of the board or corrugated fiberboard.

The moisture that enters the board through diffusion in high humidity environments may cause so called creeping when the box is under load or under compression conditions, and eventually it will lead to failure or collapse of the box, which of course is undesirable. This effect will be even more severe if going through a moisture cycle, for instance low-high-low moisture, at constant or various temperatures. This can be seen in Fig. 1 where the E-modulus of a conventional board shows a peak quite soon after changing the moisture content. This effect can thus be detrimental for a board or corrugated fiberboard box.

In the article "Moisture sorption Isotherms for Paper and paperboard in Food Chain Conditions" (M.E Parker et al, Packag. Technol. Sci. 2006; 19: 193-209) the moisture sorption properties of paper based materials in high humidity conditions is discussed.

Normally the problem with compression strength reduction at various relative humidity's (RH) has been solved by increasing the grammage of the fluting or liner thus creating an increased compression strength of the box. This however leads to increased cost of the end product.

There is thus a need for a board or corrugated fiberboard having increased compression strength, in particular in so called cyclic moisture

humidity conditions, which board is both easy and cheap to produce. There is also a need for a board that can withstand the impact of high moisture over a longer period of time.

5 Summary

It is an object of the present disclosure, to provide an improved corrugated fiberboard, which eliminates or alleviates at least some of the disadvantages of the prior art boards in particular during high moisture or relative humidity conditions.

10 More specific objects include providing a corrugated fiberboard having increased compression strength during such conditions.

The invention is defined by the appended independent claims. Embodiments are set forth in the appended dependent claims and in the following description.

15 According to a first aspect, there is provided a corrugated fiberboard, comprising cellulosic fibers, wherein said corrugated fiberboard has at least one of a geometrical tensile index in the range of from 32 to 65 Nm/g, a fracture toughness index in the range of from 14 to 24 Jm/kg, and a ring crush index in the range of from 5 to 10 Nm/g measured at relative humidity of 85%
20 RH, wherein the cellulosic fibers comprises a mixture of less refined fibers having a Schopper-Riegler (SR) value in the range of 15 to 28 and microfibrillated cellulose fibers, wherein the mixture comprises said microfibrillated cellulose in a range of from 1% to 5% by weight of the dry content of the cellulosic fibers.

25 Paperboard is usually classified into three different categories, cartonboards, containerboards and specialty boards. Often the paperboard is a multiply product, but it may also be a single ply product. Corrugating medium or corrugated fiberboard belongs to the group of containerboards, and is usually a single ply board (Papermaking Science and Technology book
30 18, "Paper and Board Grades"). Corrugated fiberboard is a paper-based material consisting of a fluted corrugated sheet and one or two flat linerboards. It is made on "flute lamination machines" or "corrugators" and is used in the manufacture of shipping containers and corrugated boxes.

This means that the corrugated fiberboard has a high tensile stiffness,
35 high fracture toughness and a good ring crush at a high relative humidity, this allows for a corrugated fiberboard which does not easily break during compression, i.e. has good resistance and structural stability, even at a high

relative humidity. The ring crush is an important parameter for the liner or fluting of a corrugated fiberboard.

This means that the corrugated fiberboard may be made from a mixture of less refined fibers, i.e. fibers having a relatively low SR value, in the base pulp and an addition of microfibrillated cellulose to form a furnish ,
5 giving the corrugated fiberboard the excellent resistance and structural stability even at a high relative humidity, such as 85% RH. The corrugated fiberboard has an improved ability to be able to withstand penetration of water at high humidity and the effect of a possible water penetration.

10 By less refined cellulose fibers is meant that the cellulosic fibers in the base pulp have been refined to a lesser extent than in a base pulp conventionally used for manufacturing paperboard or corrugated paper board.

The less refined fibers have a Schopper-Riegler (SR) value in the range of 15 to 28.

15 The furnish preferably comprises less refined fibers in an amount of 95-99% by weight of the dry content of the cellulosic fibers, i.e. the furnish only comprise a mixture of less refined fibers and microfibrillated cellulose. It is thus possible to reduce the refining of the entire base pulp and be able to produce a product with improved properties at high humidity.

20 The corrugated fiberboard may comprise a hydrophobic sizing additive.

The addition of a hydrophobic sizing additive in the wet end of a paper and board making process provides the corrugated fiberboard with improved or less compression creep, even at a high relative humidity, such as 85% RH, and in particular in instances where corrugated fiberboard is subjected to
25 cyclic humidity variations such as for instance low-high-low humidity. The hydrophobic sizing additive may thus slow down any moisture variations in for instance a box made from a corrugated fiberboard.

The hydrophobic sizing additive may be any one of alkylketene dimer (AKD), succinic anhydrides (ASA), rosin sizes, styrene maleic anhydride
30 (SMA), or other emulsions, modifications or mixtures thereof.

The hydrophobic sizing additive is thus such that it may be recycled/re-pulpered in the broke. A controlled hydrofobic sizing of the corrugated fiberboard may allow for a slower moisture penetration, or a reduced moisture gradient speed, into the corrugated fiberboard at the high relative humidity
35 and when the reative humidity drops again the compression strenght of the board is increased. Sizing the corrugated fiberboard with for instance AKD

thus reduces the compression creep, especially at high cyclic moisture variations, i.e. when the moisture level changes from low to high to low.

The combination of mixing less refined cellulose fibers with MFC and adding a hydrofobic sizing additive, such as for instance AKD, to the
5 paperboard or corrugated fiberboard even further improves the resistance and structural stability, i.e. gives a synergistic positive effect on the compression strength and the compression creep of the corrugated fiberboard even at a high relative humidity such as 85% RH.

The corrugated fiberboard may have a basis weight or grammage in
10 the range of 250 to 450 g/m², and a thickness in the range of 400 to 500 µm.

The corrugated fiberboard according to the first aspect may have fraction toughness measured as Jm/kg at 85% RH in the range of 5 to 12 % higher than compared to a conventional corrugated fiberboard.

By conventional corrugated fiberboard is meant a board made from
15 fibers having a conventional degree of refining as compared to the inventive board.

According to a second aspect there is provided a method of manufacturing a corrugated fiberboard comprising cellulosic fibers, wherein the corrugated fiberboard has at least one of a geometrical tensile index in
20 the range of from 32 to 65 Nm/g, a fracture toughness index in the range of from 14 to 24 Jm/kg, and a ring crush index in the range of from 5 to 10 Nm/g measured at relative humidity of 85% RH, and wherein the corrugated fiberboard is produced from a base pulp, wherein the base pulp comprises less refined cellulosic fibers having a Schopper-Riegler value in the range of
25 15 to 28, and wherein said method comprises the step of providing a furnish comprising said base pulp; adding a microfibrillated cellulose solution to said furnish, wherein the content of the microfibrillated cellulose is in the range of 1% to 5% by weight of the dry content of the cellulosic fibers.

By less refined cellulose fibers is meant that the cellulosic fibers in the
30 base pulp have been refined to a lesser extent than in a base pulp conventionally used for manufacturing corrugated paper board.

This means that the base pulp refining level is lowered from what is conventionally seen as optimum for producing corrugated fiberboards.

By this method it is thus possible to manufacture a corrugated
35 fiberboard having improved structural characteristics even subjected to moisture conditions.

The method may further comprise a step of surface sizing said corrugated fiberboard, wherein a hydrophobic surface sizing additive is added in said surface sizing step.

The internal or hydrophobic sizing additive used in the surface
5 sizing step may be any one of alkylketene dimer (AKD), alkenyl succinic anhydrides (ASA), rosin sizes, styrene maleic anhydride (SMA), and emulsions, modifications or mixtures thereof. The hydrophobic sizes (AKD, ASA, etc) can be added to both wet end and via a surface treatment (surface sizing) step. In a surface sizing, the varieties of hydrophobic chemicals that
10 can be used are usually larger.

Either one of fluting and liner, or both fluting and liner of the corrugated fiberboard may be manufactured from said furnish.

It is also possible to provide a corrugated fiberboard having a layered structure where the furnish may be used for all or different layers.

15 The base pulp may comprise any one of a virgin and recycled pulp. When a virgin pulp is used the Schopper-Riegler (SR) value of the less refined fibers is preferably below 25. For a recycled pulp there is a usually a contribution of fines in the pulp which gives the base pulp a higher SR value than a virgin pulp, the main proportion of the pulp should preferably comprise
20 less refined cellulose fibers than used in conventional paperboard or corrugated fiberboard manufacturing processes.

The base pulp may comprise any one of a chemical pulp, mechanical pulp, thermomechanical pulp and chemi-thermomechanical pulp.

According to a third aspect there is provided a corrugated fiberboard,
25 comprising cellulosic fibers obtained by the method according to the second aspect, having at least one of a geometrical tensile index in the range of from 32 to 65 Nm/g, a fracture toughness index in the range of from 14 to 24 Jm/kg, and a ring crush index in the range of from 5 to 10 Nm/g measured at relative humidity of 85% RH, wherein said cellulosic fibers comprises a
30 mixture of less refined fibers and microfibrillated cellulose.

The corrugated fiberboard as claimed may have a fraction toughness measured as Jm/kg at 85% RH which is in the range of 5 to 12 % higher than compared to a conventional corrugated fiberboard.

According to a fourth aspect there is provided the use of corrugated
35 fiberboard according to the first or third aspect for manufacturing any one of a box, a tray, a packaging.

Brief Description of the Drawings

Examples of the present invention will be described, with reference to the accompanying drawing.

Fig. 1 Diagram showing a schematic transient change in the elastic
5 modulus as a function of time following a moisture change.

Description of Embodiments

According to the invention a corrugated fiberboard, i.e. comprising fluting and liner, is manufactured from a base pulp comprising cellulosic
10 fibers. The corrugated fiberboard may be manufactured in any conventional paper or board making process and machine, known to the skilled person. In the description the term "board" will be used to encompass corrugated fiberboard, where nothing else is indicated. The corrugated fiberboard may comprise a layered structure.

15 The base pulp may be any one of a chemical pulp, mechanical pulp, thermomechanical pulp and chemi-thermomechanical pulp (CTMP), and neutral sulphite semi-chemical (NSSC) pulp.

The base pulp may further be any one of a virgin and a re-cycled pulp.

The base pulp comprises cellulosic fibers which have been less refined
20 than conventional fibers for use in board applications. By less refined is meant that the cellulosic fibers in the base pulp are coarser than the fibers conventionally used for these types of applications. The refining of the fibers may be reduced by around 20% compared to the conventional refining for board applications. By less refined fibers is meant that they are more
25 undamaged and may be coarser than conventionally used fibers.

The Schopper-Riegler value is dependent on the type of base pulp used for the manufacture of the board, and is usually in the range of 15 to 35, preferably between 15-28. The SR value may also be influenced by different types of chemicals, the temperature and pH.

30 For a virgin pulp the SR value preferably is in the range of from 15 to 25.

For a re-cycled pulp the SR value may be slightly higher than for a virgin pulp due to the occurrence of fines in the re-cycles water etc. This means that for a re-cycled pulp the SR value may rather be in the range of 20
35 to 35, preferably between 20-28.

The base pulp is used to form a furnish for the manufacture of the corrugated fiberboard.

Microfibrillated cellulose (MFC) is added to the furnish, in a range of range of 1% to 5% by weight of the dry content of the cellulosic fibers in the furnish, or is dosed at a range of 15-50 kg/t base pulp.

The microfibrillated cellulose is microfibrillated cellulose produced from
5 mechanical, thermomechanical or chemical pulp. The microfibrillated cellulose is preferably produced from kraft pulp. The microfibrillated cellulose preferably has a Schopper-Riegler value (SR°) of more than 93. According to another embodiment the MFC may have a Schopper-Riegler value (SR°) of more than 95. The Schopper-Riegler value can be obtained through the
10 standard method defined in EN ISO 5267-1. This high SR value is determined for a pulp, with or without additional chemicals, thus the fibers have not consolidated into a film or started e.g. hornification. It has been found that the use a MFC with a very high SR value, i.e. value above 93, in combination with less refined pulp has strongly improved the mentioned
15 properties for a corrugated fiberboard.

Microfibrillated cellulose (MFC) shall in the context of the patent application mean a nano scale cellulose particle fiber or fibril with at least one dimension less than 100 nm. MFC comprises partly or totally fibrillated cellulose or lignocellulose fibers. The liberated fibrils have a diameter less
20 than 100 nm, whereas the actual fibril diameter or particle size distribution and/or aspect ratio (length/width) depends on the source and the manufacturing methods. The smallest fibril is called elementary fibril and has a diameter of approximately 2-4 nm (see e.g. *Chinga-Carrasco, G., Cellulose fibres, nanofibrils and microfibrils, The morphological sequence of MFC components from a plant physiology and fibre technology point of view, Nanoscale research letters 2011, 6:417*), while it is common that the aggregated form of the elementary fibrils, also defined as microfibril (*Fengel, D., Ultrastructural behavior of cell wall polysaccharides, Tappi J., March 1970, Vol 53, No. 3.*), is the main product that is obtained when making MFC e.g. by
25 using an extended refining process or pressure-drop disintegration process. Depending on the source and the manufacturing process, the length of the fibrils can vary from around 1 to more than 10 micrometers. A coarse MFC grade might contain a substantial fraction of fibrillated fibers, i.e. protruding fibrils from the tracheid (cellulose fiber), and with a certain amount
30 of fibrils liberated from the tracheid (cellulose fiber).
35

There are different acronyms for MFC such as cellulose microfibrils, fibrillated cellulose, nanofibrillated cellulose, fibril aggregates, nanoscale

cellulose fibrils, cellulose nanofibers, cellulose nanofibrils, cellulose microfibers, cellulose fibrils, microfibrillar cellulose, microfibril aggregates and cellulose microfibril aggregates. MFC can also be characterized by various physical or physical-chemical properties such as large surface area or its ability to form a gel-like material at low solids (1-5 wt%) when dispersed in water. The cellulose fiber is preferably fibrillated to such an extent that the final specific surface area of the formed MFC is from about 1 to about 200 m²/g, or more preferably 50-200 m²/g when determined for a freeze-dried material with the BET method.

Various methods exist to make MFC, such as single or multiple pass refining, pre-hydrolysis followed by refining or high shear disintegration or liberation of fibrils. One or several pre-treatment step is usually required in order to make MFC manufacturing both energy efficient and sustainable. The cellulose fibers of the pulp to be supplied may thus be pre-treated enzymatically or chemically, for example to reduce the quantity of hemicellulose or lignin. The cellulose fibers may be chemically modified before fibrillation, wherein the cellulose molecules contain functional groups other (or more) than found in the original cellulose. Such groups include, among others, carboxymethyl (CMC), aldehyde and/or carboxyl groups (cellulose obtained by N-oxyl mediated oxydation, for example "TEMPO"), or quaternary ammonium (cationic cellulose). After being modified or oxidized in one of the above-described methods, it is easier to disintegrate the fibers into MFC or nanofibrillar size or NFC.

The nanofibrillar cellulose may contain some hemicelluloses; the amount is dependent on the plant source. Mechanical disintegration of the pre-treated fibers, e.g. hydrolysed, pre-swelled, or oxidized cellulose raw material is carried out with suitable equipment such as a refiner, grinder, homogenizer, colloidizer, friction grinder, ultrasound sonicator, fluidizer such as microfluidizer, macrofluidizer or fluidizer-type homogenizer. Depending on the MFC manufacturing method, the product might also contain fines, or nanocrystalline cellulose or e.g. other chemicals present in wood fibers or in papermaking process. The product might also contain various amounts of micron size fiber particles that have not been efficiently fibrillated.

MFC is produced from wood cellulose fibers, both from hardwood or softwood fibers. It can also be made from microbial sources, agricultural fibers such as wheat straw pulp, bamboo, bagasse, or other non-wood fiber sources. It is preferably made from pulp including pulp from virgin fiber, e.g. mechanical,

chemical and/or thermomechanical pulps. It can also be made from broke or recycled paper.

The above described definition of MFC includes, but is not limited to, the new proposed TAPPI standard W13021 on cellulose nanofibril (CMF) defining a cellulose nanofiber material containing multiple elementary fibrils with both crystalline and amorphous regions, having a high aspect ratio with width of 5-30nm and aspect ratio usually greater than 50.

The furnish may further comprise other types of additives. Starch may for instance be used to enhance strength properties, but at high moisture contents starch absorb moisture and large part of the strength gained is lost. In case of MFC the moisture absorption is much less, and thus strength is not lost as much. Surprisingly this is even more so with compression strength. Fillers may also be added, but are usually not used in board grades, and if so only to top ply to control opacity and brightness of the board.

The corrugated fiberboard may then in its entirety be formed from said furnish, or different layers of the board may be formed from the furnish and combined with layers of different compositions.

For the corrugated fiberboard either the fluting or the liner may be manufactured from the furnish comprising MFC. The fluting may also be made from a different type of base pulp than the liner.

The largest effect for the compression strength is the layer which has the highest grammage, which is typically the middle ply or the in second ply, however MFC could be included into any layer of the corrugated fiberboard.

The compression strength of a material can for instance be measured by a technique known as short-span compressive test (SCT). This test is widely used by board manufacturers to control the paper raw material. There are a number of standards, known to the skilled person and manufacturers of board that describe the SCT method.

The corrugated fiberboard formed by mixing less refined cellulosic fibers in the base pulp with MFC in the furnish, has at least one of the following characteristics measured at a relative humidity of 85%, a geometrical tensile index in the range of from 32 to 65 Nm/g, a fracture toughness index in the range of from 14 to 24 Jm/kg, and a ring crush index in the range of from 5 to 10 Nm/g. The fracture toughness index is preferably between 16-24 Jm/kg. Tensile index is measured according to SCAN-P 67 and the geometrical tensile index is then calculated based on the tensile index in the cross-machine direction (CD) and the tensile index in the

machine direction (MC) according to $(MD \times CD)^{1/2}$. Fracture toughness index is measured according to SCAN-P 77. The ring crush index is measured according to ISO 5270.

By at least one of is meant that the corrugated paperboard may exhibit
5 just one, two or all three of these characteristics, depending on the structure of the board. This means that the compression strength of the board, is significantly higher than for a conventional corrugated fiberboard at increased moisture levels.

The board may further be surface sized in a surface sizing said step in
10 for instance in a wet end process in the paper or board making machine.

The surface sizing may be performed in any conventional type of surface sizing equipment, known to the skilled person.

A hydrophobic or internal surface sizing additive or agent may be used.

The hydrophobic or internal sizing additive or agent may be any one of
15 alkylketene dimer (AKD), alkenyl succinic anhydrides (ASA), rosin sizes, AKD. The surface sizing additive or agent may also be other types of sizing chemicals such as polymeric sizes like styrene maleic anhydride (SMA), or other emulsions. These examples also include modification or mixtures of the agents.

20 In a size press agents such as SMA (styrene-maleic anhydride copolymer derivatives), SA (anionic and cationic styrene acrylic copolymer, styrene acrylate copolymer, styrene-acrylate copolymer derivatives), PU (anionic and cationic polyurethanes) etc and all wet end hydrophobic chemicals may be added.

25 The MFC may improve the retention and distribution of the sizing chemicals, and AKD and MFC may for instance be added at the same time. In addition to this they may be mixed together, for an improved simultaneous dosage.

30 Waxes may be added to protect the corrugated fiberboard from high moisture environment.

The board may have a basis weight or grammage in the range of 250 to 450 g/m².

The thickness of the board may be in the range of 400 to 500 μm.

35 The fraction toughness of the board measured as Jm/kg at 85% RH may be in the range of 5 to 12 % higher than the fraction toughness of a conventional corrugated fiberboard. This means that the compression strength and the ability of the board to maintain its structure when subjected

to pressure or loads, even at high humidity or in moist conditions, is significantly increased compared to conventionally manufactured corrugated fiberboards. The increased compression strength, and reduced compression creep of the board, is advantageous in applications where the board is used in conditions where the humidity changes. One such application is for instance boxes or packaging for fruit and vegetables, where the box is subjected not only to high moisture environments, but also to temperature variations. Other applications of the board material may be for manufacture (pressing) of trays.

Example 1

This trial was carried out on a pilot paper machine. The pulp mix comprised 70 % wet hardwood and 30 % dry softwood pulp. Refining at pH 7-8, and the Schopper-Riegler (SR) values were, after refining, 23-25 for both pulp qualities. The machine speed was 28 m/min. The pilot paper machine produced a moldable board. The board was stored at 85% moisture content before moldable products were produced, and this example thus refers to high moisture behavior.

The grammage of the fiberboard was 330 g/m², and the target thickness 450 µm.

Fixed chemicals added were a wet strength agent 1 kg/t (leveling box 1), starch 2 kg/t (leveling box 3) and AKD 1,5 kg/t (suction side of the fan pump). The SR values were determined using the ISO 5267/1 standard.

The effect of the addition of MFC in the pulp is shown in Table 1. There is a significant increase in the geometrical tensile index and the fracture toughness of the paperboard comprising MFC at both 50% and 85% relative humidity (RH). The tensile index, stretch at break and the tensile stiffness index was measured according to SCAN-P 67. The geometrical tensile index was calculated from the value in cross-machine direction and machine direction according to $(MD \times CD)^{1/2}$. The fracture toughness index was measured according to SCAN-P 77.

Table 1. Effect of addition of MFC in the pulp

	Without MFC	Without MFC	With 25 kg/t MFC	With 25 kg/t MFC
	50% RH	85% RH	50 % RH	85 % RH
Tensile index (geo) Nm/g	57,3	36,4	59,1 (+3%)	39 (+7%)
Stretch at break %	-	4.0	-	4.1
Tensile stiffness index kNm/g	-	4.1	-	4.6
Fracture toughness index Jm/kg	15.1	15.8	15.6 (+3%)	17.2 (+9%)

Example 2

A pilot paper machine trial with unbleached kraft pulp having a kappa value about 72 was performed, where a liner board was produced (simulation for top ply for corrugated board) and typical wet end chemicals used in liner board was used (AKD+oven treated, AKD amount 0,02 kg/t). The ring crush index of a conventionally refined virgin fiber having an SR value of 32, with less refined virgin fiber having an SR value of 20, with a 2 % addition of MFC was compared with each other. The effect on the ring crush index at the higher (85%) relative humidity is shown in Table 2, where the ring crush index value, in particular after a 48 h stabilization time, is significantly higher than for the paperboard comprising the conventionally refined fibers. The ring crush index was measured according to ISO 5270.

15

Table 2. Effect on ring crush index with less refined fibers and MFC

Pulp refined	Ring crush index 50 % RH	Ring crush index 85% RH 2 h stabilization time	Ring crush index 85 % RH, 48 h stabilization time
32 SR value	0,53 kN/m	0,33 kN/m	0,32 kN/m
20 SR value + 2 % MFC	0,54 kN/m	0,39 kN/m	0,40 kN/m

Example 3

A moldable product forming trial was made using the pulp of Example 2 and adding 25 kg/t base pulp of microfibrillated cellulose (MFC). The pilot paper machine produced a moldable board and the board was stored at 85% moisture content before moldable products were produced. The moldable product formed exhibited fewer cracks and imperfections that conventionally formed moldable products (without MFC addition, and higher refining). The results are shown in Table 3.

10 Table 3.

	Perfect moldable product	Minor cracks
Without MFC addition	70 %	30 %
With MFC 25 kg/t base pulp	90 %	10 %

In view of the above detailed description of the present invention, other modifications and variations will become apparent to those skilled in the art. However, it should be apparent that such other modifications and variations may be effected without departing from the spirit and scope of the invention.

CLAIMS

1. A corrugated fiberboard, comprising cellulosic fibers, wherein said corrugated fiberboard has at least one of a geometrical tensile index in the range of from 32 to 65 Nm/g, a fracture toughness index in the range of from 14 to 24 Jm/kg, and a ring crush index in the range of from 5 to 10 Nm/g measured at relative humidity of 85% RH;
c h a r a c t e r i z e d in that
the cellulosic fibers comprises a mixture of less refined fibers having a Schopper-Riegler (SR) value in the range of 15 to 28 and microfibrillated cellulose fibers, wherein mixture comprises said microfibrillated cellulose in a range of from 1% to 5% by weight of the dry content of the cellulosic fibers.
2. The corrugated fiberboard as claimed in claim 1, wherein the corrugated fiberboard comprises a hydrophobic sizing additive.
3. The corrugated fiberboard as claimed in claim 2, wherein the hydrophobic sizing additive is any one of alkylketene dimer (AKD), succinic anhydrides (ASA), rosin sizes, and styrene maleic anhydride (SMA), or emulsions or modifications or mixtures thereof.
4. The corrugated fiberboard as claimed in any one of the preceding claims, wherein the corrugated fiberboard has a basis weight in the range of 250 to 450 g/m², and a thickness in the range of 400 to 500 µm.
5. The corrugated fiberboard as claimed in any one of the preceding claims having fraction toughness index measured as Jm/kg at 85% RH which is in the range of 5 to 12 % higher than compared to a conventional corrugated fiberboard.

6. A method of manufacturing a corrugated fiberboard comprising cellulosic fibers, wherein the paperboard or a corrugated fiberboard has at least one of a geometrical tensile index in the range of from 32 to 65 Nm/g, a fracture toughness index in the range of from 14 to 24 Jm/kg, and a ring crush
5 index in the range of from 5 to 10 Nm/g measured at relative humidity of 85% RH, and wherein the corrugated fiberboard is produced from a base pulp characterized in that
the base pulp comprises less refined cellulosic fibers having a Schopper-Riegler value in the range of 15 to 28,
10 and wherein said method comprises the steps of
providing a furnish comprising said base pulp;
adding a microfibrillated cellulose solution to said furnish, wherein the content of the microfibrillated cellulose is in the range of 1% to 5% by weight of the dry content of the cellulosic fibers.
15
7. The method as claimed in claim 6, wherein the method further comprises a step of surface sizing said corrugated fiberboard in a wet end process, wherein a hydrophobic surface sizing additive is added in said surface sizing step.
20
8. The method as claimed in any one of claims 6 or 7, wherein the hydrophobic sizing additive is any one of alkylketene dimer (AKD), succinic anhydrides (ASA), rosin sizes, and styrene maleic anhydride (SMA), or emulsions or modifications or mixtures thereof.
25
9. The method as claimed in any of claim 6 to 8, wherein either one of fluting and liner, or both fluting and liner of the corrugated fiberboard are manufactured from said furnish.
- 30 10. The method as claimed in any one of claim 6 to 9, wherein said base pulp comprises any one of a virgin and recycled pulp.
11. The method as claimed in claim 10, wherein the base pulp comprises any one of a chemical pulp, mechanical pulp, thermomechanical
35 pulp and chemi-thermomechanical pulp.

12. A corrugated fiberboard, comprising cellulosic fibers obtained by the method as claimed in any one of claims 6 to 11, having at least one of a geometrical tensile index in the range of from 32 to 65 Nm/g, a fracture toughness index in the range of from 14 to 24 Jm/kg, and a ring crush index
5 in the range of from 5 to 10 Nm/g measured at relative humidity of 85% RH, wherein said cellulosic fibers comprises a mixture of less refined fibers and microfibrillated cellulose wherein said less refined fibers has a SR value of 15 to 28.
- 10 13. The corrugated fiberboard as claimed in claim 12, having fraction toughness measured as Jm/kg at 85% RH in the range of 5 to 12 % higher than compared to a conventional corrugated fiberboard.
- 15 14. Use of a corrugated fiberboard as claimed in any one of claims 1-5 or claims 12 to 13 for manufacturing any one of a box, a tray, and a packaging.

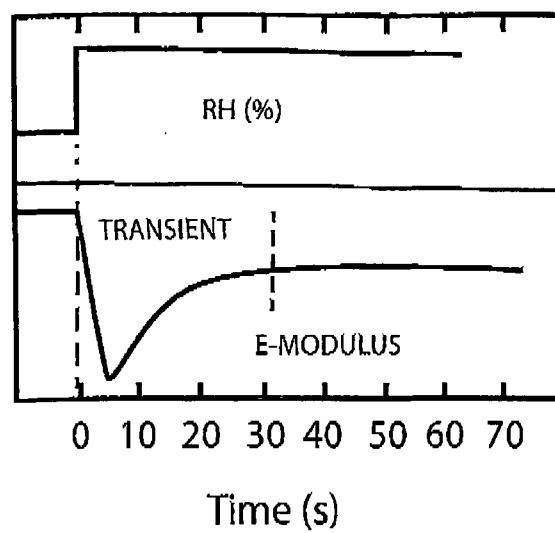


Fig. 1

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IB2017/051623

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: B32B, C08B, C08L, D21H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE, DK, FI, NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, PAJ, WPI data, BIOSIS, COMPENDEX, INSPEC, MEDLINE, IBM-TDB

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2008076056 A1 (AKZO NOBEL NV ET AL), 26 June 2008 (2008-06-26); page 1, line 20 - page 2, line 5; page 3, line 10 - page 3, line 11; page 5, line 5 - page 5, line 30; page 6, line 1 - page 6, line 7; page 7, line 9 - page 7, line 23; page 8, line 32 - page 8, line 33; page 11, line 8 - page 13, line 13 --	1-4, 6-12, 14
Y	HIETALA, M. et al. 'Fluting medium strengthened by periodate-chlorite oxidized nanofibrillated celluloses' In: Cellulose, 2016, Vol. 23, pp. 427-437; abstract; pages 428-430, 433; figure 4 --	1, 4, 6, 9, 12, 14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

08-06-2017

Date of mailing of the international search report

08-06-2017

Name and mailing address of the ISA/SE

Patent- och registreringsverket

Box 5055

S-102 42 STOCKHOLM

Facsimile No. + 46 8 666 02 86

Authorized officer

Kristin Persson

Telephone No. + 46 8 782 28 00

INTERNATIONAL SEARCH REPORT

 International application No.
 PCT/IB2017/051623

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GONZÁLEZ, I. et al. 'Nanofibrillated cellulose as paper additive in eucalyptus pulps' In: Bioresources, 2012, Vol. 7, pp. 5167-5180; abstract; pages 5169, 5172-5178 --	1, 4, 6, 9, 12, 14
A	WO 9841392 A1 (CONNELLY CONTAINERS INC), 24 September 1998 (1998-09-24); abstract; figure 1 --	1-14
A	WO 2012066308 A2 (IMERYS MINERALS LTD ET AL), 24 May 2012 (2012-05-24); abstract --	1-14
A	WO 0014333 A1 (STORA KOPPARBERG BERGSLAGS AB ET AL), 16 March 2000 (2000-03-16); page 3, line 30 - page 4, line 10; claims 1,27 --	1-14
A	WO 2012039668 A1 (STORA ENSO OYJ ET AL), 29 March 2012 (2012-03-29); page 12, line 15 - page 12, line 26; claims 1,3 --	1-14
A	EP 2947203 A2 (SMURFIT KAPPA PAPER HOLDINGS FRANCE), 25 November 2015 (2015-11-25); abstract; paragraph [0015] --	1-14
A	TAIPELE, T. et al. 'Effect of microfibrillated cellulose and fines on the drainage of kraft pulp suspension and paper strength' In: Cellulose, 2010, Vol. 17, pp. 1005-1020; abstract --	1-14
A	AHOLA, S. et al. 'Cellulose nanofibrils-adsorption with poly(amideamine) epichlorohydrin studied by QCM-D and application as a paper strength additive' In: Cellulose, 2008, Vol. 15, pp. 303-314; abstract; figures 8,9 -- -----	1-14

Continuation of: second sheet

International Patent Classification (IPC)

D21H 27/40 (2006.01)

B32B 29/08 (2006.01)

D21H 11/18 (2006.01)

D21H 17/25 (2006.01)

D21H 21/16 (2006.01)

D21H 21/18 (2006.01)

D21H 27/10 (2006.01)

D21H 27/38 (2006.01)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IB2017/051623

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☒ Claims Nos.: **5 and 13**
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

Present claims 5 and 13 relate to a corrugated fibreboard having a fraction .../...

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

Continuation of: Box No. II

toughness index measured at 85% relative humidity which is in the range of 5 to 12% higher than compared to a conventional corrugated fibreboard. The use of these parameters in the present context is considered to lead to a lack of clarity within the meaning of Article 6 PCT. It is impossible to compare the parameters the applicant has chosen to employ with what is set out in the prior art. The fraction toughness value for conventional corrugated fibreboard at a relative humidity of 85% is not considered obvious to a person skilled in the art, nor is it defined in the claims or in the description. It is further not clear what is meant with a conventional corrugated fibreboard, as there are many different types of corrugated fibreboards.

Therefore, a reasoned statement under Rule 43*bis*.1(a)(i) with regards to novelty, inventive step or industrial applicability has not been established for claims 5 and 13.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/IB2017/051623

WO	2008076056 A1	26/06/2008	AR	064603 A1	15/04/2009
			AT	540161 T	15/01/2012
			AU	2007334667 A1	26/06/2008
			BR	PI0720426 A2	31/12/2013
			CA	2673096 A1	26/06/2008
			CL	2007003626 A1	25/07/2008
			CN	101563504 B	05/09/2012
			EP	2094910 B2	11/01/2017
			EP	1936032 A1	25/06/2008
			ES	2379897 T3	04/05/2012
			JP	5406038 B2	05/02/2014
			JP	2010513741 A	30/04/2010
			JP	5782003 B2	24/09/2015
			JP	2013064222 A	11/04/2013
			KR	101467421 B1	01/12/2014
			KR	20090109532 A	20/10/2009
			MX	2009006583 A	30/06/2009
			MY	153651 A	13/03/2015
			RU	2009127770 A	27/01/2011
			RU	2428535 C2	10/09/2011
			TW	I382113 B	11/01/2013
			TW	200842225 A	01/11/2008
			US	8142615 B2	27/03/2012
			US	20100024998 A1	04/02/2010
WO	9841392 A1	24/09/1998	AU	6468498 A	12/10/1998
			US	5944252 A	31/08/1999
WO	2012066308 A2	24/05/2012	AU	2016202328 A1	05/05/2016
			AU	2011330981 B2	14/01/2016
			BR	112013011629 A2	16/08/2016
			CA	2817635 A1	24/05/2012
			CN	103210144 B	06/04/2016
			EP	2640893 A2	25/09/2013
			JP	2014503696 A	13/02/2014
			KR	20130096755 A	30/08/2013
			TW	201241268 A	16/10/2012
			TW	I561701 B	11/12/2016
			US	20160230341 A1	11/08/2016
			US	20130280545 A1	24/10/2013

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/IB2017/051623

WO	0014333 A1	16/03/2000	AT	553919 T	15/05/2012
			AU	5893899 A	27/03/2000
			BR	9913134 A	08/05/2001
			CA	2342227 A1	16/03/2000
			CN	1136362 C	28/01/2004
			CN	1316030 A	03/10/2001
			EP	1117869 A1	25/07/2001
			ES	2386805 T3	31/08/2012
			JP	2002524315 A	06/08/2002
			JP	4694691 B2	08/06/2011
			NZ	510171 A	29/04/2003
			PL	199323 B1	30/09/2008
			PL	346425 A1	11/02/2002
			RU	2202021 C2	10/04/2003
			US	6537680 B1	25/03/2003
WO	2012039668 A1	29/03/2012	BR	112013006626 A2	28/06/2016
			CN	103154366 A	12/06/2013
			EP	2619367 A4	29/10/2014
			JP	2013537942 A	07/10/2013
			SE	1050985 A1	23/03/2012
			US	20130180680 A1	18/07/2013
EP	2947203 A2	25/11/2015	WO	2017046086 A1	23/03/2017