

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 January 2009 (22.01.2009)

PCT

(10) International Publication Number
WO 2009/011961 A2

- (51) **International Patent Classification:**
G02B 5/02 (2006.01) H05B 33/00 (2006.01)
G02B 5/04 (2006.01)
- (21) **International Application Number:**
PCT/US2008/063209
- (22) **International Filing Date:** 9 May 2008 (09.05.2008)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
11/777,453 13 July 2007 (13.07.2007) US
- (71) **Applicant (for all designated States except US):** 3M INNOVATIVE PROPERTIES COMPANY [US/US];
3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).
- (72) **Inventors:** POTTS, John E.; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). MCCORMICK, Fred B.; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). WOLK, Martin B.; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). ZHANG, Jun-Ying; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). SMITH, Terry L.; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). BATTIATO, James M.; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). WANG,

- Ding; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). TOLBERT, William A.; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). ROEHRIG, Mark A.; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). BRIGHT, Clark I.; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).
- (74) **Agents:** VIETZKE, Lance L. et al.; 3M Center, Office of Intellectual Property Counsel Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,

[Continued on next page]

(54) **Title:** LIGHT EXTRACTION FILM FOR ORGANIC LIGHT EMITTING DIODE DISPLAY DEVICES

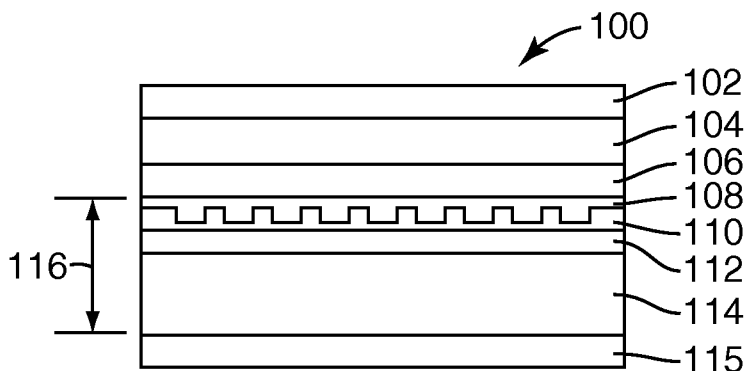


Fig. 1

(57) **Abstract:** A multifunctional optical film for enhancing light extraction includes a flexible substrate, a structured layer, and a backfill layer. The structured layer effectively uses microreplicated diffractive or scattering nanostructures located near enough to the light generation region to enable extraction of an evanescent wave from an organic light emitting diode (OLED) device. The backfill layer has a material having an index of refraction different from the index of refraction of the structured layer. The backfill layer also provides a planarizing layer over the structured layer in order to conform the light extraction film to a layer of an OLED display device. The film may have additional layers added to or incorporated within it to an emissive surface in order to effect additional functionalities beyond improvement of light extraction efficiency.

WO 2009/011961 A2



NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

— *without international search report and to be republished upon receipt of that report*

LIGHT EXTRACTION FILM FOR ORGANIC LIGHT EMITTING DIODE DISPLAY DEVICES

REFERENCE TO RELATED APPLICATION

5 The present application is related to U.S. patent application entitled "Light
Extraction Film for Organic Light Emitting Diode Lighting Devices" and filed on even
date herewith (Attorney Docket No. 63288US003), which is incorporated herein by
reference.

BACKGROUND

10 Organic Light Emitting Diodes (OLEDs) are the basis for a new display and
lighting technology, providing a good match for high resolution or high pixel count high
definition display applications, and for efficient, broad area, flexible lighting applications.
OLED devices include a thin film of electroluminescent organic material sandwiched
15 between a cathode and an anode, with one or both of these electrodes being a transparent
conductor. When a voltage is applied across the device, electrons and holes are injected
from their respective electrodes and recombine in the electroluminescent organic material
through the intermediate formation of emissive excitons.

20 In OLED devices, over 70% of the generated light is typically lost due to processes
within the device structure. The trapping of light at the interfaces between the higher
index organic and Indium Tin Oxide (ITO) layers and the lower index substrate layers is
the major cause of this poor extraction efficiency. Only a relatively small amount of the
emitted light emerges through the transparent electrode as "useful" light. The majority of
the light undergoes internal reflections, which result in its being emitted from the edge of
25 the device or trapped within the device and eventually being lost to absorption within the
device after making repeated passes.

30 Efforts have been made to improve the internal quantum efficiency (number of
photons generated per electron injected) of OLEDs by means such as modifying the
charge injection or transport layers, using fluorescent dyes or phosphorescent materials, or
by using multilayer structures (see, for example, K.Meerholz, Adv.Funct.Materials v.11,
no.4, p251 (2001)). Light extraction efficiency (number of photons emerging from the

structure vs. the number generated internally) can be influenced by factors external to the emission layers themselves.

A bottom emitting OLED may be thought of as consisting of a core containing high index of refraction layers (organic layers for light generation, carrier transport ,
5 injection or blocking, and, typically, a transparent conductive oxide layer) and a low index of refraction substrate material (typically glass, but could be a polymer film). Therefore light that is generated within the core may encounter two high-index to low-index interfaces where it might undergo internal reflection. Light unable to escape the core as a result of encounter at the first interface is confined to a waveguide mode, while light
10 passing through that interface but unable to escape from the substrate as a result of reflection at the substrate-to-air interface is confined to a substrate mode. Similar optical losses occur due to interfaces in top emitting OLEDs.

Various solutions have been proposed to affect light reaching the substrate-to-air interface by disturbing that interface (e.g., microlenses or roughened surfaces). Others
15 have introduced scattering elements into the substrate or into an adhesive (see Published PCT Application No. WO2002037580A1 (Chou)), thereby interrupting the substrate modes to redirect that light out of the device. There have even been some preliminary attempts to disturb the core-to-substrate interface by introducing scattering or diffractive elements at this interface. Detailed analysis has shown that scattering or diffracting
20 structures will be most effective in extraction light when located at this interface (M.Fujita, et al.; Jpn.J.Appl.Phys. 44 (6A), pp.3669-77 (2005)). Scattering efficiency is maximized when the index contrast between the scattering or diffractive elements and the backfill material is large and when the length scale of the index contrast variations is comparable to the wavelength of the light (see, for example, F.J.P.Schuurmans, et al.;
25 Science 284 (5411), pp.141-143 (1999)).

Fabrication of defect-free OLED devices in contact with this light extracting layer will require a smooth planar surface, so planarity of the top surface of a light extraction film is important. There has been, however, some work on corrugating the electrode structure in order to couple light out of the OLED (M.Fujita, et al.; Jpn.J.Appl.Phys. 44
30 (6A), pp.3669-77 (2005)); the resultant effects on the electric fields in the device are expected to have deleterious effects. So great care must be taken to not adversely affect

the electrical operation of the device while disturbing this interface. Practical solutions to balancing these conflicting issues have not yet been proposed.

5 Similar problems in external efficiency exist with inorganic light-emitting diodes (LEDs), where the very high refractive indices of the active materials can severely limit the extraction of internally generated light. In these cases, there have been some attempts to utilize photonic crystal (PC) materials to improve the extraction efficiency (S.Fan, Phys.Rev.Letters v.78, no.17, p.3294 (1997); H.Ichikawa, Appl.Phys.Letters V.84, p.457 (2004)). Similar reports on the use of PCs in connection with OLED efficiency improvement have begun to appear (M.Fujita, Appl.Phys.Letters v.85, p.5769 (2004); 10 Y.Lee, Appl.Phys.Letters v.82, p.3779 (2003)), but previously reported results have involved time-consuming and costly procedures which do not lend themselves incorporation into existing OLED fabrication processes.

Accordingly, a need exists for a product which can enhance light extraction from OLED devices in a form which is compatible with fabrication processes for these devices.

15

SUMMARY

A multifunctional optical film for enhancing light extraction, consistent with the present invention, includes a flexible substrate, a structured layer, and a backfill layer. The structured layer of extraction elements has a first index of refraction, and a substantial 20 portion of the extraction elements are within an evanescent zone adjacent to a light emitting region of a self-emissive light source when the optical film is located against the self-emissive light source. The backfill layer has a material having a second index of refraction different from the first index of refraction, and the backfill layer forms a planarizing layer over the extraction elements. The film may optionally have additional 25 layers added to or incorporated within it to effect additional functionalities beyond improvement of light extraction efficiency; these additional functionalities may include mechanical support, barrier protection, electrical conductance, spectral modification, or polarization.

A method of making a multifunctional optical film for enhancing light extraction, 30 consistent with the present invention, includes coating a layer of a material having a first index of refraction onto a flexible substrate. Nanostructured features are imparted into the organic material to create a nanostructured surface. The organic material having the

nanostructured features is cured. A backfill layer is then applied to the nanostructured surface to form a planarizing layer on the nanostructured surface. The backfill layer comprises a material having a second index of refraction different from the first index of refraction. Alternatively, a thin layer of nanoparticles may be distributed on the surface of the film and then overcoated with an essentially planarizing material of a different index.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings are incorporated in and constitute a part of this specification and, together with the description, explain the advantages and principles of the invention. In the drawings,

FIG. 1 is a diagram of a bottom emitting OLED display device with a light extraction film;

FIG. 2 is a diagram of a top emitting OLED display device with a light extraction film;

FIG. 3 is a diagram illustrating spatially modulated OLEDs for a solid state lighting element;

FIG. 4 is a diagram of an OLED backlight unit with a light extraction film;

FIG. 5 is a diagram illustrating OLEDs used as an LCD backlight unit;

FIGS. 6-9 are diagrams depicting possible spatial configurations of extraction elements; and

FIGS. 10-14 are diagrams depicting possible surface configurations of extraction elements.

DETAILED DESCRIPTION

Embodiments include methods to form light-extracting nanostructures, or other nanostructures, in a polymer replication process, a direct deposition of nanoparticles, or other processes to make a light extraction film for OLED devices. The multifunctional film product can, in addition to enhancing light extraction, serve additional functions such as a substrate, encapsulant, barrier layer, filter, polarizer, or color converter and may be employed either during or after manufacture of an OLED device. The film construction is based upon photonic crystal structures, or other nanostructures, for improved efficiency of

light extraction from the devices by modifying the interface between high and low index layers within the device.

Elements of the invention include the provision of structures of dimensions comparable to or less than the wavelength of the light to be controlled, the provision of a material with contrasting index of refraction to fill in the areas surrounding the structures and also to planarize the structure in order to present an essentially smooth surface to come in contact with the OLED structure, and the location of this index-contrasting nanostructured layer within a small enough distance from the light-emitting region to be effective in extracting the light that would otherwise be trapped in that region.

Light incident from a high-index material onto an interface with a lower index medium will undergo total internal reflection (TIR) for all incidence angles greater than the critical angle θ_C , defined by $\theta_C = \sin^{-1}(n_2/n_1)$, where n_1 and n_2 are the refractive indices of the high- and low-index regions, respectively. The electromagnetic field associated with this light reflected by TIR extends into the lower-index region in an evanescent standing wave, but the strength of this field diminishes exponentially with distance from the interface. Absorbing or scattering entities located within this evanescent zone, typically about one wavelength thick, can disrupt the TIR and cause the light to pass through the interface. Therefore, it is preferable that the nanostructured index contrast layer be located within the evanescent zone if it is to be most effective in causing extraction of the light from the emission region by scattering or diffraction.

Replication master tools can be fabricated with regular or random structures of the required average periodicity for light extraction, 200 nanometers (nm)–2000nm, over increasingly larger areas. Combining this tooling capability with microreplication processes such as continuous cast and cure (3C) enable the formation of the photonic crystal structures, or other nanostructures, on the surface of a film substrate. Examples of a 3C process are described in the following patents, all of which are incorporated herein by reference: U.S. Patent Nos. 4,374,077; 4,576,850; 5,175,030; 5,271,968; 5,558,740; and 5,995,690.

The terms "nanostructure" or "nanostructures" refers to structures having at least one dimension (e.g., height, length, width, or diameter) of less than 2 microns and more preferably less than one micron. Nanostructure includes, but is not necessarily limited to,

particles and engineered features. The particles and engineered features can have, for example, a regular or irregular shape. Such particles are also referred to as nanoparticles.

The term "nanostructured" refers to a material or layer having nanostructures.

5 The term "photonic crystal structures" refers to periodic or quasi-periodic optical nanostructures interspersed with a material of sufficiently different index of refraction that will enable the structure to produce gaps in the spectrum of allowed electromagnetic modes in the material.

The term "index" refers index of refraction.

10 The term "backfill" refers to the material incorporated into a structure, and of a different index from the structure, to fill in voids in the structure and planarize the structure.

The term "extraction elements" refers to any type and arrangement of nanostructures enhancing light extraction from self-emissive light sources. The extraction elements are preferably not contained within a volume distribution.

15

Bottom Emitting OLED Display Device

FIG. 1 illustrates a structure of bottom emitting OLED device 100 with a film substrate having a light extraction film. A bottom emitting OLED device is defined as an OLED device emitting light through the substrate. Table 1 describes the exemplary
20 elements of device 100 and the arrangement of those elements, as identified by the reference numbers provided in FIG. 1. Each layer of device 100 can be coated on or otherwise applied to the underlying layer.

Table 1 - Bottom Emitting OLED Device with Light Extraction Film	
Ref. No.	Type of Element
102	electrode 1
104	organic layers
106	electrode 2
108	high index structure
110	low index structure
112	optional barrier layer
114	substrate
115	optional functional layers
116	light extraction film

The substrate 114 is composed of a material, substantially transparent (transmissive) to the desired emitted wavelengths, that provides sufficient mechanical support and thermal stability for the device. Substrate 114 preferably comprises a flexible material. Examples of substrate materials include the following: glass; flexible glass; polyethylene terephthalate ("PET"); polyethylene naphthalate ("PEN"); or other translucent or transparent materials. Substrate 114 can optionally also function as a barrier layer. Also, substrate 114 can optionally contain dyes or particles, and it can be tented or include prismatic structures.

The optional barrier layer 112 effectively blocks or helps prevent permeation of oxygen and water to the layers of the device, particularly the organic layers. Examples of barrier layers are described in U.S. Patent Application Publication Nos. 2006/0063015 (describing boron oxide layers with inorganic barrier layers) and 2007/0020451 (describing diamond-like glass (DLG) and diamond-like carbon (DLC)), both of which are incorporated herein by reference.

The electrodes 102 and 106 can be implemented with, for example, transparent conductive oxide (TCO) such as indium tin oxide (ITO) or metals with the appropriate work function to make injection of charge carriers such as calcium, aluminum, gold, or silver.

The organic layers 104 can be implemented with any organic electroluminescent material such as a light-emitting polymer, an example of which is described in U.S. Patent No. 6,605,483, which is incorporated herein by reference. Other examples of suitable

light emitting materials include evaporated small molecule materials, light-emitting dendrimers, molecularly doped polymers, and light-emitting electrochemical cells.

The light extraction film 116 in this embodiment is composed of substrate 114, optional barrier layer 112, low index structure 110, and high index structure 108. The high index structure uses a backfill medium to effectively provide a planarizing layer over the low index structure in order to make the light extraction film sufficiently planar to allow OLED fabrication. The backfill layer can alternatively have other optical properties. Also, the backfill layer material can function as a barrier to moisture and oxygen or provide electrical conduction, possibly in addition to having barrier properties, depending upon the type of material used. The backfill layer can alternatively be implemented with an optically clear adhesive, in which case the extraction film can be applied to top emitting OLED device, for example.

The low index structure 110 has a material with an index substantially matched to the underlying layer, typically the substrate. The low index structure 110 is composed of a nanostructured layer, which can have a periodic, quasi-periodic, or random distribution or pattern of optical nanostructures, including photonic crystal structures. It can include discrete nanoparticles. The nanoparticles can be composed of organic materials or other materials, and they can have any particle shape. The nanoparticles can alternatively be implemented with porous particles. The distribution of nanostructures can also have varying pitches and feature size. At least a portion of the extraction elements or nanostructures are preferably in contact with the flexible substrate, and the extraction elements may have voids beneath them. The layer of nanoparticles can be implemented with nanoparticles in a monolayer or with a layer having agglomerations of nanoparticles.

Using a thickness of the nanostructures on the order of the evanescent wave from the organic layers can result in coupling of the evanescent wave to the nanostructures for extraction of additional light from the device. This coupling preferably occurs when the light extraction film is adjacent to the light emitting region of the self-emissive light source. When the backfill layer has a lower index than the structured layer, then the backfill layer preferably has a thickness substantially equal to the extraction elements. When the backfill layer has a higher index than the structured layer, then the backfill layer can be thicker than the extraction elements provided it can still interact with the evanescent wave. In either case, the structured layer and backfill layer are preferably in

sufficient proximity to the light output surface in order to at least partially effect the extraction of light from that surface.

5 The nanostructured features in layer 110 can be fabricated using any printing techniques for replication of submicron features such as the following: imprinting; embossing; nanoimprinting; thermal- or photo-nanoimprint lithography; injection molding; or nanotransfer printing. Another technique for fabricating the extraction elements is described in Example 18 in U.S. Patent No. 6,217,984, which is incorporated herein by reference.

10 The high index structure 108 is a high index material providing index contrast to the adjacent low index nanostructured layer and provides an effective planarization layer to it. The index of refraction mismatch between nanostructured layer 110 and backfill medium 108 at the emission wavelength(s) is referred to as Δn , and a greater value of Δn generally provides better light extraction. The value of Δn is preferably greater than or equal to 0.3, 0.4, 0.5, or 1.0. Any index mismatch between the extraction elements and backfill medium will provide for light extraction; however, a greater mismatch tends to provide greater light extraction and is thus preferred. Examples of suitable materials for backfill medium 108 include the following: high index inorganic materials; high index organic materials; a nanoparticle filled polymer material; silicon nitride; polymers filled with high index inorganic materials; and high-index conjugated polymers. Examples of high-index polymers and monomers are described in C. Yang, et al., Chem. Mater. 7, 1276 (1995), and R. Burzynski, et al., Polymer 31, 627 (1990) and U.S. Patent No. 6,005,137, all of which are incorporated herein by reference. Examples of polymers filled with high index inorganic materials are described in U.S. Patent No. 6,329,058, which is incorporated herein by reference. The backfill layer can be applied to form the planarizing layer using, for example, one of the following methods: liquid coating; vapor coating; powder coating; or lamination.

25
30
Functionality can be added to the construction by depositing on it a transparent conductor such as ITO ($n \approx 1.9-2.1$) with high index, high transparency and low sheet resistivity, to serve as the anode for the OLED device. The ITO can even be used as the backfill for the structure, if the layer can fill the structures and form into a smooth layer without adverse effects on the optical or electrical properties. Alternatively, after backfilling and smoothing, alternating metallic and organic layers may be deposited to

form a transparent conductive overlayer in the manner as described in U.S. Patent Application Publication No. 2004/0033369, which is incorporated herein by reference.

Additional flexibility in the functionality of the extractor pattern of the photonic crystal structures or nanostructures can be obtained through the use of photonic quasicrystal structures. These quasicrystal structures are designed using tiling rules; they have neither true periodicity nor translation symmetry but have a quasi-periodicity with long-range order and orientation symmetry, examples of which are described in the following reference, which is incorporated herein by reference: B. Zhang et al., "Effects of the Artificial Ga-Nitride/Air Periodic Nanostructures on Current Injected GaN-Based Light Emitters," *Phys.Stat.Sol.(c)* 2(7), 2858-61 (2005). The photonic quasicrystal structures offer the possibility of a pseudogap for all propagation directions, and they exhibit unique light scattering behaviors. In particular, these patterns of quasiphotonic crystal structures can eliminate artifacts resulting from the regularity of conventional photonic crystal structures, and they can be used to tailor unique light emission profiles and possibly can eliminate undesirable chromatic effects when working with broadband OLED emitters. Photonic crystal structures are described in the following patents, all of which are incorporated herein by reference: U.S. Patent Nos. 6,640,034; 6,901,194; 6,778,746; 6,888,994; 6,775,448; and 6,959,127.

Embodiments can involve the incorporation of the diffractive or scattering nanostructures into a film product which could be continuously produced, for example, on a web line having a polymer film or ultrabARRIER coated film substrate fed to a 3C replication process followed by deposition of a high index backfill medium. Alternate ways to incorporate the diffractive or scattering nanoparticles into the film include solution coating a dispersion of particles. This film can be designed to be used directly as the substrate on which a bottom emitting OLED is fabricated, enabling the production of a film capable of many uses in addition to enhancing light extraction.

Additional functionality could be incorporated into the light extraction film product by forming the extraction structures on an optional ultrabARRIER film, which provides excellent moisture and oxygen barrier properties. UltrabARRIER films include multilayer films made, for example, by vacuum deposition of two inorganic dielectric materials sequentially in a multitude of layers on a glass or other suitable substrate, or alternating layers of inorganic materials and organic polymers, as described in U.S. Patent

Nos. 5,440,446; 5,877,895; and 6,010,751, all of which are incorporated herein by reference.

Materials may also be incorporated within the film to enhance light extraction through scattering or to filter, color shift, or polarize the light. Finally, surface coatings or structures, for example functional layers 115, can be applied to the air surface of the light extraction film in order to further increase the functionality and possibly value of a light extraction film. Such surface coatings can have, for example, optical, mechanical, chemical, or electrical functions. Examples of such coatings or structures include those having the following functions or properties: antifog; antistatic; antiglare; antireflection; antiabrasion (scratch resistance); antimudge; hydrophobic; hydrophilic; adhesion promotion; refractive elements; color filtering; ultraviolet (UV) filtering; spectral filtering; color shifting; color modification; polarization modification (linear or circular); light redirection; diffusion; or optical rotation. Other possible layers to be applied to the air surface include a barrier layer or a transparent electrically conductive material.

Top Emitting OLED Display Device

FIG. 2 illustrates a structure of top emitting OLED device 120 with a film substrate having a light extraction film. Table 2 describes the exemplary elements of the device 120 and the arrangement of those elements, as identified by the reference numbers provided in FIG. 2. Each layer of the device can be coated on or otherwise applied to the underlying layer. The configurations shown in FIGS. 1 and 2 are provided for illustrative purposes only, and other configurations of bottom emitting and top emitting OLED display devices are possible.

Table 2 - Top Emitting OLED Device with Light Extraction Film	
Ref. No.	Type of Element
121	optional functional layers
122	substrate 1
124	optional barrier layer
126	low index structure
128	high index structure
130	optical coupling layer
132	electrode 1
134	optional thin film encapsulant layer
136	organic layers
138	electrode 2
140	substrate 2
142	light extraction film

The light extraction film 142 in this embodiment is composed of substrate 122, optional barrier layer 124, low index structure 126, and high index structure 128. Low index structure 126 and high index structure 128 can be implemented with the exemplary materials and constructions described above. Layers 128 and 130 can optionally be implemented with a single layer. The substrates 122 and 140, optional barrier layer 124, electrodes 132 and 138, and organic layers 136 can be implemented with the exemplary materials identified above.

Optional thin film encapsulant 134 can be implemented with, for example, any suitable material for protecting the organic layers from moisture and oxygen. Examples of encapsulants for OLED devices are described in U.S. Patent No. 5,952,778 and U.S. Patent Application Serial No. 11/424997, filed June 19, 2006, both of which are incorporated herein by reference.

OLED devices, especially top emitting OLED devices as shown in FIG. 2, are optionally completed by depositing a thin film encapsulant, typically on a semitransparent electrode. This construction of an OLED device provides an advantage; in particular it creates access to the critical high index device-air interface after the completion of device fabrication, enabling a lamination process for the application of the light extraction film. For top emitting OLED devices, embodiments include a light extraction film as described above for bottom emitting OLED devices. Alternatively, the film can be designed to be the capping layer on a top emitting OLED structure when combined with a suitable high

index adhesive to serve as the optical layer 130 in order to optically couple the OLED device to the light-extracting layer. The encapsulant material may itself serve as the index contrast material which backfills the nanostructures to form the light extraction layer.

5 **OLED Solid State Lighting Element**

Top emitting OLED device 120 or bottom emitting OLED device 100 can also be used to implement an OLED solid state lighting element. In addition to the substrates identified above, examples of substrates useful in top emitting OLED solid state lighting devices, including flexible metal foils, are described in the following papers, all of which
10 are incorporated herein by reference: D.U. Jin et al., "5.6-inch Flexible Full Color Top Emission AMOLED Display on Stainless Steel Foil," SID 06 DIGEST, pp. 1855-1857 (2006); and A. Chwang et al., "Full Color 100 dpi AMOLED Displays on Flexible Stainless Steel Substrates," SID 06 DIGEST, pp. 1858-1861 (2006).

FIG. 3 is a diagram illustrating a device 220 having spatially modulated OLED
15 devices for use in solid state lighting devices. Device 220 includes a substrate 222 supporting a plurality of OLED devices 223, 224, 225, and 226, each of which may correspond with the structures described above with respect to bottom or top emitting OLED display devices. Each of the OLED devices 223-226 can be individually controlled as represented by lines 228 and 230, which would provide electrical connections to the
20 anodes and cathodes in devices 223-226. Device 220 can include any number of OLED devices 223-226 with electrical connections, and substrate 222 can be scaled to accommodate them. The individual control of devices 223-226, via connections 228 and 230, can provide for spatial modulation of them such that they are individually or in groups lighted in a particular sequence or pattern. Device 220 can be used in solid state
25 light, for example, on a rigid or flexible substrate 222.

OLED Backlight Unit

FIG. 4 is a diagram of a top emitting OLED backlight unit 180 with light extraction film. Table 3 describes the exemplary elements of the backlight unit 180 and
30 the arrangement of those elements, as identified by the reference numbers provided in FIG. 4. Each layer of backlight unit 180 can be coated on or otherwise applied to the

underlying layer. Alternatively, bottom emitting OLEDs can also be used for backlight units.

Table 3 – OLED Backlight Unit with Light Extraction Film	
Ref. No.	Type of Element
182	polarizer
184	optional prism layer
186	optional asymmetric reflective film
188	optional diffuser
189	substrate 1
190	low index structure
192	high index structure
194	optical coupling layer
195	optional thin film encapsulant layer
197	electrode 1
200	organic layers
202	electrode 2
204	substrate 2
206	auxiliary optical films
208	light extraction film

5 The light extraction film 208 in this embodiment is composed of optional prism layer 184, optional diffuser 188, low index structure 190, and high index structure 192. Low index structure 190 and high index structure 192 can be implemented with the exemplary materials and constructions described above. The other elements of this embodiment, as provided in Table 3, can be implemented with the exemplary materials
10 identified above. Layers 192 and 194 can alternatively be implemented with a single layer.

15 FIG. 5 is a diagram illustrating OLED devices used as a liquid crystal display (LCD) backlight unit 242 for an LCD panel 240. Backlight unit 242 may correspond with the structure 180. The backlight unit 242 can alternatively be implemented with the spatially modulated light panel shown in FIG. 3. LCD panel 240 typically includes the entire LCD device except the backlight and drive electronics. For example, LCD panel 240 typically includes the backplane (subpixel electrodes), front and back plates, liquid crystal layer, color filter layer, polarizing filters, and possibly other types of films. Use of OLED devices as a backlight may provide for a thin, low power backlight for LCDs. An

example of LCD panel components and a backlight unit are described in U.S. Patent No. 6,857,759, which is incorporated herein by reference.

High Index/Low Index Regions and Surface Configurations

5 FIGS. 6-9 are diagrams depicting the possible spatial configurations of extraction elements. FIG. 6 illustrates a low index structure 250, having a regular pattern of nanostructures, with a high index structure 251 providing a planarizing layer over the nanostructures. The structures 250 and 251 are located between a low index substrate 246 and an OLED device region 247. FIG. 7 illustrates a low index structure 252, having an
10 irregular pattern of nanostructures, with a high index structure 253 providing a planarizing layer over the nanostructures. The structures 252 and 253 are located between a low index substrate 248 and an OLED device region 249. In FIGS. 6 and 7, the low and high index structures are located between a substrate and an OLED device (light emitting) region.

 FIG. 8 illustrates high index extraction elements 255 within a low index backfill region 254 with the low index region 254 providing the planarizing layer. The extraction
15 elements 255 and backfill 254 are located between a low index substrate 260 and an OLED device region 259. FIG. 9 illustrates low index extraction elements 257 within a high index backfill region 256 with the high index region 256 providing the planarizing layer. The extraction elements 257 and backfill 256 are located between a low index
20 substrate 261 and an OLED device region 262. In the embodiments shown in FIGS. 8 and 9, the extraction elements are concentrated in the evanescent zone. The layers shown in FIGS. 6-9 illustrate patterns and interfaces of the low index and high index structures described above.

 FIGS. 10-14 are top view diagrams depicting possible surface configurations of
25 extraction elements. FIGS. 10 and 11 illustrate regular periodic arrays of extraction elements. FIG. 12 illustrates a random distribution of extraction elements. FIG. 13 illustrates patterned regions of extraction elements. In particular, FIG. 13 illustrates portions of features, possibly in a regular pattern 264 or an irregular pattern 265, interspersed within a different distribution of features 263. The regular or irregular
30 patterns 264 and 265, respectively, along with the different distribution 263 may each have periodic, quasi-periodic, or random distributions of extraction elements. Such regions of patterns may be useful to optimize extraction of particular wavelengths of light

at those regions, for example wavelengths corresponding with red, green, and blue light. In that case, the extraction regions can correspond and be aligned the red, green, and blue regions comprising pixels of a display device, and each extraction region can each be optimized to extract light from the corresponding red, green, and blue regions. FIG. 14 illustrates quasicrystal (tiled patterns) of extraction elements.

Examples of techniques for making extraction elements are described in U.S. Patent Application Serial No. 11/556719, filed November 6, 2006, which is incorporated herein by reference. FIGS. 10-14 illustrate possible surface configurations of the nanostructures or other extraction elements described above with a backfill medium providing the planarizing layer over the nanostructures.

Additional techniques could include using lithography or interference lithography to expose nanoscale regions in a photosensitive polymer deposited on a flexible polymer web. After the exposure and development steps, the remaining photosensitive polymer would then define a nanostructured surface. Alternatively, this nanostructured photosensitive polymer surface can serve as an etch mask for exposure of the surface in an etching process. This etching technique would transfer the nanoscale pattern into the surface of the underlying polymer web or into a layer of a harder material, such as a silicon oxide, which had been deposited on the polymer web prior to the lithographic steps. The nanoscale surface defined in any of these manners could then be backfilled with an index contrasting medium to form the light scattering or diffracting layer.

Distributions of Nanoparticles for Light Extraction

This embodiment provides enhanced light extraction from an OLED using an index-contrasting film with randomly distributed high index nanostructures created by coating nanoparticles such as, for example, ITO, silicon nitride (Si_3N_4 , referred to here as SiN), CaO, Sb_2O_3 , ATO, TiO_2 , ZrO_2 , Ta_2O_5 , HfO_2 , Nb_2O_3 , MgO, ZnO, In_2O_3 , Sn_2O_3 , AlN, GaN, TiN, or any other high index materials on a substrate used in OLED fabrication or encapsulation, and then applying a low index coating, such as SiO_2 , Al_2O_3 , DLG, DLC, or polymeric materials over the nanoparticles to provide the index contrast needed for scattering or diffraction efficiency and to planarize the surface. The randomly distributed nanostructures can be in contact with the substrate, proximate the substrate, grouped together in places, or in any random configuration proximate the substrate. A converse

construction, potentially providing similar effectiveness, can comprise a random distribution of low index nanoparticles or nanostructures such as SiO₂, porous SiO₂, Borosilicate (BK), Al₂O₃, MgF₂, CaF, LiF, DLG, DLC, poly(methyl methacrylate) (PMMA), polycarbonate, PET, low index polymers, or any other low index materials with
5 a contrasting high index filler material such as vapor deposited Si₃N₄ or a solvent-coated particle-filled polymer or a high index polymer.

Coating processes such as spin coating, dip coating, and knife coating may be used for distributing the nanoparticles on the surface, and a similar process may be used to coat the backfill/planarization layer. The use of such techniques should render the process
10 simple, easily scaled for manufacturing, and suitable for incorporation in film products manufactured via web line or roll-to-roll processes.

One particular method involves applying nanoparticles having a first index of refraction onto a flexible substrate and overcoating a backfill layer on the nanoparticles to form a planarizing layer over them. The backfill layer comprises a material having a
15 second index of refraction different from the first index of refraction. Preferably, a substantial portion of the nanoparticles are within an evanescent zone adjacent to a light emitting region of a self-emissive light source when the optical film is located against the self-emissive light source. For example, a substantial portion of the nanoparticles can be in contact with the substrate to be within the evanescent zone, although in some
20 embodiments the substantial portion of the nanoparticles in the evanescent zone need not be in contact with the substrate.

Applying the nanoparticles can involve coating the nanoparticles dispersed in a solvent onto the flexible substrate and allowing the solvent to evaporate before overcoating the backfill layer. Applying the nanoparticles can also involve applying them
25 in dry form to the flexible substrate and then overcoating them with the backfill layer. An alternative to the method involves using substrate with a release agent, in which the particles are applied to a substrate with a release agent, the substrate with the particles is applied to a device substrate with the particles in contact with it, and then the substrate is released to transfer the particles to the device substrate.

30

Replication Method

One solution for forming a master tool having nanostructures involves the use of interference lithography. Regular periodic features as small as 100nm-150nm can be quickly written using this method. An advantage involves being able to write these patterns over larger areas, which can make the process more amenable to manufacturing.

5 Production of a master tool for replication of the pattern can involve the following. A substrate is coated with an overlayer of photoresist and then illuminated with one or more UV interference patterns to expose the resist in a regular pattern with the desired feature sizes. Development of the resist then leaves an array of holes or posts. This pattern can subsequently be transferred into the underlying substrate through an etching
10 process. If the substrate material is not suitable to be used as a replication tool, a metal tool can be made using standard electroforming processes. This metal replica would then become the master tool.

Another method involves forming a master tool having randomly-distributed nanostructures. A solution is prepared comprising nanoparticles of the appropriate size
15 and with the appropriate surface modifications to prevent agglomeration. Methods for preparing such solutions are generally specific to the particular nanoparticles to be dispersed; general methods have been described elsewhere, including U.S. Patent No. 6,936,100 and Molecular Crystals and Liquid Crystals, 444 (2006) 247-255, both of which are incorporated herein by reference. The solution is then coated onto a flexible substrate
20 using one of a variety of solvent coating techniques, including knife coating, dip coating, or spray coating. Pretreatment of the substrate using methods such as plasma etching may be required in order to assure uniformity of the solution coating. After solvent evaporation, the nanoparticles should be distributed in a way that is microscopically random but macroscopically uniform. As was the case with the uniform tool fabrication
25 process described above, this pattern could then be transferred to an underlying substrate material through an etching or embossing process, or a metal tool can be made using standard electroforming processes.

In any of these cases, if a flat master tool has been produced, it or its replicas may then be tiled together to form a larger tool, as described in U.S. Patent No. 6,322,652,
30 incorporated herein by reference, or may be formed into a cylindrical tool for compatibility with a roll-to-roll replication process.

Once a master tool has been produced, replication of the structure into a polymer can be done using one of a variety of replication processes, including the 3C process. The substrate for this replication could be any polymer sheeting compatible with the chosen replication process; it may be already coated with the ultrabARRIER film as described above.

5 Backfilling would then be performed downstream in, for example, a chemical vapor deposition (CVD) or sputtering process which can deposit a high index material, such as SiN or ITO, which is capable of filling the structures and then leveling out into a smooth layer. If SiN is used, this might then be followed by an ITO deposition process if a conductive upper layer is required. Alternatively, the downstream backfilling may be

10 performed in a solvent coating process using suitable materials.

Examples

Table 4 provides definitions and sources for materials used in the Examples.

Table 4
Tetrafluorotetracyanoquinodimethane (FTCNQ, TCI America, Portland, Oregon)
4,4',4''-Tris(N-(3-methylphenyl)-N-phenylamino)triphenylamine (MTDATA, H. W. Sands Corp., Jupiter, Florida)
Aluminum tris(8-hydroxyquinolate) (AlQ, H. W. Sands Corp., Jupiter, Florida)
N,N'-bis(naphthan-2-yl)-N,N'-bis(phenyl)benzidine (NPD, H. W. Sands Corp., Jupiter, Florida)
Coumarin 545T dye (C545T, Eastman Kodak Co., Rochester, New York)
Lithium fluoride (LiF, Alfa Aesar Co., Ward Hill, Massachusetts)
Aluminum (Al, Alfa Aesar Co., Ward Hill, Massachusetts)

Example 1 – Periodic array of low index nanostructures with thick high index vapor-deposited backfill

A regular periodic array of nanostructures was produced in a low-index polymer layer using interference lithography. It is known that, for 2-beam interference, the peak-to-peak spacing of the fringes is given by $(\lambda/2)/\sin(\theta/2)$, where λ is the wavelength and θ is the angle between the two interfering waves. This technique enables patterning of structures down to periods as small as one half of the exposing wavelength.

For this example, a thin film of UV-sensitive photoresist (PR) was spun onto a thin glass substrate. The PR was then exposed by a two-beam interference pattern from a

25 325nm argon ion laser; the periodic patterns of high and low intensity created lines of exposed regions of period 520nm in the PR. The substrate was then rotated by 90 degrees

and another exposure was made. This resulted, after development, in a pattern of square holes in the PR with hole spacing of 520nm, hole dimension approximately 250nm, and hole depth approximately 200nm. This pattern was then backfilled with plasma-enhanced chemical vapor deposition (PECVD) Si₃N₄ to a thickness of 1000nm in the manner described in Example 3.

Example 2 – Periodic array of low index nanostructures with thinned high index planarization vapor-deposited backfill

In order to obtain a higher degree of planarization, a thick (1.3 microns) layer of photoresist (such as Shipley PR1813 available from Electronic Materials Inc., Spartanburg, SC) was coated on the SiN layer by spin coating using a substrate as prepared in Example 1. Then reactive ion etching (RIE) was performed to etch away the PR and part of the SiN. A reactive ion etch (RIE, Model PlasmaLab™ System100 available from Oxford Instruments, Yatton, UK) was performed according to the conditions described in Table 5.

Table 5 - Materials/Conditions used for Reactive Ion Etching	
Reactant/Condition	Value
C ₄ F ₈	10-50 sccm (standard cubic centimeters per minute)
O ₂	0.5-5 sccm
RF power	50-100W
Inductive Coupling Plasma (ICP) power	1000-2000 W
Pressure	3-10 mTorr

This light extraction structure then served as the substrate for deposition of a bottom emitting green OLED in a manner similar to that described in Example 3 except that ITO covered the entire substrate. In this case, the OLED layers were deposited through a 40 millimeters (mm) x 40mm shadow mask in the following order: 3000Å MTDATA doped with 2.8% FTCNQ/400Å NPD/300Å AIQ doped with 1% C545T/200Å AIQ/7Å LiF. The 40mm x 40mm shadow mask was replaced by a mask containing several parallel 3mm x 25mm openings and through which 2500Å of Al cathode metal was then deposited. This provided OLED devices containing several independently addressable 3mm x 25mm pixels.

Light emitted from the cathode stripe from the resulting OLED was observed. The cathode stripe passes over areas with and without the periodic patterns, enabling observation of patterned and unpatterned regions simultaneously, with the same voltage applied across both regions. It was quite apparent that the area with the periodic patterns was brighter than the area without the periodic patterns.

Example 3 - Random distribution of low-index nanoparticles with high-index planarization layer

A coating of nanoparticles (NPs) was created on a 50mm x 50mm glass substrate by applying a commercially-obtained sol of silica (SiO₂) NPs to the substrate and drying at 100°C for 5 minutes. The sol consisted of 46 weight percent of SiO₂ nanoparticles suspended in water solution (available from Nalco Company, 1601W. Diehl Rd., Naperville, IL 60563-1198). The particle size in this sol ranges from a 60nm-300nm diameter, with an average diameter of 244nm. Alternatively, it is possible to use particles having at least one dimension (e.g., diameter) in the range 20nm-1000nm.

After coating the part of the glass substrate with the nanoparticles, a 300nm thick layer of silicon nitride (Si₃N₄) was coated onto the SiO₂-NPs and bare glass portions of the substrate by plasma-enhanced chemical vapor deposition (PECVD, Model PlasmaLab™ System100 available from Oxford Instruments, Yatton, UK), using the parameters described in Table 6.

Table 6 - Conditions used for depositing SiN layer	
Reactant/Condition	Value
SiH ₄	400 sccm
NH ₃	20 sccm
N ₂	600 sccm
Pressure	650 mTorr
Temperature	60°C
High frequency (HF) power	20W
Low frequency (LF) power	20W

The refractive index of the SiN core layer was measured using a Metricon Model 2010 Prism Coupler (Metricon Corporation; Pennington, N.J.) and was found to be 1.8. SEM imaging of the resultant SiN surface indicated that the roughness of the SiO₂ NP surface

had been reduced considerably by the 300nm SiN coating, although residual deviations remained.

5 In order to incorporate the index-contrasted nanostructured light-scattering layer into an OLED, 110nm of ITO was deposited on the SiN through a 5mm x 5mm pixilated shadow mask to serve as the OLED anode. Subsequently a simple green organic emitting layer and cathode were deposited to complete the OLED. The OLEDs were fabricated by standard thermal deposition in a bell-jar vacuum system. The OLED layers were deposited through a 40mm x 40mm shadow mask covering the 5mm x 5mm ITO pixels in the following order: 3000Å MTDATA doped with 2.8% FTCNQ/400Å NPD/300Å AIQ
10 doped with 1% C545T/200Å AIQ/7Å LiF. The 5mm x 5mm shadow mask was then realigned and 2500Å of Al metal was deposited to form the cathodes contacting the tops of the pixels. This provided OLED devices containing several independently addressable 5mm x 5mm pixels with some pixels disposed over nanoparticles and other pixels not disposed over the nanoparticles.

15 Light emitted from the cathodes of the resulting OLEDs was observed. It was apparent that these devices with the nanoparticle coating were qualitatively brighter than the devices prepared under identical conditions but without nanoparticle coatings. Subsequent quantitative measurements on these devices have borne out these results. Significant increases in brightness have been observed for modified devices over those
20 with no modification of the interface, whether driving the devices at the same voltage or the same current. Efficiency measurements (candelas per ampere) show an improvement of about 40% with this simple modification.

Example 4 – Random distribution of high index nanoparticles with low index backfill

25 A coating of high index NPs was created on a glass substrate by applying a commercially-obtained sol of ITO NPs to the substrate and drying at 100°C for 5 minutes. The sol consisted of 20 weight percent of ITO nanoparticles suspended in a 1:1 isopropanol/water solution (Advanced Nano Products Co., LTD., Chungwon-kun, Chungcheonbuk-do, Korea). The particle size in this sol ranges from a 30nm-300nm
30 diameter, with an average diameter of 86nm. After coating a portion of the glass substrate with the nanoparticles, a 200nm-400nm thick layer of silicon oxide was coated onto the ITO-NPs and bare glass portions of the substrate by plasma-enhanced chemical vapor

deposition (PECVD, Model PlasmaLab™ System100 available from Oxford Instruments, Yatton, UK), using the parameters described in Table 7.

Reactant/Condition	Value
SiH ₄	200-400 sccm
N ₂ O	500-1500 sccm
N ₂	200-800 sccm
Pressure	400-1600 mTorr
Temperature	60°C
High frequency (HF) power	50-150W

5 With these parameters, a refractive index of 1.46 can be achieved for the silicon oxide film; the index of the ITO NPs is approximately 1.95. At the completion of the PECVD process, high-index nanoparticles with low-index backfill had been generated. Subsequent deposition of an OLED device on this modified substrate resulted in significant enhancement of the light extracted from the portions of the device that had been patterned with NPs when compared to the unpatterned portions. Efficiency measurements (candelas per ampere) show an improvement of about 60-80% with this simple modification.

Example 5 - Production of nanoscale structures on flexible sheet with barrier coating

15 The experiment began with a film on which oxygen/moisture barrier layers had previously been deposited. This barrier film typically comprises PET overcoated with a first polymer layer and further overcoated with at least two visible light-transmissive inorganic barrier layers separated by at least one second polymer layer. Such barrier films have demonstrated oxygen transmission rates less than 0.005 cc/m²/day at 23°C and 90% relative humidity and are described in greater detail in, for example, U.S. Patent Nos. 20 7,018,713 and 6,231,939, which are incorporated herein by reference.

Samples of these barrier films were cut into small 1 inch x 1 inch pieces and cleaned with methanol and distilled water. A layer of photoresist (Shipley UV5) was deposited and then baked at 135°C for 60 seconds, producing a coating of thickness 0.56 microns. This sample was then exposed to interfering laser beams as described in Example 1 above to produce a square array of exposed elements. The resulting pattern had a periodicity of 1.6 microns in each direction and a duty cycle of approximately 50%.

The sample was then placed on a hot plate and baked at 130°C for 90 seconds. After the sample cooled down it was then placed in a developer bath (MF-CD-26 from Rohm&Haas) for 10 seconds with stirring. After drying in air for about 3 hours, the samples were then heated on a hot plate at 130°C for 1 minute to remove any residual moisture.

5 The resulting film is an example of nanostructures useful for light extraction disposed on a flexible substrate with an interposed barrier layer. This film corresponds with elements 110, 112 and 114 in FIG. 1 and with elements 126, 124 and 122 in FIG. 2.

10 **Example 6 – Random distribution of high index nanoparticles with low index backfill on flexible sheet with barrier coating**

 The experiment began with a film on which oxygen/moisture barrier layers had previously been deposited. This barrier film typically comprises PET flexible sheet overcoated with a first polymer layer and further overcoated with at least two visible light-transmissive inorganic barrier layers separated by at least one second polymer layer. Such barrier films have demonstrated oxygen transmission rates less than 0.005 cc/m²/day at 15 23°C and 90% relative humidity and are described in greater detail in, for example, U.S. Patent Nos. 7,018,713 and 6,231,939, which are incorporated herein by reference.

 Samples of these barrier films were cut into small 2 inch x 2 inch pieces. A dip-coating of high index NPs was created on the flexible sheet by applying a commercially- 20 obtained sol of ITO NPs to the substrate and drying at 100°C for 5 minutes. The sol consisted of 20 weight percent of ITO nanoparticles suspended in a 1:1 isopropanol/water solution (Lot-3M-060330-1, Advanced Nano Products Co., LTD.Chungwon-kun, Chungcheonbuk-do, Korea). The particle size in this sol ranges from a 30nm-300nm diameter, with an average diameter of 86nm. After coating a portion of the flexible sheet 25 substrate with the nanoparticles, a 200nm-400nm thick layer of silicon oxide was coated onto the ITO-NPs and bare flexible sheet portions of the substrate by plasma-enhanced chemical vapor deposition (PECVD, Model PlasmaLab™ System100 available from Oxford Instruments, Yatton, UK), using the parameters described in Table 7.

 With these parameters, a refractive index of 1.46 can be achieved for the silicon 30 oxide film; the index of the ITO NPs is approximately 1.95. At the completion of the PECVD process, high-index nanoparticles with low-index backfill had been generated. Subsequent deposition of an OLED device on this modified substrate resulted in

significant enhancement of the light extracted from the portions of the device that had been patterned with NPs when compared to the unpatterned portions.

Subsequent quantitative measurements on these devices have borne out these results. Significant increases in brightness have been observed for modified devices over
5 those with no modification of the interface, whether driving the devices at the same voltage or the same current. Efficiency measurements (candelas per ampere) show an improvement of about 100% with this simple modification.

CLAIMS

1. A multifunctional optical film for enhancing light extraction from a self-emissive light source, comprising:

5 a flexible substrate;

a structured layer of extraction elements having a first index of refraction, wherein a substantial portion of the extraction elements are within an evanescent zone adjacent to a light emitting region of the self-emissive light source when the optical film is located against the self-emissive light source; and

10 a backfill layer comprising a material having a second index of refraction different from the first index of refraction, wherein the backfill layer forms a planarizing layer over the extraction elements.

2. The multifunctional optical film of claim 1, wherein the backfill layer has a lower index than the extraction elements and wherein the backfill layer has a thickness approximately equal to a thickness of the layer of the extraction elements.

3. The multifunctional optical film of claim 1, wherein the backfill layer has a higher index than the extraction elements.

20

4. The multifunctional optical film of claim 1, wherein the extraction elements comprise nanostructured features.

5. The multifunctional optical film of claim 4, wherein the nanostructured features comprise nanoparticles or replicated features.

25

6. The multifunctional optical film of claim 1, further comprising a coating having at least one of the following functions: color filtering; color shifting; polarization modification; antireflection; light redirection; diffusion; or optical rotation.

30

7. The multifunctional optical film of claim 1, further comprising a coating applied to the substrate and having at least one of the following functions: antiabrasion; antismudge; hydrophobicity; or hydrophilicity.
- 5 8. The multifunctional optical film of claim 1, wherein the backfill layer material comprises one of the following: an inorganic material; an organic material; or a nanoparticle filled polymer material.
9. The multifunctional optical film of claim 1, wherein the difference between the
10 first and second indices of refraction is greater than or equal to 0.3.
10. The multifunctional optical film of claim 4, wherein the nanostructured features
comprise one of the following: a periodic or quasi-periodic array of features; a random
distribution of features; or portions of periodic or quasi-periodic array of features
15 interspersed within a different distribution of features.
11. The multifunctional optical film of claim 1, wherein the substrate comprises one of
the following: glass; a polymer film; a substantially optically transmissive material; or a
barrier material.
20
12. The multifunctional optical film of claim 1, further comprising a barrier layer.
13. The multifunctional optical film of claim 1, further comprising a layer applied to
the backfill layer comprising a transparent electrically conductive material.
25
14. The multifunctional optical film of claim 1, wherein the backfill layer material
functions as a barrier to moisture and oxygen.
15. The multifunctional optical film of claim 1, wherein the backfill layer material is
30 transparent.

16. The multifunctional optical film of claim 1, wherein the backfill layer material is electrically conductive.

17. The multifunctional optical film of claim 1, wherein the extraction elements
5 comprise particles having at least one dimension between 20 nanometers and 1000 nanometers.

18. The multifunctional optical film of claim 1, wherein the extraction elements
10 comprise particles having at least one dimension between 30 nanometers and 300 nanometers.

19. The multifunctional optical film of claim 1, wherein the extraction elements
15 comprise particles having at least one dimension between 60 nanometers and 300 nanometers.

20. A method for making an optical film for enhancing light extraction, comprising:
coating a layer of an organic material having a first index of refraction onto a
flexible substrate;
imparting nanostructured features into the organic material to create a
20 nanostructured surface; and
applying a backfill layer to the nanostructured surface to form a planarizing layer
on the nanostructured surface,
wherein the backfill layer comprises a material having a second index of refraction
different from the first index of refraction, and
25 wherein a substantial portion of the nanostructured features are within an
evanescent zone adjacent to a light emitting region of a self-emissive light source when
the optical film is located against the self-emissive light source.

21. The method of claim 20, further comprising curing the organic material having the
30 nanostructured features.

22. The method of claim 20, wherein the imparting step comprises:

providing a master tool having nanostructured features; and
applying the flexible substrate with the layer of the organic material to the tool
with the organic material applied against the tool to impart the nanostructures into the
organic material.

5

23. The method of claim 20, wherein the imparting step comprises printing the
nanostructured features onto the organic material.

10

24. The method of claim 20, wherein the imparting step comprises embossing the
nanostructured features into the organic material.

25. The method of claim 20, further comprising using one of the following methods to
apply the backfill layer to form the planarizing layer: liquid coating; vapor coating;
powder coating; or lamination.

15

26. A method for making an optical film for enhancing light extraction, comprising:
applying nanoparticles having a first index of refraction onto a flexible substrate,
wherein a substantial portion of the nanoparticles are within an evanescent zone adjacent
to a light emitting region of a self-emissive light source when the optical film is located
against the self-emissive light source; and

20

overcoating a backfill layer on the nanoparticles to form a planarizing layer over
the nanoparticles, wherein the backfill layer comprises a material having a second index of
refraction different from the first index of refraction.

25

27. The method of claim 26, wherein the applying step comprises:
coating the nanoparticles dispersed in a solvent onto the flexible substrate; and
allowing the solvent to evaporate before overcoating the backfill layer.

30

28. The method of claim 26, wherein the applying step comprises applying the
nanoparticles in dry form to the flexible substrate.

29. The method of claim 26, wherein the applying step includes forming the nanoparticles as a monolayer on the flexible substrate.

5 30. The method of claim 26, wherein the substantial portion of the nanoparticles are in contact with the flexible substrate.

31. An organic light emitting diode (OLED) display device, comprising:
an OLED display device comprising a self-emissive light source having at least one surface that outputs light from the device; and
10 a light extraction film adjacent the at least one surface of the self-emissive light source, wherein the light extraction film comprises:
a flexible substrate;
a structured layer of extraction elements having a first index of refraction, wherein a substantial portion of the extraction elements are within an evanescent
15 zone of the light output surface of the self-emissive light source; and
a backfill layer comprising a material having a second index of refraction different from the first index of refraction, wherein the backfill layer forms a planarizing layer over the extraction elements,
wherein the structured layer and backfill layer are in sufficient proximity to
20 the light output surface of the self-emissive light source in order to at least partially enhance the extraction of light from that surface.

32. The device of claim 31, wherein the OLED display device comprises a bottom emitting OLED display device.

25

33. The device of claim 31, wherein the OLED display device comprises a top emitting OLED display device.

30

34. An organic light emitting diode (OLED) solid state lighting element, comprising:

an OLED solid state lighting element comprising a self-emissive light source having at least one surface that outputs light from the element; and

a light extraction film adjacent the at least one surface of the self-emissive light source, wherein the light extraction film comprises:

5 a flexible substrate;

a structured layer of extraction elements having a first index of refraction, wherein a substantial portion of the extraction elements are within an evanescent zone of the light output surface of the self-emissive light source; and

10 a backfill layer comprising a material having a second index of refraction different from the first index of refraction, wherein the backfill layer forms a planarizing layer over the extraction elements,

wherein the structured layer and backfill layer are in sufficient proximity to the light output surface of the self-emissive light source in order to at least partially enhance the extraction of light from that surface.

15

35. The OLED solid state lighting element of claim 34, wherein the backfill layer comprises an optically clear adhesive.

20

36. The OLED solid state lighting element of claim 34, wherein the substrate comprises a barrier film.

37. The OLED solid state lighting element of claim 34, wherein the OLED comprises a top emitting OLED.

25

38. The OLED solid state lighting element of claim 34, wherein the OLED comprises a bottom emitting OLED.

30

39. The OLED solid state lighting element of claim 34, wherein the backfill layer has a lower index than the extraction elements and wherein the backfill layer has a thickness approximately equal to a thickness of the layer of the extraction elements.

40. The OLED solid state lighting element of claim 34, wherein the backfill layer has a higher index than the extraction elements.
41. The OLED solid state lighting element of claim 34, wherein the extraction
5 elements comprise nanostructured features.
42. The OLED solid state lighting element of claim 41, wherein the nanostructured features comprise nanoparticles or replicated features.
- 10 43. The OLED solid state lighting element of claim 34, further comprising a coating having at least one of the following functions: color filtering; color shifting; polarization modification; antireflection; light redirection; diffusion; or optical rotation.
44. The OLED solid state lighting element of claim 34, further comprising a coating
15 applied to the substrate and having at least one of the following functions: antiabrasion; antismudge; hydrophobicity; or hydrophilicity.
45. The OLED solid state lighting element of claim 34, wherein the backfill layer
20 material comprises one of the following: an inorganic material; an organic material; or a nanoparticle filled polymer material.
46. The OLED solid state lighting element of claim 34, wherein the difference
between the first and second indices of refraction is greater than or equal to 0.3.
- 25 47. The OLED solid state lighting element of claim 41, wherein the nanostructured features comprise one of the following: a periodic or quasi-periodic array of features; a random distribution of features; or portions of periodic or quasi-periodic array of features interspersed within a different distribution of features.
- 30 48. The OLED solid state lighting element of claim 34, wherein the substrate comprises one of the following: glass; a polymer film; or a substantially optically transmissive material.

49. The OLED solid state lighting element of claim 34, further comprising a barrier layer.

5 50. The OLED solid state lighting element of claim 34, further comprising a layer applied to the backfill layer comprising a transparent electrically conductive material.

51. The OLED solid state lighting element of claim 34, wherein the backfill layer material functions as a barrier to moisture and oxygen.

10

52. The OLED solid state lighting element of claim 34, wherein the backfill layer material is transparent.

15

53. The OLED solid state lighting element of claim 34, wherein the backfill layer material is electrically conductive.

54. The OLED solid state lighting element of claim 34, wherein the extraction elements comprise particles having at least one dimension between 20 nanometers and 1000 nanometers.

20

55. The OLED solid state lighting element of claim 34, wherein the extraction elements comprise particles having at least one dimension between 30 nanometers and 300 nanometers.

25

56. The OLED solid state lighting element of claim 34, wherein the extraction elements comprise particles having at least one dimension between 60 nanometers and 300 nanometers.

30

57. A liquid crystal display (LCD) device, comprising:
an LCD panel; and
a backlight unit adjacent the LCD panel, the backlight unit comprising:

a self-emissive light source having at least one surface that outputs light;
and

a light extraction film adjacent the at least one surface of the self-emissive light source, wherein the light extraction film comprises:

5 a flexible substrate;

a structured layer of extraction elements having a first index of refraction, wherein a substantial portion of the extraction elements are within an evanescent zone of the light output surface of the self-emissive light source; and

10 a backfill layer comprising a material having a second index of refraction different from the first index of refraction, wherein the backfill layer forms a planarizing layer over the extraction elements,

wherein the structured layer and backfill layer are in sufficient proximity to the light output surface of the self-emissive light source in
15 order to at least partially enhance the extraction of light from that surface.

58. The LCD device of claim 57, wherein the self-emissive light source comprises an organic light emitting diode.

20

1/4

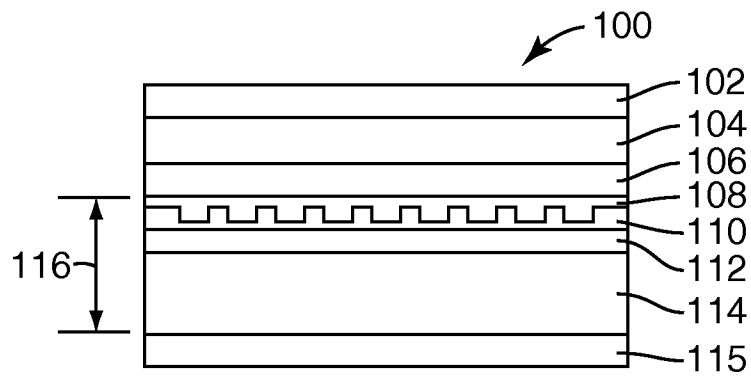


Fig. 1

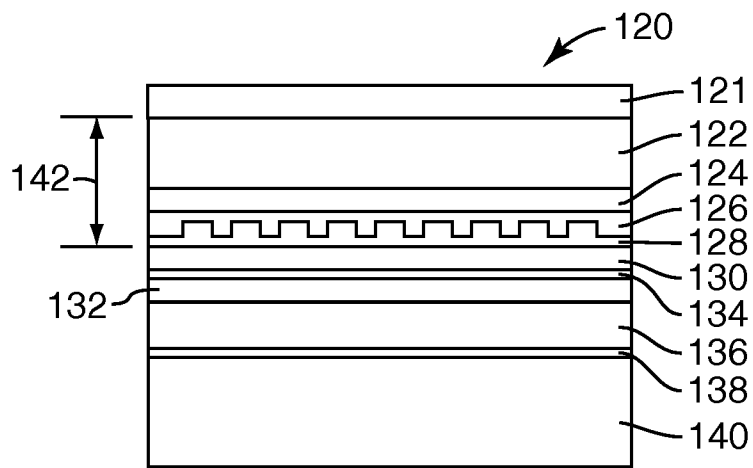


Fig. 2

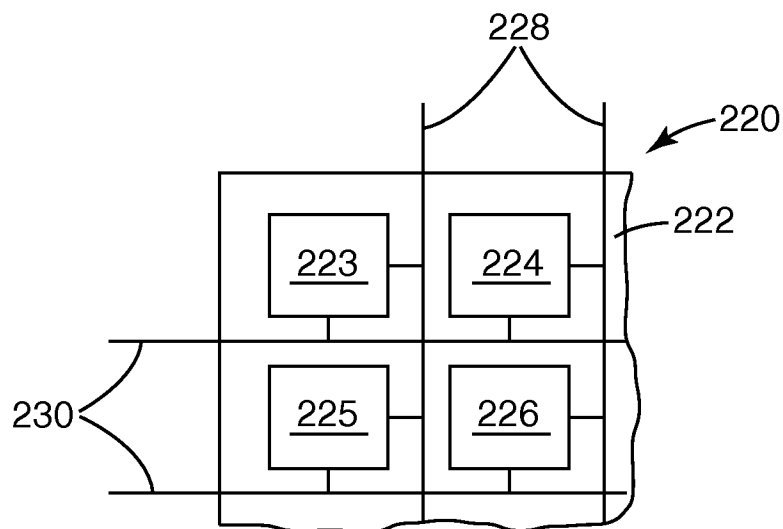


Fig. 3

2/4

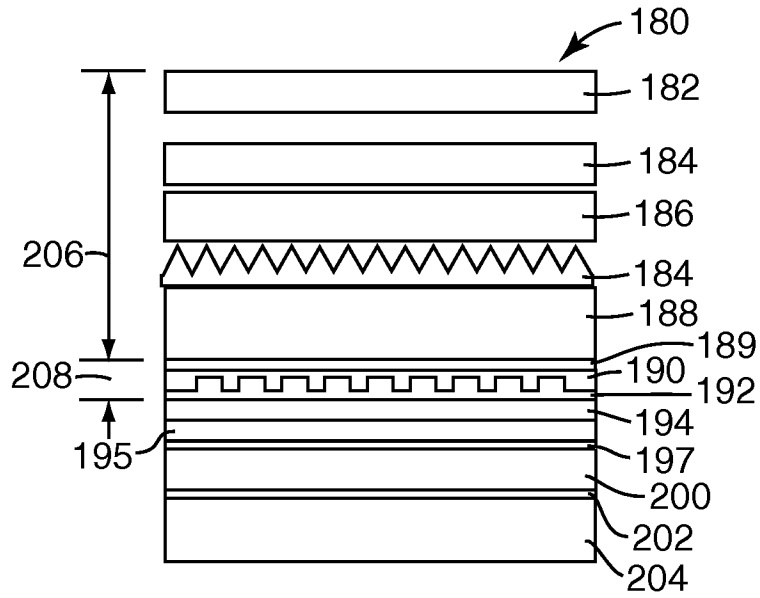


Fig. 4




Fig. 5

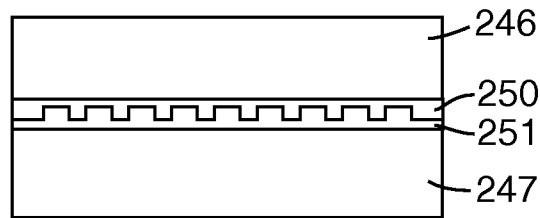


Fig. 6

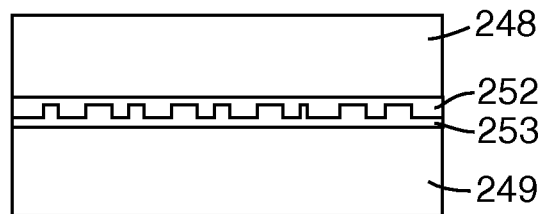


Fig. 7

3/4

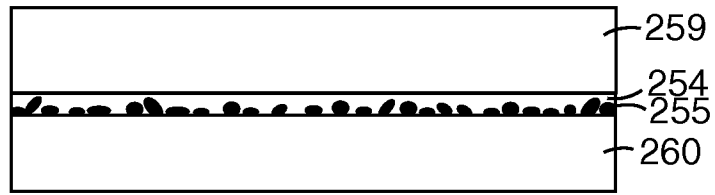


Fig. 8

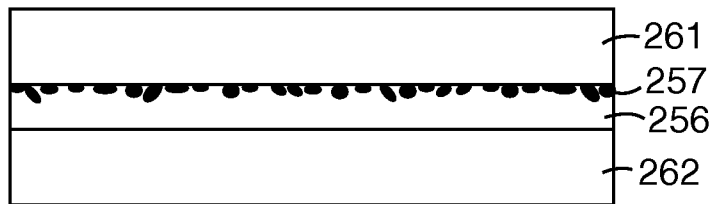


Fig. 9

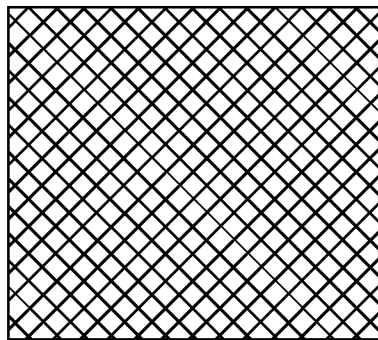


Fig. 10

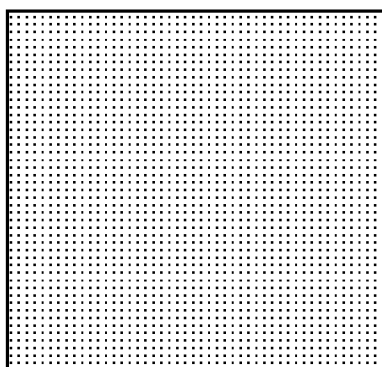


Fig. 11

4/4

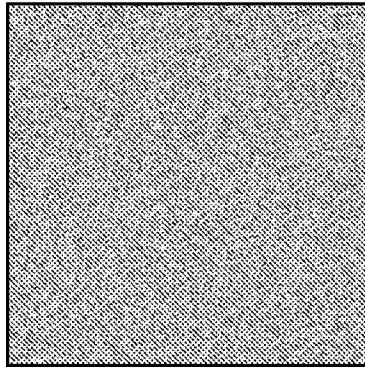


Fig. 12

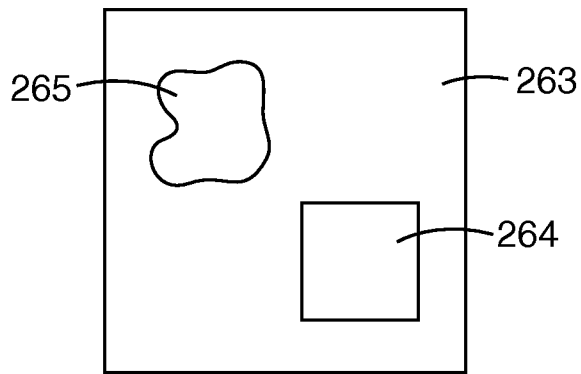


Fig. 13

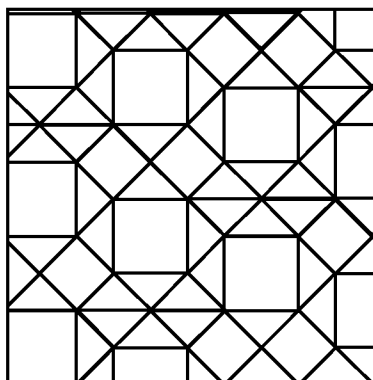


Fig. 14