



(51) International Patent Classification:
G11B 5/31 (2006.01)

(21) International Application Number:
PCT/US2009/038843

(22) International Filing Date:
30 March 2009 (30.03.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/040,373 28 March 2008 (28.03.2008) US

(71) Applicant (for all designated States except US): **ADVANCED RESEARCH CORPORATION** [US/US];
4459 White Bear Parkway, White Bear Lake, MN 55110 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DUGAS, Matthew, P.** [US/US]; 2324 Valentine Avenue, St. Paul, MN 55108 (US).

(74) Agents: **WITZANY, Nathan, J.** et al.; Dorsey & Whitney LLP, Suite 1500, 50 South Sixth Street, Minneapolis, MN 55402-1498 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: THIN FILM PLANAR ARBITRARY GAP PATTERN MAGNETIC HEAD

FIG. 4A

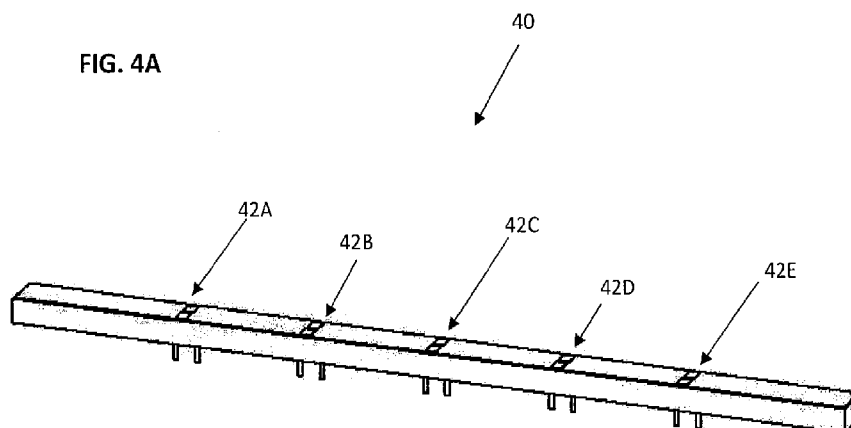

(57) Abstract: Planar magnetic heads and methods of making the same using a built-up approach and thru-hole via technology to achieve a true planar head. A head may comprise a substrate having conductive thru-hole vias extending therethrough, a first magnetic layer deposited and patterned on the substrate, a first insulation layer deposited and patterned on the first magnetic layer, a conductive coil layer deposited and patterned on the first insulation layer and connected to the conductive thru-hole vias, a second insulation layer deposited and patterned on the conductive coil layer, vias patterned into the insulation layer extending to the first magnetic layer, a second magnetic layer deposited in the vias, and a third magnetic layer deposited and patterned on the second insulation layer. The third magnetic layer may be connected to the first magnetic layer through the second magnetic layer deposited in the vias of the insulation layers.

THIN FILM PLANAR ARBITRARY GAP PATTERN MAGNETIC HEAD

Field of the Invention

[001] The present disclosure relates to magnetic recording heads and methods of making the same. More particularly, the present disclosure relates to thin film planar arbitrary gap pattern magnetic recording heads and methods of making the same.

Background of the Invention

[002] Prior art magnetic heads are disclosed in U.S. Patent 6,947,256 (“‘256 Patent”), titled “Embedded Wire Planar Write Head System and Method,” issued to Biskeborn, Doscher, and Eaton, U.S. Patent 7,322,096 (“‘096 Patent”), which is a divisional of the ‘256 Patent, also titled “Embedded Wire Planar Write Head System and Method,” and issued to Biskeborn, Doscher, and Eaton, and U.S. Patent 7,119,976 (“‘976 Patent”), titled “Planar Servo Format Verifier Head,” issued to Biskeborn, Kirschenbaum, and Taylor. A characteristic of these prior art heads is beginning fabrication of the head with a trenched substrate, the trench being made into a nonmagnetic substrate, and the fabrication of the head proceeding thereupon with thin film processing. The trenched substrate is subsequently filled in so that the final plane of the recording head is substantially close to the plane of the originating substrate with the trench being filled in with much of the head structure.

[003] FIGS. 1A and 1B illustrate a prior art magnetic write head of the type disclosed in the ‘256 Patent. The ‘256 Patent discloses building a head from a substrate **406** into which a trench has been made. For the single gap set head **400**, the head is fabricated by depositing thin film layers into the trench. For each set of gaps **500**, made up of arrays of discrete gaps **411** and **413** spanning the width of the tape, there is a single coil layer **410** running beneath the set of gaps **500**. The coil layer **410** spans from one edge of the head to the other, parallel to

the tape bearing surface, but the longitudinal axis and current flow of the coil layer **410** is perpendicular to the tape's velocity direction.

[004] In FIGS. 2A and 2B, the '256 Patent further illustrates tandem head structures **900** and **1200** made from two pockets patterned into the insulating layer in a single trench **906**. This embodiment has two coils, one for each pocketed head element **902**, **904** (FIG. 2A) or **1202**, **1204** (FIG. 2B). This embodiment allows for two head elements **902**, **904** (FIG. 2A) or **1202**, **1204** (FIG. 2B), each of which are functionally identical to single head element **400** but which are displaced in the down-track direction with respect to each other. Each of the two coil layers, i.e., **1208**, **1210**, drives a uniquely associated set of gaps, i.e., write gaps **1206** of first head element **1202** and write gaps **1206** of second head element **1204**, respectively, that are staggered from one another in the down-track direction to accommodate the necessary conducting circuit **1208**, **1210** that spans from one end of the slider to the other, beneath the associated gap set.

[005] In FIG. 2C, the '256 Patent illustrates another embodiment **1000** based on a further down-track staggered gap and down-track staggered coil expansion of embodiment **900**. In this embodiment **1000**, a generalization of embodiment **900** is called out so that more gaps **1004** can be driven independently. In all of the above embodiments, the gaps are shown to be driven by a coil layer that spans from one edge of the slider to the other, each coil driving an associated set of gaps and each coil starting on one end of the slider body and ending on the other end. In the generalized embodiment, the gaps **1004** are aligned in a staggered formation to accommodate the necessary conducting circuits, and magnetic circuit, one circuit for each gap or gap set, and hence the gaps can only be written independently if they are staggered to accommodate the associated magnetic circuit and associated electrical conducting circuit.

[006] The '096 Patent further discloses and teaches the same subject matter as the above described planar head built from a trenched substrate. The '976 Patent discloses a second trench for accommodation of the lead for a servo

read head element and a formatting system for using such a head. This prior art embodiment is illustrated in FIG. 3.

[0007] The prior art only teaches planar heads built from a trenched substrate. Trenched substrate based heads lead to a natural result of air skiving edged, flat contour sliders that are velocity independent. However, the limited multichannel embodiments of the prior art have fabrication limitations and interconnect issues that are not fully addressed. In the independently written multi-channel embodiments, each channel is a full width trench head that is merely displaced in the down-track direction from one another. As such, seventeen such channels, for example, would require seventeen trenched heads displaced sixteen times in the down-track direction from one another. The resulting head-to-media interface would have an extremely wide media scrub zone that would mitigate the elegance of the air skiving single trench head.

[0008] Thus, there exists a need in the art for an easily manufactured planar magnetic head, particularly for tape servo format writing and verification, and more particularly for multi-channel embodiments with a narrow scrub path single bump interface. There is a need in the art for a method of making a planar magnetic head using a built-up approach on planar substrate, as opposed to deposition and lithography in a trenched substrate, to achieve a true planar head. There is a further need in the art for a method of making a planar magnetic head using thru-hole via technology to connect the leads to a conductive coil layer. There is a further need in the art for an easily manufactured planar magnetic head having independent channels without each gap set having to be displaced or staggered in the down-track direction.

Brief Summary of the Invention

[0009] The present disclosure, in one embodiment, relates to a magnetic head for magnetic tape. The magnetic head may include a substrate having a substantially continuous surface generally parallel with a tape bearing surface of the magnetic head. A first magnetic layer may be deposited on the substantially

continuous surface of the substrate. An electrically conductive coil layer is deposited on the first magnetic layer. A second magnetic layer may be deposited on the electrically conductive coil layer. The second magnetic layer may include one or more magnetic gap patterns. In further embodiments, the first and second magnetic layers may be separated from the electrically conductive coil layer by insulating layers. Additionally, the first and second magnetic layers may be connected through vias in the insulating layers to form a closed magnetic flux path.

[010] The present disclosure, in another embodiment, relates to a method of making a magnetic head. The method may include providing a substrate having a substantially continuous surface generally parallel with a tape bearing surface of the magnetic head, providing a first magnetic layer on the substantially continuous surface of the substrate, providing an electrically conductive coil layer on the first magnetic layer, and providing a second magnetic layer on the electrically conductive coil layer. In other embodiments, a full single turn may be used or multiple turns may be used. The second magnetic layer may include one or more magnetic gap patterns. Electrically conductive vias may be provided that extend through the substrate and contact the conductive coil layer. In other embodiments, the leads may be brought to the edge of the slider body. In further embodiments, a first insulation layer may be provided between the first magnetic layer and the electrically conductive coil layer, and a second insulation layer may be provided between the electrically conductive coil layer and the second magnetic layer. Vias, connecting the first and second magnetic layers, may further be provided in the insulating layers to form a closed magnetic flux path.

[011] The present disclosure, in a further embodiment, relates to magnetic media and/or formatted magnetic tape cartridges, which contain a media format particular to a planar magnetic head in accordance with the present disclosure, and particularly to a planar magnetic head having independent addressable channels. The present disclosure further relates to a method of

formatting and or verifying magnetic media and/or magnetic tape cartridges using a write/read magnetic head in accordance with the present disclosure.

[012] While multiple embodiments are disclosed, still other embodiments of the present invention will become apparent to those skilled in the art from the following detailed description, which shows and describes illustrative embodiments of the invention. As will be realized, the invention is capable of modifications in various obvious aspects, all without departing from the spirit and scope of the present invention. Accordingly, the drawings and detailed description are to be regarded as illustrative in nature and not restrictive.

Brief Description of the Drawings

[013] While the specification concludes with claims particularly pointing out and distinctly claiming the subject matter that is regarded as forming the present invention, it is believed that the invention will be better understood from the following description taken in conjunction with the accompanying Figures, in which:

[014] FIG. 1A is a cross-sectional view of a prior art magnetic head.

[015] FIG. 1B is a perspective view of another prior art magnetic head.

[016] FIG. 2A is a cross-sectional view of a prior art magnetic write head with two staggered coil circuits and two staggered gap sets.

[017] FIG. 2B is a perspective view of a prior art magnetic write head with two staggered coil circuits and two staggered gap sets, resulting in essentially two staggered heads made into a common trench.

[018] FIG. 2C is a perspective view of a prior art magnetic write head with an arbitrary array of staggered gaps and staggered coils, resulting in essentially a large number of staggered heads made into a common trench.

[019] FIG. 3 is a cross section view of a prior magnetic read head.

[020] FIG. 4A is a perspective view of a multichannel magnetic head in accordance with an embodiment of the present disclosure.

[021] FIG. 4B is a close up perspective view of one of the head channels of the multichannel magnetic head shown in FIG. 4A.

[022] FIG 4C is a close-up perspective view of one of the head channels of another embodiment of a multichannel magnetic head having a different lead configuration.

[023] FIG. 5 is a perspective view of a multichannel magnetic head in accordance with an embodiment of the present disclosure that is placed into a slider body.

[024] FIG. 6 is a flow chart of a method of making a magnetic head in accordance with one embodiment of the present disclosure.

[025] FIG. 7 is a perspective view of a substrate wafer in accordance with an embodiment of the present disclosure.

[026] FIG. 8 is a perspective view of a single head channel of a multichannel head having thru-hole vias prepared in the substrate, the thru-hole vias having electrically conductive material deposited therein in accordance with an embodiment of the present disclosure.

[027] FIG. 9 is a perspective view of a single head channel of a multichannel head having a first magnetic layer deposited and patterned on top of the substrate in accordance with an embodiment of the present disclosure.

[028] FIG. 10 is a perspective view of a single head channel of a multichannel head having a first insulation layer deposited and patterned on top of the first magnetic layer and substrate in accordance with an embodiment of the present disclosure.

[029] FIG. 11A is a perspective view of a single head channel of a multichannel head having a coil conductor layer deposited and patterned on top of the first insulation layer in accordance with an embodiment of the present disclosure.

[030] FIG. 11B is a perspective view of a single head channel of a multichannel head having a coil conductor layer deposited and patterned on top of

the first insulation layer in accordance with another embodiment of the present disclosure.

[031] FIG. 12A is a perspective view of a single head channel of a multichannel head having a second insulation layer deposited over the coil conductor layer, first insulation layer, first magnetic layer, and substrate in accordance with an embodiment of the present disclosure.

[032] FIG. 12B is a perspective view of a single head channel of a multichannel head having a second insulation layer deposited over the coil conductor layer, first insulation layer, first magnetic layer, and substrate in accordance with another embodiment of the present disclosure.

[033] FIG. 13 is a perspective view of a single head channel of a multichannel head having vias provided in the second insulation layer.

[034] FIG. 14 is a perspective view of a single head channel of a multichannel head having a second magnetic layer deposited in the vias and creating magnetic subpoles to form a closed magnetic path in accordance with an embodiment of the present disclosure.

[035] FIG. 15 is a perspective view of a single head channel of a multichannel head having a third magnetic layer deposited on top of the second magnetic layer and second insulation layer in accordance with an embodiment of the present disclosure.

[036] FIG. 16A is a perspective view of a single head channel of a multichannel head having a gap pattern formed in the third magnetic layer, wherein the third magnetic layer is further patterned to provide magnetic isolation from channel to channel in accordance with an embodiment of the present disclosure.

[037] FIG. 16B is a perspective view of a single head channel of a multichannel head having a gap pattern formed in the third magnetic layer, wherein the third magnetic layer is further patterned to provide magnetic isolation

from channel to channel in accordance with another embodiment of the present disclosure.

[038] FIG. 17 is a detailed perspective cross-sectional view, in the cross-track direction, of a channel of a magnetic head in accordance with an embodiment of the present disclosure.

[039] FIG. 18 is a detailed perspective cross-sectional view, in the down-track direction, of a channel of a magnetic head in accordance with one embodiment of the present disclosure.

[040] FIG. 19A is a top view of a magnetic head having a two-dimensional array of channels in accordance with an embodiment of the present disclosure.

[041] FIG. 19B is a top view of a magnetic head having a two-dimensional array of channels in accordance with another embodiment of the present disclosure.

[042] FIG. 20 is a schematic view of a standard LTO format.

[043] FIG. 21 is a top view of a data band between two servo bands.

[044] FIG. 22 is a top view of two servo bands encoded unique data in the servo pulse groups using a magnetic head in accordance with one embodiment of the present disclosure.

[045] FIG. 23 is a schematic view of a tape transport system in accordance with an embodiment of the present disclosure.

Detailed Description

[046] The present disclosure relates to novel and advantageous magnetic recording heads and methods of making the same. Particularly, the present disclosure relates to novel and advantageous planar magnetic heads and methods of making planar magnetic heads using a built-up approach to achieve a true planar head. Furthermore, the present disclosure, in one of its embodiments, relates to a novel and advantageous method of making a planar magnetic head

using thru-hole via technology to connect the leads to a conductive coil layer. In one embodiment, a magnetic head may comprise a substrate having conductive thru-hole vias extending through the substrate, a first magnetic layer deposited and patterned on the substrate, a first insulation layer deposited and patterned on the first magnetic layer, a conductive coil layer deposited and patterned on the first insulation layer, a second insulation layer deposited and patterned on the conductive coil layer, vias patterned or etched into the insulation layers extending to the first magnetic layer, a second magnetic layer deposited in the vias, and a third magnetic layer deposited and patterned on the second insulation layer and second magnetic layer. The third magnetic layer may be connected to the first magnetic layer through the second magnetic layer deposited in the vias of the insulation layers.

[047] In regards to descriptions of magnetic and nonmagnetic materials, terms such as “nonmagnetic materials” and “magnetically impermeable materials” are meant to mean materials with a substantially or very low magnetic permeability approaching that of free space, which is of unit permeability. As magnetic fields permeate free space and all materials with the exception of superconductors and perfect diamagnetic materials, the practical concept of using high permeability or magnetically soft materials for the active recording head elements is juxtaposed to the use of nonmagnetic or magnetically impermeable materials for other parts of the device and the meaning should be made clear from the discussion and context provided herein.

[048] In the figures that follow, some may be considered wafer level illustrations and other may be considered row bar or device level illustrations. In regards to the process illustrations which are predominately wafer level illustrations, the figures may also reveal the row bar level or device level sections and borders, so as to provide clarity.

[049] FIGS. 4A, 4B and 4C illustrate an embodiment of a multichannel magnetic head **40** in accordance with the present disclosure. In FIGS. 4A, 4B,

and 4C, the head contour is flat and there is no slider body. In other embodiments, the head 40 may have a different contour, such as a curved, or cylindrical contour. FIG. 4A illustrates the completed head in a five-channel format with channels or bands 42A through 42E, and collectively and individually referred to as 42, with each of the five channels 42 having independent leads. While FIG. 4A illustrates five independently addressable channels 42A-42E, it is recognized that any suitable number of channels 42 may be employed, such as fewer or greater than five channels. Each of the channels may have the same or different signals impressed. The channels may be connected in series, parallel, or series-parallel in such common signal applications. Such signal may have a common phase or may be made to have a relative phase delay. Each of the independent channels 42 may have a gap configuration consisting of typically two gap lines. However, any combination of gap lines may be used, such as a single gap line or three or more gap lines per head channel. FIG. 4B illustrates a close up perspective view of a head channel, e.g., 42C, and the surrounding area, the head channel 42C having a pair of angled gaps 45. The external leads 46 illustrated in FIG. 4B are an electrical extension of the substrate thru-via leads, discussed in further detail below. These external leads 46, of FIGS. 4A and 4B, are shown for illustrative purposes only and can also represent solder or gold or alloy bumps that could form a direct bonded connection to a rigid lead assembly or flex circuit. Each of the channels 42 may be driven simultaneously or independently. Each of the channels 42 of magnetic recording head 40 may have individual coil layers with associated coil leads, as described in further detail below, such that each of the channels 42 may be driven independently with the same or different signals, as required for the format being written.

[050] In another embodiment, as illustrated in FIG. 4C, the leads may be made to wrap around the edge of the head 40. In this embodiment, the side plane 49 of the head 40 may be lapped to reveal the planar surface coil and sputter or plate the edge leads 47 such that they make electrical connection to the edge

revealed surface coil. The edge leads **47** may terminate in larger pad areas, as shown. The leads **47** may then be made to have contact with external circuitry by means of, for example but not limited to, a flex circuit, wire bonds, or soldered solid wire. Each of the channels **42** may be driven simultaneously or independently. Each of the channels **42** of magnetic recording **40** may have individual coil layers with associated coil leads, as described in further detail below, such that each of the channels **42** may be driven independently with the same or different signals, as required for the format being written.

[051] An embodiment of this head placed into an external slider body **50** is illustrated in FIG. 5. In alternative embodiments, the head **40** can comprise its own independent slider body, and an external slider body **50** may not be used. The external slider body **50** may be suitably made for a cylindrical contour head or a flat contour head. The external slider body **50** may have air bleed slots and/or skiving edges. The external slider body **50** may be made of a common hard ceramic, such as but not limited to bi-crystal poly crystal N58 AlTiC or polycrystal Al₂O₃, or may be made of single crystal sapphire, the latter allowing for transparency and direct optical observation of the head-to-tape interface. All of the above described slider systems are not limiting and other slider systems may be used without departing from the spirit and scope of the present disclosure.

[052] FIG. 6 is a flow chart for a method **600** of making a magnetic head **40** according to one embodiment of the present disclosure. The steps illustrate a method of making a head **40** having a single strip line coil. However, a full coil turn or multiple coil turns are considered fully within the spirit and scope of the present disclosure; these embodiments may include more method steps and may result in a more efficient head. The method steps are not limiting and are not meant to be complete or exhaustive. In some embodiments, some of the steps may be excluded and other steps may be included without departing from the spirit and scope of the present disclosure.

[053] In step 605, and as illustrated in FIG. 7, a wafer level substrate 72 having a substantially continuous surface generally parallel with a tape bearing surface of the magnetic head 40 may be provided. Head row bar 74 is shown as a section of the wafer. The substrate 72 may be prepared having thru-hole vias 82 (shown in FIG. 8) for coil conducting leads. Alternatively, as discussed with reference to FIG. 4C, the leads may run to the edge of the head slider in the down-track direction and can be made to run over the edge of the slider and wrap around the corner by matching with leads running on the vertical face of the slider, and may subsequently be attached to flex or wire leads. Such an edge connection technique can offer an alternative to a thru-hole via technique. Alternatively, the leads may be run in the cross-track direction past the region of the tape bearing surface, and connect to pads so as to avoid interfering with the tape path, or they could wrap around these other perpendicular cross-track edges, as just discussed. Illustration of a substrate 72 wafer in FIG. 7 is not limiting, and a magnetic head 40 of the present disclosure may be manufactured at a wafer level or row bar level without departing from the spirit and scope of the present disclosure. In some embodiments, manufacturing at a wafer level may be preferred due to manufacturing efficiencies, and may further be preferred for flat head contours. In one embodiment, the wafer substrate 72 may comprise a silicon wafer, as the silicon wafer may easily have the vertical thru-hole vias prepared using the well known "Bosch" process, for example, and thus the process of making the vias can be a wafer level process. Another process for etching thru-hole vias is that of an anisotropic KOH wet etch. When using a semiconductor material such as silicon for the substrate, an initial non-conducting layer may be used to insulate the current leads so that the silicon does not electrically short the lead. Such insulating layers could be SiO₂ or SiN, among other suitable materials. Similarly, insulating layers may be used so that the conductor-filled vias, described in detail below, will not be shorted by the semiconductor material.

[054] Various techniques of connecting through the substrate may be considered fully within the scope of the disclosure. In regards to using KOH as a selective etch, if SiN is used as the first insulating layer of the planar device formation, this may also be used as an etch stop for KOH wet etching. In the latter embodiment, it is envisioned that the KOH thru-hole via etch could be used in a back-end process step.

[055] In another embodiment, an insulating material may be used as the substrate. One such choice would be sapphire or other insulating technical ceramic, such as but not limited to zirconium oxide, alumina, calcium titanate, barium titanate, etc., each of which is commercially available in bulk or wafer form.

[056] In yet another embodiment, the vias can be machined with high speed drilling techniques. This is a serial process and can be more expensive. However, with a non-conductive substrate, the subsequent oxidizing or insulating step is not required, mitigating the machining expense of a technical ceramic insulating substrate. Also, such materials are far harder than silicon and hence are mechanically more stable as a head slider body. Thus, a substrate, such as single crystal alumina, is entirely within the spirit and scope of the present disclosure and may offer many mechanical and electrical advantages.

[057] As further shown in detail in FIG. 8, thru-hole vias **82** extend to the underside of the substrate **72**. FIG. 8 may be considered a section of the wafer but can also represent a section of a head row bar. As stated above, a magnetic head **40** of the present disclosure may be manufactured at a wafer level or row bar level without departing from the spirit and scope of the present disclosure. A row bar may represent a single head row or may be multiple heads all in the same row. The length of the row bar cut from the wafer is a matter of choice or design in the manufacturing process. In one embodiment, there are two thru-hole vias **82** prepared in the substrate **72** for each channel. Other coil configurations, such as center tapped and magneto-resistive leads, may be considered and are within the

spirit and scope of the present disclosure. Such coil configurations may require more leads per channel and therefore may involve more process steps. As illustrated in FIG. 8, an electrically conductive material **84** may be plated into, or otherwise placed into, the thru-hole vias **82**, resulting in electrically conductive leads **86**. In one embodiment, the electrically conductive material **84** may be copper. In other embodiments, the electrically conductive material **84** may be any other suitable electrically conductive material.

[058] In step **610**, and as illustrated in FIG. 9, a first, or bottom, magnetic layer **92** may be deposited and patterned on top of the substrate **72**. The first magnetic layer **92** may comprise NiFe or other suitable magnetically permeable material or materials. In one embodiment, as shown in FIG. 9, the conductive leads **86** are entirely exposed and uncovered by the patterned first magnetic layer **92**. The first magnetic layer **92** may be patterned according to a specific head design and/or requirement. The first magnetic layer **92** may comprise the bottom magnetic yoke of a magnetic circuit for the magnetic head **40**.

[059] In step **620**, and as illustrated in FIG. 10, in one embodiment, a first insulation layer **102** may be deposited and patterned on top of the first magnetic layer **92** and substrate **72**. In one embodiment, the first insulation layer **102** may comprise a nonmagnetic material. In one embodiment, as shown in FIG. 10, the conductive leads **86** may be entirely exposed and uncovered by the first insulation layer **102**. The first insulation layer **102** may be patterned according to a specific head design and/or requirement. In a further embodiment, the first insulation layer **102** may be planarized. The first insulation layer **102** forms an insulating barrier for a subsequent coil layer. In alternative embodiments, a first insulation layer **102** may not be used, and the step of depositing and patterning the first insulation layer **102** may be eliminated. In such embodiments, the coil current will also run through the magnetic material.

[060] In step **630**, and as illustrated in FIG. 11A, a coil conductor layer **112** is deposited and patterned on top of the first insulation layer **102**. The coil

conductor layer **112**, in one embodiment, may be copper. In other embodiments, the coil conductor layer **112** may be any other suitable electrically conductive material. The coil conductor layer **112** is patterned such that it extends over the first insulation layer **102**, first magnetic layer **92**, and substrate **72** from one conductive lead **86** to the other **86**. FIG. 11B shows an embodiment wherein the coil layer **112** is directed to the edge of the row bar such that it may subsequently be revealed and connected to edge lead **47**, as shown, for example, in FIG. 4C.

[061] In alternative embodiments, the coil layer may be made into two layers with one layer going beneath the first magnetic layer **92** and then coming back on top of the first magnetic layer **92** to form a complete single-turn head. In such an embodiment, the thru-hole vias **82** may be prepared generally adjacent to each other. The resulting leads **86** would likewise be adjacent to one another. Such an alternative embodiment will allow for one layer below and one layer above the bottom magnetic yoke **92**. Prior to depositing a first magnetic layer **92**, a first conductor layer may be deposited and patterned or etched on the substrate **72**. An insulator may then be deposited and etched over the first conductor layer. The head may then be planarized, and vias will be opened such that the second coil layer will connect with the bottom coil layer thru one via and then to the other lead end thru another via. Whether a single coil layer is used, or whether a full single-turn style coil, e.g., under and over the bottom magnetic yoke, is used will depend on the efficiency of the head and the write driver used. In the latter construction, the natural extension to a multi-turn helical coil is evident and would be particularly advantageous for an inductive read verify head or data head, each of which are within the spirit and scope of the present disclosure. Multi-turn helical coils can be done with no more layer processing than the full single-turn system described and would be particularly advantageous in a servo pattern verify inductive read head design.

[062] In step **640**, and as illustrated in FIG. 12A, a second insulation layer **122** may be deposited over the coil conductor layer **112**, first insulation

layer 102, first magnetic layer 92, and substrate 72. The insulation layer 122 may comprise a nonmagnetic material and may insulate the coil conductor 112 from a subsequent upper magnetic layer. In one embodiment, the second insulation layer 122 may be deposited across the entire surface of the substrate 72, e.g., the entire surface of the substrate wafer. In a further embodiment, in step 645, the second insulation layer 122 may be planarized to eliminate height differential in the tape path and provide a planar layer of insulation on the substrate 72. The conductive leads 86, coil conductor layer 112, first insulation layer 102, and first magnetic layer 92 are illustrated in dashed line in FIG. 12A, indicating the location of each beneath the second insulation layer 122. In alternative embodiments, a second insulation layer 122 may not be used, and the step of depositing and patterning the second insulation layer 122 may be eliminated. In some embodiments, both the first insulation layer 102 and the second insulation layer 122 may not be used. In such embodiments, there may be no insulating layers between the coil conductor layer 102 and the magnetic layers. However, in many practical situations with current thin film materials, it will be preferred to use insulating layers, as most magnetic materials are conductors and having write currents inside the magnetic layers may not lead to a well-behaved head. The situation may become even more complicated if the recording medium is a conductive thin film. As illustrated in another embodiment in FIG. 12B, the coil leads may be made to terminate along the row bar boundary such that they may be exposed and connected to edge leads 47, as shown, for example, in FIG. 4C.

[063] In step 650, and as illustrated in FIG. 13, a via 132 may be etched, or otherwise prepared, in the surface of the second insulation layer 122. The via 132 may extend through the second insulation layer 122 and first insulation layer 102 to the first magnetic layer 92. As can be seen in FIG. 13, vias 132 may be provided on each side of the coil conductor layer 112 and expose at least a portion of the first magnetic layer 92.

[064] In step 660, and as illustrated in FIG. 14, a second magnetic layer 142 may be deposited on top of the second insulation layer 122, and into the vias 132, thereby filling vias 132 down to the level of the first magnetic layer and creating magnetic subpoles 146 in the vias. The magnetic sub-poles 146 are made from the planarized blanket film 142. The second magnetic layer 142 may comprise NiFe or other suitable highly permeable magnetic material. In step 665, and as illustrated in FIG. 14, the second magnetic layer 142 may be planarized to remove extraneous magnetic material from the surface of the second insulation layer 122 and reveal the discrete subpoles 146 made of material 142. Planarization may be important, in some embodiments, to remove height differential in the tape path and provide a planar, wear-bearing surface without undue step height differentials. The magnetic subpoles 146, e.g., the remaining section or component of magnetic film 142 after planarization step 665, connect the first magnetic layer 92, or lower magnetic yoke, to an upper magnetic film, which carries the gap pattern(s). Alternatively, the magnetic sub-poles may be directly plated up into the vias.

[065] In step 670, and as illustrated in FIG. 15, a third, or upper, magnetic layer 152 is deposited on top of the second magnetic layer 142 and second insulation layer 122, which have been co-planarized as shown in Figure 14. Subpoles 146 are illustrated in dashed line in FIG. 15, indicating the location of the subpoles 146 beneath the third magnetic layer 152. The third magnetic layer 152 may comprise NiFe or other suitable magnetically permeable material.

[066] As illustrated in FIG. 16A, a gap pattern 162 is etched, or otherwise prepared, into the third magnetic layer 152 for the magnetic head channel 42C. In other embodiments, the third magnetic layer 152 can be plated up and around gap features made in photoresist to form the gap pattern 162, or the gap pattern 162 may be made into photoresist and then deposited over in a lift-off process. The gap pattern 162 made into film layer 152 may be any suitable timing-based or amplitude-based gap pattern or a data write or data read gap

pattern. As further illustrated in the embodiment of FIG. 16A, the third magnetic layer **152** may further be patterned or etched to provide magnetic isolation spaces **166** in the magnetic layer **152**, for example, from channel **42B** to channel **42C** of magnetic head **40**. Likewise the edge of the film **168** can be placed on or backed away from the edge of the head row bar element **74**. Such patterning of the gaps **162** and the isolation spaces **166**, **168** could also have been prepared as part of step **670** or may be done as independent process steps, depending on the manufacturing methods chosen. Additionally, the third magnetic layer **152** can be patterned to define a well-behaved, flux bearing, head channel film element **167** and non-flux bearing magnetic elements **169** of the third magnetic layer **152**. Such isolation and flux confinement produces a true multichannel magnetic head, while the flux bearing and non-flux bearing film elements provide a substantially coplanar tape bearing surface feature. In yet another embodiment, as illustrated in FIG. 16B, the non-magnetic flux bearing film **169** may be completely eliminated and etched away leaving only magnetic flux bearing film **167** of blanket deposited thin film **152**. Alternatively the film **152** and/or film **167** and/or film **169** may be made by selectively plating up. Further discussion of non-magnetically energized wear pads may be found in U.S. Patent No. 6,989,960, issued January 24, 2006, titled "Wear Pads for Timing-Based Surface Film Servo Heads," which is hereby incorporated by reference herein in its entirety.

[067] As illustrated in FIGS. 16A and 16B, the channel film element **167** may extend past the top and bottom of the gap pattern slightly, so that the pattern does not wear prematurely at the top and bottom. Likewise, the channel film element **167** may extend outside the subpoles **146** toward the edge of the slider body to provide a stable tape-bearing surface.

[068] In other embodiments, vias **132** and the second magnetic layer **142** may not be used. In such embodiments, there may not be a magnetic connection between the first magnetic layer **92**, or bottom magnetic yoke, and the third, or

upper, magnetic layer **152**. This may result in a less efficient head, but a cheaper and easier to build head.

[069] FIG. 17 illustrates a detailed cross-section, in the cross-track direction, of a channel **42C** of a magnetic head **40** in accordance with one embodiment of the present disclosure. The cross-section features shown include the first magnetic layer **92**, the first insulation layer **102**, the coil conductor layer **112**, the second insulation layer **122**, and the third magnetic layer **152**.

[070] FIG. 18 illustrates a detailed cross-section, in the down-track direction, of a channel **42C** of a magnetic head **40** in accordance with one embodiment of the present disclosure. The cross-section features shown include the first magnetic layer **92**, the first insulation layer **102**, the coil conductor layer **112**, the second insulation layer **122**, the magnetic subpoles **146**, and the third magnetic layer **152**.

[071] In both cross-sectional illustrations of FIGS. 17 and 18, the nature of the topology and the associated step heights are shown for purposes of illustration only. The exact material physical topology is a function of the specific process used, and in particular, which planarization operations were performed and in which order they were performed. One skilled in the art will understand that the exact final process, the exact step heights, and the topology will be a function of the exact processing operations and process order chosen and all are to be considered fully within the spirit and scope of the present disclosure.

[072] In some embodiments, the magnetic head **40** may have a generally flat contour or surface or a non-flat contour or surface. Furthermore, the magnetic head **40** may include negative pressure features, such as but not limited to, skiving edges or air bleed slots. The magnetic head **40** may also include embedded tape edge guides, such as the guides disclosed in U.S. Prov. Appl. No. 61/022,872, filed January 23, 2008, titled "Apparatus and Methods for Recording Heads with Embedded Tape Guides, Systems for Such Recording Heads, and Magnetic

Media Made by Such Recording Heads,” which is hereby incorporated by reference herein in its entirety.

[073] In further embodiments, the underside of the substrate **72** may be “bumped” with conductors that connect the magnetic head **40** through its underside, for example, to a physical electrical connector to a write driver or read back amplifier. For example, in one embodiment, a masking layer or photoresist layer may be deposited and patterned or etched on the underside of the substrate **72**. The masking layer may be patterned such that the electrically conductive leads **86** are at least partially exposed on the underside of the substrate **72**. An electrically conductive material, such as but not limited to indium, gold, gold-tin eutectic, etc., may be deposited or bumped onto the exposed electrically conductive leads **86**, thereby creating conductive bumps or posts on the underside of the substrate **72**, such that the head element may be bonded to a lead element. Similar bumping may be done on the edge connector embodiment shown, for example, in FIG. 4C.

[074] The various embodiments of heads of the present disclosure and methods of making the same may be used to form a head having a two-dimensional array of channels or magnetic heads **190**, **192**, such as those illustrated in FIGS. 19A and 19B. A two-dimensional array of channels or magnetic heads may make up a compound magnetic head, for example, including write gaps (or write heads), read gaps (or read heads), and/or erase gaps (or erase heads). In further embodiments, a two-dimensional array of channels or magnetic heads may include data read/write heads and format or servo read/write heads. As illustrated in FIG. 19A, the two-dimensional array of channels or magnetic heads may be substantially aligned, such that the pairs of channels or magnetic heads are aligned with the same servo or data band in the down-track direction. Alternatively, as illustrated in FIG. 19B, the two-dimensional array of channels or magnetic heads may not be aligned in the down-track direction. It is recognized that any suitable pattern of two-dimensional arrays of channels or magnetic heads

may be used and are within the spirit and scope of the present disclosure. As described above, each of the channels may be independently driven.

[075] In one embodiment, a head in accordance with the various embodiments of the present disclosure can be used for recording magnetic transitions on magnetic media, for example, by supplying a current through the coil conductor layer to create a magnetic field in the magnetic layers. For example, a head in accordance with the various embodiments of the present disclosure can be used to format or verify magnetic media, e.g., write/read servo tracks to/from the magnetic media. In other embodiments, as stated above, a head in accordance with the various embodiments of the present disclosure can be used to read/write data tracks. Additionally, as stated above, each of the channels of a head in accordance with the various embodiments of the present disclosure can be driven simultaneously or independently. Independently driven channels provide additional advantages to a head in accordance with the various embodiments of the present disclosure, some of which are described below, and others of which will be recognized by those skilled in the art. Other embodiments of heads may include compound systems of such heads, for example, with some heads being used as servo verify heads and some heads being used as pre-erase heads. Further discussion on such compound heads may be found in U.S. Patent No. 7,283,317, issued October 16, 2007, titled "Apparatus and Methods for Pre-Erasing During Manufacture of Magnetic Tape," which is hereby incorporated by reference herein in its entirety.

[076] In further embodiments, a head in accordance with the various embodiments of the present disclosure allows for complex tape formatting techniques, such as un-staggered servo bands that can linearly encode for the data band that lies in between each pair of servo tracks. In a standard LTO format system, five bands are staggered such that each pair of servo bands has a unique stagger as compared to any other pair of servo bands. This format is illustrated in FIG. 20, schematically shown in a view looking at the head through the tape; a

tape view would be the mirror image of FIG. 20. As shown in FIG. 20, each data band **200** is bounded by a pair of servo bands **202**, each pair having a unique stagger. For example, servo band 0 and servo band 1 have a lead/follow 1 stagger, servo band 1 and servo band 2 have a follow 1/lead stagger, servo band 2 and servo band 3 have a lead/follow 2 stagger, and servo band 3 and servo band 4 have a follow 2/lead stagger. The unique staggers are used to encode for the four data bands **200** of the standard LTO format. A staggered servo technique may be printed into the gap pattern during format head manufacture. However, it is highly unlikely that for servo systems with a greater number of servo bands, for example, 9, 13, or 17 servo bands, that a physical stagger on the head proper will be a suitable choice.

[077] FIG. 21 illustrates two servo bands **210**, **212** that lie on either side of a data band **214**. The number of data tracks within the data band **214** will depend on how many positions the timing based servo encodes and is a matter of design choice. Servo read heads A and B **216** are positioned to read the servo tracks of servo bands **212** and **210**, respectively. This provides redundancy. Data read/write heads may be positioned over the data band **214** region on the same head slider system as servo reads A and B **216**. Hence, the position of the servo read heads A and B **216** provides the position of the data read/write heads. In high speed systems, including those developed in the future, there can be a large number of servo bands as well as a relatively higher frequency content of the servo signal as compared to currently available products. The head-to-tape interface and spacing could become more critical, the inductance for the head may need to be lower to write at higher frequencies, the head efficiency may need to be greater, and the moment density of the main film 152 that carries the gaps may need to be higher.

[078] As a result of the above factors, in one embodiment of the present disclosure, it may be desirable to make a non-staggered array of head elements for a given head bump line. It may further be desirable, in accordance with one

embodiment of the present disclosure, regardless of the servo track or data band encoding scheme, to address the servo head elements or channels independently in order to encode the servo bands and thus, the data band identifications. In the exemplary embodiment of FIG. 22, the servo signals are repeated at a certain frequency in groups of pulses, or frames **220**, to average the ratios of the time-based signals. According to the various embodiments of the present disclosure, it is further possible to encode data in the servo band. One such data encoding is illustrated in FIG. 22, wherein the servo format band identification is encoded using the first and fifth short pulse **224** of the pulse group **220** of servo band N+1 and the second and fourth short pulses **226** of the pulse group **228** of servo band N. As such, each servo band includes a unique servo band identification encoded therein. These unique servo band identifications can be further used to determine data band identification. For example, as illustrated in FIG. 22, data band N may be identified by being bound by servo band N having short pulses **226** and servo band N+1 having short pulses **224**. The encoding illustrated in FIG. 22 is exemplary and is not limiting. One advantage of having an equal lead and equal lag pulse in the same frame is that the time base signal temporal signature will average out the same as if no extra pulses were used at all. In this way, data can be encoded without affecting, or substantially affecting, the fundamental timing signature. Other ways of preserving the timing based signature would be to use extra pulse codes after the timing frame, with these extra pulses being ignored for timing purposes and only attended to for other information, such as manufactures information or servo and data band identification information. Other methods of encoding servo band identification in a unique manner may be used and are all within the spirit and scope of the present disclosure, as the head allows for them all to be used depending on the servo channel requirements and specific designs. The more servo bands there are, the more complex the encoding may be. In accordance with the present disclosure, using independently addressable servo bands, encoding can be placed electronically, and electronic encoding allows each

head element to be substantially physically identical to one another. While the figures show static transition positions, it is entirely possible to use frequency based servo band identification schemes, and such frequency based servo band identification schemes are within the spirit and scope of the present disclosure.

[079] FIG. 23 illustrates a tape transport system **232** in accordance with one embodiment of the present disclosure. The tape transport system **232** may include a supply reel **234** and a take-up reel **236**. The tape transport system may further include tape guides **238** and/or other suitable tape guiding systems. A servo write head **240** can be positioned on the transport system **232**, such that magnetic media guided through the transport system **232** from the supply reel **234** to the take-up reel **236** can be formatted, for example, with the timing-based servo formats described above or other suitable servo formats, including amplitude-based servo formats. In further embodiments, a servo verify head **242**, or read head, may be positioned on the transport system **232** and can be used to verify the magnetic transitions, and thus the servo formats, written into the magnetic media by the servo write head **240**. In some embodiments, as disclosed above, the servo write head **240** and servo verify head **242** may comprise a single compound head. It is recognized that the various embodiments of a magnetic head in accordance with the present disclosure may be suitable for data read/write heads, and tape transport systems for such data read/write heads may be similar to the transport system **232** illustrated in FIG. 23 and are within the spirit and scope of the present disclosure.

[080] Although the present invention has been described with reference to preferred embodiments, persons skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention. For example, each layer of the magnetic head may be made by one of a variety of different manufacturing processes or techniques, including but not limited to, deposition techniques, wet plating techniques, etching techniques, etc. In some embodiments, planarization may be used after any step, thereby, among

other things, eliminating or substantially eliminating height differential in the resulting tape path and allowing for the application of an air skiving flat contour. Other embodiments may include, for example, a complete single coil turn that goes under and above the first magnetic layer, multiple complete coil turns, each having a portion above and below the first magnetic layer (which could make for a particularly efficient inductive read head), and embedding magneto-resistive read elements in each read channel for data read or format verification. As stated previously, the magnetic head of the present disclosure may be a single channel or multichannel magnetic head. Furthermore, two-dimensional arrays of channels or magnetic heads, including compound magnetic heads, including writers and readers and erase heads and including data heads and format head writers and readers are within the scope of the present disclosure.

Claims

We claim:

1. A multichannel magnetic head comprising:

a substrate having a substantially continuous surface generally parallel with a tape bearing surface; and

a plurality of independent and magnetically isolated channels, each comprising:

a first magnetic layer deposited on the substantially continuous surface of the substrate;

an electrically conductive coil layer deposited on the first magnetic layer; and

a second magnetic layer deposited on the electrically conductive coil layer, the second magnetic layer comprising at least one magnetic gap pattern.

2. The multichannel magnetic head of claim 1, wherein the first and second magnetic layers of one or more of the channels are separated from their respective electrically conductive coil layer by at least one insulating layer.

3. The multichannel magnetic head of claim 1, wherein the first and second magnetic layers of one or more of the channels are connected forming a closed magnetic flux path.

4. The multichannel magnetic head of claim 2, wherein the first and second magnetic layers of the one or more channels are connected through vias in the insulating layers to form a closed magnetic flux path.

5. The multichannel magnetic head of claim 2, wherein the substrate comprises a plurality of conductive thru vias.

6. The multichannel magnetic head of claim 5, wherein the electrically conductive coil layer of one or more channels extends from and connects a first conductive thru via to a second conductive thru via associated with the respective channel.

7. The multichannel magnetic head of claim 1, wherein the at least one magnetic gap pattern comprises a timing-based magnetic gap pattern.

8. A method of formatting magnetic media, comprising:

providing a multichannel magnetic head comprising:

a substrate having a substantially continuous surface generally parallel with a tape bearing surface; and

a plurality of independent and magnetically isolated channels, each comprising:

a first magnetic layer deposited on the substantially continuous surface of the substrate;

an electrically conductive coil layer deposited on the first magnetic layer; and

a second magnetic layer deposited on the electrically conductive coil layer, the second magnetic layer comprising at least one magnetic gap pattern; and

writing magnetic transitions in a magnetic media passing over the magnetic head, thereby formatting the magnetic media.

9. The method of formatting magnetic media of claim 8, wherein each of the channels is driven simultaneously.

10. The method of formatting magnetic media of claim 8, wherein each of the channels is driven independently.
11. The method of formatting magnetic media of claim 8, wherein the magnetic transitions create timing-based servo patterns on the magnetic media.
12. The method of formatting magnetic media of claim 11, wherein the first and second magnetic layers of one or more of the channels are separated from the respective electrically conductive coil layer by at least one insulating layer.
13. The method of formatting magnetic media of claim 12, wherein the first and second magnetic layers of the one or more channels are connected forming a closed magnetic flux path.
14. The method of formatting magnetic media of claim 13, wherein the first and second magnetic layers of the one or more of the channels are connected through vias in the insulating layers to form a closed magnetic flux path.
15. The method of formatting magnetic media of claim 14, wherein the substrate comprises a plurality of conductive thru vias.
16. The method of formatting magnetic media of claim 15, wherein the electrically conductive coil layer of one or more channels extends from and connects a first conductive thru via to a second conductive thru via associated with the respective channel.
17. Magnetic media formed by a magnetic recording head comprising:
 - a substrate having a substantially continuous surface generally parallel with a tape bearing surface; and
 - a plurality of independent and magnetically isolated channels, each comprising:
 - a first magnetic layer deposited on the substantially continuous surface of the substrate;

an electrically conductive coil layer deposited on the first magnetic layer; and

a second magnetic layer deposited on the electrically conductive coil layer, the second magnetic layer comprising at least one magnetic gap pattern.

18. The magnetic media of claim 17, wherein the first and second magnetic layers of one or more of the channels are separated from their respective electrically conductive coil layer by at least one insulating layer.

19. The magnetic media of claim 17, wherein the first and second magnetic layers of one or more of the channels are connected forming a closed magnetic flux path.

20. The magnetic media of claim 18, wherein the first and second magnetic layers of the one or more channels are connected through vias in the insulating layers to form a closed magnetic flux path.

21. The magnetic media of claim 18, wherein the substrate comprises a plurality of conductive thru vias.

22. The magnetic media of claim 21, wherein the electrically conductive coil layer of one or more channels extends from and connects a first conductive thru via to a second conductive thru via associated with the respective channel.

23. The magnetic media of claim 17, wherein the at least one magnetic gap pattern comprises a timing-based magnetic gap pattern.

24. The magnetic media of claim 22, wherein two or more of the channels are driven independently of one another and at least one of the servo bands of the magnetic media has a unique servo track ID encoded in the magnetic transitions of the servo band.

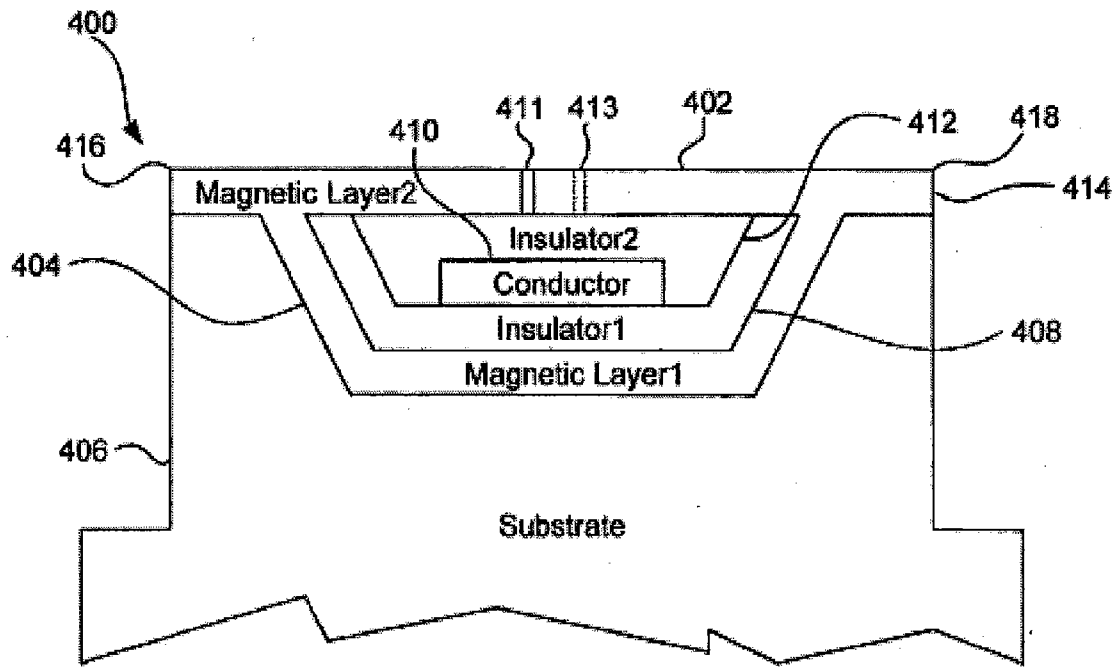


FIG. 1A Prior Art

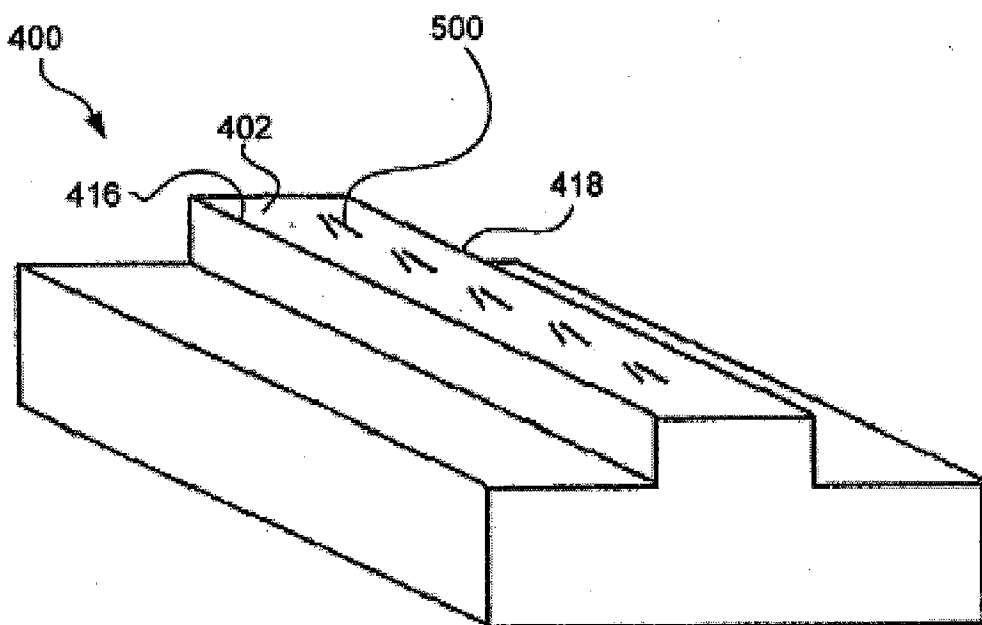


FIG. 1B Prior Art

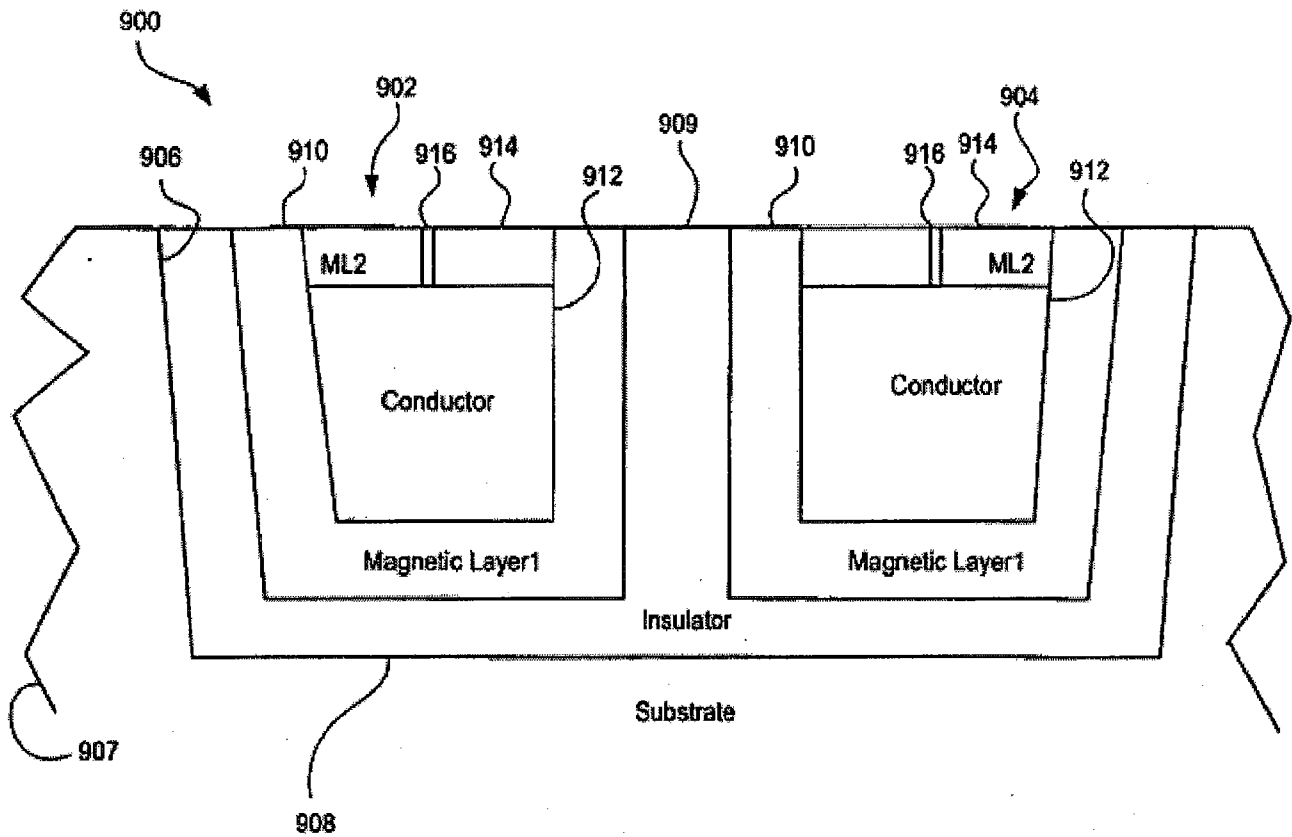


FIG. 2A Prior Art

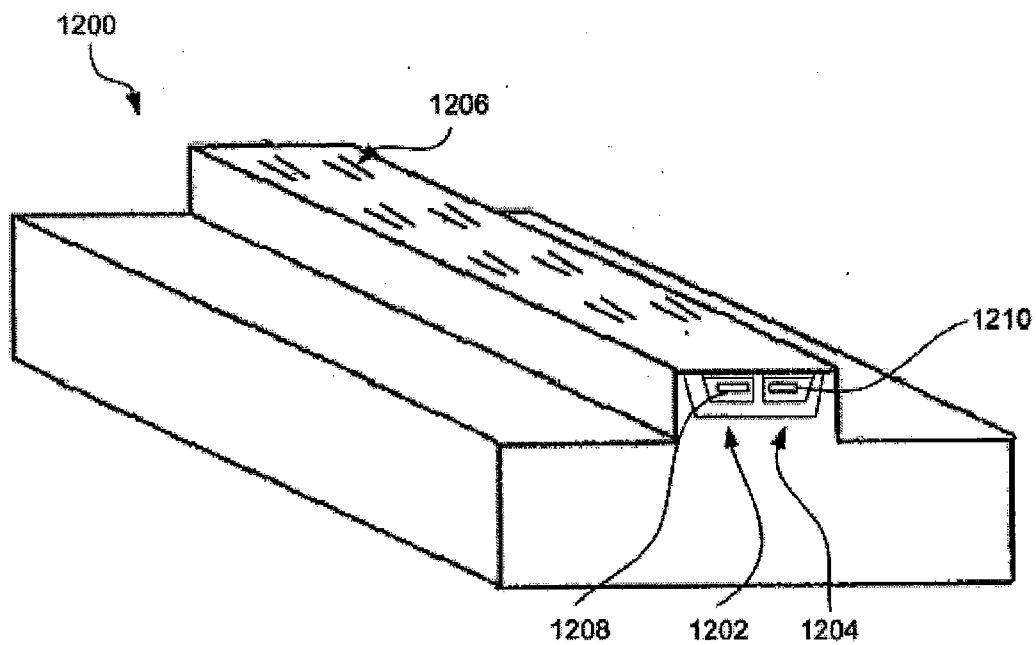


FIG. 2B Prior Art

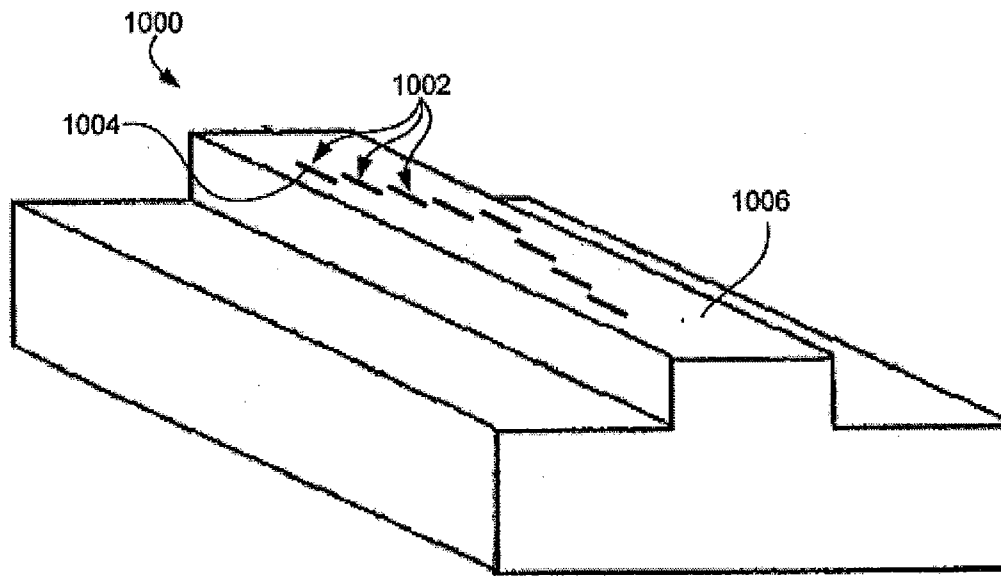


FIG. 2C Prior Art

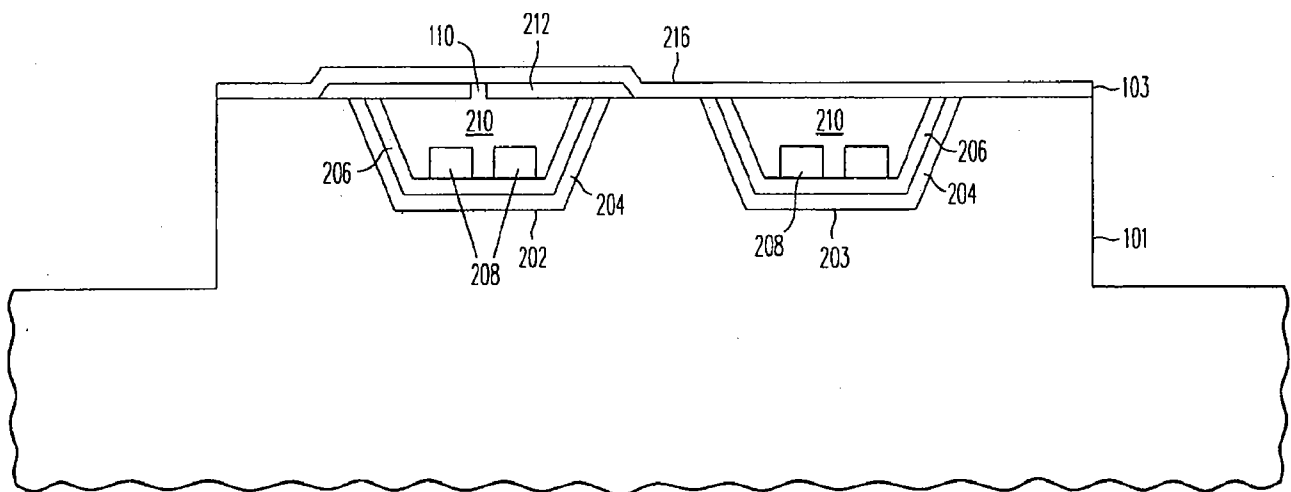


FIG. 3 Prior Art

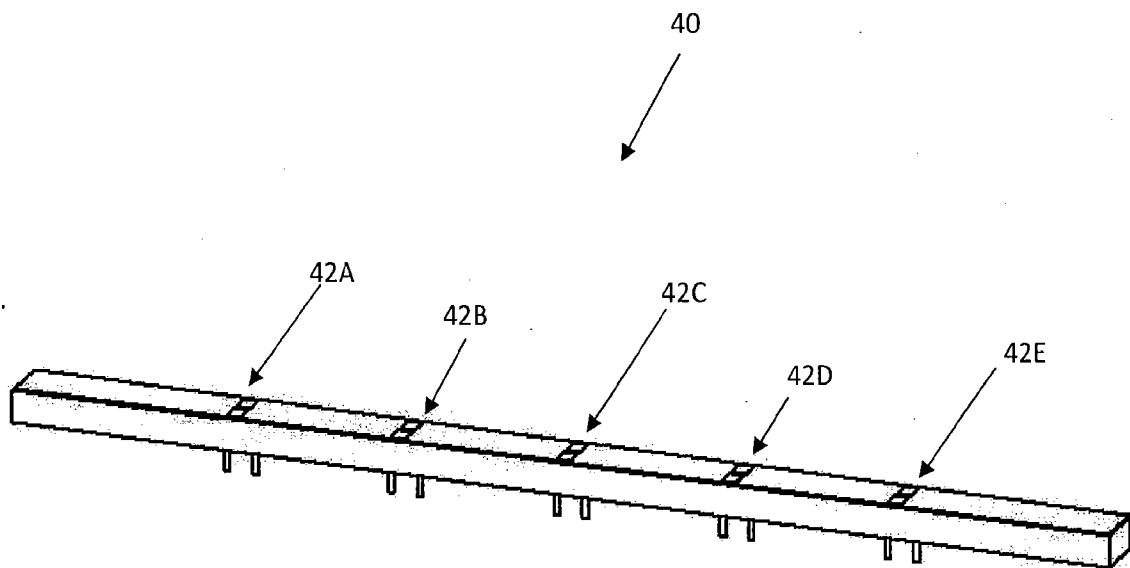


FIG. 4A

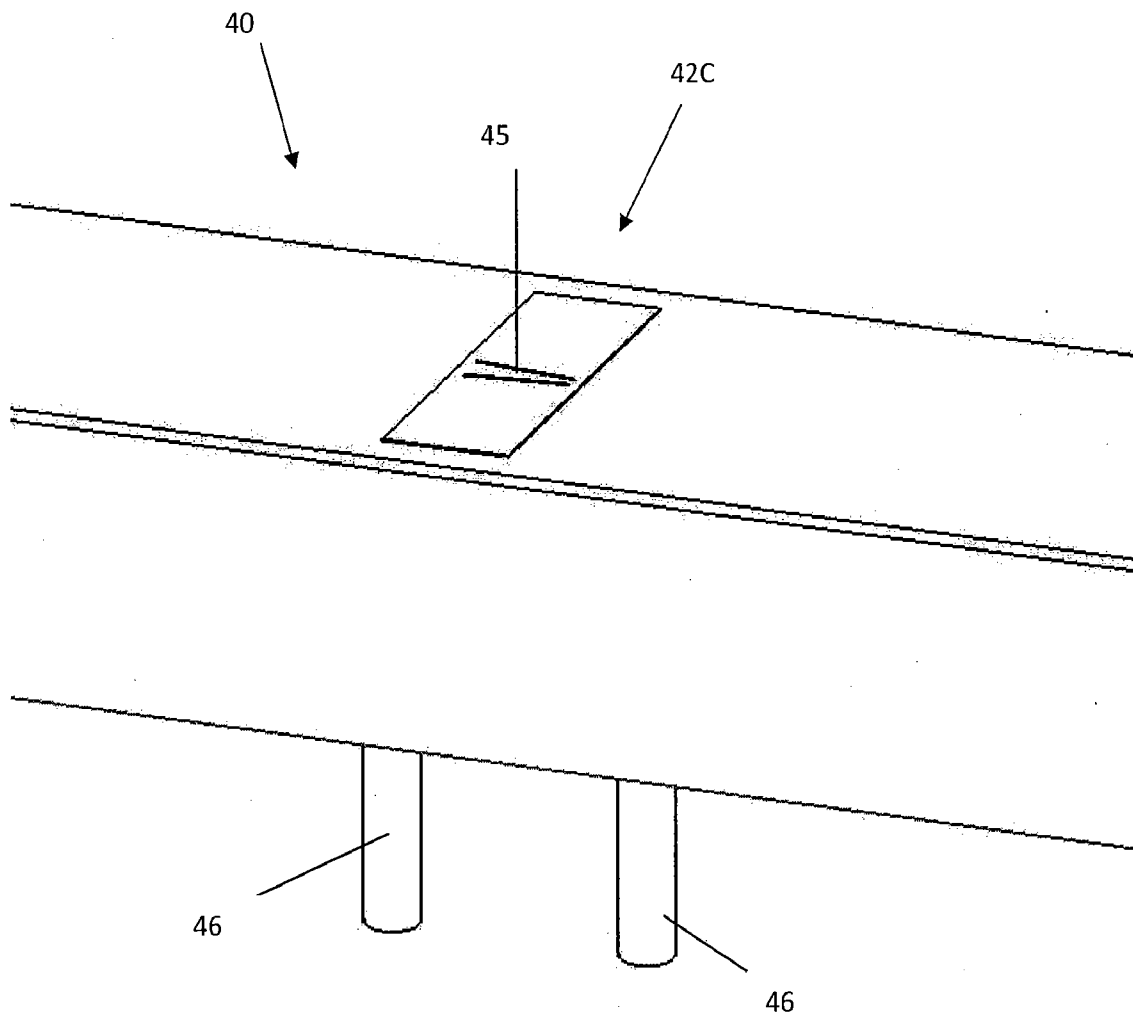


FIG. 4B

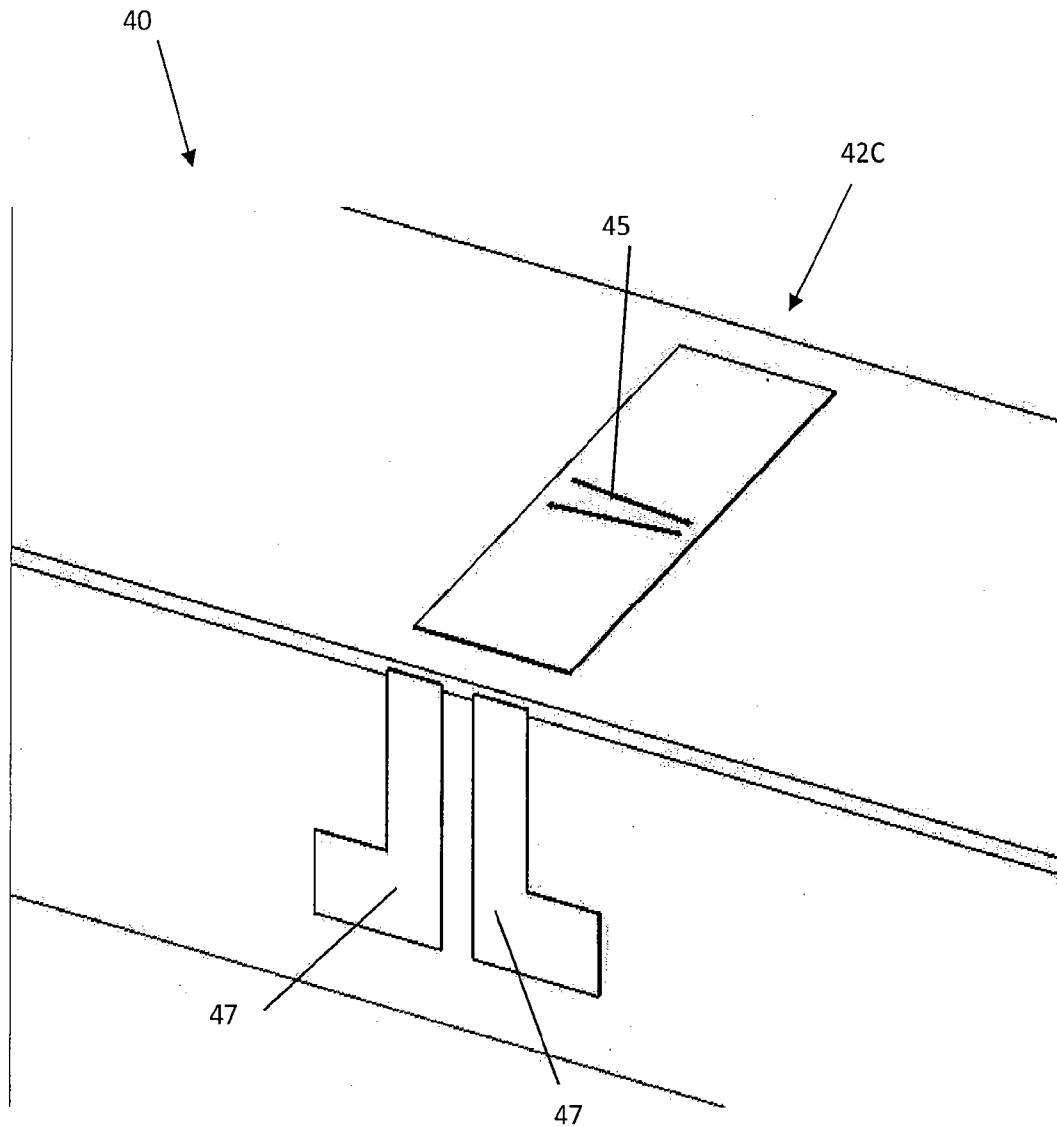


FIG. 4C

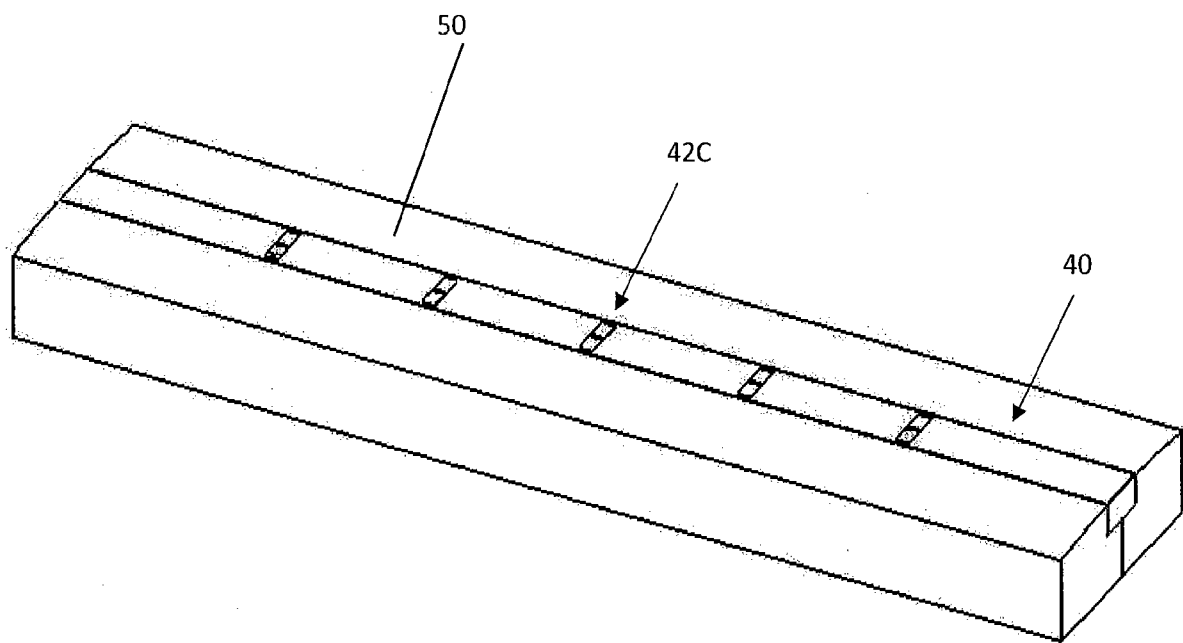


FIG. 5

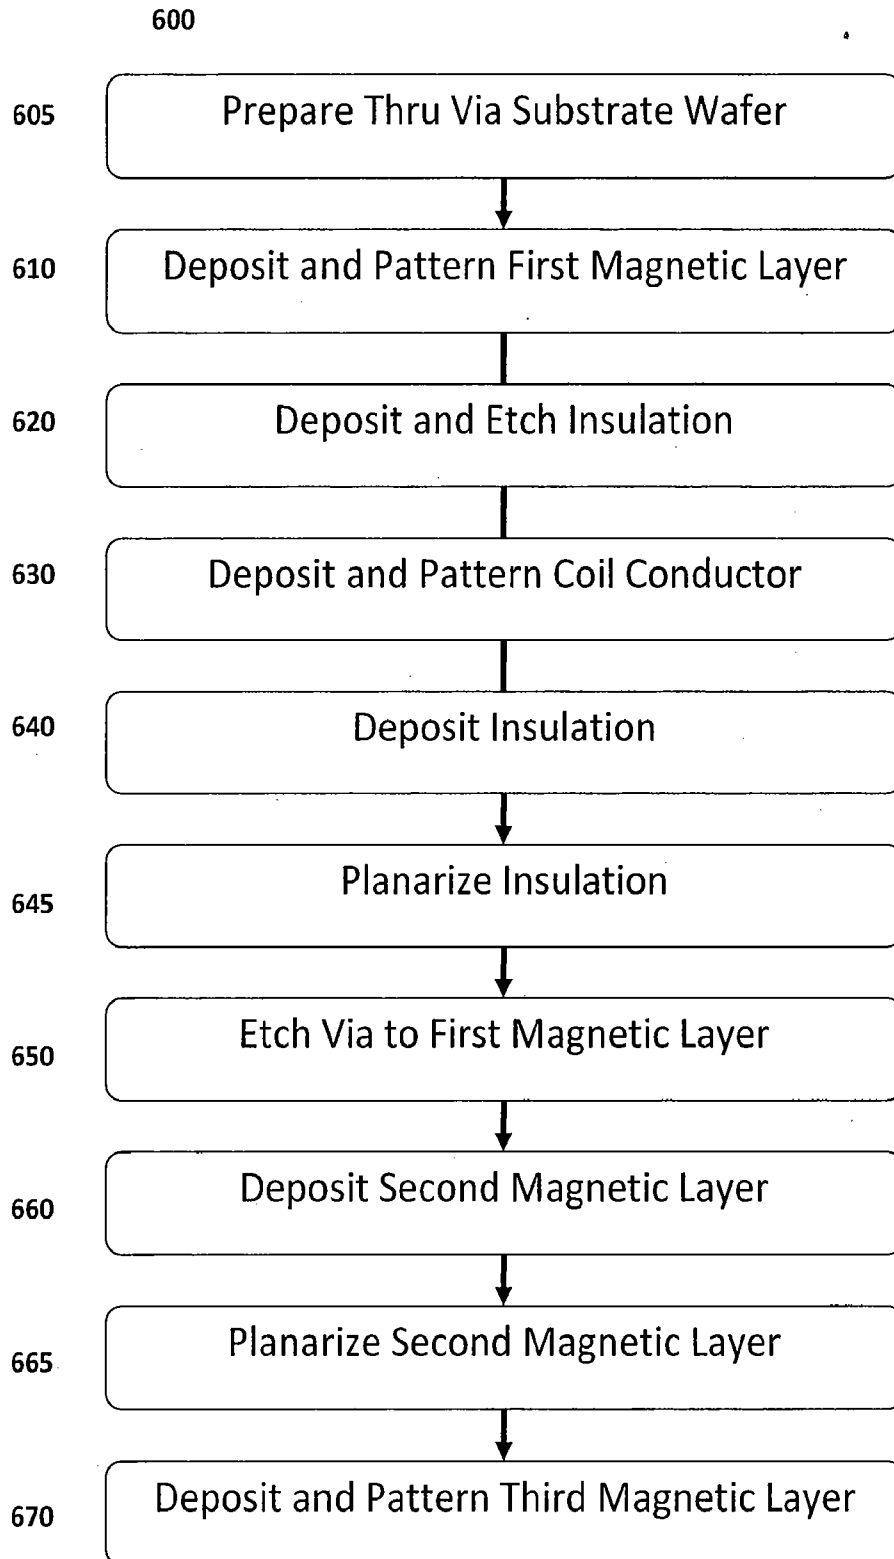


FIG. 6

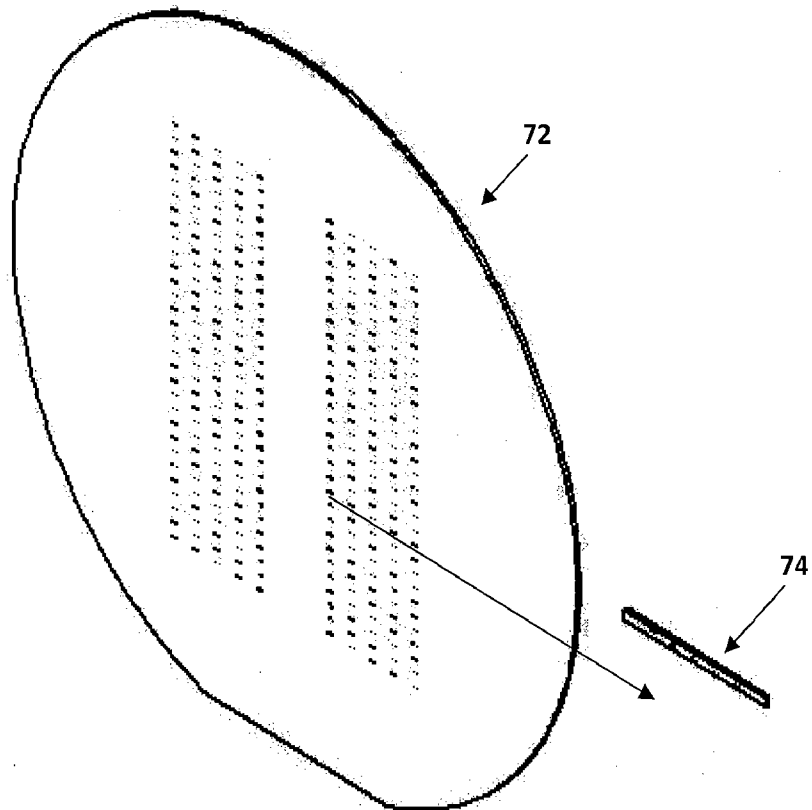


FIG. 7

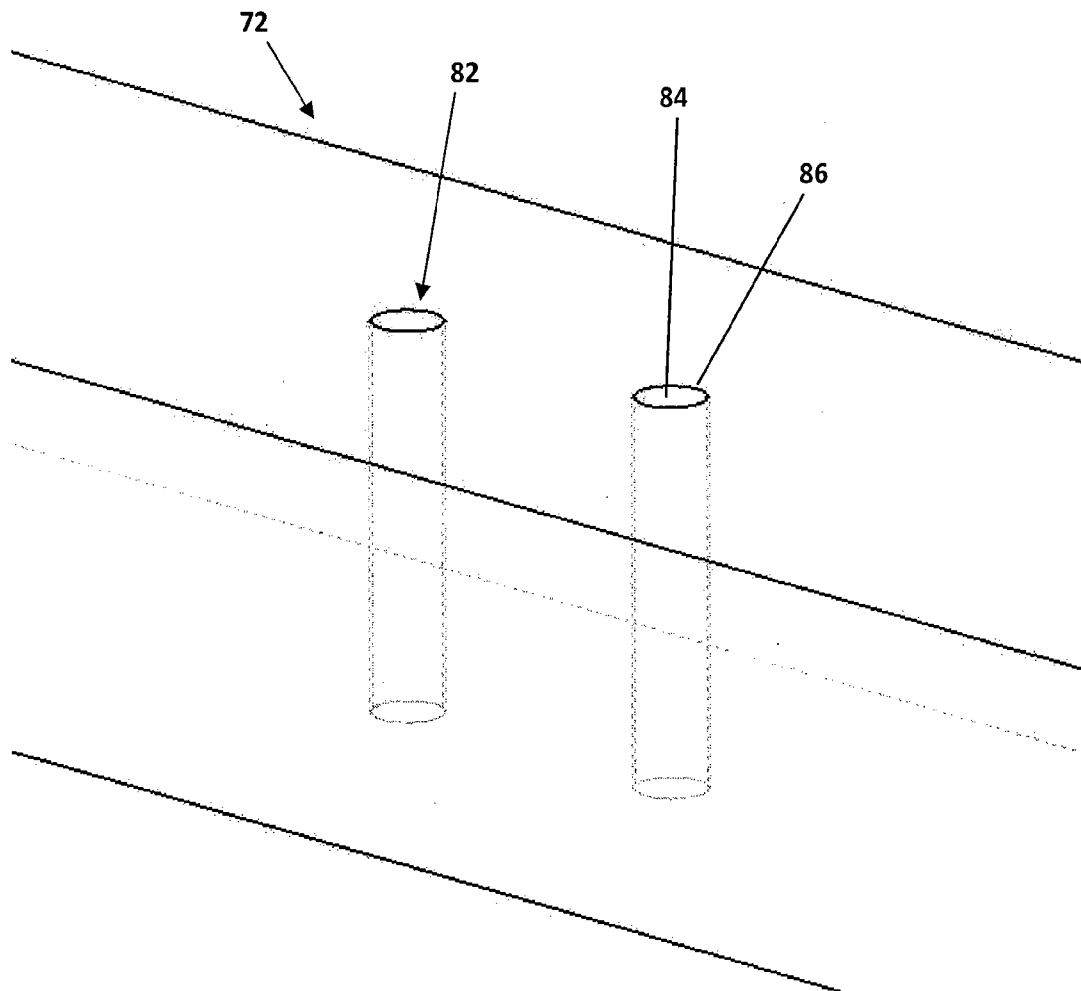


FIG. 8

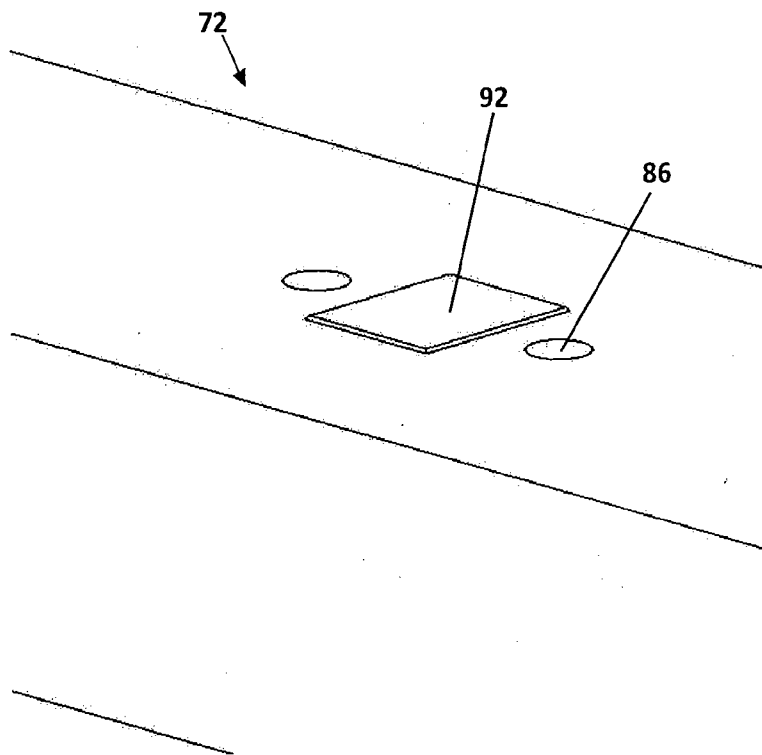


FIG. 9

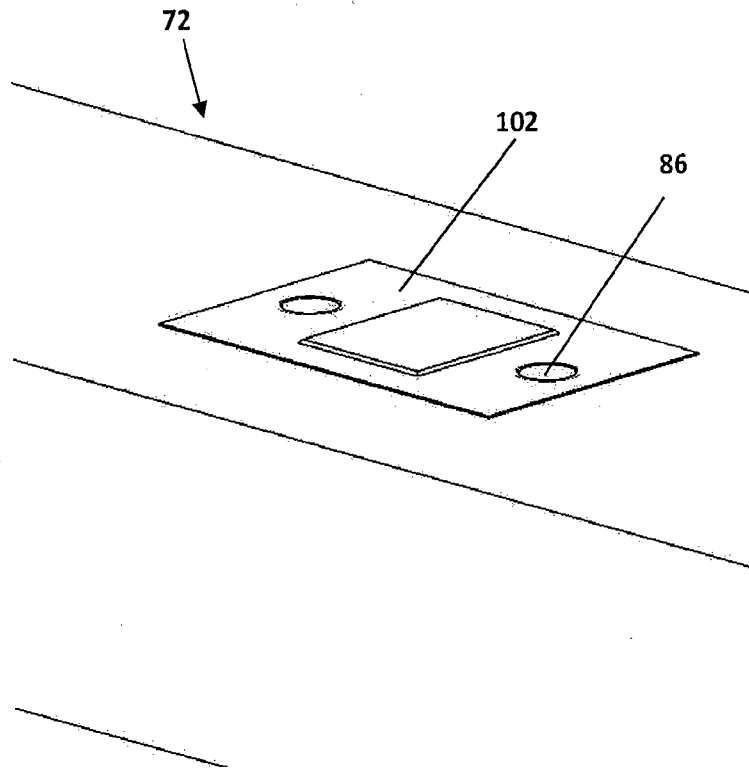


FIG. 10

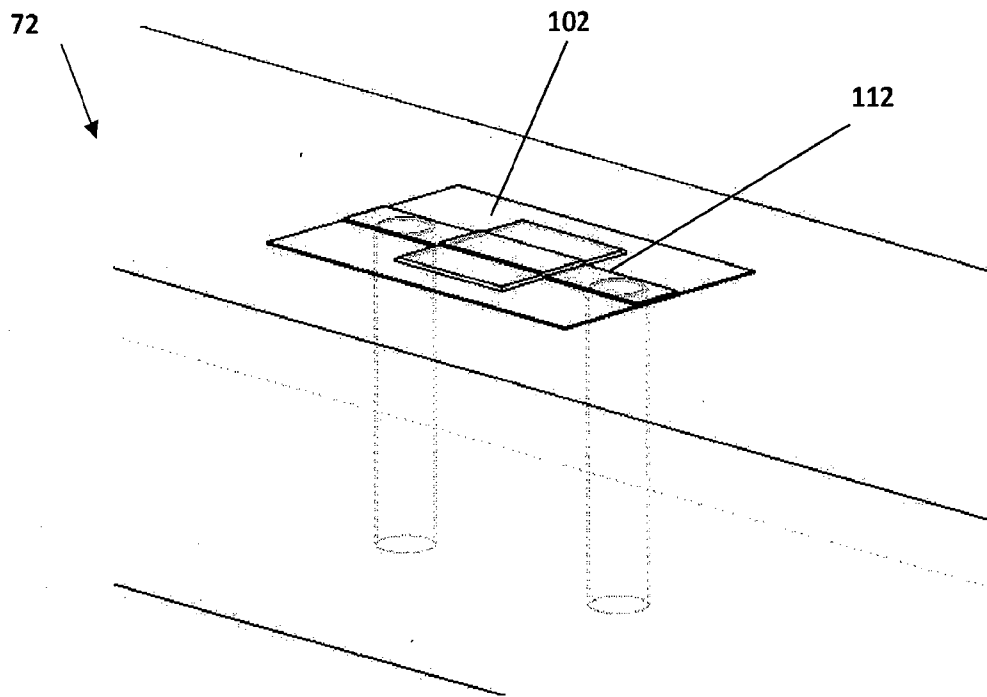


FIG. 11A

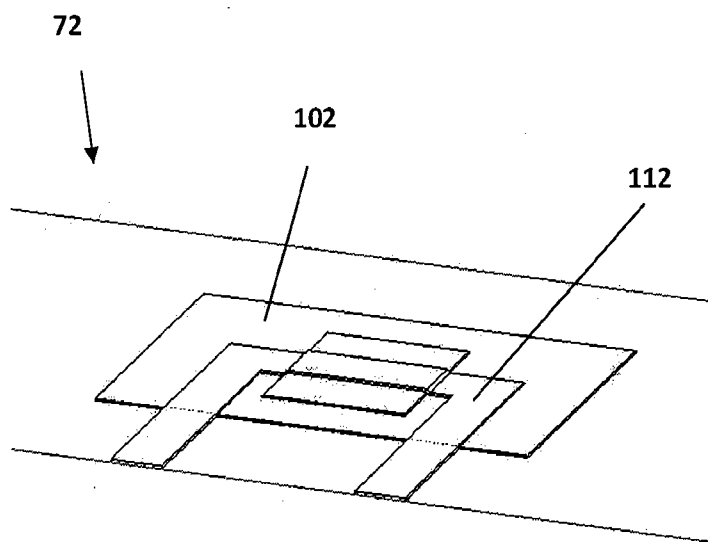


FIG. 11B

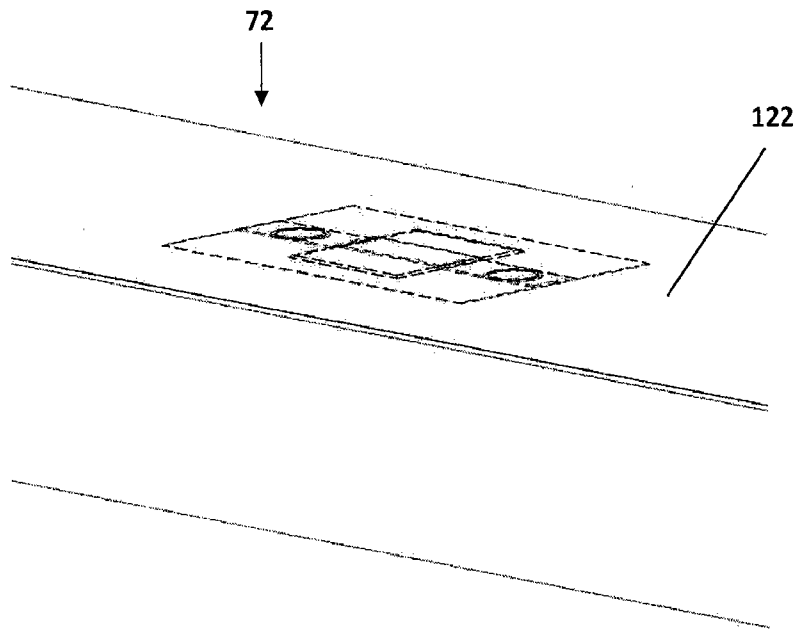


FIG. 12A

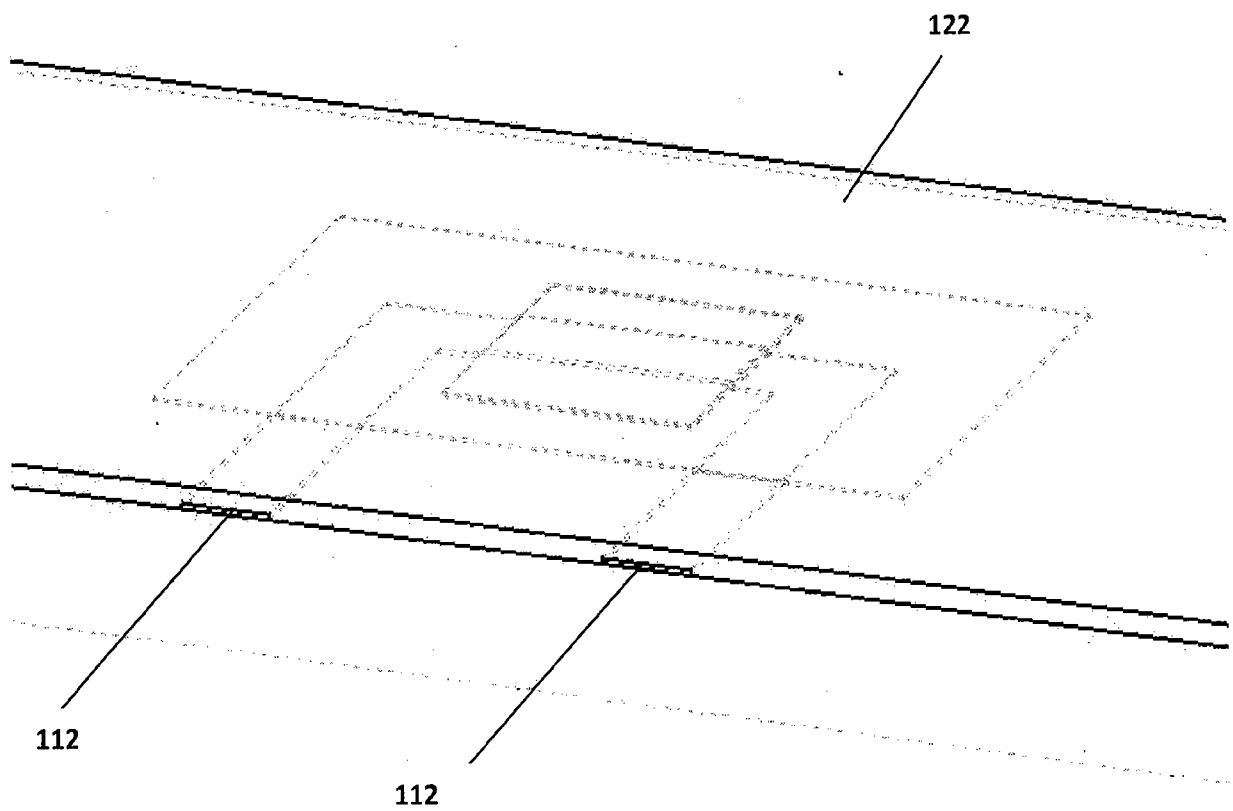


FIG. 12B

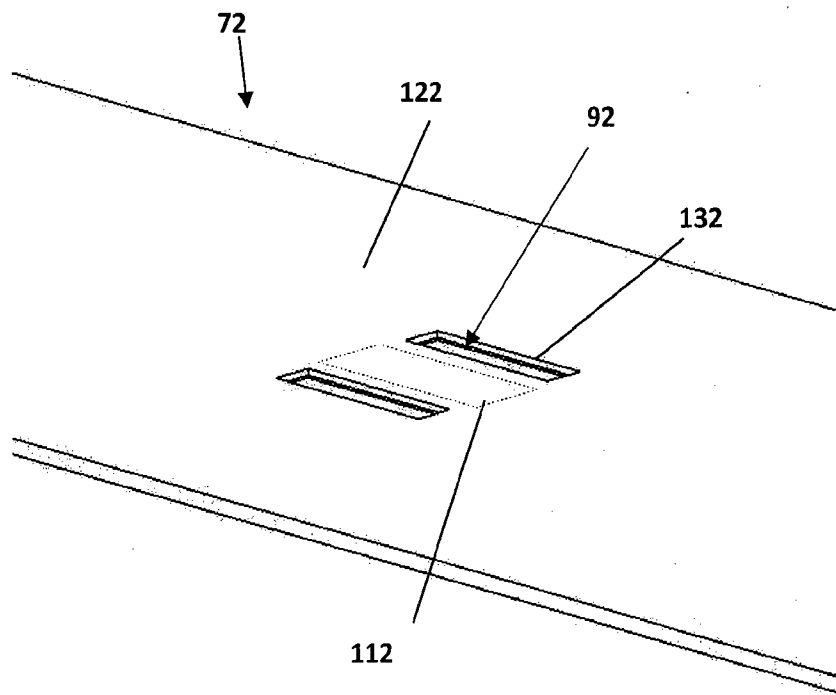


FIG. 13

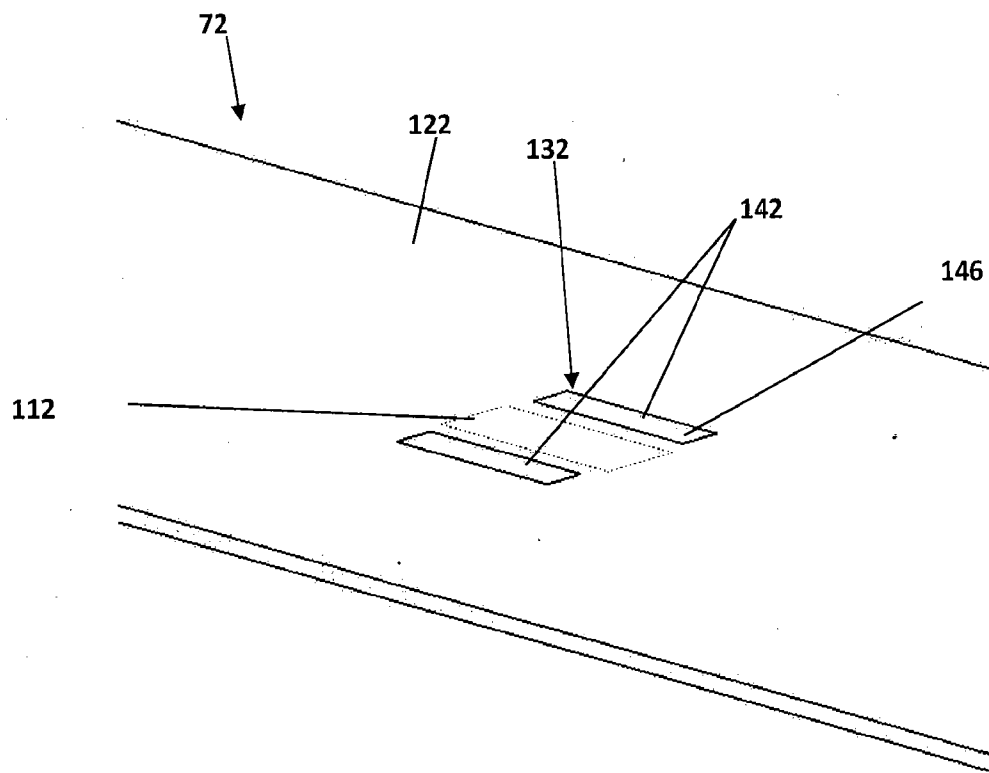


FIG. 14

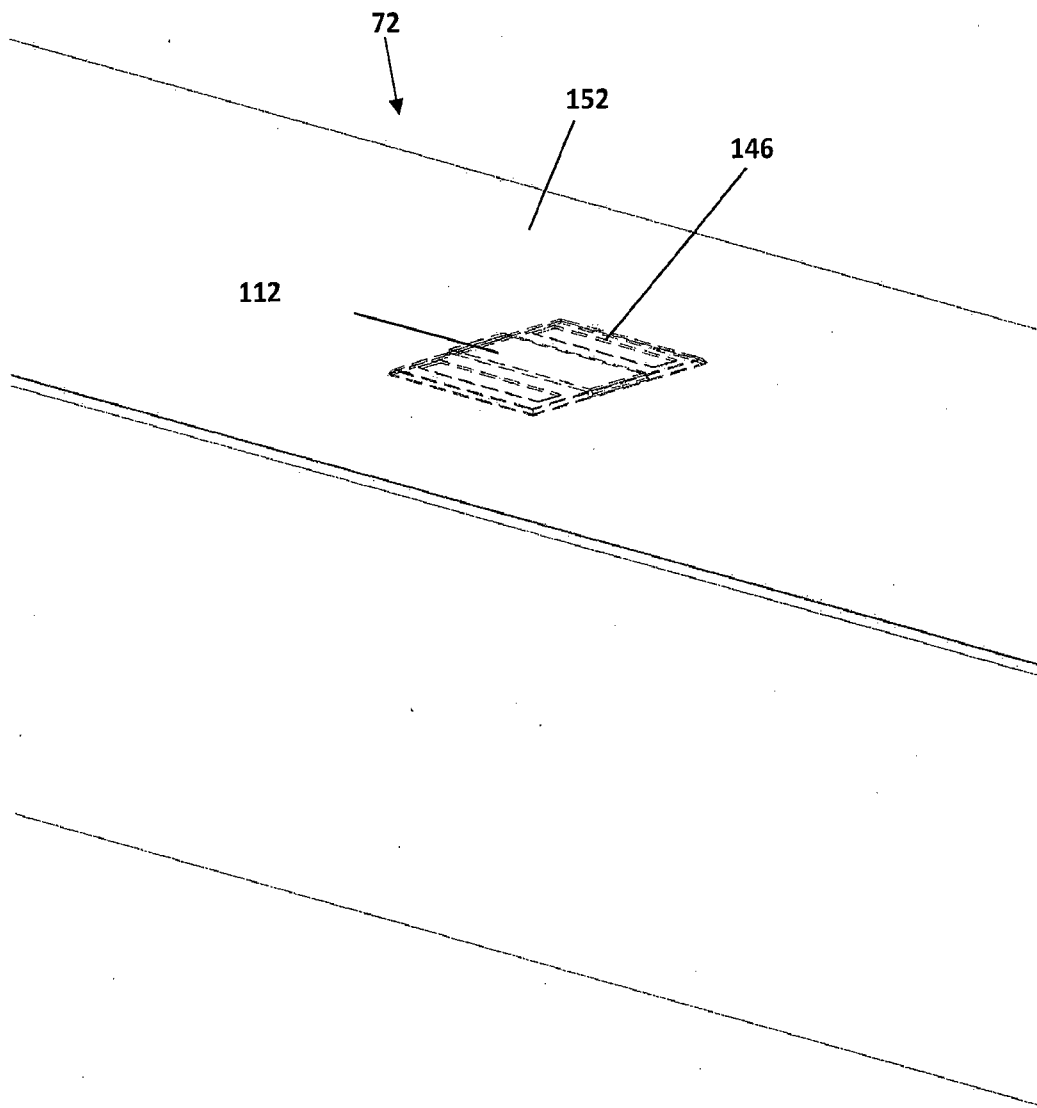


FIG. 15

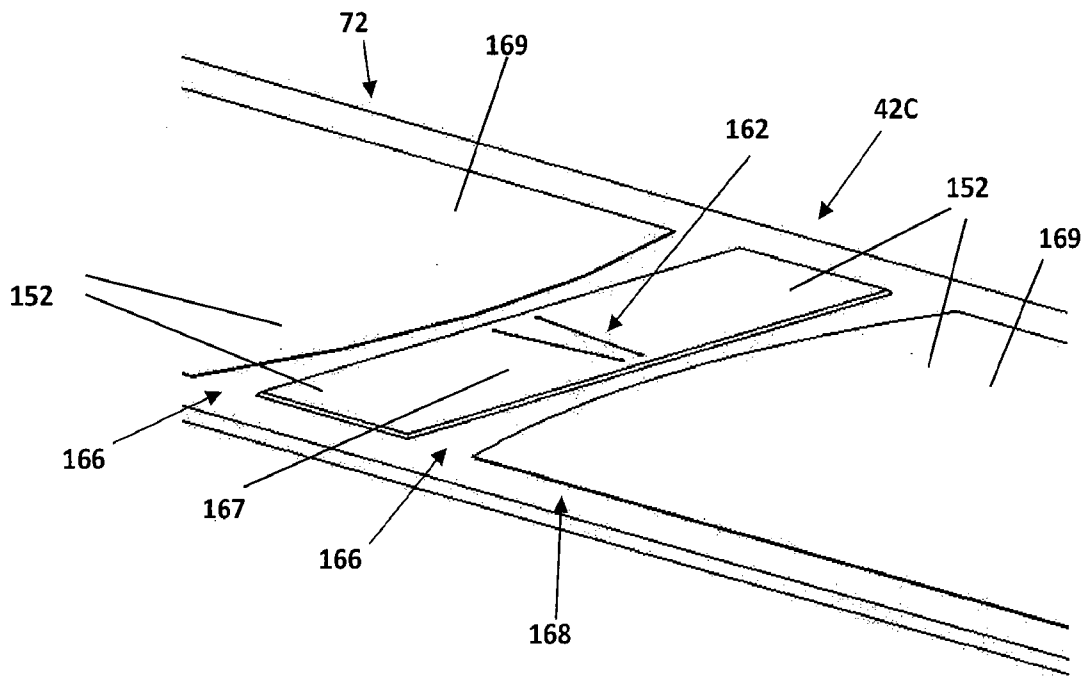


FIG. 16A

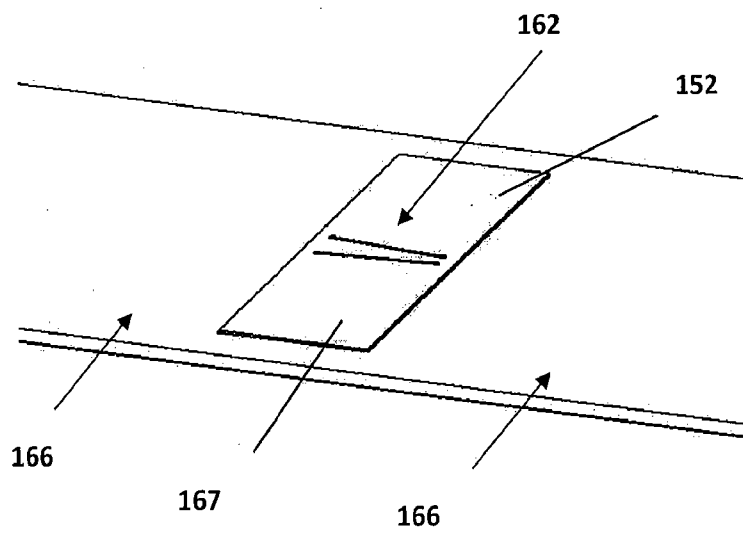


FIG. 16B

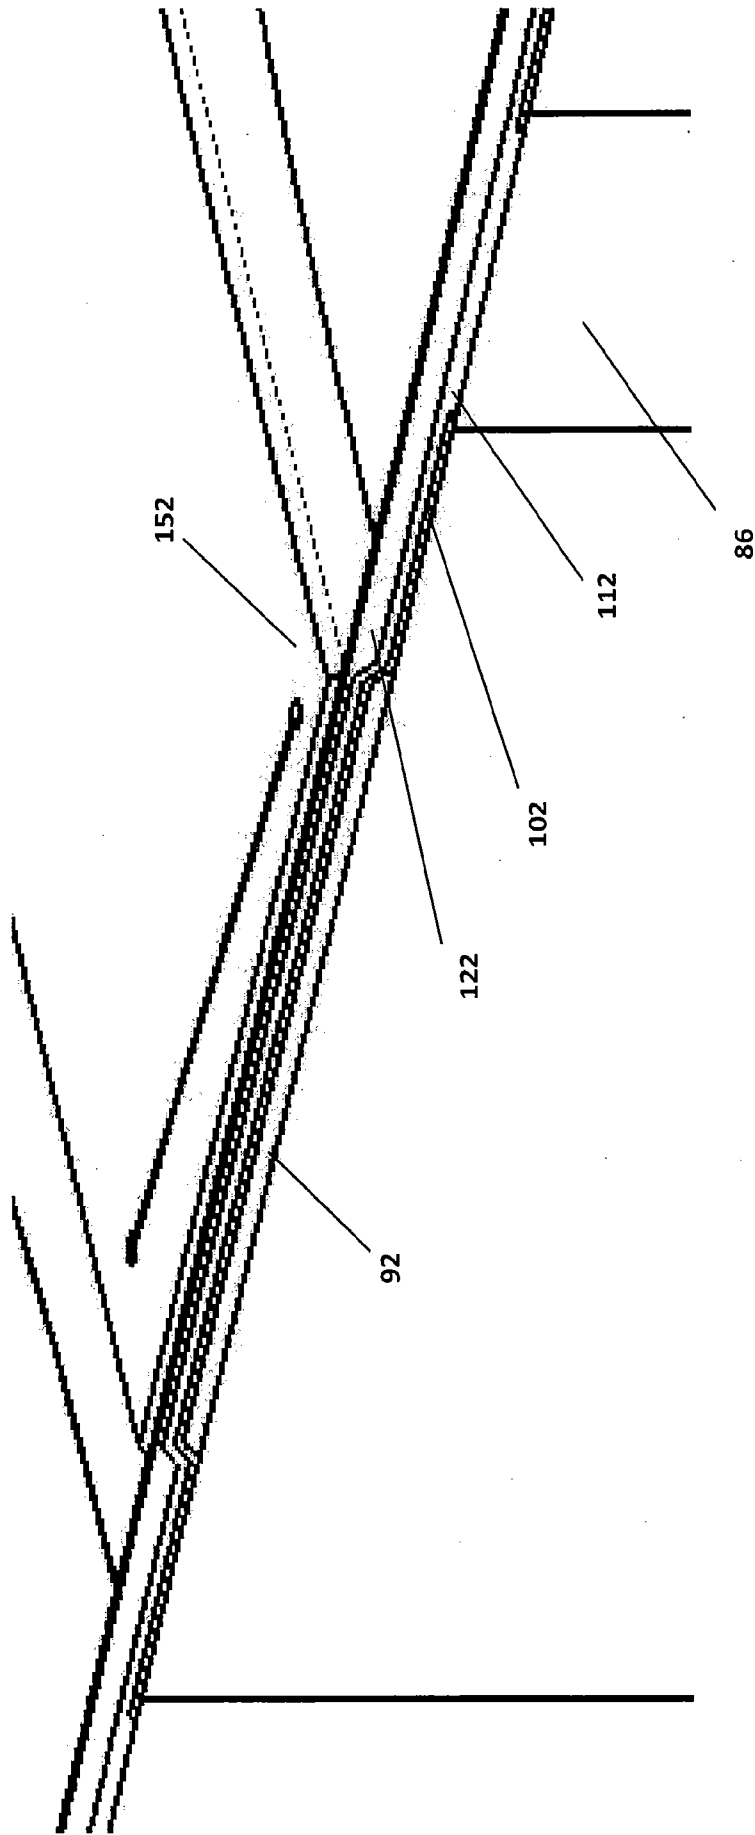


FIG. 17

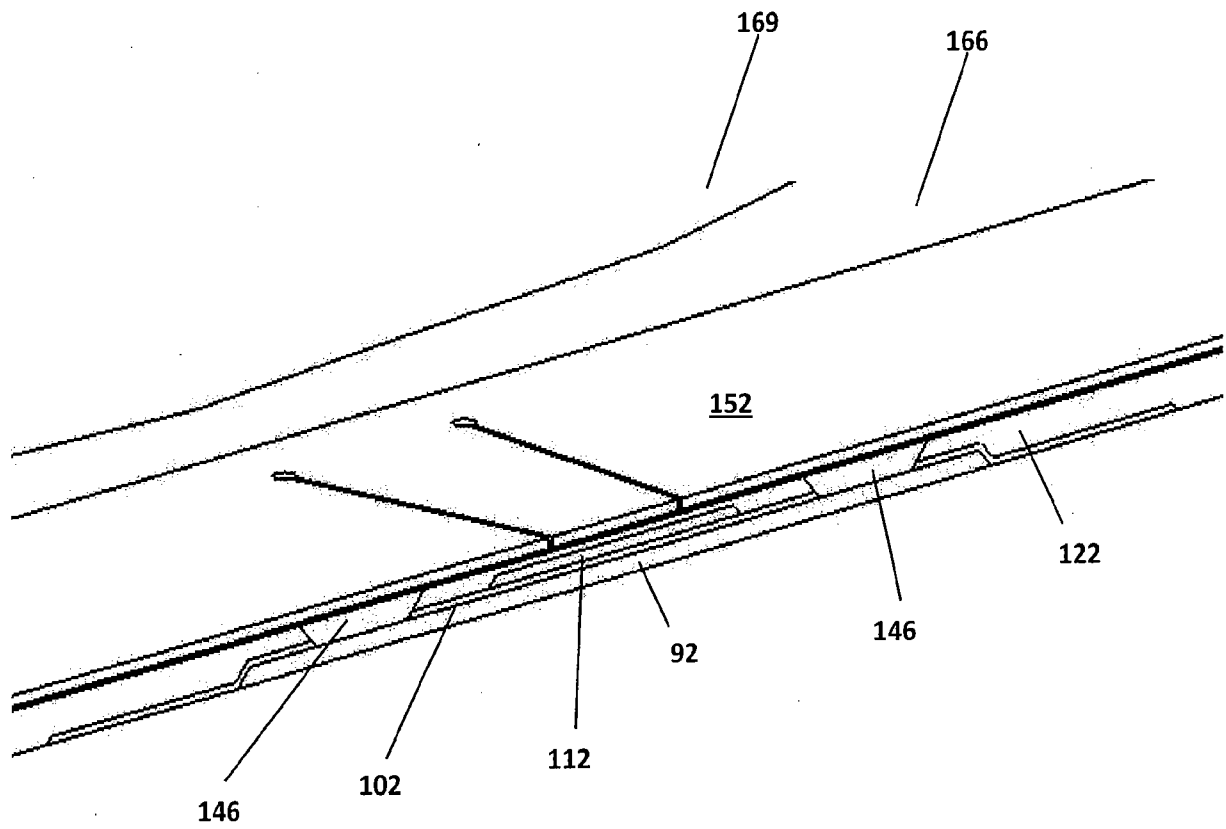


FIG. 18

FIG. 19A

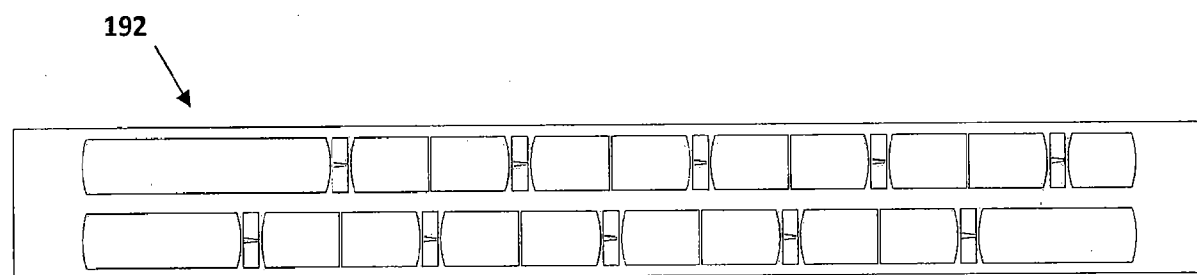
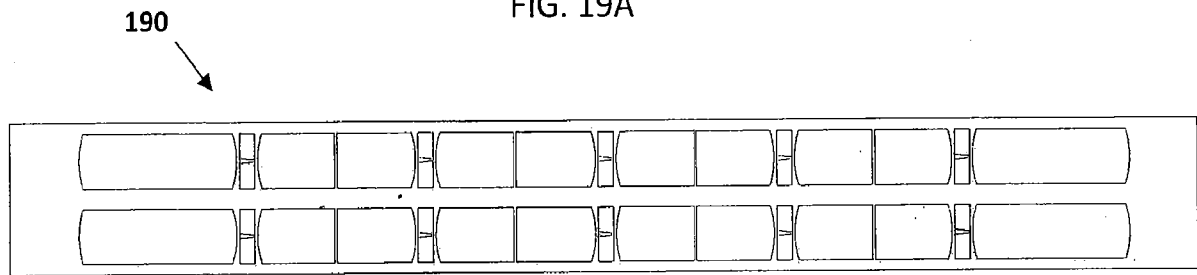


FIG. 19B

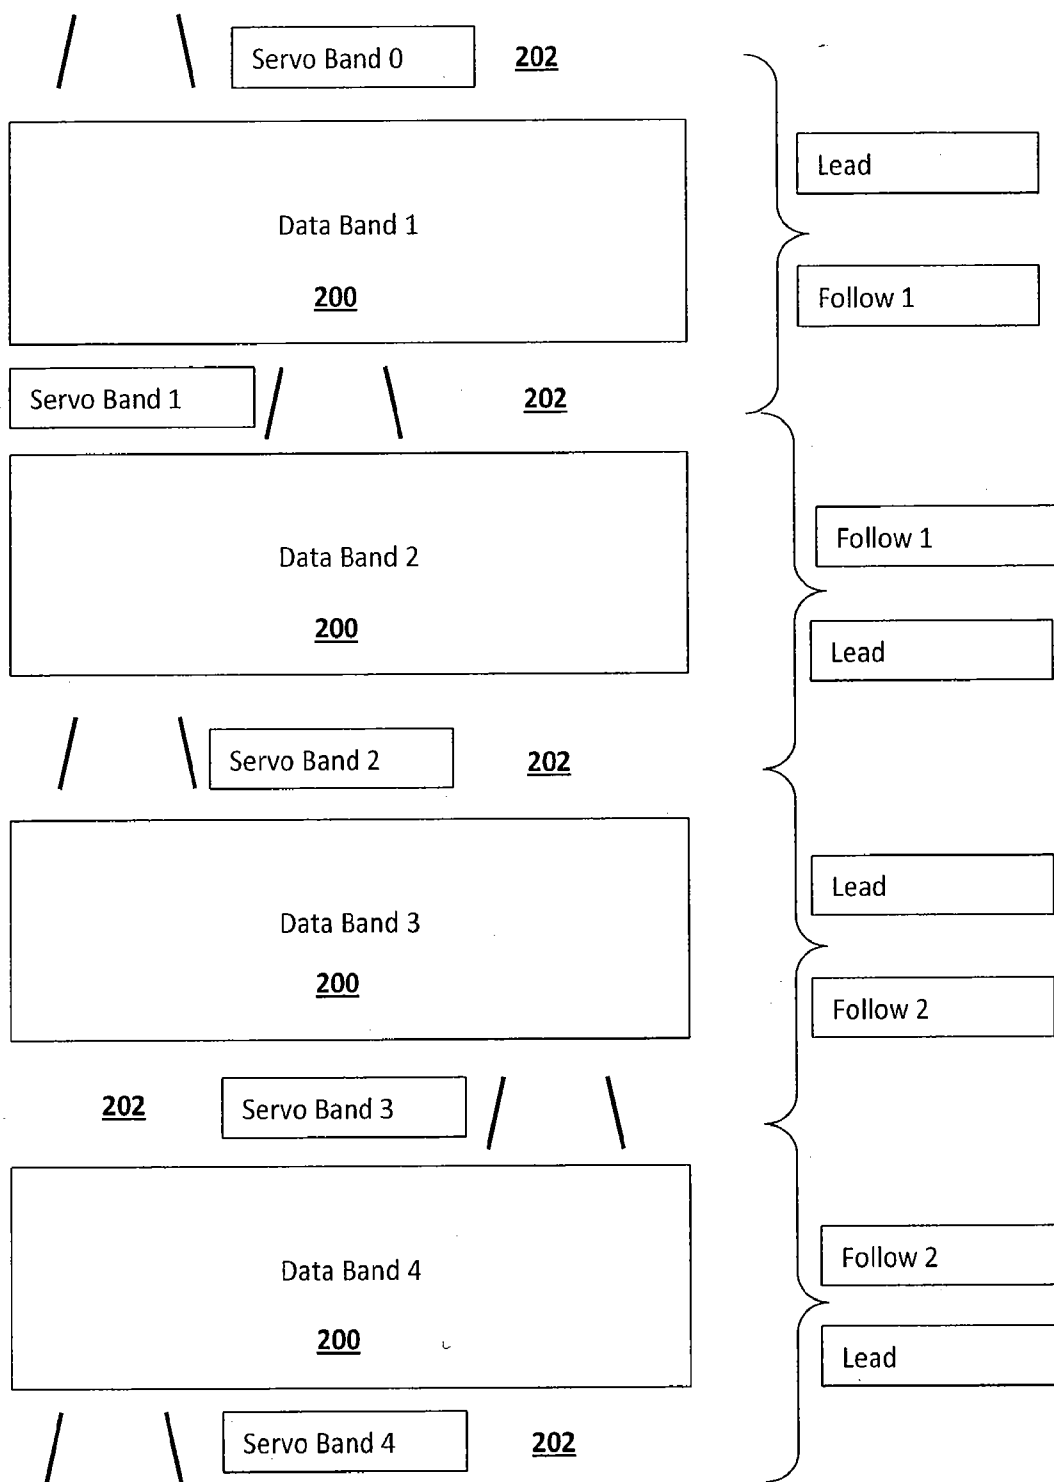


FIG. 20 Prior Art

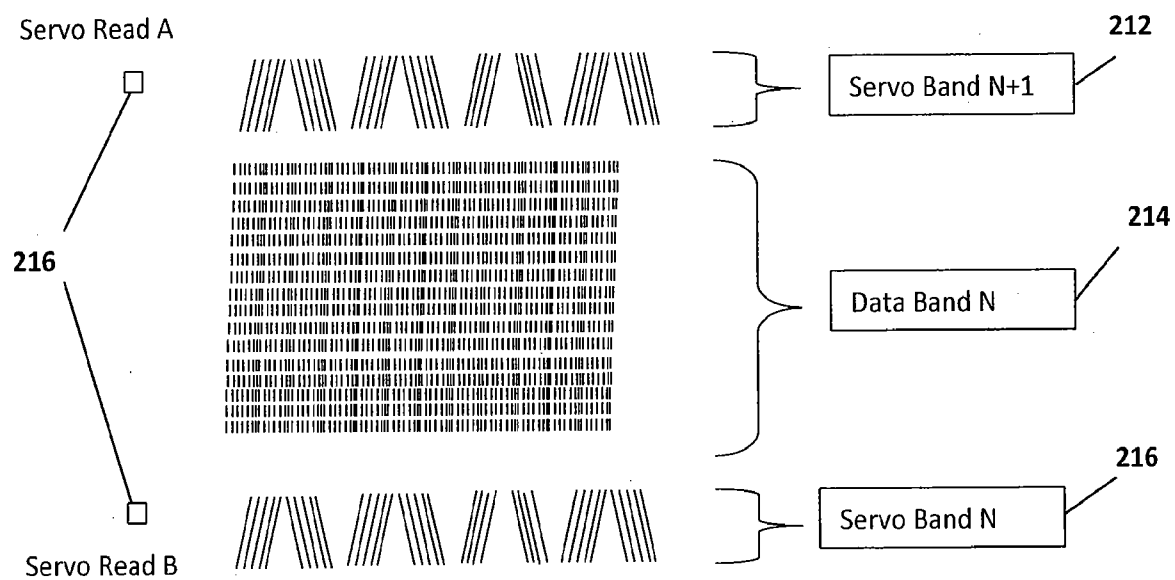


FIG. 21

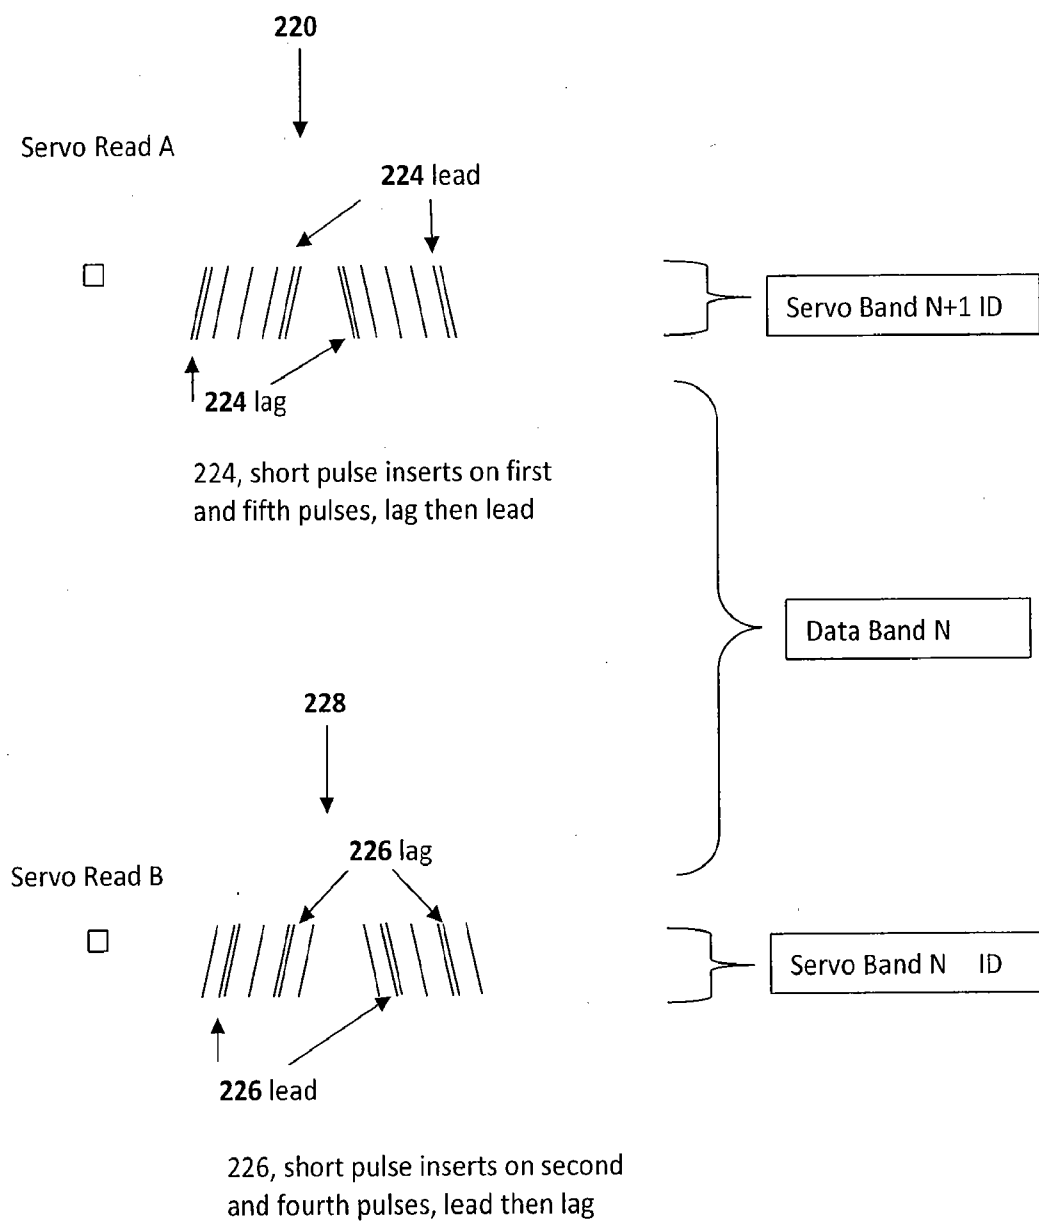


FIG. 22

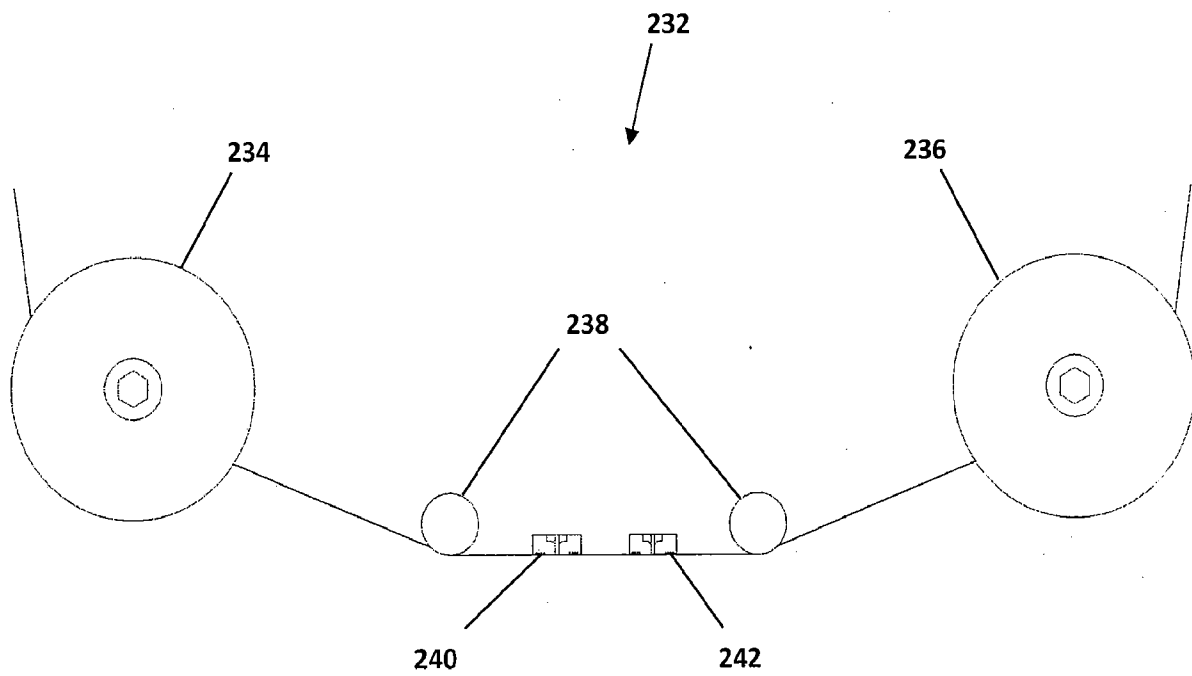


FIG. 23

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2009/038843

A. CLASSIFICATION OF SUBJECT MATTER

INV. G11B5/31

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003/011922 A1 (NOZIERES JEAN-PIERRE [FR] ET AL NOZIERES JEAN-PIERRE [FR] ET AL) 16 January 2003 (2003-01-16) figures 1-6 paragraph [0017] paragraph [0032] paragraph [0049] - paragraph [0050] the whole document	1-24
X	US 2005/152066 A1 (YIP YUNG [US]) 14 July 2005 (2005-07-14) paragraph [0026] paragraph [0039] - paragraph [0040] claim 9 figures 3,4,9 the whole document	1-24

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

7 May 2009

Date of mailing of the international search report

28/05/2009

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Malagoli, M

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2009/038843

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 863 450 A (DUTERTRE PIERRE [FR] ET AL) 26 January 1999 (1999-01-26) figures the whole document	1-24
X	US 2004/145827 A1 (BISKEBORN ROBERT GLENN [US] ET AL) 29 July 2004 (2004-07-29) cited in the application figure 4 claim 23 the whole document	1-24

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2009/038843

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003011922 A1	16-01-2003	NONE	
US 2005152066 A1	14-07-2005	US 2005152067 A1	14-07-2005
US 5863450 A	26-01-1999	EP 0775997 A1	28-05-1997
		FR 2741470 A1	23-05-1997
		JP 9274709 A	21-10-1997
US 2004145827 A1	29-07-2004	US 2005235483 A1	27-10-2005