FORM 1

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952 60,343

APPLICATION FOR A STANDARD PATENT

I\We,

NIPPON PNEUMATIC MANUFACTURING CO., LTD

of 11-5, KAMIJI 4-CHOME
HIGASHINARI-KU
OSAKA
JAPAN

hereby apply for the grant of a standard patent for an invention entitled:

HYDRAULIC IMPACT TOOL

which is described in the accompanying complete specification

Details of basic application(s):


Number of basic application	Name of Convention country in which basic application was filed	Date of basic application
63-186349	JP	26 JUL 88

My/our address for service is care of GRIFFITH HACK & CO., Patent Attorneys, 601 St. Kilda Road, Melbourne 3004, Victoria, Australia.

DATED this 24th day of July 1989

NIPPON PNEUMATIC MANUFACTURING CO., LTD

GRIFFITH HACK & CO.

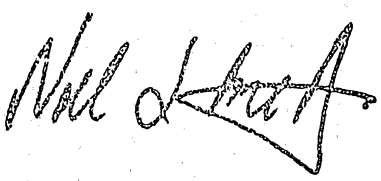

TO: The Commissioner of Patents.

APPLICATION ACCEPTED AND AMENDMENTS ALLOWED 7.12.90

A 010966 24C:39

AUSTRALIA

PATENTS ACT 1952

B

APPLICATION BY ASSIGNEE OF INVENTOR

DECLARATION IN SUPPORT OF AN APPLICATION FOR A PATENT

NAME OF APPLICANT

In support of an application made by:

NIPPON PNEUMATIC MANUFACTURING CO., LTD.

TITLE

for a patent for an invention entitled:

HYDRAULIC IMPACT TOOL

FULL NAME AND ADDRESS OF SIGNATORY

I, Yoshiharu Kotone

of Nippon Pneumatic Manufacturing Co., Ltd.

11-5, Kamiji 4-chome, Higashinari-ku, Osaka, Japan

do solemnly and sincerely declare as follows:

1. I am authorised by the above mentioned applicant for the patent to make this declaration on its behalf.

FULL NAME AND ADDRESS OF INVENTOR(S)

SEE NOTES OVER

2. The name and address of each actual inventor of the invention is as follows:

Takanobu Yamanaka, 4-238-2, Kashimura-cho, Yao-shi, Osaka, Japan

3. The facts upon which the applicant is entitled to make this application are as follows:

The said applicant is the assignee of the actual inventor.

DELETE PARAGRAPHS 4 AND 5 FOR NON-CONVENTION APPLICATION

4. The basic application(s) as defined by Section 141 of the Act was (were) made as follows:

Country Japan on 26th July 1988

in the name(s) Nippon Pneumatic Manufacturing Co., Ltd.

and in on

in the name(s)

5. The basic application(s) referred to in the preceding paragraph was (were) the first application(s) made in a Convention country in respect of the invention the subject of this application.

PLACE AND DATE OF SIGNING

Declared at Osaka, Japan

this 16th day of November 1990

Signed Yoshiharu Kotone

Position Vice President

GRIFFITH HACK & CO

PATENT AND TRADE MARK ATTORNEYS

MELBOURNE · SYDNEY · PERTH

(12) PATENT ABRIDGMENT (11) Document No. AU-B-38887/89
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 607343

(54) Title
HYDRAULIC IMPACT TOOL

International Patent Classification(s)
(51)[4] E21C 003/20 E21C 003/22

(21) Application No. : 38887/89 (22) Application Date : 24.07.89

(30) Priority Data

(31) Number	(32) Date	(33) Country
63-186349	26.07.88	JP JAPAN

(43) Publication Date : 01.02.90

(44) Publication Date of Accepted Application : 28.02.91

(71) Applicant(s)
NIPPON PNEUMATIC MANUFACTURING CO., LTD.

(72) Inventor(s)
TAKANOBU YAMANAKA

(74) Attorney or Agent
GRIFFITH HACK & CO, GPO Box 1285K, MELBOURNE VIC 3001

(57) Claim

1. A hydraulic impact tool for striking a tool such as a chisel, comprising:

a cylinder having the tool slidably mounted therein at lower end thereof;

a piston slidably mounted in said cylinder for striking the tool during its downward movement, said piston having a large-diameter portion, said cylinder having an upper chamber filled with a fluid to apply fluid pressure to the top of said piston, and a middle chamber and a lower chamber defined directly above said large-diameter portion and directly below said large-diameter portion, respectively;

a valve chest connected to said middle chamber and said lower chamber and an oil supply port and an oil discharge port; and

a valve body slidably mounted in said valve chest for controlling the communication between said middle chamber

.../2

and said lower chamber on one hand and said oil supply port and said oil discharge port on the other hand to alternately raise and lower said piston,

characterised in that a cylindrical member is mounted between the outer periphery of said piston and the inner periphery of said cylinder so as to be slidable with respect to both said piston and said cylinder, the bottom of said cylindrical member defining the top end of said lower chamber.

AUSTRALIA 607343

PATENTS ACT 1952

Form 10

COMPLETE SPECIFICATION

(ORIGINAL)

FOR OFFICE USE

Short Title:

Int. Cl:

Application Number:
Lodged:

Complete Specification-Lodged:
Accepted:
Lapsed:
Published:

This document contains the amendments made under Section 49 and is correct for printing.

Priority:

Related Art:

TO BE COMPLETED BY APPLICANT

Name of Applicant:
NIPPON PNEUMATIC MANUFACTURING CO., LTD.

Address of Applicant: 11-5, KAMIJI 4-CHOME
HIGASHINARI-KU
OSAKA
JAPAN

Actual Inventor:

Address for Service: GRIFFITH HACK & CO.,
601 St. Kilda Road,
Melbourne, Victoria 3004,
Australia.

Complete Specification for the invention entitled:
HYDRAULIC IMPACT TOOL.

The following statement is a full description of this invention including the best method of performing it known to me:-

HYDRAULIC IMPACT TOOL

The present invention relates to a hydraulic impact tool. It has particular but not exclusive application for being adapted to be mounted on the head of a hydraulic power shovel or the like and may be used to demolish a concrete structure, crush rocks, or excavate a rock base.

Hydraulic impact tools can be classified roughly into an accumulator type and a gas pressure type. With an accumulator type tool, pressurized oil is accumulated in an accumulator while a piston is rising and is released during its downward stroke to accelerate the piston.

With a gas pressure type tool, one example of which is disclosed in U.S. Patent 4034817, a piston compresses a gas filled in the space above the piston to store energy when it rises under oil pressure. During its downward stroke, the compressed gas expands to accelerate the piston. The prior art impact tool is shown in Fig. 12 in which numeral 1 designates a cylinder and a tool 2 such as a chisel is slidably mounted in the lower end thereof.

A piston 4 formed with a large-diameter portion 3 is mounted in the cylinder 1 to strike the tool 2. The cylinder 1 has an upper chamber 5 charged with gas over the piston 4 to exert the gas pressure to the piston 4 as it reaches its upper limit.

The piston 4 has small-diameter portions over and under

AUSTRALIAN PATENT OFFICE LS

the large-diameter portion 3. A middle chamber 6 and a lower chamber 7 are formed between these small-diameter portions and the inner periphery of the cylinder 1.

A valve chest 8 is formed at one side of the cylinder 1. A valve body 10 formed with a center bore is mounted in the valve chest 8. The valve chest communicates with the cylinder 1 through oil channels 14, 15 extending from the upper and lower parts of the former to the upper part of the middle chamber 6 and to the lower part of the lower chamber 7, respectively. Further, the cylinder 1 and the valve chest 8 have their respective mid-portions communicating with each other by means of one main oil channel 15 and a branch channel.

The valve chest 8 has its upper and lower parts connected to a discharge port 11 and an oil feed port 12, respectively. From the oil feed port 12, another oil channel branches and leads to the top end of a plunger 13 for pressing down the valve body 10.

In operation, when the valve body 10 is at its lowermost position, pressure oil is supplied through the oil feed port 12 to pressurize the lower chamber 7. Since the middle chamber 6 is open to the discharge port 11, the piston 4 rises up in the cylinder to compress the gas in the upper chamber 5.

When the piston 4 approaches the uppermost position,

the oil feed port 12 gets into communication with the middle oil channels 15 through which pressure oil flows into the valve chest 8 to push up the valve body 10. As soon as the valve body 10 clears the bottom of the valve chest 8, the lower chamber 7 communicates with the discharge port 11 through the bore 9 in the valve body 10. Thus, the piston 4 is pushed down by the pressure of gas in the upper chamber 5 to strike the tool 2.

With this prior art impact tool, when the piston 4 rebounds violently immediately after striking the tool 2, the pressure in the lower chamber 7 drops sharply because the chamber 7 is open to the discharge port 11, thus allowing air bubbles in the hydraulic oil to grow rapidly. This phenomenon is called cavitation. When the valve body 10 descends thereafter and pressure oil flows back into the lower chamber 7, the pressure in the lower chamber will increase sharply. Thus the air bubbles which have grown large will collapse in an instant, producing a very high pressure and a shock wave. This happens repeatedly several hundred times a minute. Thus, the piston 4 and th cylinder 1 tend to develop erosion on their surface after long use.

According to the present invention, there is provided a hydraulic impact tool for striking a tool such as a chisel, comprising:

a cylinder having the tool slidably mounted therein at lower end thereof;

a piston slidably mounted in said cylinder for striking the tool during its downward movement, said piston having a large-diameter portion, said cylinder having an upper chamber filled with a fluid to apply fluid pressure to the top of said piston, and a middle chamber and a lower chamber defined directly above said large-diameter portion and directly below said large-diameter portion, respectively;

a valve chest connected to said middle chamber and said lower chamber and an oil supply port and an oil discharge port; and

a valve body slidably mounted in said valve chest for controlling the communication between said middle chamber and said lower chamber on one hand and said oil supply port and said oil discharge port on the other hand to alternately raise and lower said piston,

characterised in that a cylindrical member is mounted between the outer periphery of said piston and the inner periphery of said cylinder so as to be slidable with respect to both said piston and said cylinder, the bottom of said cylindrical member defining the top end of said lower chamber.

In order that the present invention might be more fully understood, embodiments of the invention will be described by way of example only with reference to the accompanying drawings, in which:

Fig. 1 is a vertical sectional front view of the first embodiment of the present invention;

Figs. 2 and 3 are vertical sectional enlarged front view of the same showing how it operates;

Figs. 4 to 6 are vertical sectional front views of the second to fourth embodiments, respectively;

Figs. 7, 8A and 8B, 9A and 9B, 10A and 10B and 11 are vertical sectional front views of five modifications of the embodiments of Fig. 1; and

Fig. 12 is a vertical sectional front view of a prior art impact tool.

In at least one embodiment of the present invention, a cylindrical member is slidably mounted between the piston and the inner wall of the cylinder. It moves down with the piston during the downward movement of the piston, but keeps moving down under the inertia force when the piston rebounds and rises violently after striking the tool. This prevents a rapid increase in the volume of the lower chamber and a rapid decrease in the pressure in the lower chamber.

When both the valve body and the piston are at their lowermost position, the lower chamber communicates

AUSTRALIAN PATENT OFFICE LS

with the oil feed port, whereas the middle chamber communicates with the discharge port. Thus the piston is pushed up, compressing the gas in the upper chamber.

During the upward stroke of the piston, the valve body will begin to rise under oil pressure. When it rises to such a level that the lower chamber communicates with the discharge port through the bore formed through the valve body, the piston will begin to descend at a high speed under the gas pressure in the upper chamber to strike the tool.

When the piston strikes the tool and rebounds upwardly, the cylindrical member mounted on the piston keeps going down under the influence of inertia force. This will prevent any sharp change in the volume of the lower chamber and thus any sharp pressure drop. This will in turn prevent the growth of air bubbles contained in the hydraulic oil in the lower chamber, so that no cavitation will occur.

Damage to the piston and the cylinder is reduced to a minimum and the durability of the impact tool increases.

After the piston has risen to a given level, the cylindrical member is adapted to be pushed up under oil pressure so as to move together with the piston. Thus the cylindrical member will scarcely affect the reciprocating motion of the piston so that the piston can move smoothly.

The tool differs from a conventional tool only in that the cylindrical member is fitted on the piston around its large-diameter portion or thereunder. The other parts or portions such as the oil channels and the valve mechanism are identical in construction to those of a conventional impact tool. Thus its construction is simple.

Figs. 1 to 3 show the first embodiment which differs from the prior art tool shown in Fig. 12 only in that the large-diameter portion 3 of the piston 4 is slightly smaller in diameter than on the prior art tool, and a cylindrical member 21 is slidably mounted on the large-diameter portion 3. It is integrally formed at its


AUSTRALIAN PATENT OFFICE

bottom end with an inturned annular flange 23.

The tool of this embodiment operates in substantially the same way as the prior art tool shown in Fig. 12. But its operation immediately after the piston has struck the tool 2 is slightly different from that of the prior art tool.

Namely, when the piston 4 is descending under the gas pressure in the upper chamber 5 with the lower chamber 7 in communication with the discharge port 11, the cylindrical member 21 mounted on the large-diameter portion 3 of the piston 4 descends together with the piston until the piston 4 strikes the tool. (Fig. 2)

Upon striking the tool, the piston 4 will rebound and rise violently. But the cylindrical member 21, which is slidable with respect to the piston 4, will keep descending

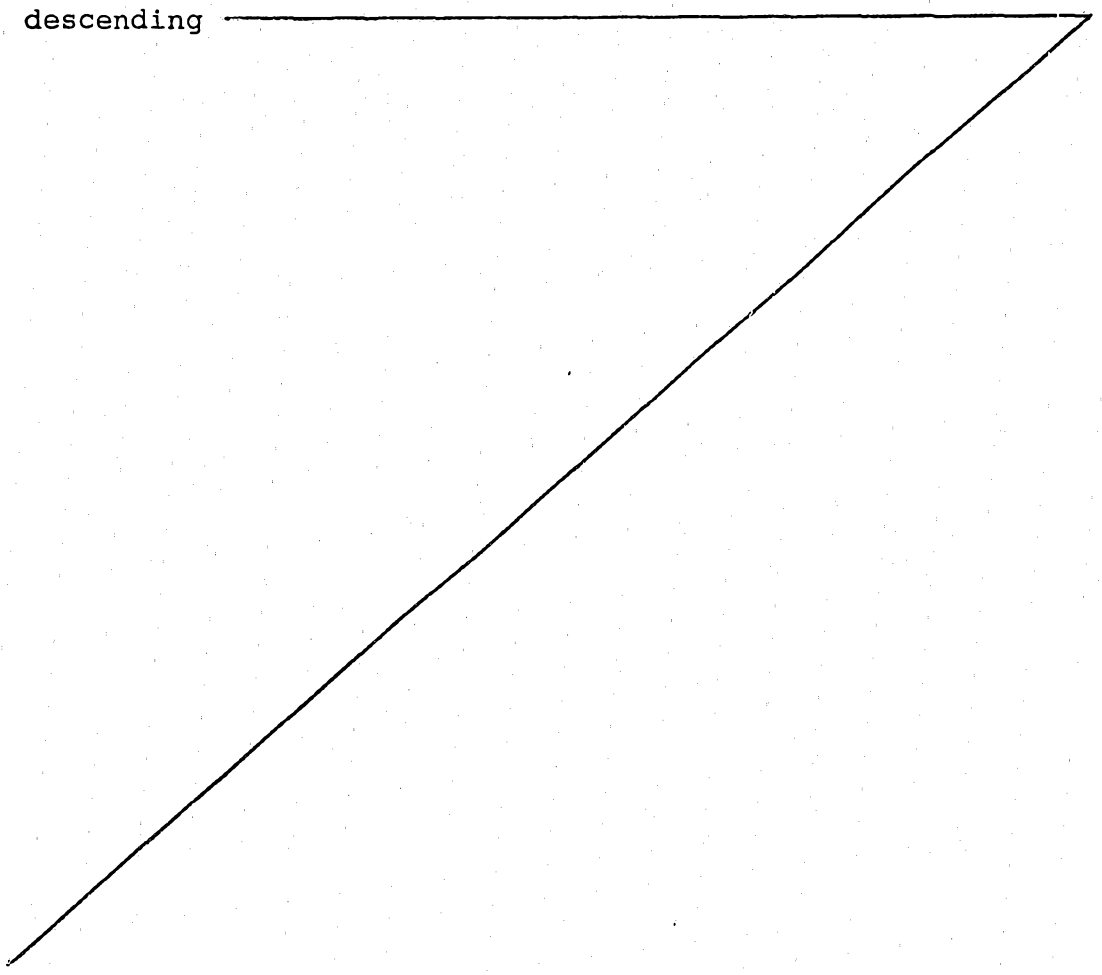

AUSTRALIAN PATENT OFFICE LS

owing to the inertia force. In other words, the bottom edge of the cylindrical member 21 will get away from that of the large-diameter portion 3 as shown in Fig. 3.

Since the cylindrical member 21 keeps descending while the piston 4 is rebounding, the volume of the lower chamber 7 will be kept from increasing sharply immediately after impact. This will keep the lower chamber 7 from being put under negative pressure and thus avoid the development of cavitation.

Although immediately after impact the bottom of the cylindrical member 21 will get apart from the bottom of the large-diameter portion 3, when the lower chamber 7 communicates with the oil feed port 12 and hydraulic oil begins to flow into the lower chamber 7, the cylindrical member 21 will be pushed up under the pressure in the lower chamber 7.

The cylindrical member 21 will rise until its flange 23 comes into abutment with the bottom end of the large-diameter portion 3. Then the piston 4 and the cylindrical member 21 will rise together and descend together as if in one piece until the piston 4 strikes the tool 2.

In the second embodiment shown in Fig. 4, the large-diameter portion 3 of the piston 4 is short in length and flange-like. A cylindrical member 21 is slidably mounted on the piston 4 so that its top end abuts the bottom end of the

large-diameter portion 3. Otherwise, this embodiment is identical in construction and function to the first embodiment.

The third embodiment shown in Fig. 5 slightly differs from the above-described embodiments in the hydraulic circuit. This arrangement requires a longer large-diameter portion 3 and the provision of an annular groove 24 around the cylindrical member 21.

In this embodiment, too, the cylindrical member 21 is adapted to get away from the large-diameter portion 3 immediately after the piston 4 has struck the tool 2, to prevent a sharp drop in pressure in the lower chamber 7.

While the above-described embodiments are related to gas pressure type impact tools, the fourth embodiment shown in Fig 6 is an impact tool of an accumulator type.

In this figure, numeral 29 designates an accumulator and 30 does an oil pressure changeover valve. The piston 4 is adapted to move up and down by switching hydraulic circuits leading to the upper chamber 5, the middle chamber 6 and the lower chamber 7, respectively. In this figure, the cylindrical member 21 is slidably mounted on the large-diameter portion 3 of the piston 4 and the inturned flange 23 is formed at the bottom edge of the member 21 as in the first embodiment. But the cylindrical member 21 may be formed as in the second and third embodiments. In this

embodiment, a gas is sealed in a chamber formed over the upper chamber to auxiliarily apply pressure to the top of the piston.

Fig. 7 shows a modification of the first embodiment in which the large-diameter portion 3 is integrally provided at its top end with a flange 32 so that when the cylindrical member 21 rises with respect to the piston 4, the cylindrical member 21 will abut the flange 32 at its top end, thus keeping the inturned flange 23 out of contact with the bottom end of the large-diameter portion 3.

This arrangement will be effective in preventing cracks from being formed at the top end of the inturned flange 23 and at the inner periphery of the cylindrical member 21 near its bottom end.

Figs. 8A and 8B show a further modification of the example shown in Fig. 7 in which the piston 4 is formed in its outer periphery below its large-diameter portion 3 with an annular groove 34.

With this arrangement, when the cylindrical member 21 lowers with respect to the piston 4 (Fig. 8A), a gap 35 will be formed between the annular groove 34 and the inturned flange 23 so that a sufficient amount of oil can be supplied into a cushioning chamber 36.

Figs. 9A and 9B show another example, which has the same function as the example shown in Fig. 8. In this

example, the cylindrical member 21 is formed with a channel 37. When the cylindrical member 21 lowers with respect to the piston 4 (Fig. 9B), oil will flow into the cushioning chamber 36 through the channel 37.

In still another example shown in Figs. 10A and 10B, the flange 32 is stepped so that its lower half portion 38 has a smaller diameter and the cylindrical member 21 has its top end recessed circumferencially along its inner edge as shown at 39. When the cylindrical member 21 lowers with respect to the piston 4 (Fig. 10B), oil will flow into the recess 39 to serve as a cushion when the cylindrical member 21 rises again.

The larger the size of the piston 4 and hence the larger the mass of the cylindrical member 21, the larger the inertia force acting on the cylindrical member 21 will be. This will cause the cylindrical member 21 to descend too far downward and thus badly influence the operation of the impact tool.

To solve this problem, another inturned flange 40 may be provided at the top end of the cylindrical member 21 as shown in Fig. 11 to restrict the downward stroke of the cylindrical member 21.

In the preferred embodiments, we showed only impact tools having the piston mounted in direct contact with the cylinder for simplification. But an impact tool having its

piston mounted in a cylinder through a bush is also within the scope of the present invention.

In the preferred embodiments, we showed only impact tools in which the lower chamber communicates with the oil discharge port during the downward stroke of the piston. But, the present invention is also applicable to impact tools in which the lower chamber does not communicate with the oil discharge port during the downward stroke of the piston, but is always in communication with the oil supply port.

Though the above-described embodiments are related to impact tools, the concept of the present invention will be applicable to not only an impact tool but also other tools and devices such as a pile driver in which an impact is given to an object during its downward stroke.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A hydraulic impact tool for striking a tool such as a chisel, comprising:

a cylinder having the tool slidably mounted therein at lower end thereof;

a piston slidably mounted in said cylinder for striking the tool during its downward movement, said piston having a large-diameter portion, said cylinder having an upper chamber filled with a fluid to apply fluid pressure to the top of said piston, and a middle chamber and a lower chamber defined directly above said large-diameter portion and directly below said large-diameter portion, respectively;

a valve chest connected to said middle chamber and said lower chamber and an oil supply port and an oil discharge port; and

a valve body slidably mounted in said valve chest for controlling the communication between said middle chamber and said lower chamber on one hand and said oil supply port and said oil discharge port on the other hand to alternately raise and lower said piston,

characterised in that a cylindrical member is mounted between the outer periphery of said piston and the inner periphery of said cylinder so as to be slidable with respect to both said piston and said cylinder, the bottom of said

cylindrical member defining the top end of said lower chamber.

2. An impact tool as claimed in claim 1, wherein said cylindrical member is mounted on said piston under said large-diameter portion.

3. An impact tool as claimed in claim 1, wherein said cylindrical member is mounted on said piston around said large-diameter portion and formed at the bottom end thereof with an inturned annular flange so as to engage the bottom end of said large-diameter portion.

4. An impact tool as claimed in claim 3, wherein said large-diameter portion has its top protruding radially to form a flange and said cylindrical member is so dimensioned that when said cylindrical member abuts the bottom of said flange at top end thereof, said inturned flange will be out of contact with the bottom end of said large-diameter portion.

5. An impact tool as claimed in claim 4, wherein said piston is formed at a point below the bottom end of said large-diameter portion with an annular groove so that when said cylindrical member gets apart from said flange formed at top of said large-diameter portion by a predetermined

length, a gap will be formed between the inner edge of said inturned flange and said piston.

6. An impact tool as claimed in claim 4, wherein said cylindrical member is formed with a channel to pass oil therethrough.

7. An impact tool as claimed in claim 4, wherein said flange formed at top of said large-diameter portion has a lower half portion thereof smaller in diameter than its upper half portion and larger in diameter than the large-diameter portion and said cylindrical member has its top end recessed along its inner edge over the whole periphery so that said lower half portion of said flange will snugly fit in said recess.

8. An impact tool substantially as hereinbefore described and illustrated with reference to Figures 1 to 11 of the accompanying drawings.

DATED THIS 4TH DAY OF DECEMBER, 1990.

NIPPON PNEUMATIC MANUFACTURING CO., LTD.
By Its Patent Attorneys:

GRIFFITH HACK & CO.
Fellows Institute of Patent
Attorneys of Australia.

AUSTRALIAN PATENT OFFICE LS

FIG. 1

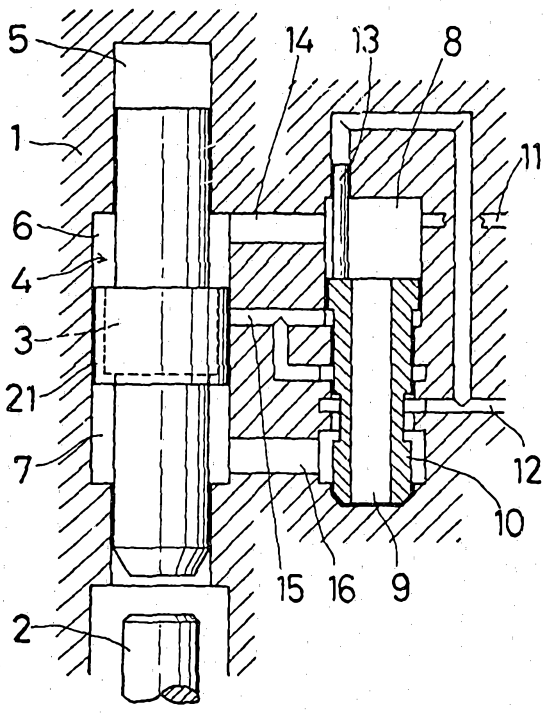


FIG. 2

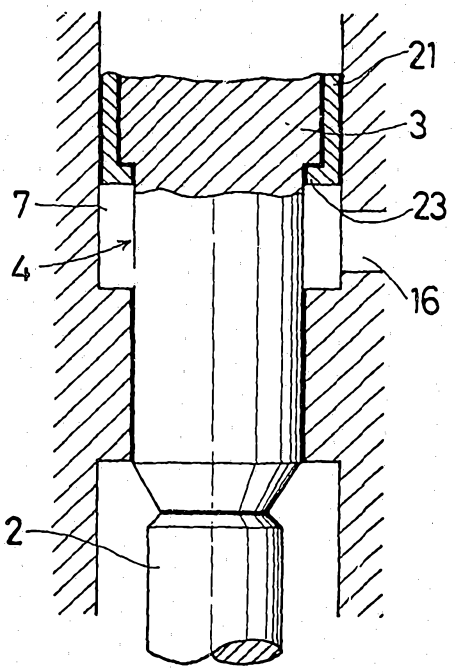


FIG. 3

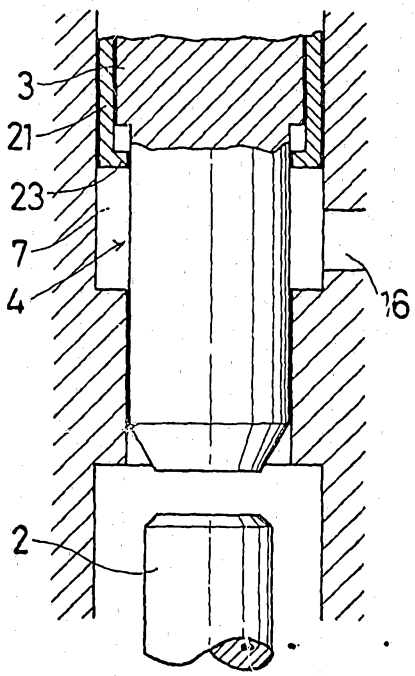


FIG. 4

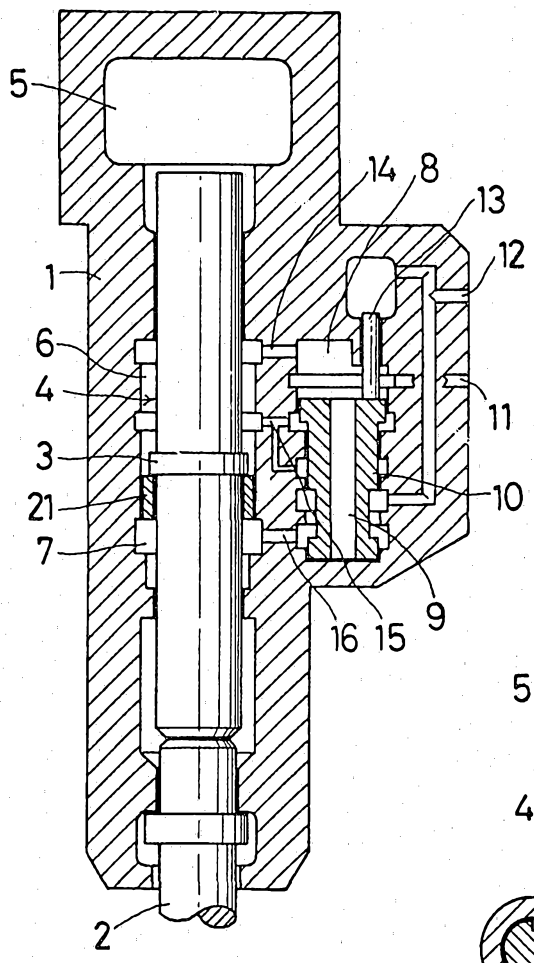


FIG. 5

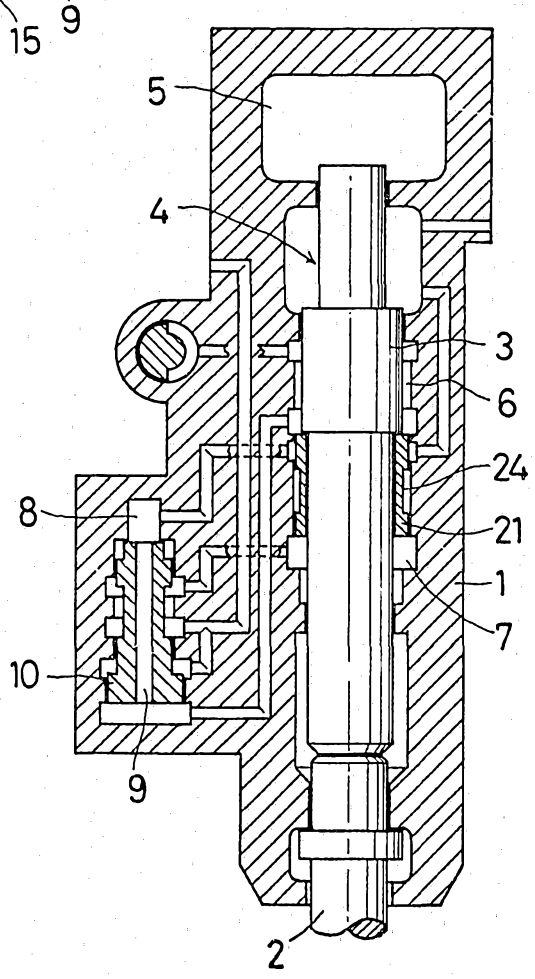


FIG. 6

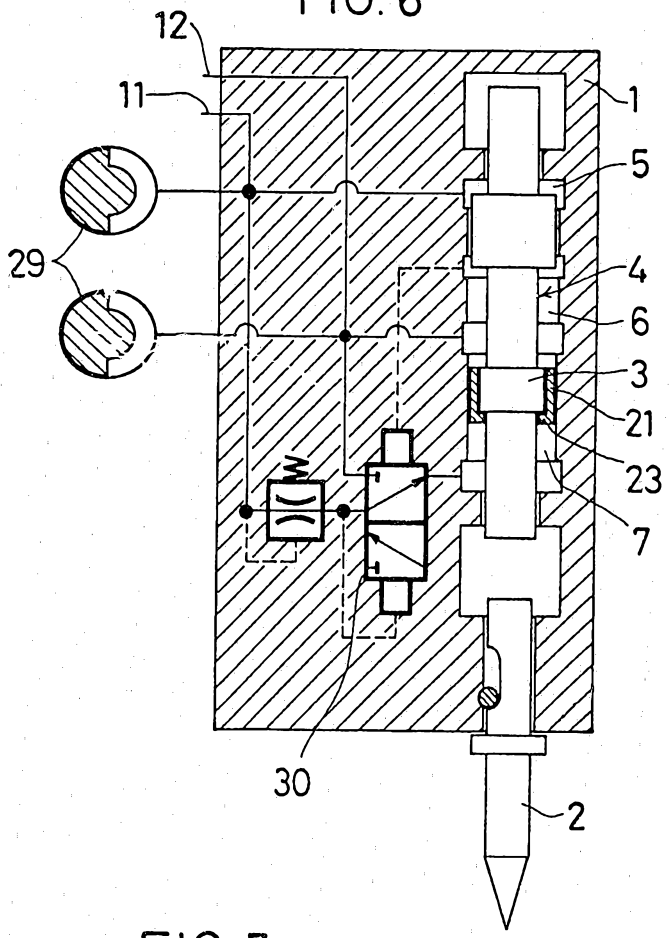


FIG. 7

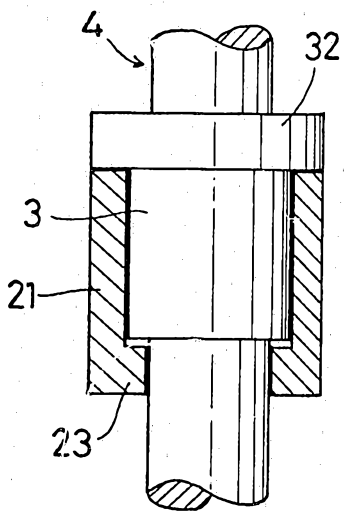


FIG. 8A

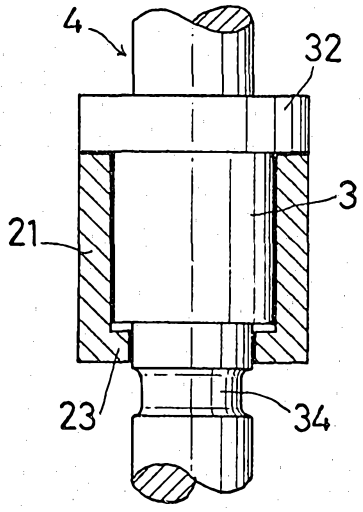


FIG. 8B

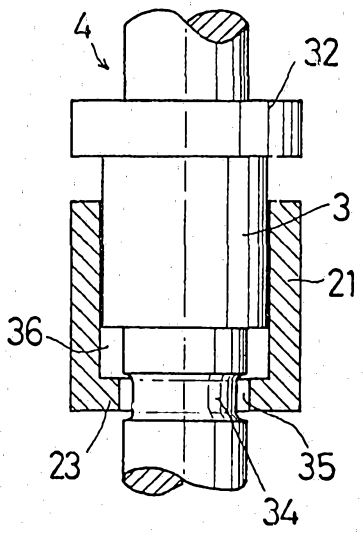


FIG. 9A

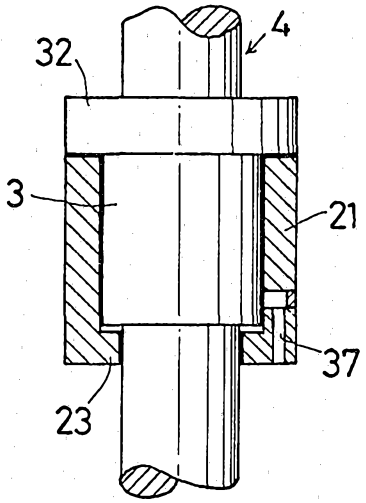


FIG. 9B

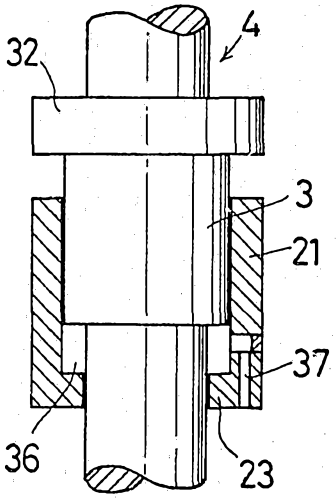


FIG. 10A

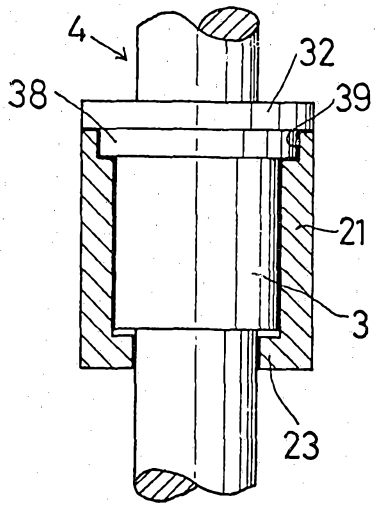


FIG. 10B

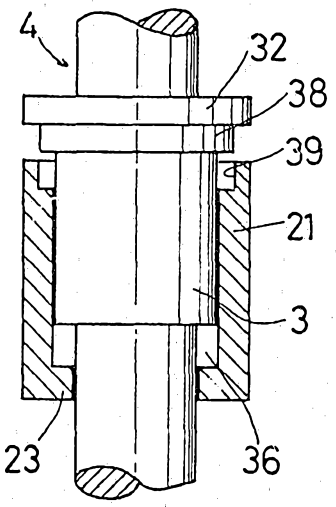


FIG. 11

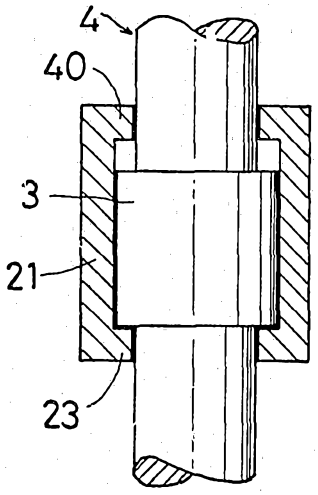


FIG. 12

