




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁵ : A61F 13/15</p>	<p>A1</p>	<p>(11) International Publication Number: WO 94/07451 (43) International Publication Date: 14 April 1994 (14.04.94)</p>
<p>(21) International Application Number: PCT/US93/08816 (22) International Filing Date: 20 September 1993 (20.09.93) (30) Priority data: 07/951,608 25 September 1992 (25.09.92) US (71) Applicant: THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US). (72) Inventors: CLEAR, Sandra, Hintz ; 9056 Meadow Drive, Maineville, OH 45039 (US). ROBLES, Miguel, Alvaro ; 785 Congress Avenue, Glendale, OH 45246 (US). DREIER, Kimberly, Ann ; 9228 Axminster Drive, Cincinnati, OH 45251 (US).</p>		<p>(74) Agents: REED, T., David et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45202 (US). (81) Designated States: AU, BB, BG, BR, BY, CA, CZ, FI, HU, JP, KP, KR, KZ, LK, LV, MG, MN, MW, NO, NZ, PL, RO, RU, SD, SK, UA, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i></p>

(54) Title: ABSORBENT ARTICLE WITH DYNAMIC ELASTIC LEG FEATURE COMPRISING ELASTICIZED THIGH PANELS

(57) Abstract

Absorbent articles such as disposable diapers (20), incontinent briefs, diaper holders, training pants and the like, that have an elastic leg feature that provides dynamic fit around the leg of the wearer. Such absorbent articles comprise a liquid pervious topsheet (24); a liquid impervious backsheet (26); an absorbent core (28) disposed between the topsheet and the backsheet; and an elastic leg feature (32) comprising an elasticized leg cuff (150) and elasticized thigh panels (154). The elasticized leg cuff (150) is positioned in at least the center leg zone of the elastic leg feature (32), and comprises one or more elastic members (152) operatively associated in an elastically contractible condition so that the leg cuff (150) is elastically contractible in generally the longitudinal direction. The elasticized thigh panels (154) comprise a stretch laminate (156) that is mechanically stretched so that the elasticized thigh panel (154) is capable of expanding beyond the original planar state of the absorbent article (20) in at least one direction at an angle from the longitudinal direction.

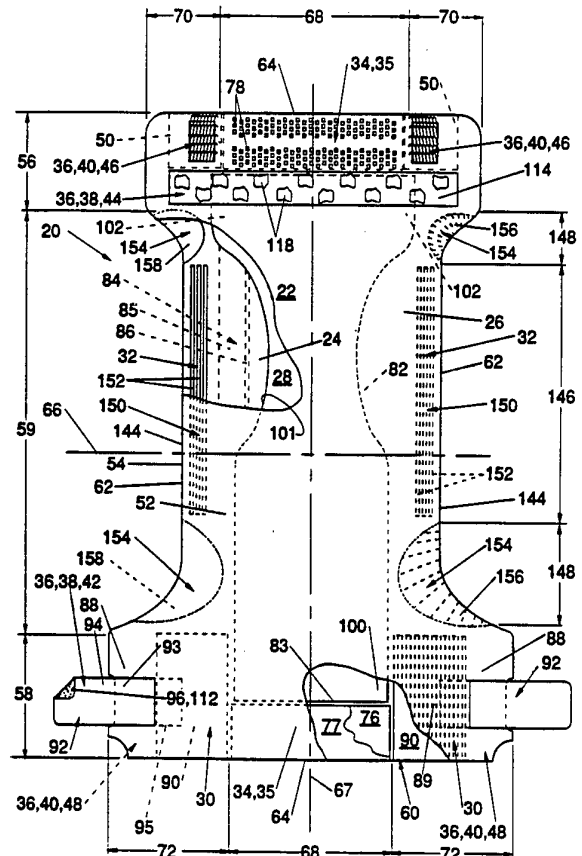

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NE	Niger
BE	Belgium	GN	Guinea	NL	Netherlands
BF	Burkina Faso	GR	Greece	NO	Norway
BG	Bulgaria	HU	Hungary	NZ	New Zealand
BJ	Benin	IE	Ireland	PL	Poland
BR	Brazil	IT	Italy	PT	Portugal
BY	Belarus	JP	Japan	RO	Romania
CA	Canada	KP	Democratic People's Republic of Korea	RU	Russian Federation
CF	Central African Republic	KR	Republic of Korea	SD	Sudan
CG	Congo	KZ	Kazakhstan	SE	Sweden
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovak Republic
CM	Cameroon	LU	Luxembourg	SN	Senegal
CN	China	LV	Latvia	TD	Chad
CS	Czechoslovakia	MC	Monaco	TG	Togo
CZ	Czech Republic	MG	Madagascar	UA	Ukraine
DE	Germany	ML	Mali	US	United States of America
DK	Denmark	MN	Mongolia	UZ	Uzbekistan
ES	Spain			VN	Viet Nam
FI	Finland				

5

ABSORBENT ARTICLE WITH DYNAMIC ELASTIC
LEG FEATURE COMPRISING ELASTICIZED THIGH PANELS

10

FIELD OF THE INVENTION

The present invention relates to absorbent articles such as
15 diapers, incontinent briefs, diaper holders, and the like, and
more particularly, to absorbent articles having elastic leg
features providing dynamic fit about the wearer as well as
improved comfort characteristics of the absorbent article.

20

BACKGROUND OF THE INVENTION

Infants and other incontinent individuals wear absorbent
articles such as diapers to receive and contain urine and other
body exudates. Absorbent articles function both to contain the
discharged materials and to isolate these materials from the body
25 of the wearer and from the wearer's garments and bed clothing.
Disposable absorbent articles having many different basic designs
are known to the art. For example, U.S. Patent Re. 26,152,
entitled "Disposable Diaper" issued to Duncan and Baker on January
31, 1967, describes a disposable diaper which has achieved wide
30 acceptance and commercial success.

In order to provide better fit and reduced leakage about the
leg of the wearer, absorbent articles have been provided with
elastic leg closures. U.S. Patent 3,860,003, entitled
"Contractable Side Portions For Disposable Diaper", issued to
35 Kenneth B. Buell on January 14, 1975, describes an elasticized leg
cuff disposable diaper which has achieved wide acceptance and
commercial success. U.S. Patent 4,743,241 issued to Igaue et al.

on May 10, 1988, describes a disposable diaper having a wide pre-stretched elastic leg closure designed to provide lower pressure on the skin to reduce skin marking along the leg of the wearer as well as a high tension for reduced leakage.

5 However, it has been found that absorbent articles having elastic leg closures still have a tendency to gap or be too tight about the leg during use. As the wearer goes from a standing position to a sitting position, changes occur in the body measurements, particularly in the hips and buttocks, of the wearer
10 thereby causing the diaper to have to change its dimensions to accommodate the changes in the wearer's dimensions. Conventional disposable diapers are made of nonelastic cover materials which are unable to elastically expand to accommodate these wearer changes and have elastic leg features unable to fully elastically
15 expand without placing undue pressure on the wearer's legs. Thus, the elastic leg features and the materials making up the elastic leg features are unable to dynamically elastically expand to accommodate these body dimensions as the wearer moves. As a result, the elastic leg feature tends to gap away from the leg
20 causing an increased likelihood of leakage or undue pressure may be applied to the leg that can cause skin marking.

 Thus, it would be advantageous to provide an absorbent article having elastic leg features that provide better fit.

 Therefore, it is an object of the present invention to
25 provide an absorbent article having dynamic fit about the leg of the wearer.

 It is a further object of the present invention to provide an absorbent article having an elastic leg feature that provides sustained dynamic fit as the wearer moves.

30 These and other objects of the present invention will be more readily apparent when considered in reference to the following description and when taken in conjunction with the accompanying drawings.

SUMMARY OF THE INVENTION

35 The present invention provides absorbent articles such as disposable diapers, incontinent briefs, diaper holders, training pants and the like, that have an elastic leg feature that provides

dynamic fit around the leg of the wearer. Such absorbent articles comprise a liquid pervious topsheet; a liquid impervious backsheet; an absorbent core disposed between the topsheet and the backsheet; and an elastic leg feature comprising an elasticized leg cuff and elasticized thigh panels. The elasticized leg cuff is positioned in at least the center leg zone of the elastic leg feature, and comprises one or more elastic leg members operatively associated in an elastically contractible condition so that the leg cuff is elastically contractible in generally the longitudinal direction. Thus, the elasticized leg cuffs tend to draw and hold the diaper against the leg of wearer, particularly the inner portions of the leg. The elasticized thigh panels comprise a stretch laminate that is mechanically stretched so that the elasticized thigh panel is capable of expanding beyond the original planar state of the absorbent article in at least one direction at an angle from the longitudinal direction. The stretch laminate preferably comprises a zero strain stretch laminate comprising a portion of the topsheet, a portion of the backsheet, and an elastic panel member positioned therebetween.

In an alternative embodiment of the present invention, the elastic panel members of the elasticized thigh panels and the elastic leg member of the elasticized leg cuff comprise the same piece of elastomeric material.

In a further alternative embodiment, the absorbent article additionally comprises elasticized side panels comprising a side panel stretch laminate comprising an elastic side panel member and an elongatable component (typically the topsheet and/or the backsheet), wherein the elastic side panel member, the elastic panel members of the elasticized thigh panels, and the elastic leg member of the elasticized leg cuff are formed of a single piece of elastomeric material. The single piece of elastomeric material is mechanically stretched in the side panels to provide lateral expansion and in the corner leg zones of the elastic leg feature to provide expansion in at least one direction at an angle to the longitudinal direction (preferably in a curvilinear contour) and is at least operatively associated in an elastically contractible

condition in the center leg zone, preferably in generally the longitudinal direction.

BRIEF DESCRIPTION OF THE DRAWINGS

While the specification concludes with claims particularly
5 pointing out and distinctly claiming the subject matter which is regarded as forming the present invention, it is believed that the invention will be better understood from the following description which is taken in conjunction with the accompanying drawings in which like designations are used to designate substantially
10 identical elements, and in which:

Figure 1 is a plan view of a disposable diaper embodiment of the present invention having portions cut-away to reveal underlying structure, the outer surface of the diaper facing the viewer;

15 Figure 2 is a plan view of an alternative disposable diaper embodiment of the present invention wherein the elastic leg closure comprises a single elastomeric member; and

Figure 3 is a plan view of a further alternative disposable diaper embodiment of the present invention wherein the elastic leg
20 closure and side panels comprise a single elastomeric member.

DETAILED DESCRIPTION OF THE INVENTION

As used herein, the term "absorbent article" refers to devices which absorb and contain body exudates, and, more specifically, refers to devices which are placed against or in
25 proximity to the body of the wearer to absorb and contain the various exudates discharged from the body. The term "disposable" is used herein to describe absorbent articles which are not intended to be laundered or otherwise restored or reused as an absorbent article (i.e., they are intended to be discarded after a
30 single use and, preferably, to be recycled, composted or otherwise disposed of in an environmentally compatible manner). A "unitary" absorbent article refers to absorbent articles which are formed of separate parts united together to form a coordinated entity so that they do not require separate manipulative parts like a
35 separate holder and liner. A preferred embodiment of an absorbent article of the present invention is the unitary disposable absorbent article, diaper 20, shown in Figure 1. As used herein,

the term "diaper" refers to an absorbent article generally worn by infants and incontinent persons that is worn about the lower torso of the wearer. It should be understood, however, that the present invention is also applicable to other absorbent articles such as incontinent briefs, incontinent undergarments, diaper holders and liners, feminine hygiene garments, training pants, and the like.

Figure 1 is a plan view of the diaper 20 of the present invention in its flat-out, uncontracted state (i.e., with elastic induced contraction pulled out except in the side panels and thigh panels wherein the elastic is left in its relaxed condition) with portions of the structure being cut-away to more clearly show the construction of the diaper 20 and with the portion of the diaper 20 which faces away from the wearer, the outer surface 52, facing the viewer. As shown in Figure 1, the diaper 20 comprises a containment assembly 22 preferably comprising a liquid pervious topsheet 24, a liquid impervious backsheet 26 joined with the topsheet 24, and an absorbent core 28 disposed between the topsheet 24 and the backsheet 26; elasticized side panels 30; an elastic leg feature 32; an elastic waist feature 34; and a closure system comprising a dual tension fastening system generally multiply designated as 36. The dual tension fastening system 36 preferably comprises a primary fastening system 38 and a waist closure system 40. The primary fastening system 38 preferably comprises a pair of securement members 42 and a landing member 44. The waist closure system 40 is shown in Figure 1 to preferably comprise a pair of first attachment components 46 and a second attachment component 48. The diaper 20 also preferably comprises a positioning patch 50 located subjacent each first attachment component 46. The elastic leg feature 32 preferably comprises (i) an elasticized leg cuff 150 comprising one or more elastic leg members 152 operatively associated in an elastically contractible condition, preferably between the topsheet 24 and the backsheet 26, such that the elasticized leg cuff 150 is elastically contractible in generally the longitudinal direction; and (ii) at least one, preferably a pair of, elasticized thigh panels 154 comprising a stretch laminate 156 comprising one or more elongatable components, typically the topsheet 24 and the

backsheet 26, and an elastic panel member 158. As shown in Figure 1, the stretch laminate 156 has been mechanically stretched so that the elasticized thigh panel 154 is capable of elastically expanding beyond the original planar state of the diaper 20 (the elongatable components) in at least one direction at an angle from the longitudinal direction. (The direction of stretch in the thigh panels and the side panels are denoted by dashed lines.)

The diaper 20 is shown in Figure 1 to have an outer surface 52 (facing the viewer in Figure 1), an inner surface 54 opposed to the outer surface 52, a first waist region 56, a second waist region 58 opposed to the first waist region 56, a crotch region 59 positioned between the first waist region and the second waist region, and a periphery 60 which is defined by the outer perimeter or edges of the diaper 20 in which the longitudinal edges are designated 62 and the end edges are designated 64. The inner surface 54 of the diaper 20 comprises that portion of the diaper 20 which is positioned adjacent to the wearer's body during use (i.e., the inner surface 54 generally is formed by at least a portion of the topsheet 24 and other components joined to the topsheet 24). The outer surface 52 comprises that portion of the diaper 20 which is positioned away from the wearer's body (i.e., the outer surface 52 generally is formed by at least a portion of the backsheet 26 and other components joined to the backsheet 26). The first waist region 56 and the second waist region 58 extend, respectively, from the end edges 64 of the periphery 60 to the crotch region 59. The waist regions each comprise a central region 68 and a pair of side panels which typically comprise the outer lateral portions of the waist regions. The side panels positioned in the first waist region 56 are designated 70 while the side panels in the second waist region 58 are designated 72. (In the discussion that follows, unless otherwise noted, the diaper 20 will comprise a pair of side panels in each waist region. While it is not necessary that the pairs of side panels or each side panel be identical, they are preferably mirror images one of the other.) In a preferred embodiment of the present invention, the side panels 72 positioned in the second waist region 58 are elastically extensible, preferably elastically

expandable, in the lateral direction (i.e., elasticized side panels 30). (The lateral direction (x direction or width) is defined as the direction parallel to the lateral centerline 66 of the diaper 20; the longitudinal direction (y direction or length) being defined as the direction parallel to the longitudinal centerline 67; and the axial direction (Z direction or thickness) being defined as the direction extending through the thickness of the diaper 20.) Figure 1 shows a preferred embodiment of the diaper 20 in which the topsheet 24 and the backsheet 26 have length and width dimensions generally larger than those of the absorbent core 28. The topsheet 24 and the backsheet 26 extend beyond the edges of the absorbent core 28 to thereby form the periphery 60 of the diaper 20.

The containment assembly 22 of the diaper 20 is shown in Figure 1 as comprising the main body (chassis) of the diaper 20. The containment assembly 22 comprises at least an absorbent core 28 and preferably an outer covering layer comprising the topsheet 24 and the backsheet 26. When the absorbent article comprises a separate holder and a liner, the containment assembly 22 generally comprises the holder and the liner (i.e., the containment assembly 22 comprises one or more layers of material to define the holder while the liner comprises an absorbent composite such as a topsheet, a backsheet, and an absorbent core.) For unitary absorbent articles, the containment assembly 22 comprises the main structure of the diaper with other features added to form the composite diaper structure. Thus, the containment assembly 22 for the diaper 20 generally comprises the topsheet 24, the backsheet 26, and the absorbent core 28.

The absorbent core 28 may be any absorbent means which is generally compressible, conformable, non-irritating to the wearer's skin, and capable of absorbing and retaining liquids such as urine and other certain body exudates. As shown in Figure 1, the absorbent core 28 has a garment surface 100, a body surface 101, side edges 82, and waist edges 83.

The absorbent core 28 may be manufactured in a wide variety of sizes and shapes (e.g., rectangular, hourglass, "T"-shaped, asymmetric, etc.) and from a wide variety of liquid-absorbent

materials commonly used in disposable diapers and other absorbent articles such as comminuted wood pulp which is generally referred to as airfelt. Examples of other suitable absorbent materials include creped cellulose wadding, meltblown polymers including
5 coform, cross-linked cellulosic fibers, tissue including tissue wraps and tissue laminates, absorbent foams, absorbent sponges, superabsorbent polymers, absorbent gelling materials, or any equivalent material or combinations of materials. The configuration and construction of the absorbent core may also be
10 varied (e.g., the absorbent core may have varying caliper zones, a hydrophilic gradient, a superabsorbent gradient, or lower average density and lower average basis weight acquisition zones; or may comprise one or more layers or structures). The total absorbent capacity of the absorbent core 28 should, however, be compatible
15 with the design loading and the intended use of the diaper 20. Further, the size and absorbent capacity of the absorbent core 28 may be varied to accommodate wearers ranging from infants through adults.

A preferred embodiment of the diaper 20 has an asymmetric, modified T-shaped, absorbent core 28 having ears 102 in the first
20 waist region 56 but a generally rectangular shape in the second waist region 58. This configuration allows wider elasticized side panels 30 in the second waist region 58. An exemplary absorbent structure for use as the absorbent core 28 of the present
25 invention that has achieved wide acceptance and commercial success is described in U.S. Patent 4,610,678 entitled "High-Density Absorbent Structures" issued to Weisman and Goldman on September 9, 1986. U.S. Patent 4,673,402 entitled "Absorbent Articles With Dual-Layered Cores" issued to Weisman, Houghton, and Gellert on
30 June 16, 1987; and U.S. Patent 4,888,231 entitled "Absorbent Core Having A Dusting Layer" issued to Angstadt on December 19, 1989; also describe absorbent structures that are useful in the present invention. The absorbent core 28 may also comprise the commercially successful absorbent member described in U.S. Patent
35 4,834,735, entitled "High Density Absorbent Members Having Lower Density and Lower Basis Weight Acquisition Zones", issued to Alemany and Berg on May 30, 1989. The absorbent core may further

comprise the dual core system containing an acquisition/distribution core of chemically stiffened fibers positioned over the absorbent storage cores as detailed in co-pending U.S. Patent Application Serial No. 07/843,706, 5 "Absorbent Article With Elastic Waist Feature and Enhanced Absorbency", Clear and Alemany, filed on February 28, 1992; and in U.S. Patent 5,147,345, "High Efficiency Absorbent Articles For Incontinence Management" issued to Young, LaVon and Taylor on September 15, 1992. All of these references are incorporated 10 herein by reference.

The backsheet 26 is positioned adjacent the garment surface 100 of the absorbent core 28 and is preferably joined thereto by attachment means (not shown) such as those well known in the art. For example, the backsheet 26 may be secured to the absorbent core 15 28 by a uniform continuous layer of adhesive, a patterned layer of adhesive, or an array of separate lines, spirals, or spots of adhesive. Adhesives which have been found to be satisfactory are manufactured by Century Adhesives, Inc. of Columbus, Ohio and marketed as Century 5227; and by H. B. Fuller Company of St. Paul, 20 Minnesota and marketed as HL-1258. The attachment means will preferably comprise an open pattern network of filaments of adhesive as is disclosed in U.S. Patent 4,573,986 entitled "Disposable Waste-Containment Garment", which issued to Minetola and Tucker on March 4, 1986, and which is incorporated herein by 25 reference. An exemplary attachment means of an open pattern network of filaments comprises several lines of adhesive filaments swirled into a spiral pattern such as is illustrated by the apparatus and methods shown in U.S. Patent 3,911,173 issued to Sprague, Jr. on October 7, 1975; U.S. Patent 4,785,996 issued to 30 Ziecker, et al. on November 22, 1978; and U.S. Patent 4,842,666 issued to Werenicz on June 27, 1989. Each of these patents are incorporated herein by reference. Alternatively, the attachment means may comprise heat bonds, pressure bonds, ultrasonic bonds, dynamic mechanical bonds, or any other suitable attachment means 35 or combinations of these attachment means as are known in the art.

The backsheet 26 is impervious to liquids (e.g., urine) and is preferably manufactured from a thin plastic film, although

other flexible liquid impervious materials may also be used. As used herein, the term "flexible" refers to materials which are compliant and will readily conform to the general shape and contours of the human body. The backsheet 26 prevents the exudates absorbed and contained in the absorbent core 28 from wetting articles which contact the diaper 20 such as bedsheets and undergarments. The backsheet 26 may thus comprise a woven or nonwoven material, polymeric films such as thermoplastic films of polyethylene or polypropylene, or composite materials such as a film-coated nonwoven material. Preferably, the backsheet is a thermoplastic film having a thickness of from about 0.012 mm (0.5 mil) to about 0.051 mm (2.0 mils).

In a preferred embodiment of the present invention, at least a portion of the backsheet 26 is subjected to mechanical stretching in order to provide both a "zero strain" stretch laminate that forms the elasticized side panels 30 and/or the elasticized thigh panels 154 and, optionally, to prestrain a portion of the backsheet coinciding with the other elastic features. Thus, the backsheet is preferably elongatable, most preferably drawable, but not necessarily elastomeric, so that the backsheet will, upon mechanical stretching, be at least to a degree permanently elongated such that it will not fully return to its original undistorted configuration. In preferred embodiments, the backsheet can be subjected to mechanical stretching without undue rupturing or tearing. Thus, it is preferred that the backsheet have an ultimate elongation to break of at least about 400% to about 700% in the cross-machine direction as measured using a method consistent with ASTM D-638. Thus, preferred polymeric films for use as the backsheet contain a high content of linear low density polyethylene. Particularly preferred materials for the backsheet include blends comprised of about 45-90% linear low density polyethylene and about 10-55% polypropylene. Exemplary films for use as the backsheet of the present invention are manufactured by Tredegar Industries, Inc. of Terre Haute, Indiana under the designation RR8220 blend for blown films and RR5475 blend for cast films. The backsheet 26 is preferably embossed (typically, to a caliper of about 0.127 mm (5.5 mils))

and/or matte finished to provide a more clothlike appearance. Further, the backsheet 26 may permit vapors to escape from the absorbent core 28 (i.e., breathable) while still preventing exudates from passing through the backsheet.

5 The size of the backsheet 26 is dictated by the size of the absorbent core 28 and the exact diaper design selected. In a preferred embodiment, the backsheet 26 has a modified hourglass shape extending beyond the absorbent core 28 around the entire
10 diaper periphery 60. Preferably, the backsheet 26 is much wider than the absorbent core 28 in the second waist region 58 so that the side panels 72 in the second waist region 58 are generally wider in the lateral direction than the side panels 70 in the first waist region 56.

 The topsheet 24 is positioned adjacent the body surface 101
15 of the absorbent core 28 and is preferably joined thereto and to the backsheet 26 by attachment means (not shown) such as those well known in the art. Suitable attachment means are described with respect to joining the backsheet 26 to the absorbent core 28. As used herein, the term "joined" encompasses configurations
20 whereby an element is directly secured to the other element by affixing the element directly to the other element, and configurations whereby the element is indirectly secured to the other element by affixing the element to intermediate member(s) which in turn are affixed to the other element. In a preferred
25 embodiment of the present invention, the topsheet 24 and the backsheet 26 are joined directly to each other in the diaper periphery 60 and are indirectly joined together by directly joining them to the absorbent core 28 by the attachment means (not shown).

30 The topsheet 24 is compliant, soft feeling, and non-irritating to the wearer's skin. Further, the topsheet 24 is liquid pervious permitting liquids (e.g., urine) to readily penetrate through its thickness. A suitable topsheet may be
35 manufactured from a wide range of materials, such as porous foams; reticulated foams; apertured plastic films; or woven or nonwoven webs of natural fibers (e.g., wood or cotton fibers), synthetic fibers (e.g., polyester or polypropylene fibers), or a combination

of natural and synthetic fibers. Preferably, the topsheet 24 is made of a hydrophobic material to better isolate the wearer's skin from liquids contained in the absorbent core 28 (i.e., prevent "rewet").

5 In a preferred embodiment of the present invention, at least a portion of the topsheet 24 is subjected to mechanical stretching in order to provide a "zero strain" stretch laminate that forms the elasticized side panels 30 and/or the elasticized thigh panels 154. Thus, the topsheet is preferably elongatable, most
10 preferably drawable, but not necessarily elastomeric, so that the topsheet will, upon mechanical stretching, be at least to a degree permanently elongated such that it will not fully return to its original configuration. In preferred embodiments, the topsheet can be subjected to mechanical stretching without undue rupturing or tearing of the topsheet. Thus, it is preferred that the
15 topsheet have a low cross-machine direction (lateral direction) yield strength.

There are a number of manufacturing techniques which may be used to manufacture the topsheet 24. For example, the topsheet
20 may be a nonwoven web of fibers. When the topsheet comprises a nonwoven web, the web may be spunbonded, carded, wet-laid, meltblown, hydroentangled, combinations of the above, or the like. A preferred topsheet is carded and thermally bonded by means well known to those skilled in the fabrics art. A preferred topsheet
25 comprises staple length polypropylene fibers having a denier of about 2.2. As used herein, the term "staple length fibers" refers to those fibers having a length of at least about 15.9 mm (0.625 inches). Preferably, the topsheet has a basis weight from about 18 to about 25 grams per square meter. A suitable topsheet is
30 manufactured by Veratec, Inc., a Division of International Paper Company, of Walpole, Massachusetts under the designation P-8.

The elastic leg features 32 of the present invention provide improved dynamic fit about the leg. Each elastic leg feature 32 extends laterally outwardly from the side edge 82 of the absorbent
35 core 28 in the crotch region 59 and generally forms at least a portion of the longitudinal edge 62 of the diaper 20, typically the curvilinear side notch portion of the longitudinal edge 62,

herein designated as the leg edge 144. Thus, the elastic leg feature 32 comprises that portion of the diaper 20 extending from the side edge 82 of the absorbent core 28 to the leg edge 144 and is intended to be placed about the wearer's leg during use. While
5 the elastic leg feature 32 or any of its constituent elements can comprise a separate element affixed to the containment assembly 22 of the diaper 20, the elastic leg feature 32 will be described with respect to a preferred embodiment in which the elastic leg feature 32 is partially constructed as an extension of other
10 elements of the diaper 20 such as the backsheet 26 or the topsheet 24, preferably both the backsheet 26 and the topsheet 24.

The elastic leg feature 32 has a center leg zone 146 and a pair of corner leg zones 148, one at each end of the center leg zone 146. The center leg zone 146 is that portion of the elastic
15 leg feature 32 designed to fit about the inner segments of the wearer's thighs and is typically the middle rectilinear portion of the leg edge 144. The corner leg zones 148 are contiguous with the center leg zone 146 and extend longitudinally outward from the ends of the center leg zone 146. The corner leg zones 148 are
20 designed to fit about the outer segments of the wearer's thigh and typically form the curvilinear end segments of the leg edge 144.

The elastic leg feature 32 comprises an elasticized leg cuff 150 and at least one, preferably a pair of, elasticized thigh panels 154. The elasticized leg cuffs 150 are positioned in at
25 least the center leg zone 146 of the elastic leg feature 32 while the elasticized thigh panels 154 are positioned in the corner leg zones 148. The elasticized leg cuffs 150 are elastically contractible in the longitudinal direction while the elasticized thigh panels 154 are elastically expandable in at one direction at
30 an angle from the longitudinal direction, preferably along a curvilinear contour corresponding to the contour of the leg edge 144.

The elasticized leg cuffs 150 are disposed in at least the center leg zone 146 of the elastic leg feature 32 so that the
35 elasticized leg cuffs 150 tend to draw and hold the diaper against the legs of the wearer. The elasticized leg cuffs 150 are elastically contractible in generally the longitudinal direction.

While the elasticized leg cuffs 150 may comprise any of several constructions, including stretch laminates, heat shrinkable elastic leg features, or the like; a preferred elasticized leg cuff construction comprises a portion of the topsheet 24, a
5 portion of the backsheet 26, and one or more elastic leg members 152 operatively associated in an elastically contractible condition with the topsheet 24, the backsheet 26, or both. Such a preferred construction is described in U.S. Patent 3,860,003 entitled "Contractable Side Portions For a Disposable Diaper"
10 issued to Buell on January 14, 1975, which patent is incorporated herein by reference. In addition, a method and apparatus suitable for manufacturing a disposable diaper having elastically contractible leg cuffs are described in U.S. Patent 4,081,301 entitled "Method and Apparatus for Continuously Attaching
15 Discrete, Stretched Elastic Strands to Predetermined Isolated Portions of Disposable Absorbent Articles" which issued to Buell on March 28, 1978 and which patent is incorporated herein by reference.

The elastic leg members 152 are operatively associated with
20 the elasticized leg cuff 150, preferably between the topsheet 24 and the backsheet 26, so that the elastic leg members 152 allow the elasticized leg cuff 150 to be elastically contractible in the longitudinal direction (i.e., longitudinally elastically contractible). The elastic leg member 152 is operatively
25 associated in an elastically contractible condition so that the elastic leg member(s) gathers or contracts the elasticized leg cuff 150. For example, the elastic leg members 152 can be contractibly affixed in the elasticized leg cuff 150 by extending the elastic leg member 152, affixing the elastic leg member 152 to
30 either or both the topsheet 24 and the backsheet 26, and allowing the elastic leg member 152 to assume its relaxed or contracted orientation. Alternatively, the elastic leg member 152 may additionally be operatively associated in an elastically contractible condition and subjected to mechanical stretching to
35 form a pretensioned stretch laminate. Further, the elastic leg member 152 can be operatively associated in an elastically contractible condition in an uncontracted state and then treated

to contract such as the materials which contract unidirectionally and become elastic following specific treatment such as heating (heat shrinkable elastomeric materials). Examples of such materials are disclosed in U.S. Patent 3,819,401 issued to
5 Massengale, et al. on June 25, 1974 and in U.S. Patent 3,912,565 issued to Koch, et al. on October 14, 1975. A more detailed description of a manner for using a heat-shrinkable elastomeric member is described in U.S. Patent 4,515,595 issued to Kievit and Osterhage on May 7, 1985; this patent being incorporated herein by
10 reference.

The elastic leg members 152 useful in the present invention may take on a number of different sizes, shapes, configurations, and materials. For example, the elasticized leg cuff 150 may be formed from one or a plurality of elastic leg members; the elastic
15 leg members may have varying widths and lengths; or the elastic leg members may comprise relatively narrow strands of elastomeric material or a larger area patch of elastomeric material. One elastomeric material which has been found to be suitable for use as the elastic leg member is an elastomeric foam such as the
20 crosslinked natural rubber foams or polyurethane foams described hereinafter for use as the elastomeric materials of the elasticized thigh panels or the elasticized side panels. Other suitable elastomeric materials for use as the elastic leg members 152 include "live" synthetic or natural rubber, elastomeric films
25 (including heat-shrinkable elastomeric films), formed elastomeric scrim, or the like. In a preferred embodiment as is shown in Figure 1, the elastic leg members 152 are elastic strands of natural rubber or LYCRA such as the natural rubber strands marketed by Fulflex Inc. of Middletown, RI.

30 The elastic leg feature 32 further comprises an elasticized thigh panel 154 disposed in at least one, preferably each, corner leg zone 148 of the elastic leg feature 32. (As used herein, the term "disposed" is used to mean that an element(s) of the diaper is formed (joined and positioned) in a particular place or
35 position as a unitary structure with other elements of the diaper or as a separate element joined to another element of the diaper.) The elasticized thigh panels 154 provide an elastically expandable

feature that provides a more comfortable and contouring fit about the leg of the wearer by initially conformably fitting the diaper 20 to the leg and sustaining this fit throughout the time of wear since the elasticized thigh panels 154 allow portions of the elastic leg feature 32 to elastically expand with the leg and return to their original configuration when the leg contracts. While the diaper 20 of the present invention preferably has the elasticized thigh panels 154 disposed in both of the corner leg zones 148 of the elastic leg feature 32; alternatively, the diaper 20 may be provided with an elasticized thigh panel 154 disposed only in one of the corner leg zones, particularly the corner leg zone positioned adjacent the first waist region 56.

The elasticized thigh panels 154 need to be elastically expandable in at least one direction at an angle to the longitudinal direction to better fit the leg of the wearer by providing expansion in a direction that better follows the leg. Elastically expandable "in at least one direction at angle to the longitudinal direction" means that the panel can expand at least at one point (or at a number of or all points) in a direction other than the longitudinal direction and the lateral direction (1° to 89° from the longitudinal direction). It should be noted, however, that segments of the panel may be elastically expandable in the longitudinal or lateral direction provided that expansion at an angle is provided in some segment. Preferably, the elasticized thigh panels 154 are elastically expandable generally in a curvilinear contour to follow the curvilinear shape of the leg edge 144 in the corner leg zones 148. As used herein, the term elastically expandable "in a curvilinear contour" means that the elastic feature is capable of expanding in different directions along the feature in a manner such that the directions of expansion follow a curved line. Thus, as shown by the dashed lines of stretching shown in Figure 1, the elasticized thigh panels 154 are capable of elastically expanding along the curved segment of the leg edge 144 in the corner leg zones 146. As discussed hereinafter, the curvilinear expansion is achieved by stretching the laminate at an angle to the leg edge 144. Generally, the stretching is done at a right angle to the tangent

line at the particular point on the leg edge to provide the maximum stretch; however, other patterns are possible including radial patterns or other differential stretch patterns.

5 The elasticized thigh panels 154 comprise a stretch laminate 156 so that the elasticized thigh panels are capable of expanding beyond the original planar state of the diaper 20. The stretch laminate 156 comprises an elastic panel member 158 and an elongatable component (typically the topsheet 24, the backsheet 26, or both) that have been mechanically stretched as hereinafter described. This stretch laminate 156 allows for expansion of the elasticized thigh panel 154 well beyond the dimensions of the circumference of the leg opening and beyond the initial dimension of the leg edge 144 (beyond the planar state of the diaper 20 itself). (i.e., The elasticized thigh panels 154 are capable of expanding well beyond the dimension of the circumference of the fixed dimension of the leg closure (even beyond the dimension of the materials initially forming the diaper) so as to follow the wearer's leg movements.)

15 While the stretch laminate 156 may be constructed in a number of configurations; as shown in Figure 1, the stretch laminate 156 preferably comprises a portion of the topsheet 24, a portion of the backsheet 26, and an elastic panel member 158 operatively associated with the topsheet 24 or the backsheet 26 or both, most preferably between the topsheet 24 and the backsheet 26. In a preferred embodiment of the present invention, the elastic panel members 158 are operatively associated in an untensioned state so as to form a "zero strain" stretch laminate. As used herein, the term "zero strain" stretch laminate refers to a laminate comprised of at least two plies of material which are secured to one another along at least a portion of their coextensive surfaces while in a substantially untensioned ("zero strain") condition; one of the plies comprising a material which is stretchable and elastomeric (i.e., it will return substantially to its untensioned dimensions after an applied tensile force has been released) and a second ply which is elongatable (but not necessarily elastomeric) so that upon stretching the second ply will be, at least to a degree, permanently elongated so that upon release of the applied tensile

forces, it will not fully return to its original undeformed configuration. The resulting "zero strain" stretch laminate is thereby rendered elastically expandable, at least up to the point of initial stretching, in the direction of initial stretching by mechanically stretching the laminate. Examples of such "zero strain" stretch laminates are disclosed in U.S. Patent 2,075,189 issued to Galligan, et al. on March 30, 1937; U.S. Patent 3,025,199 issued to Harwood on March 13, 1962; U.S. Patent 4,107,364 issued to Sisson on August 15, 1978; U.S. Patent 4,209,563 issued to Sisson on June 24, 1980; and U.S. Patent 4,834,741 issued to Sabee on May 30, 1989. Each of these patents are incorporated herein by reference. Alternatively, the elastic panel member can be operatively associated in a tensioned condition and the resultant laminate then subjected to mechanical stretching to form a pretensioned stretch laminate. For example, the elastic panel member may be operatively associated with the elongatable component in an elastically contractible condition so that the elastic panel member gathers or contracts the laminate. (A more detailed description of a manner in which elastomeric materials may be secured in an elastically contractible condition can be found in the above referenced U.S. Patent 3,860,003 and U.S. Patent 4,081,301; both patents being incorporated herein by reference.) While either of the elasticized thigh panels 154 of each elastic leg feature 32 may comprise a pretensioned stretch laminate or a zero strain stretch laminate (e.g., the elasticized thigh panel adjacent the first waist region 56 may be a zero strain stretch laminate while the elasticized thigh panel adjacent the back waist region 58 may be a pretensioned stretch laminate, or vice versa); in a preferred embodiment, both elasticized thigh panels 154 of the elastic leg feature 32 comprise the same type of stretch laminate, most preferably each comprise a zero strain stretch laminate.

At least a portion of the stretch laminate 156 containing the elastic panel member 158 is subjected to mechanical stretching sufficient to permanently elongate the elongatable components (preferably the topsheet 24 and the backsheet 26) of the stretch laminate 156. The stretch laminate 156 is then allowed to return

to its substantially untensioned condition. Particularly preferred methods and apparatus used for making stretch laminates out of an elongatable component(s) (the topsheet and the backsheet) and an elastomeric member positioned between the same, use meshing corrugated rolls to mechanically stretch the components. A discussion of suitable apparatus and methods for mechanically stretching portions of a diaper is contained in U.S. Patent 4,107,364 issued to Sisson on August 15, 1978 and U.S. Patent 4,834,741 issued to Sabee on May 30, 1989. Particularly preferred apparatus and methods are disclosed in U.S. Patent 5,143,679, "Method For Sequentially Stretching Zero Strain Stretch Laminate Web To Impart Elasticity Thereto Without Rupturing The Web" issued to Weber and Richardson on September 1, 1992; and in co-pending, commonly assigned, U.S. Patent Application Serial No. 07/662,536 entitled "Improved Method And Apparatus For Incrementally Stretching A Zero Strain Stretch Laminate Web To Impart Elasticity Thereto"; P&G Case 4339; filed by Gerald M. Weber et al. on February 28, 1991; and U.S. Patent Application Serial No. 07/662,537 entitled "Improved Method And Apparatus For Incrementally Stretching Zero Strain Stretch Laminate Web In A Non-Uniform Manner To Impart A Varying Degree of Elasticity Thereto"; P&G Case 4340; filed by Kenneth B. Buell et al. on February 28, 1991; each of the above references being incorporated herein by reference. In the preferred method for forming the elasticized thigh panels 154 constructed using the "zero strain" stretch laminate technology herein disclosed, the meshing teeth on the pairs of corrugated rolls employed to incrementally mechanically stretch the "zero strain" laminate of the elasticized thigh panel 154 are arrayed in the desired configuration to produce expansion in a direction at an angle from the longitudinal direction. In particular, the meshing teeth are preferably arranged in a desired curvilinear configuration to provide expansion along the desired curvilinear contour, most preferably to be perpendicular to the tangent of the point along the leg edge 144 to provide the maximum stretch.

The elastic panel members 158 may take on a number of different sizes, shapes, configurations and materials. One

elastomeric material which has been found to be especially suitable for use as the elastic panel member 158 (especially for "zero strain" stretch laminates) is an elastomeric foam having an elongation to break of at least about 400% and an extension force of about 200 grams per inch of sample width at 50% extension of its unstrained length. Exemplary elastomeric foams which have been found suitable for use as an elastic panel member 158 include: (a) crosslinked natural rubber foams preferably having a caliper of approximately 50 mils and a density of 13.3 pounds per cubic foot (0.214 g/cm³), such as is available from Fulflex Inc. of Middletown, Rhode Island; or as available from Ludlow Composites Corporation of Fremont, Ohio and marketed under the tradename Baby Foam; or (b) polyurethane foams having a caliper of approximately 80 mils and a density of approximately 2.06 pounds per cubic foot (0.033 g/cm³) such as is available from Bridgestone of Yokohama, Japan and marketed under the tradename Bridgestone SG polyurethane foam; or as available from General Foam of Paramus, New Jersey and marketed under the designation of Polyurethane Foam No. 40310. Other suitable elastomeric materials for use as the elastic panel members 158 include "live" synthetic or natural rubber, other synthetic or natural rubber foams, elastomeric films (including heat shrinkable elastomeric films), elastomeric scrim, elastomeric woven or nonwoven webs, elastomeric composites such as elastomeric nonwoven laminates, or the like.

As shown in Figure 1, the elastic panel members 158 each comprises a patch of elastomeric material (elastomeric patch). The length and width of the elastic panel members 158 are dictated by the diaper's functional design. In the particular embodiment shown in Figure 1, the elastic panel members 158 have a crescent moon shape. It has been found that this shape is desirable from a product performance, process, and aesthetics standpoint. However, many other shapes are possible in the design of the elastic panel members 158.

Based upon the materials used and the manner of constructing the elasticized thigh panels 154, the extension forces at the designed "in-use" extensions of the elasticized thigh panels are preferably low to provide extensibility with reduced pressure on

the skin of the wearer. The extension forces of the elasticized thigh panels are preferably less than or equal to about 400 gramsf at extensions of between about 25 mm (1 inch) and about 50 mm (2 inches), preferably less than or equal to about 350 gramsf, more preferably less than or equal to about 300 gramsf, at extensions of between about 25 mm (1 inch) and about 50 mm (2 inches). These force/extension characteristics of the elasticized thigh panels represent the primary design criteria. The elasticized thigh panels of the present invention are more preferably designed to have force/extension characteristics such that the extension forces of the elasticized thigh panels are less than or equal to about 400 gramsf, preferably less than or equal to about 350 gramsf, and more preferably less than or equal to about 300 gramsf, at extensions of between about 25 mm (1 inch) and about 76 mm (3 inches). While these secondary design criteria for the elasticized thigh panels appear to be broader than the primary design criteria since the extension ranges are broader, it will be recognized by those of skill in the art that these design criteria are, in fact, narrower since the elasticized thigh panels must undergo an additional 26 mm (1 inch) (from 50 mm to 76 mm) of stretch while maintaining a value for its extension forces less than or equal to the designed target extension force. (Thus, for the additional incremental extension of between 50 mm (2 inches) and about 76 mm (3 inches) the extension forces are less than or equal to about 400 gramsf, preferably 350 gramsf, more preferably 300 gramsf.

In a preferred embodiment of the present invention, the diaper 20 further comprises elasticized barrier cuffs 84 for providing improved containment of liquids and other body exudates. Each elasticized barrier cuff 84 may comprise several different embodiments for reducing the leakage of body exudates in the legs. (The barrier cuffs can be and are sometimes also referred to as stand-up cuffs, containment flaps, leakage control shields, etc.). U.S. Patent 4,909,803 entitled "Disposable Absorbent Article Having Elasticized Flaps" issued to Aziz and Blaney on March 20, 1990, describes a disposable diaper having "stand-up" elasticized flaps (barrier cuffs) to improve the containment of the leg

regions. U.S. Patent 4,695,278 entitled "Absorbent Article Having Dual Cuffs" issued to Lawson on September 22, 1987, describes a disposable diaper having dual cuffs including an elasticized leg cuff (gasketing cuff) and an elasticized barrier cuff. U.S. Patent 4,704,115 entitled "Disposable Waist Containment Garment" issued to Buell on November 3, 1987, discloses a disposable diaper or incontinent garment having side-edge-leakage-guard gutters configured to contain free liquids within the garment. Each of these patents are incorporated herein by reference. While each elasticized barrier cuff 84 may be configured so as to be similar to any of the elasticized flaps, barrier cuffs, gutters, or stand-up flaps described above, each elasticized barrier cuff 84 preferably comprises a barrier flap 85 and one or more spacing elastic members 86 such as constructions described in the above-referenced U.S. Patent 4,909,803 and U.S. Patent 4,695,278.

The diaper 20 preferably further comprises an elastic waist feature 34 that provides improved fit and containment about the waist of the wearer. The elastic waist feature 34 at least extends longitudinally outwardly from at least one of the waist edges 83 of the absorbent core 28 in at least the central region 68 and generally forms at least a portion of the end edge 64 of the diaper 20. Thus, the elastic waist feature 34 comprises that portion of the diaper 20 at least extending from the waist edge 83 of the absorbent core 28 to the end edge 64 of the diaper 20 and is intended to be placed adjacent the wearer's waist. Disposable diapers are generally constructed so as to have two elastic waist features, one positioned in the first waist region 56 and one positioned in the second waist region 58. While a disposable diaper of the present invention can be constructed with a single elastic waist feature encircling the wearer, the discussion regarding the elastic waist feature will focus on diapers having a pair of elastic waist features, at least one, and preferably both, being constructed according to the technologies described in U.S. Patent Application Serial No. 07/750,775, "Absorbent Article With Dynamic Elastic Waist Feature Having A Predisposed Resilient Flexural Hinge", Buell, Clear & Falcone, filed on August 22, 1991, allowed; the specification and drawings of which are incorporated

herein by reference. Further, while the elastic waist feature 34 or any of its constituent elements can comprise a separate element affixed to the containment assembly 22 of the diaper 20, the elastic waist feature 34 will be described with respect to a preferred embodiment in which the elastic waist feature 34 is constructed as an extension of other elements of the diaper such as the backsheet 26 or the topsheet 24, preferably both the backsheet 26 and the topsheet 24.

The elasticized waistband 35 provides a member that maintains a defined area coverage, contacts the wearer's waist, and is elastically extensible in at least the lateral direction so as to dynamically fit against the waist of the wearer and to dynamically conform to the waist of the wearer so as to provide improved fit. The elasticized waistband 35 preferably comprises a portion of the topsheet 24, a portion of the backsheet 26 that has preferably been mechanically stretched prior to incorporation into the elasticized waistband 35 (mechanically prestrained), and a bi-laminate material comprising an elastomeric member 76 positioned between the topsheet 24 and the backsheet 26 and a resilient member 77 positioned between the backsheet 26 and the elastomeric member 76. The elasticized waistband 35 is also provided with regions of securement 78 wherein the backsheet 26 and the topsheet 24 are joined to the bi-laminate material of the elastomeric member 76 and the resilient member 77. Since the topsheet 24 and the backsheet 26 are gathered when the bi-laminate material is in its relaxed condition, regions of differential securement are provided which form pleats.

In a preferred embodiment, the diaper also comprises elasticized side panels 30 disposed in the second waist region 58. The elasticized side panels 30 provide an elastically extensible, preferably elastically expandable, feature that provides a more comfortable and contouring fit by initially conformably fitting the diaper to the wearer and sustaining this fit throughout the time of wear well past when the diaper has been loaded with exudates since the elasticized side panels 30 allow the sides of the diaper to expand and contract. The elasticized side panels 30 further provide more effective application of the diaper 20 since

even if the diaperer pulls one elasticized side panel 30 farther than the other during application (asymmetrically), the diaper 20 will "self-adjust" during wear. While the diaper 20 of the present invention preferably has the elasticized side panels 30 disposed in the second waist region 58; alternatively, the diaper 20 may be provided with elasticized side panels 30 disposed in the first waist region 56 or in both the first waist region 56 and the second waist region 58. While the elasticized side panels 30 may be constructed in a number of configurations, examples of diapers with elasticized side panels positioned in the ears (ear flaps) of the diaper are disclosed in U.S. Patent 4,857,067, entitled "Disposable Diaper Having Shirred Ears" issued to Wood, et al. on August 15, 1989; U.S. Patent 4,381,781 issued to Sciaraffa, et al. on May 3, 1983; U.S. Patent 4,938,753 issued to Van Gompel, et al. on July 3, 1990; and the hereinbefore referenced U.S. Patent Application Serial No. 07/750,775 of Buell, Clear & Falcone, filed on August 22, 1991 allowed; each of which are incorporated herein by reference. The preferred elasticized side panels preferably comprise a side panel stretch laminate 89 comprising an elongatable component(s) (typically a portion of the topsheet 24 and a portion of the backsheet 26) and an elastic side panel member 90 positioned therebetween that is mechanically stretched. The side panel stretch laminate 89 preferably comprises a zero strain stretch laminate formed using the method and apparatus as previously described herein and in U.S. Patent 5,143,679.

The diaper 20 is also preferably provided with a closure system (tensioning means) for dynamically creating/maintaining lateral tension through the elasticized waistband 35. The lateral tension dynamically created and maintained by the closure system "activates" the stretch of the elasticized waistband 35 thereby allowing it to more dynamically expand and contract with the motions of the wearer. Gapping of the elasticized waistband is also reduced by the activated stretch since it is held in tension to snugly fit against the wearer's waist both when the diaper is initially fitted to the wearer and during use. Further, rollover of the elasticized waistband is reduced by the tension created/maintained by the closure system. Thus, the closure

system improves the fit and containment characteristics of the diaper.

While the closure system may take on a number of configurations such as adhesive tape tabs, mechanical closure tape tabs, fixed position fasteners, or any other means for tensioning the elasticized waistband as are known in the art; as shown in Figure 1, the closure system preferably comprises a waist closure system 40 comprising at least one, typically a pair of, first attachment components 46 and at least one second attachment component 48. More preferably, the closure system additionally comprises a primary fastening system 38 such that the diaper 20 has a dual tension fastening system 36. Preferred embodiments of a diaper having a dual tension fastening system are described in commonly assigned, co-pending, U.S. Patent Application 07/714,476, P&G Case 4412, Weil et al., "Absorbent Article With Fastening System Providing Dynamic Elasticized Waistband Fit", filed June 13, 1991; and the above referenced U.S. Patent Application Serial No. 07/750,775 of Buell, et al. filed on August 22, 1991, allowed; the specification and drawings of each being incorporated herein by reference.

The diaper 20 additionally comprises a positioning patch 50 located subjacent the first attachment component 46. The positioning patch 50 raises the first attachment component 46 in the Z direction (thickness) to allow the first attachment component 46 to come in better contact with the second attachment component 48 and allow the waist closure system to more easily be closed (with less effort). Thus, the waist closure system 40 is more effectively passively activated. The positioning patch 50 also provides a zone of increased flexural stiffness that reduces the tendency of the flexible ear flaps to fold over onto the first attachment component(s) 46 thereby occluding the hooks from being secured during diaper application. Thus, the positioning patch 50 can comprise any element that provides a Z direction build up to the first attachment components 46. As shown in Figure 1, the positioning patches 50 each comprise a rectangular-shaped piece of material positioned subjacent the first attachment component 46. While the positioning patches 50 may be positioned directly

subjacent the first attachment components 46, the positioning patches 50 are preferably positioned between the topsheet 24 and the backsheet 26. In order to provide a flexurally stiff circumference about the waist of the wearer, the lateral edges of the positioning patches can be abutted to or slightly overlapped with the side edges of the elastic waistband member 76. The positioning patches 50 preferably comprise a patch of elastomeric foam. More preferably, during manufacture of the diaper, the positioning patches 50 are formed of the same material as the elastic side panel member 90 with the elastic side panel member 90 of one diaper and the positioning patch 50 of the adjacent diaper being formed from the same segment of material that is then cut after the diaper is completed. Thus, the positioning patch 50 extends from the end edge 64 of the diaper 20 inward toward the center of the diaper 20.

The diaper 20 is preferably applied to a wearer by positioning one of the waist regions, preferably the second waist region 58, under the wearer's back and drawing the remainder of the diaper between the wearer's legs so that the other waist region, preferably the first waist region 56, is positioned across the front of the wearer. The tab portions 94 of the tape tabs 92 are then released from the release portion 95. The diaperer then wraps the elasticized side panel 30 around the wearer, while still grasping the tab portion 94. The elasticized side panel 30 will typically be extended and tensioned during this operation so as to conform to the size and shape of the wearer. The first fastening component 112, the adhesive attachment layer 96, is secured to the second fastening component 114 of the landing member 44 to effect a side closure forming the initial fit dimension of the leg closure. In the preferred embodiment of the present invention, when the side closure is formed, the waist closure is also "automatically" formed, i.e., the waist closure is passively activated such that the elasticized waistband 35 is pretensioned so as to provide fit and containment benefits.

Figure 2 shows an alternative embodiment of the present invention. The elastic leg feature of this embodiment is designated 432. The elastic leg member 452 of the elasticized leg

cuff 450, and the elastic panel members 458 of the elasticized thigh panels 454 consist of the same piece of elastomeric material 400. The single piece of elastomeric material 400 preferably extends longitudinally from the corner leg zone 148 adjacent the first waist region 56 to the other corner leg zone 148 adjacent the second waist region 58. The portion of the single piece of elastomeric material positioned in the center leg zone 146 is operatively associated in an elastically contractible condition with either or both of the topsheet 24 and the backsheet 26. The portions of the single piece of elastomeric material positioned in the corner leg zones 148 are preferably joined in a relaxed condition so that these portions, when mechanically stretched, form zero strain stretch laminates forming the elasticized thigh panels 454. Alternatively, the portion of the single piece of elastomeric material positioned in the center leg zone 146 may be mechanically stretched such that the elasticized leg cuff 450 is a pretensioned stretch laminate or it may be operatively associated in a relaxed condition and mechanically stretched to form a zero strain stretch laminate.

Figure 3 shows a further alternative embodiment of the present invention. The elastic leg feature of this embodiment is designated 532. The elastic leg member 552 of the elasticized leg cuff 550, the elastic panel members 558 of the elasticized thigh panels 554, and the elastic side panel member 590 of the elasticized side panel 530 consist of the same piece of elastomeric material 500. The single piece of elastomeric material 500 preferably extends longitudinally from the end edge 64 in the first waist region 56 to the other end edge 64 in the second waist region 58. The portion of the single piece of elastomeric material positioned in the center leg zone 146 is preferably operatively associated in an elastically contractible condition with either or both of the topsheet 24 and the backsheet 26. The portions of the single piece of elastomeric material positioned in the corner leg zones 148 and in the side panel 72 in the second waist region 58 (and in the side panel 70 in the first waist region 56) are preferably joined in a relaxed condition so that the stretch laminates forming the elasticized thigh panels 554 and

the elasticized side panels 530, when mechanically stretched, form zero strain stretch laminates. The portion of the single piece of elastomeric material positioned in the first waist region 56 forms the positioning patch 50, although this portion may be eliminated
5 in an alternative embodiment not shown in drawings.

EXTENSION FORCE TEST

The extension force test for the elasticized thigh panels 154
10 uses an INSTRON Model 4502 as available from Instron Corporation of Canton, Massachusetts. The INSTRON is set for a crosshead speed of 500 mm/min, a chart speed of 500 mm/min, and with full scale at 500 gramsf. The INSTRON will be allowed to travel the desired, claimed, or full elastic extension of the thigh panel.
15 (If the full extension of the thigh panel is less than the upper limit claimed, then the test is stopped at this extension since the extension forces at nonextensible areas should not be taken into account; i.e., the designed in-use extension limit has been reached.)

20 The sample to be tested is taken from the elasticized thigh panel 154. The sample is preferably 25 mm (1 inch) by about 25 mm to about 50 mm so that a sample of 25 mm (1 inch) in the direction of stretch is tested. If an elasticized thigh panel sample of this size cannot be obtained, the test may be carried out using a
25 modified size sample although this is not a preferred situation. The ends of the sample are clamped using standard 1 inch (25 mm) clamps with 1 inch (25 mm) between the clamps. (No zones or areas of the sample should be nonextensible excluding bond sites).

Each sample is run through a travel cycle to the desired,
30 claimed, or full extension of the elasticized thigh panel sample. (The sample may be allowed to contract to also measure contractive force.) A graph of extension force (gramsf) versus extension (mm) will be generated. A total of ten samples are run. The extension force at a given extension is the average of the values for the 10
35 samples.

While particular embodiments of the present invention have been illustrated and described, it would be obvious to those skilled in the art that various other changes and modifications can be made without departing from the spirit and scope of the invention. It is therefore intended to cover in the appended claims all such changes and modifications that are within the scope of this invention.

10

15

20

25

30

35

What is Claimed is:

1. A disposable absorbent article having a first waist region, a second waist region, a crotch region between said first waist region and said second waist region, longitudinal edges having a curvilinear leg edge, and end edges, the absorbent article comprising:

a liquid pervious topsheet;

a liquid impervious backsheet joined with said topsheet;

an absorbent core having side edges and disposed between said topsheet and said backsheet; and characterized by having

an elastic leg feature extending laterally outwardly from each of said side edges of said absorbent core in said crotch region, each said elastic leg feature having a center leg zone and a pair of corner leg zones, one at each end of said center leg zone, each said elastic leg feature comprising:

(i) an elasticized leg cuff positioned in at least said center leg zone, said elasticized leg cuff comprising one or more elastic leg members operatively associated in an elastically contractible condition such that said elasticized leg cuff is elastically contractible in generally the longitudinal direction; and

(ii) an elasticized thigh panel positioned in at least one of said corner leg zones, said elasticized thigh panel comprising a stretch laminate comprising an elastic panel member and an elongatable component, said stretch laminate being mechanically stretched so that said elasticized thigh panel is capable of elastically expanding beyond the original planar state of the absorbent article in at least one direction at an angle from the longitudinal direction.

2. The absorbent article of Claim 1 wherein said elasticized thigh panel comprises a zero strain stretch laminate.
3. The absorbent article of Claim 1 wherein said elasticized thigh panel comprises a pretensioned stretch laminate.
4. The absorbent article of Claim 2 or 3 wherein said stretch laminate is elastically expandable in a curvilinear contour along said leg edge.
5. The absorbent article of Claim 1 wherein said elasticized thigh panel is positioned in said corner leg zone adjacent said first waist region.
6. A disposable absorbent article having a first waist region, a second waist region, a crotch region between said first waist region and said second waist region, longitudinal edges having a curvilinear leg edge, and end edges, the absorbent article comprising:
 - a liquid pervious topsheet;
 - a liquid impervious backsheet joined with said topsheet;
 - an absorbent core having side edges and disposed between said topsheet and said backsheet; and characterized by having
 - an elastic leg feature extending laterally outwardly from each of said side edges of said absorbent core in said crotch region, each said elastic leg feature having a center leg zone and a pair of corner leg zones, one at each end of said center leg zone, each said elastic leg feature comprising:
 - (i) an elasticized leg cuff positioned in at least said center leg zone, said elasticized leg cuff comprising one or more elastic leg members operatively associated in an elastically contractible condition such that said elasticized

leg cuff is elastically contractible in generally the longitudinal direction; and

(ii) an elasticized thigh panel positioned in each said corner leg zone, each said elasticized thigh panel comprising a stretch laminate comprising a portion of said topsheet, a portion of said backsheet, and an elastic panel member positioned therebetween, said stretch laminate being mechanically stretched so that said elasticized thigh panel is capable of elastically expanding beyond the original planar state of the absorbent article in at least one direction at an angle from the longitudinal direction.

7. The absorbent article of Claim 6 wherein one of said elasticized thigh panels comprises a zero strain stretch laminate.
8. The absorbent article of Claim 7 wherein each of said elasticized thigh panels comprises a zero strain stretch laminate.
9. The absorbent article of Claim 8 wherein said elastic panel member comprises an elastomeric foam.
10. The absorbent article of Claim 9 wherein said stretch laminate is elastically expandable in a curvilinear contour along said leg edge.

1/3

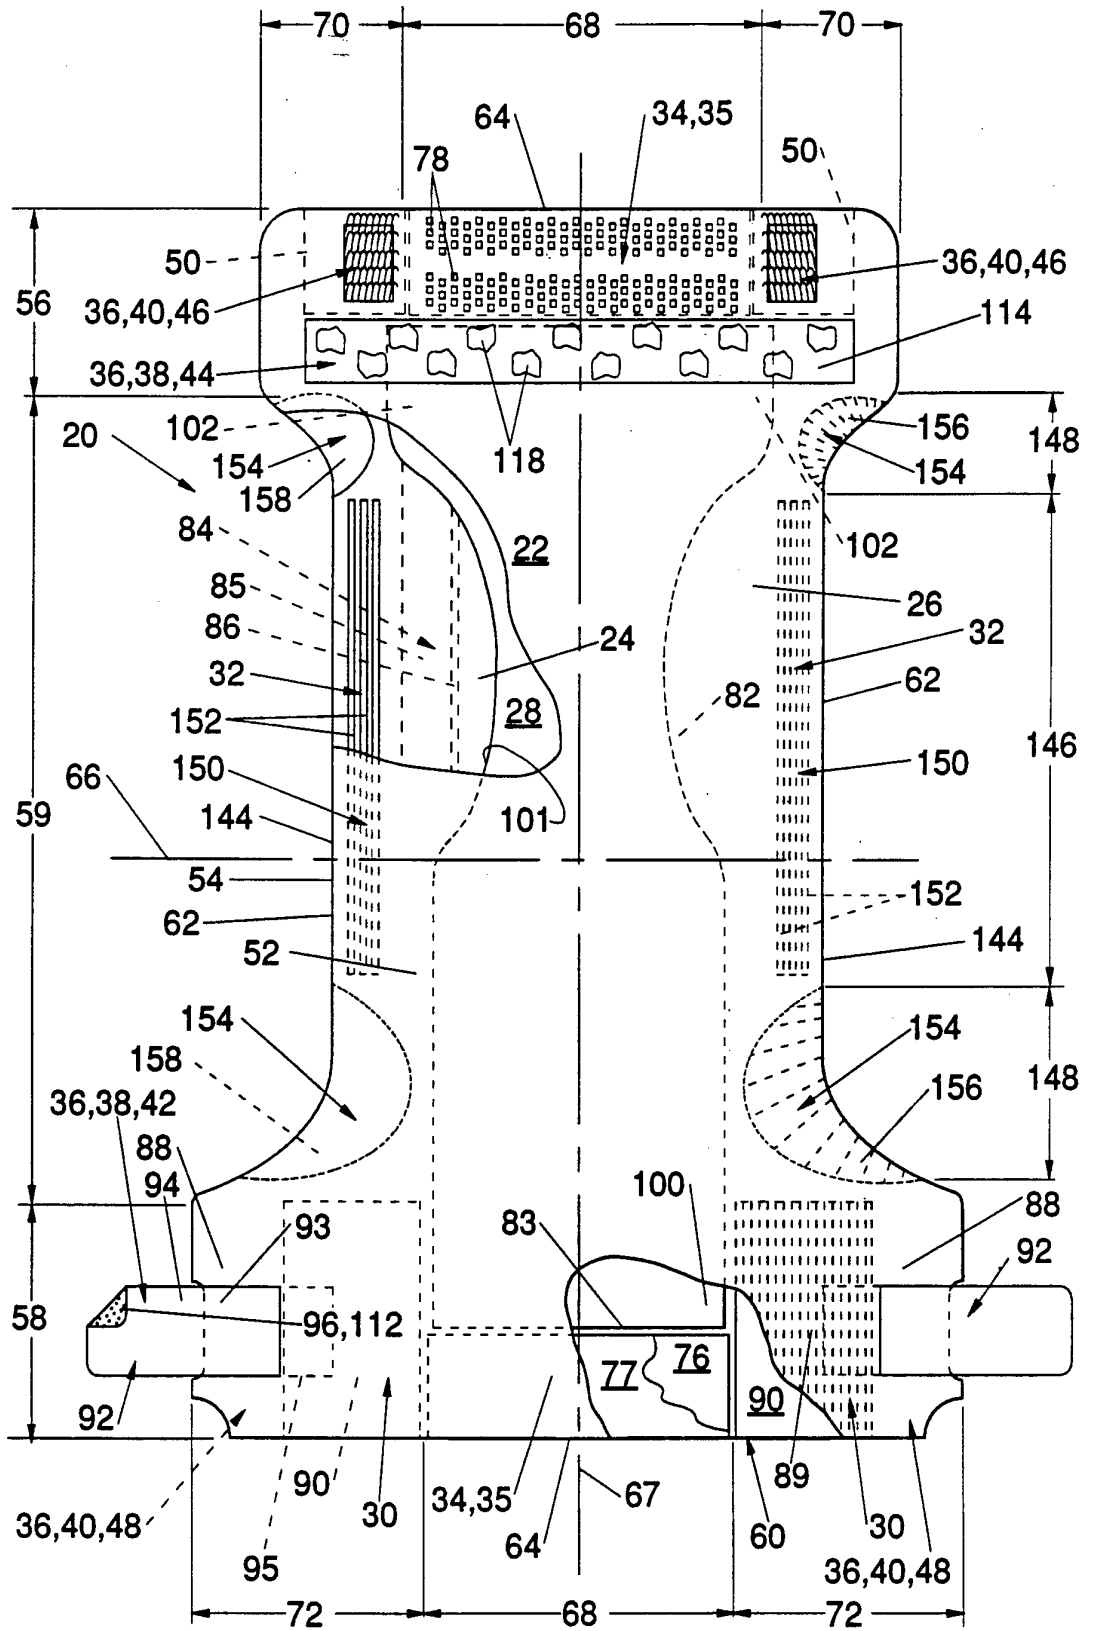


Fig. 1

2/3

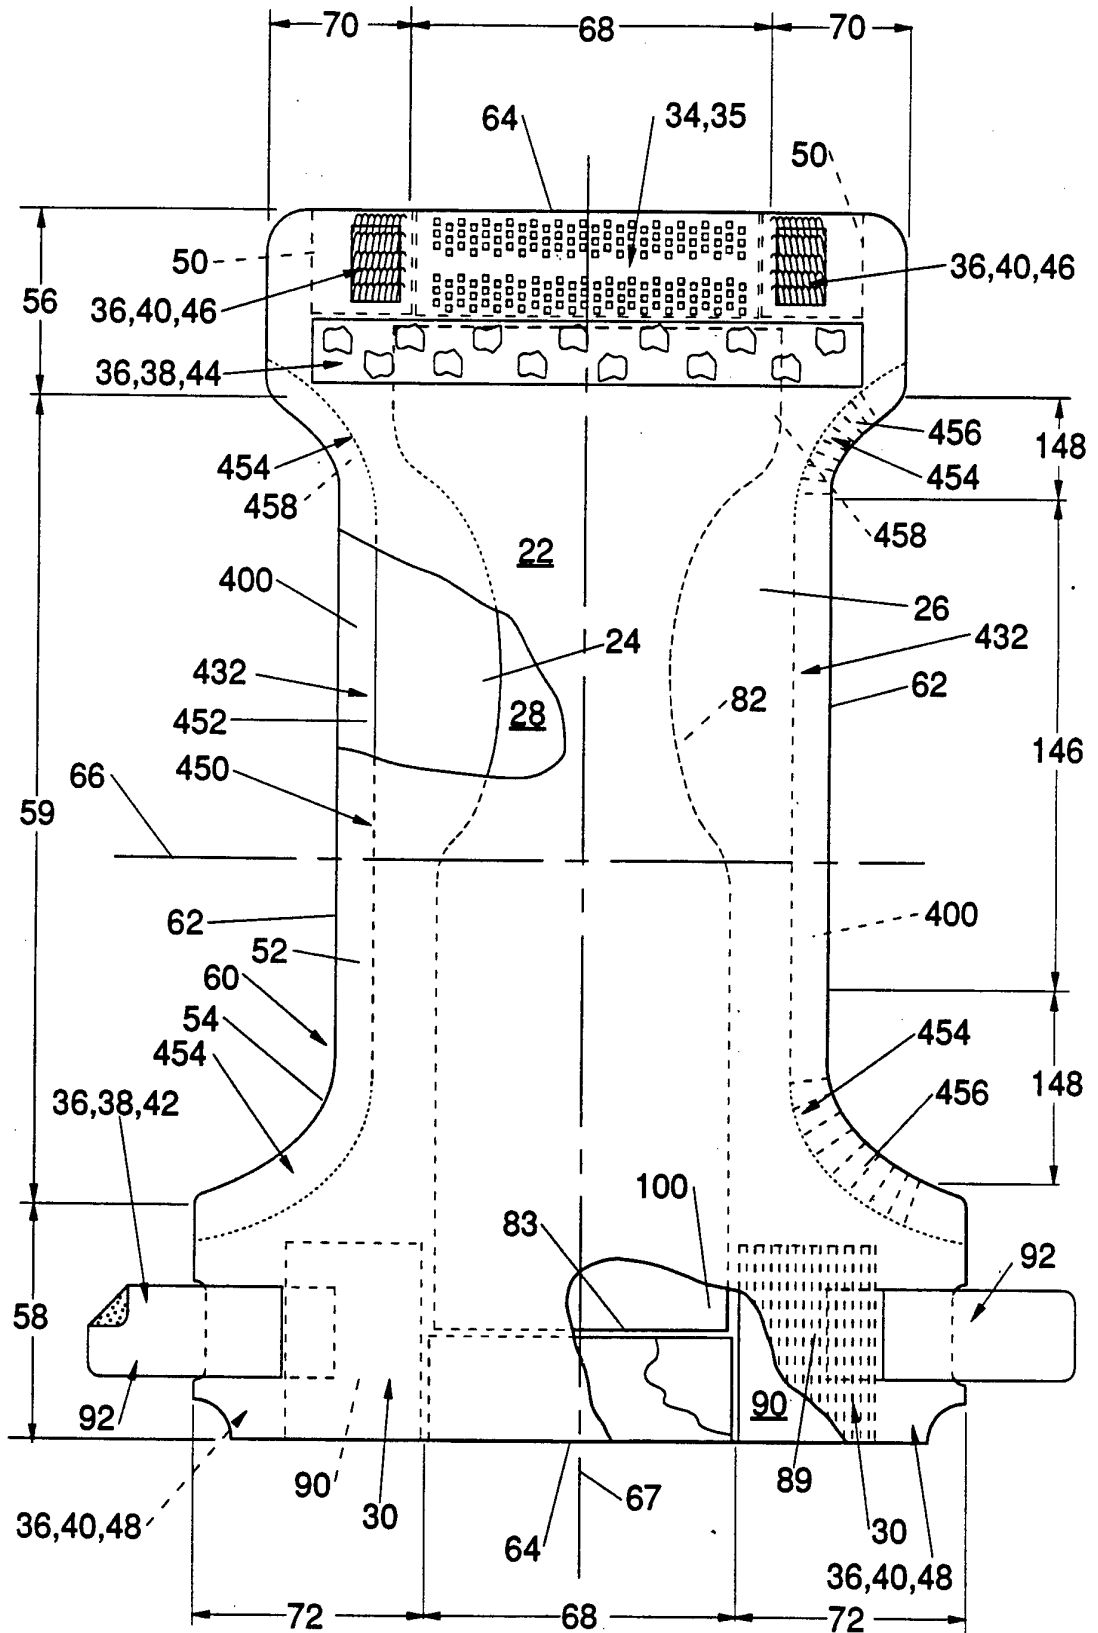


Fig. 2

3/3

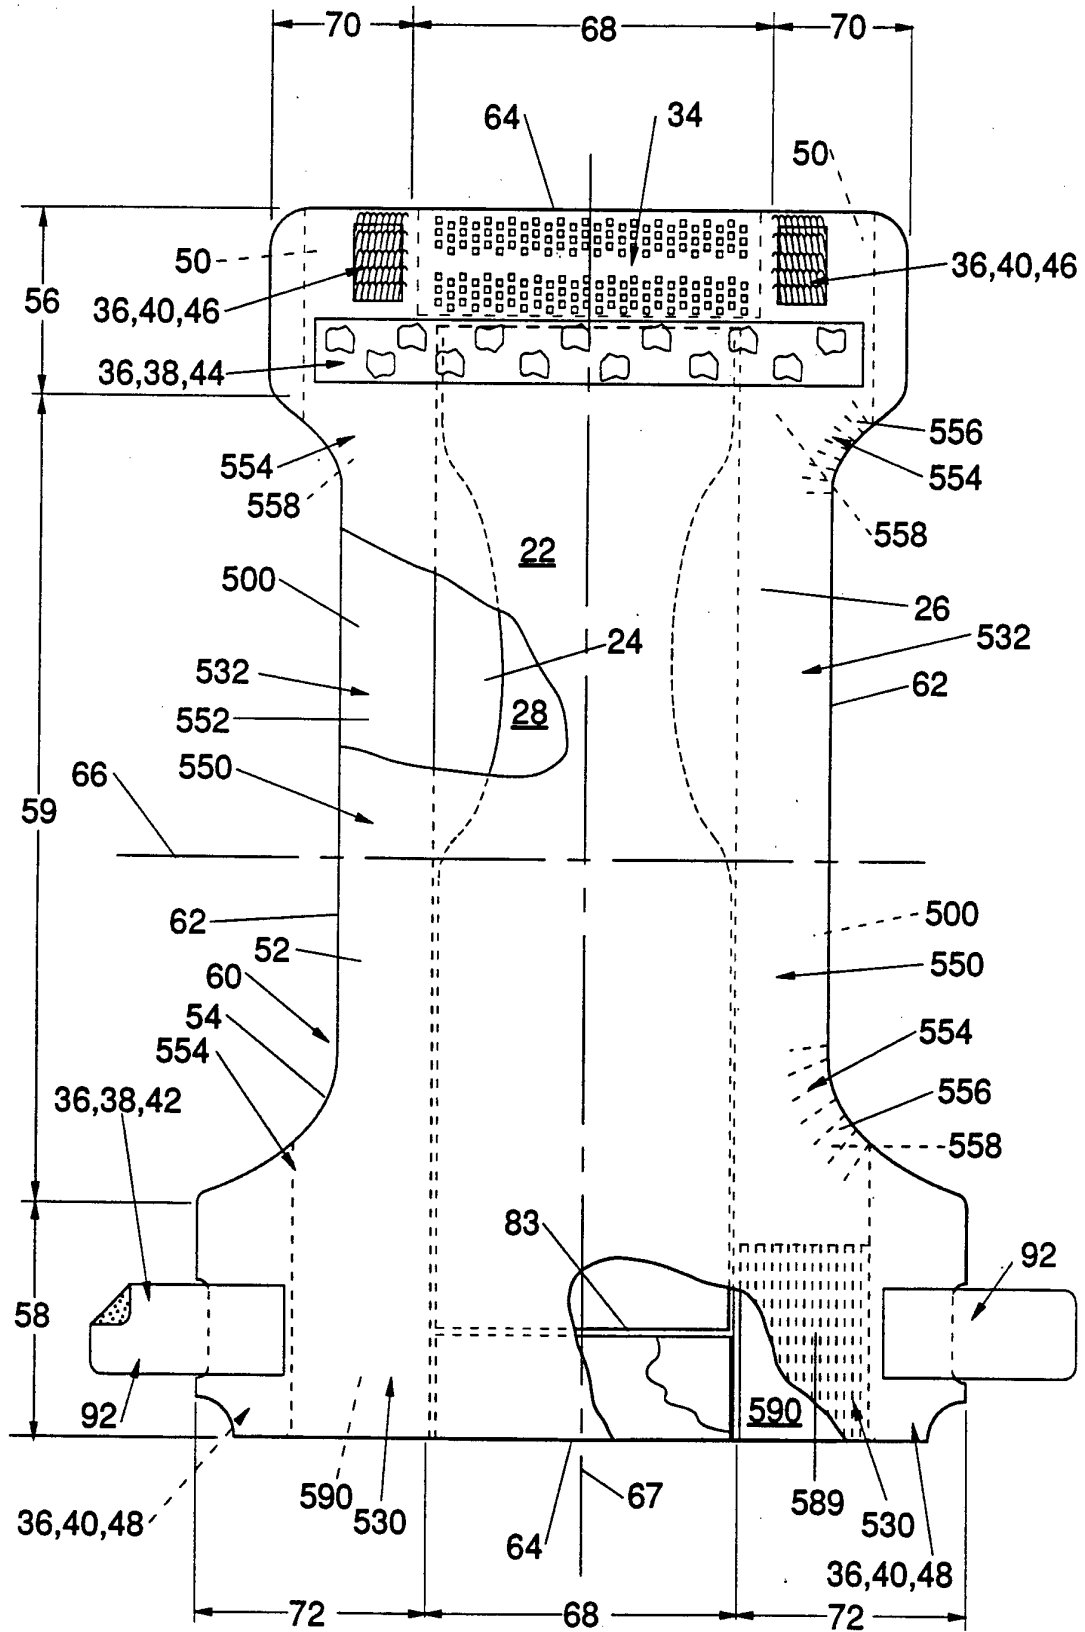


Fig. 3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 93/08816

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁴		
According to International Patent Classification (IPC) or to both National Classification and IPC		
IPC ⁵ : A 61 F 13/15		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
IPC ⁵	A 61 F, A 61 L, A 41 B	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category ⁹	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
A	US, A, 4 704 115 (BUELL) 03 November 1987 (03.11.87), claims; fig. 1-3 (cited in the application). --	1, 6
A	US, A, 4 834 738 (KIELPIKOWSKI) 30 May 1989 (30.05.89), claims; fig.. --	1, 6
A	US, A, 4 381 781 (SCIARAFFA) 03 May 1983 (03.05.83), claims; fig. (cited in the application). --	1, 6
P, X	WO, A1, 92/22 274 (THE PROCTER & CAMBLE COMPANY) 23 December 1992 (23.12.92), claims; fig. 1,4	1-10
<p>* Special categories of cited documents: ¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) for which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"Z" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
27 December 1993	07.01.94	
International Searching Authority	Signature of Authorized Officer	
EUROPEAN PATENT OFFICE	SCHÄFER e.h.	

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, " with indication, where appropriate, of the relevant passages	Relevant to Claim No.
	(cited in the application). -----	

ANHANG

ANNEX

ANNEXE

zum internationalen Recherchen-
bericht über die internationale
Patentanmeldung Nr.

to the International Search
Report to the International Patent
Application No.

au rapport de recherche inter-
national relatif à la demande de brevet
international n°

PCT/US 93/08816 SAE 79723

In diesem Anhang sind die Mitglieder
der Patentfamilien der im obenge-
nannten internationalen Recherchenbericht
angeführten Patentdokumente angegeben.
Diese Angaben dienen nur zur Unter-
richtung und erfolgen ohne Gewähr.

This Annex lists the patent family
members relating to the patent documents
cited in the above-mentioned inter-
national search report. The Office is
in no way liable for these particulars
which are given merely for the purpose
of information.

La présente annexe indique les
membres de la famille de brevets
relatifs aux documents de brevets cités
dans le rapport de recherche inter-
national visée ci-dessus. Les renseigne-
ments fournis sont donnés à titre indica-
tif et n'engagent pas la responsabilité
de l'Office.

In Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
US A 4704115	03-11-87	AT E 68337 CA A1 1259151 DE C0 3681933 EP A2 190881 EP A3 190881 EP B1 190881 ES U 292062 ES Y 292062 ES Y1 292062 JP A2 61247450	15-11-91 12-09-89 21-11-91 13-08-86 21-09-88 16-10-91 16-03-87 01-06-89 01-07-89 04-11-86
US A 4834738	30-05-89	AU A1 83121/87 BR A 8707153 CA A1 1286052 EP A2 274752 EP A3 274752 JP A2 63243308 US A 4770656	07-07-88 02-08-88 16-07-91 20-07-88 30-05-90 11-10-88 13-09-88
US A 4381781	03-05-83	keine - none - rien	
WO A1 9222274	23-12-92	AU A1 21912/92 CN A 1069648 PT U 8526 US A 5242436	12-01-93 10-03-93 26-02-93 07-09-93