



(51) International Patent Classification:

H02K 11/38 (2016.01) *H02K 11/21* (2016.01)
H02K 5/14 (2006.01) *H02K 5/22* (2006.01)

(21) International Application Number:

PCT/EP2016/080881

(22) International Filing Date:

14 December 2016 (14.12.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10 2015 122 095.4

17 December 2015 (17.12.2015)

DE

(71) Applicant: VALEO SYSTÈMES D'ESSUYAGE
 [FR/FR]; ZA l'Agiot, 8, rue Louis Lormand, CS 90581 La
 Verrière, 78322 Le Mesnil-Saint-Denis (FR).

(72) Inventors: STEFANI, Siegfried; Valeo Wischersysteme
 Gmbh, Valeostrasse 1, 74321 Bietigheim-Bissingen (DE).
 HEUBERGER, Christof; Valeo Wischersysteme Gmbh,
 Valeostrasse 1, 74321 Bietigheim-Bissingen (DE).
 KAPITZA, Harald; Valeo Wischersysteme Gmbh, Va-
 leostrasse 1, 74321 Bietigheim-Bissingen (DE). RIG-

NAULT, David; Valeo Wischersysteme Gmbh, Va-
 leostrasse 1, 74321 Bietigheim-Bissingen (DE).

(74) Agent: CALLU-DANSEUX, Violaine; ZA l'Agiot, 8, rue
 Louis Lormand, CS 90581 La Verrière, 78322 Le Mes-
 nil-Saint-Denis (FR).

(81) Designated States (unless otherwise indicated, for every
 kind of national protection available): AE, AG, AL, AM,
 AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
 BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,
 DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
 HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN,
 KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
 MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG,
 NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS,
 RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY,
 TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
 ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
 kind of regional protection available): ARIPO (BW, GH,
 GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
 TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
 TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
 DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
 LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: CONNECTION UNIT FOR A WIPER MOTOR AND WIPER MOTOR

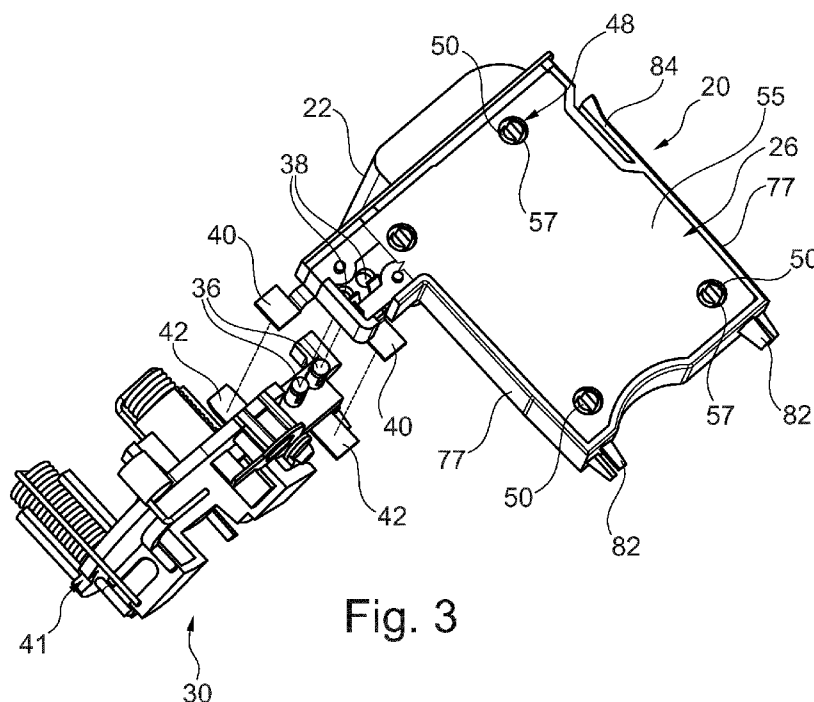


Fig. 3

(57) Abstract: The invention relates to a connection unit (20) for a wiper motor (100) for windshield wiper systems with a plug connector element (22) for receiving electric connection lines (24) which are configured for the at least indirect contacting of a commutator (6) of an electric motor (1), with a carrier element (26) on which connection elements (40) for contacting the commutator (6) and/or at least one component of an electric circuit are arranged, and with a carbon brush holder plate (30), wherein the carrier element (26) is formed as a pre-mountable construction unit (32) with the carbon brush holder plate (30) formed as separate component.

WO 2017/102781 A1



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, **Published:**
GW, KM, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*

Connection unit for a wiper motor and wiper motor

Prior art

- 5 The invention relates to a connection unit for a wiper motor for windshield wiper systems according to the preamble of claim 1. Furthermore, the invention relates to a wiper motor using a connection unit according to the invention.

10 A connection unit for a wiper motor for windshield wiper systems having the features of the preamble of claim 1 is known from US 7,109,617 B2. The known connection unit comprises a plug connector element for the reception of electric connection lines, which are formed for the at least indirect contacting of a commutator of an electric motor. At the same time, the plug connector element is designed as a carrier element, on which contacts for contacting a carbon brush holder plate for the
15 commutator of the electric motor are arranged. Here, the essential factor is that the plug connector element or the carrier element of the connection unit forms a pre-mountable construction unit together with the carbon brush holder plate formed as a separate component. To that end, the carbon brush holder plate and the plug connector element are connected with one another via plug connector, possibly using
20 additional fastening elements or a construction unit, in which an opening is formed, in order to receive sections of the carrier element or of the pug connector element and the carbon brush holder plate. Such a design of the connection unit for connecting the carrier element to the carbon brush holder plate is relatively elaborate in terms of construction, requires a large construction space and relatively high mounting efforts.

25

Disclosure of the invention

Based upon the described prior art, the object underlying the invention is to develop a connection unit for a wiper motor for windshield wiper systems according to the
30 preamble of claim 1 in such a way that a simplified mounting process of the pre-

mountable construction unit consisting of the carrier element and the carbon brush holder plate is made possible.

5 According to the invention, in a connection unit for a wiper motor for windshield wiper systems having the features of claim 1, this object is essentially achieved in that a latch connection is formed between the carrier element and the carbon brush holder plate. In a direct connection (i.e. without additional fastening elements or components) between the carrier element and the carbon brush holder plate, such a latch connection thus allows connecting the above-mentioned components to one
10 another without tools. Such a latch connection particularly provides the advantage that erroneous installation can be prevented and a particularly safe or reliable connection is made possible.

Advantageous developments of the connection unit according to the invention for a
15 wiper motor for windshield wiper systems are indicated in the dependent claims. All combinations of features disclosed in the claims, the description and the figures are in the scope of the invention.

A particularly preferred structural configuration of the connection unit provides that
20 the plug connector element is connected directly to the carrier element together with the electric connection lines.

In order to connect the carrier element to the carbon brush holder plate not only in a mechanical manner via the latch connection, but also establish an electric
25 connection, it is further provided that electric connection elements each interacting with one another are formed or provided on the carrier element and the carbon brush holder plate.

Here, it is particularly advantageous if the electric connection elements are arranged
30 outside the area of the latch connection, since a better accessibility to the connection

elements is made possible thereby, particularly if these are connected to one another by means of a device.

The electric connection elements particularly comprise a plate-shaped contact section, wherein the contact sections of the electric connection elements can be connected to one another in parallel alignment. The connection between the contact sections can be effected by means of a solder, a crimp, a plug or a weld connection, or by a spring-loaded abutment contact.

For the formation of the latch connection between the carbon brush holder plate and the carrier element, it is provided that at least one latch protrusion or a latch opening is formed on the carbon brush holder plate, which interacts with at least one latch opening or one latch protrusion on the carrier element.

Furthermore, in a structurally preferred embodiment, it is provided that the carbon brush holder plate comprises a plate-shaped carrier area with a through-opening for a drive shaft of the electric motor, and that the plane of the carrier element and of the carrier area are arranged perpendicular to one another. This predominantly achieves an advantageous mounting process of the pre-mountable unit in conjunction with a drawer-shaped insertion opening for the connection unit, since the construction unit can be connected to the gearbox by a linear movement then, wherein the carbon brush holder plate is positioned in relation to the anchor shaft at the same time.

The invention also includes a wiper motor for windshield wiper systems, wherein the wiper motor comprises an electric motor having a drive shaft, wherein the drive shaft interacts with a gear wheel inside a gearbox, and wherein the wiper motor comprises an above-described connection unit.

Furthermore, it is particularly preferred if a latch connection is formed between the gearbox and the connection unit in the mounting position. This enables mounting the connection unit in the gearbox without tools.

Further advantages, features and details of the invention result from the following description of preferred exemplary embodiments as well as by means of the drawing.

The drawing shows in:

5

Fig. 1 the essential components of a wiper motor for a windshield wiper system in an exploded view,

10

Fig. 2 the wiper motor according to Fig. 1 in a partially mounted state in a plan view,

Figs. 3 and 4 the parts of a carbon brush holder plate and a connection unit prior to and after the connection in a perspective view,

15

Fig. 5 parts of the wiper motor during the insertion of the connection unit into an insertion opening of a gearbox in a perspective view,

20

Fig. 6 an assembly consisting of a carbon brush holder plate with contacts for contacting a mating element on the gear wheel in a perspective view,

Fig. 7 the components of a modified connection unit in a perspective view, and

25

Fig. 8 a perspective illustration of a once more modified connection unit, which can be connected to a gearbox region in the type of a housing cover in a perspective illustration.

30

Like elements or elements having the same function are indicated with like reference numerals throughout the drawings.

Figs. 1 and 2 show the essential components of a wiper motor 100 serving as a part of a windshield wiper system in particular, without limitation, in the rear area of a motor vehicle for cleaning a window with a wiper arm having a wiper blade (not illustrated).

5

The wiper motor 100 comprises a brush-type (electric) motor 1, which has a pot-shaped motor housing 2 made of sheet metal produced as a separate component in a deep-drawing process. An anchor 3 is rotatably supported within the motor housing 2, the anchor shaft 4 acting as a drive shaft thereof protruding with a toothing section 5 into a gearbox 10 preferably consisting of a metal (aluminum) and produced in a pressure die casting method, wherein in a reception space of the gearbox 10, the toothing section 5 intermeshes with a counter toothing 11 of a gear wheel 15 rotatably supported in an axis 13 in the gearbox 10. The gear wheel 15 is at least indirectly coupled to a drive shaft 19 via a lever mechanism 17, and a wiper arm 15 having the above-mentioned wiper blade can be fixed to the drive shaft (not shown).

Furthermore, as can particularly be seen in conjunction with Figs. 1 to 4, the wiper motor 100 comprises a connection unit 20 which has a plug connector element 22 for the reception of electric connection lines 24 (Fig. 6). In particular, the wiper motor 100 can be actuated via the cable tree of the motor vehicle by means of the plug connector element 22 or the electric connection lines 24. Furthermore, the connection unit 20 comprises a plate-shaped carrier element 26, which carries at least one electric or electronic component (not shown), or which is connectable to an electronic circuit, which is at least indirectly connected to the carrier element 26.

25

In the illustrated exemplary embodiment, the plug connector element 22, which consists of a plastic material just like the carrier element 26, is formed as an integral (monolithic) component in such a way that the electric connection lines 24 are directly connected to the plug connector element 22 and the carrier element 26 or are at least sectionally enclosed or cast-around by the material of the plug connector element 22 and the carrier element 26.

30

It may also be provided that the plug connector element 22 and the carrier element 26 are formed as separate components, which are connected to one another for example via a latch connection, a screw connection or another suitable connection.

5

The connection unit 20 is connected to a carbon brush holder plate 30 in such a way that the carbon brush holder plate 30 and the connection plate 20 form a pre-mountable construction unit 32. To that end, a latch connection 34 is formed between the carrier element 26 and the carbon brush holder plate 30. The latch connection 34
10 comprises latch trunnions 36 formed on the carbon brush holder plate 30, which interact with corresponding latch openings 38 in the region of the carrier element 26 in order to form the latch connection 34 when fitting the latch trunnions 36 into the latch openings 38. Furthermore, electric connection elements 40 are provided in the area of the carrier element 26 outside the area of the latch connection 34, which are
15 approximately shaped in the type of plates and which are at least indirectly electrically connected to the electric connection lines 24. The electric connection elements 40 interact with the electric connection elements 42 arranged in the carbon brush holder plate 30, which get into an electrically conductive contact to the electric connection elements 40 when forming the latch connection 34, for example. Here, it
20 may be provided that the electric connection elements 40, 42 are elastically pre-bent in order to rest against one another subjected to a spring force when forming the latch connection 34.

However, it may also be possible or provided to form the connection between the
25 connection elements 40, 42 by means of a solder, crimp or weld connection, or by any other connection technique.

The electric connection elements 42 in the carbon brush holder plate 30 serve for the electric contacting of the commutator 6 of the electric motor 1 discernable in Fig. 1.

30

The carbon brush holder plate 30 comprises a plate-shaped carrier region 41 with a through-opening 43 for guiding through the anchor shaft 4, wherein, if the construction unit 32 is mounted, the planes of the carrier region 41 and of the plate-shaped carrier element 26 are arranged perpendicular to one another.

5

Furthermore, the carrier element 26 comprises lead frame elements 44 integrally formed with the connection lines 24 on a side 28, the end sections of which are partially formed in the type of contact sections 46 (Fig. 4). Via the contact section 46, a circuit carrier 52 merely shown in Fig. 7, which carries an electronic circuit (not shown) can be connected via another latch connection 48 with latch trunnions 50 arranged at the carrier element 26, the circuit carrier 52 comprising corresponding latch openings 53 to that end. Furthermore, it can be provided that in accordance with Figs. 3 and 7, the circuit carrier 52 is covered or protected by means of a cover plate 55, wherein the cover plate 55 also participates in the further latch connection 48 via latch openings 57.

15

In order to close the reception space of the gearbox 10 after installation of the required components, the gearbox 10 further comprises a gear cover 59, which can be connected to the gearbox 10 by means of fastenings screws 62 (Fig. 1).

20

As can be discerned in particular in conjunction with Figs. 5 and 6, two additional spring-loaded contacts 63 are provided on the side 62 of the carrier element 26 opposite the contact sections 46 in the area of the carrier element 26 in an exemplary manner, the spring-loaded contacts being electrically contacted to the electronic circuit in the area of the circuit carrier 52, for example. The contacts 63 connected to the lead frame elements 44 but against a contact element 67 arranged fixed in location to the gear wheel 15 in Fig. 6 in a spring-loaded manner with its point-shaped abutment regions 65 in the mounted state of the connection unit 20 in the gearbox 10, the contact element acting as a mating contact of the contacts 63. The position of the gear wheel 15 and thus also the position of the wiper arm and the wiper blade in the return position can be detected via the contacts 63.

25

30

The connection unit 20 in the mounted state is arranged inside the gearbox 10 in such a way that the contacts 63, in particular the abutment regions 65, are arranged at least at a partial overlap with the gear wheel 15. To that end, the gearbox 10 comprises a reception 69 with an insertion opening 71, which interacts with the connection unit 20 in the type of a drawer. As can particularly be discerned in Figs. 2 to 5, the reception 69 comprises groove-shaped guidance elements 75 formed parallel to an insertion direction 73 interacting with mating guidance elements 77 formed at the lateral peripheral regions of the carrier element 26, in order to guide the connection unit 20 with a relatively small clearance during the insertion into the insertion opening 71. Furthermore, a latch connection 80 is formed between the connection unit 20 and the gearbox 10 in the mounted position of the connection unit 20 in the reception 69 of the gearbox 10 (Fig. 2). By way of example, the latch connection 80 includes, as can particularly be discerned in Figs. 2 to 4, latch trunnions 82 protruding in the direction of the insertion opening 71 as well as at least one latch hook 84 arranged laterally at the carrier 26, wherein the hook interacts with a latch opening 86 (discernable in Figs. 2 and 5), and wherein the latch trunnions 82 interact with circular latch openings 88 (also discernable in Fig. 5).

When mounting the wiper motor 100, the construction unit 32 pre-mounted from the connection unit 20 and the carbon brush holder plate 30 is inserted in the reception 69 of the gearbox 10 together with the connection unit 20 all the way until the latch connection 80 is achieved. Subsequently, for example the electric motor 10 with its motor housing 2 can be connected to the gearbox 10 by means of the fastening screws 7 discernable in Fig. 1. Here, the essential factor is that according to the illustration of Fig. 2, if the electric motor 1 or motor housing 2 is mounted, the motor housing 2 is connected to the gearbox 10 in such a way that the motor housing 2 rests against a stop surface 90 of the carrier element 26 discernable in Fig. 5 and functions there as a stop in a direction opposite to the insertion direction 73.

Fig. 8 shows a variant of the connection unit 20, in which the connection unit is not connected to the carbon brush holder plate 30, which is not shown in detail in Fig. 8. The connection unit 20a, in particular the carrier element 26a, is rather formed in such a way that it closes or covers two openings 92, 93 formed in the gearbox 10a at the outer side of the gearbox 10a in the mounted state. Here, one opening is formed in the region of the gear wheel 15, so that the contacts 63 are capable of interacting with the contact element 67. The other opening 93 allows contacting the connection elements 40 formed at the carrier element 26a with connection elements 42 arranged in the area of opening 93. To that end, the connection unit 20a is connected to the gearbox 10a in the direction of the arrow 94, wherein latch protrusions 96 as well as latch openings 97 are formed both at the connection unit 20a and at the gearbox 10a, in order to form a latch connection 80a.

The above-described wiper motor 100 or the connection unit 20, 20a can be modified or changed in various ways and manners without departing from the principles of the invention.

List of reference numerals

	1	motor
	2	motor housing
5	3	anchor
	4	anchor shaft
	5	toothed section
	6	commutator
	7	fastening screw
10		
	10, 10a	gearbox
	11	counter toothed
	13	axis
	15	gear wheel
15	17	lever mechanism
	19	drive shaft
	20, 20a	connection unit
	22	plug connector element
	24	connection line
20	26, 26a	carrier element
	28	side
	30	carbon brush holder plate
	32	construction unit
	34	latch connection
25	36	latch trunnions
	38	latch opening
	40	connection element
	41	carrier region
	42	connection element
30	43	through opening
	44	lead frame element

	46	contact section
	48	latch connection
	50	latch trunnion
	52	circuit carrier
5	53	latch opening
	55	cover plate
	57	latch opening
	59	gear cover
	61	fastening screw
10	62	side
	63	contact
	65	abutment region
	67	contact element
	69	reception
15	71	insertion opening
	73	insertion direction
	75	guidance
	77	guidance element
	80, 80a	latch connection
20	82	latch trunnion
	84	latch hook
	86	latch opening
	88	latch opening
	90	stop surface
25	92	opening
	93	opening
	94	arrow
	96	latch protrusion
	97	latch opening
30		
	100	wiper motor

Claims

1. Connection unit (20) for a wiper motor (100) for windshield wiper systems with a plug connector element (22) for receiving electric connection lines (24) which
5 are configured for the at least indirect contacting of a commutator (6) of an electric motor (1), with a carrier element (26) on which connection elements (40) for contacting the commutator (6) and/or at least one component of an electric circuit are arranged, and with a carbon brush holder plate (30), wherein the carrier element (26) is formed as a pre-mountable construction unit (32) with the
10 carbon brush holder plate (30) formed as separate component,
- characterized in that
- a latching connection (36) is formed between the carrier element (26) and the
15 carbon brush holder plate (30)
2. Connection unit according to claim 1,
characterized in that
the plug connector element (22) is directly connected to the carrier element (26)
20 together with the electric connection lines (24).
3. Connection unit according to claim 1 or 2,
characterized in that
connection elements (42) interacting with the connection elements (40) are
25 arranged on the carbon brush holder plate (30).
4. Connection unit according to claim 3,
characterized in that
the electric connection elements (40, 42) are arranged outside the area of the
30 latching connection (34).

5. Connection unit according to claim 3 or 4,
characterized in that
the electric connection elements (40, 42) are formed in the type of a plate and
are oriented parallel to one another.

5

6. Connection unit according to claim 5,
characterized in that
the connection elements (40, 42) are connected to one another by means of a
clamp, solder, crimp, plug or weld connection.

10

7. Connection unit according to one of claims 1 to 6,
characterized in that
at least one latching protrusion (36) or latch opening is formed on the carbon
brush holder plate (30) for forming the latch connection (36) which interacts with
at least one latch opening (38) or one latching protrusion on the carrier element
(26).

15

8. Connection unit according to one of claims 1 to 7,
characterized in that
the carrier element (26) is at least essentially formed plate-shaped.

20

9. Connection unit according to one of claims 1 to 8,
characterized in that
the carrier element (26) is formed for receiving or fixing a circuit carrier (52) for
an electronic circuit.

25

10. Connection unit according to one of claims 1 to 9,
characterized in that
the carbon brush holder plate (30) comprises a plate-shaped carrier region (41)
with a through opening (43) for a drive shaft (4) of the electric motor (1), and

30

that the planes of the carrier element (26) and the carrier region (41) are arranged perpendicular to one another.

- 5 11. Wiper motor (100) for windshield wiper systems with an electric motor (1) comprising a drive shaft (4), wherein the drive shaft (4) interacts with a gear wheel (15) inside a gearbox (10), and wherein the wiper motor (100) comprises a connection unit (20) according to one of claims 1 to 10.
- 10 12. Wiper motor according to claim 11, characterized in that the gear box (10) comprises a reception (69) with an insertion opening (71), into which at least a part of the connection unit (20) can be inserted from outside the gear box (10) in the type of a drawer.
- 15 13. The wiper motor according to Claim 11, characterized in that the gear box (10) has an opening (92) to which the connection elements (40) of the connection unit (20) extend into, and that the connection unit (20) is connected with the gear box (10) at the outside of the gear box (10) in the
20 region of a face side of the connection unit (20).
14. The wiper motor according to Claim 13, characterized in that the opening (92) is covered by the connection unit (20) when the connection
25 unit (20) is mounted.
15. The wiper motor according to one of Claim 11 to 14, characterized in that a latch connection (80; 80a) is constructed between the gear box (10) and the
30 connection unit (20) in the installation position.

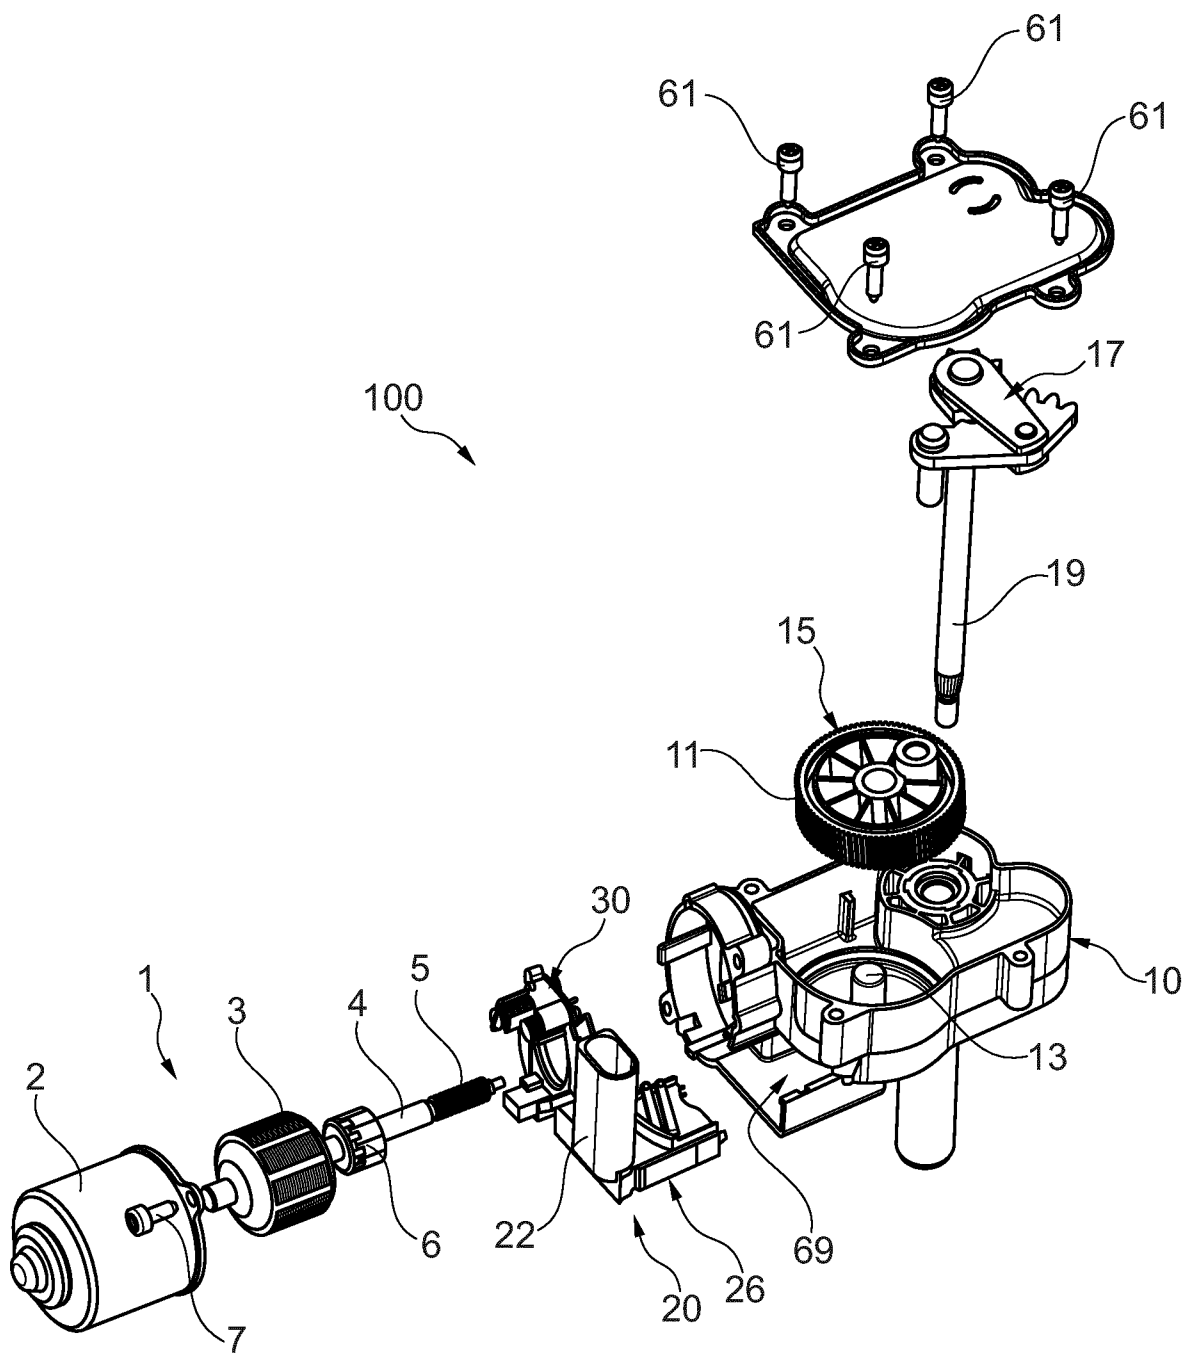


Fig. 1

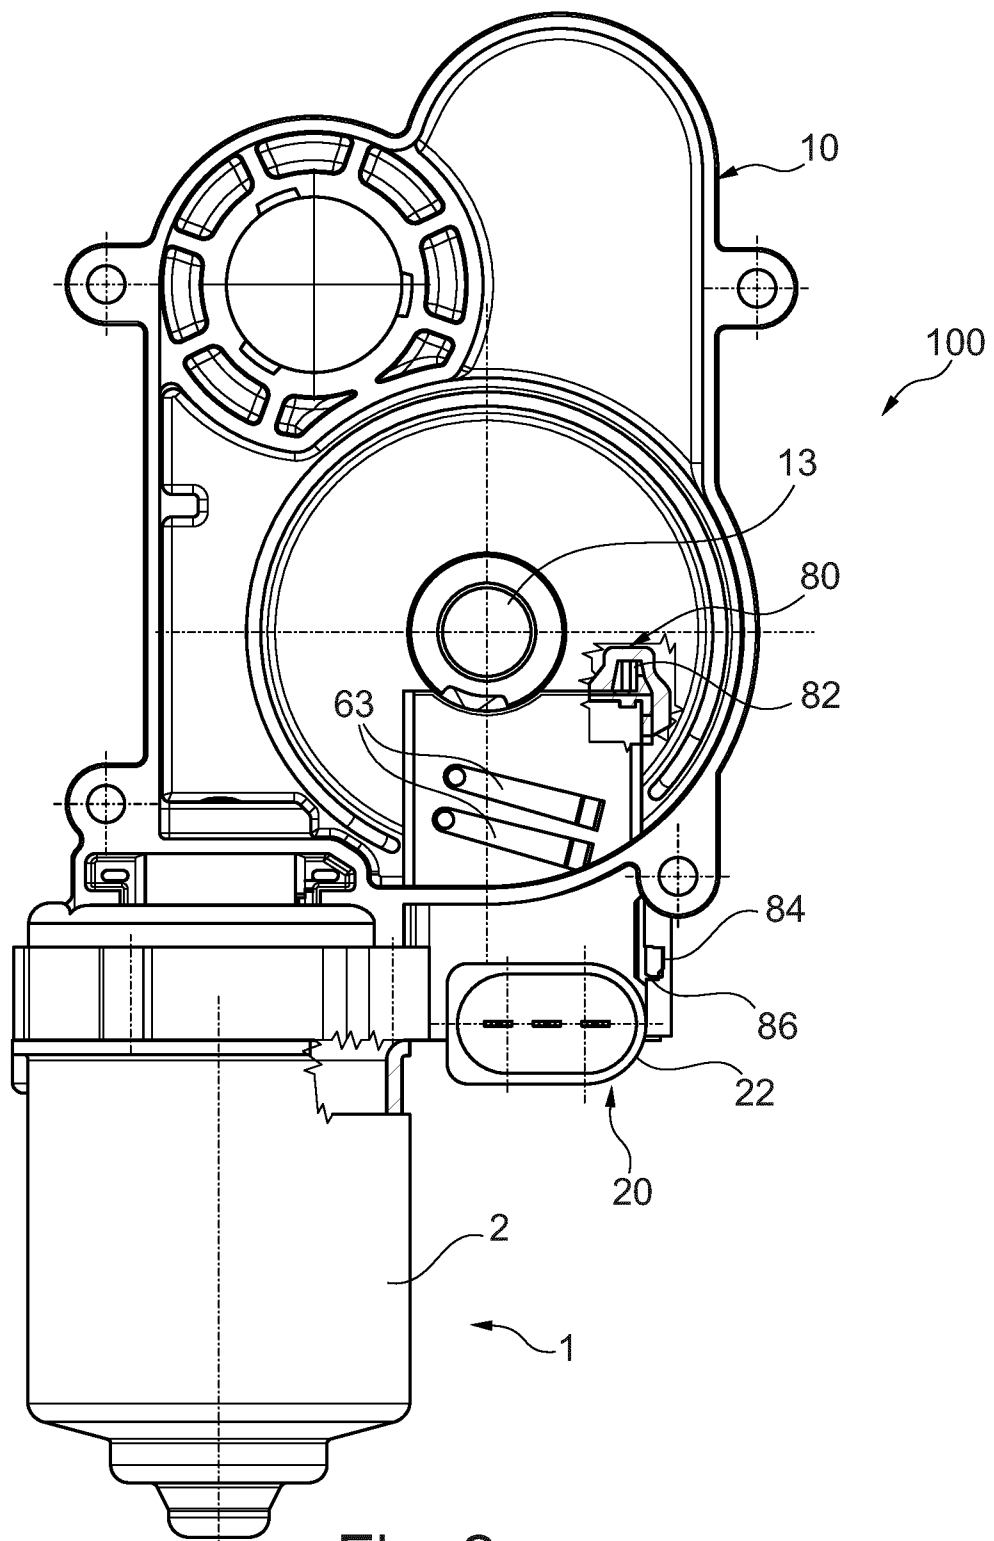


Fig. 2

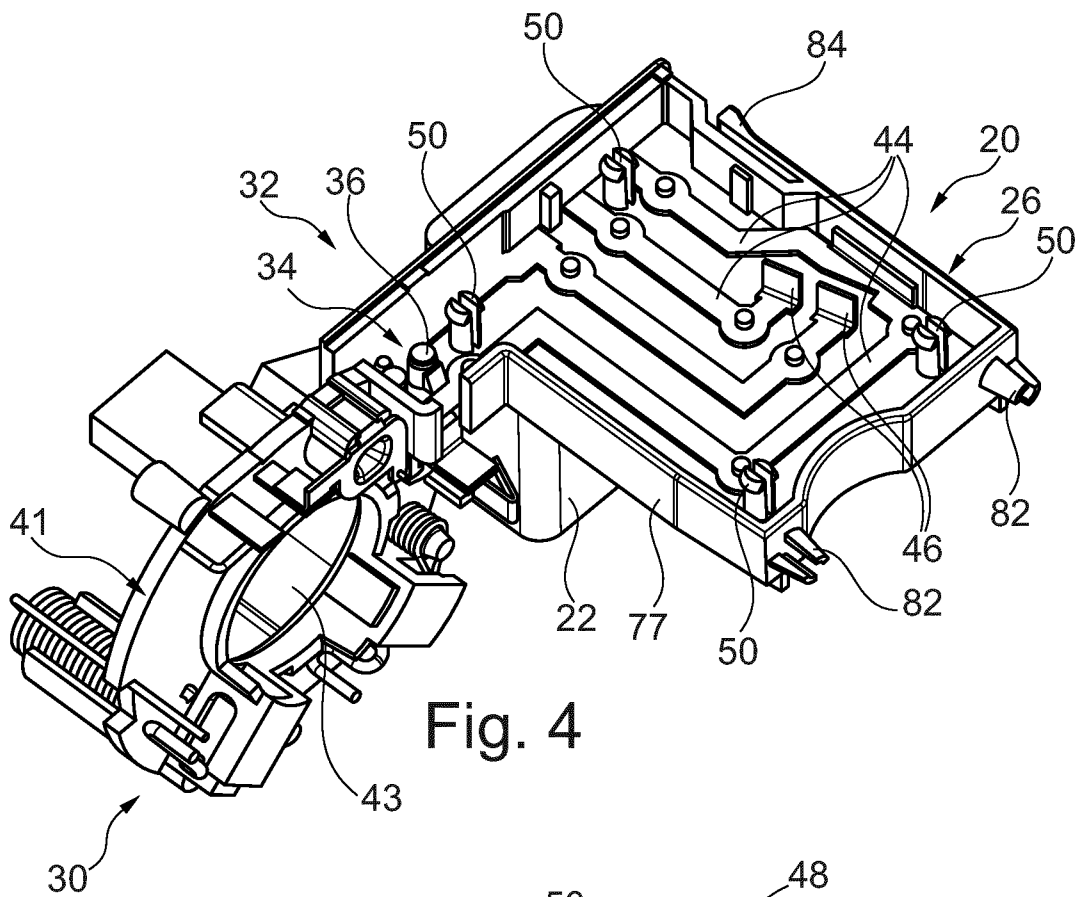


Fig. 4

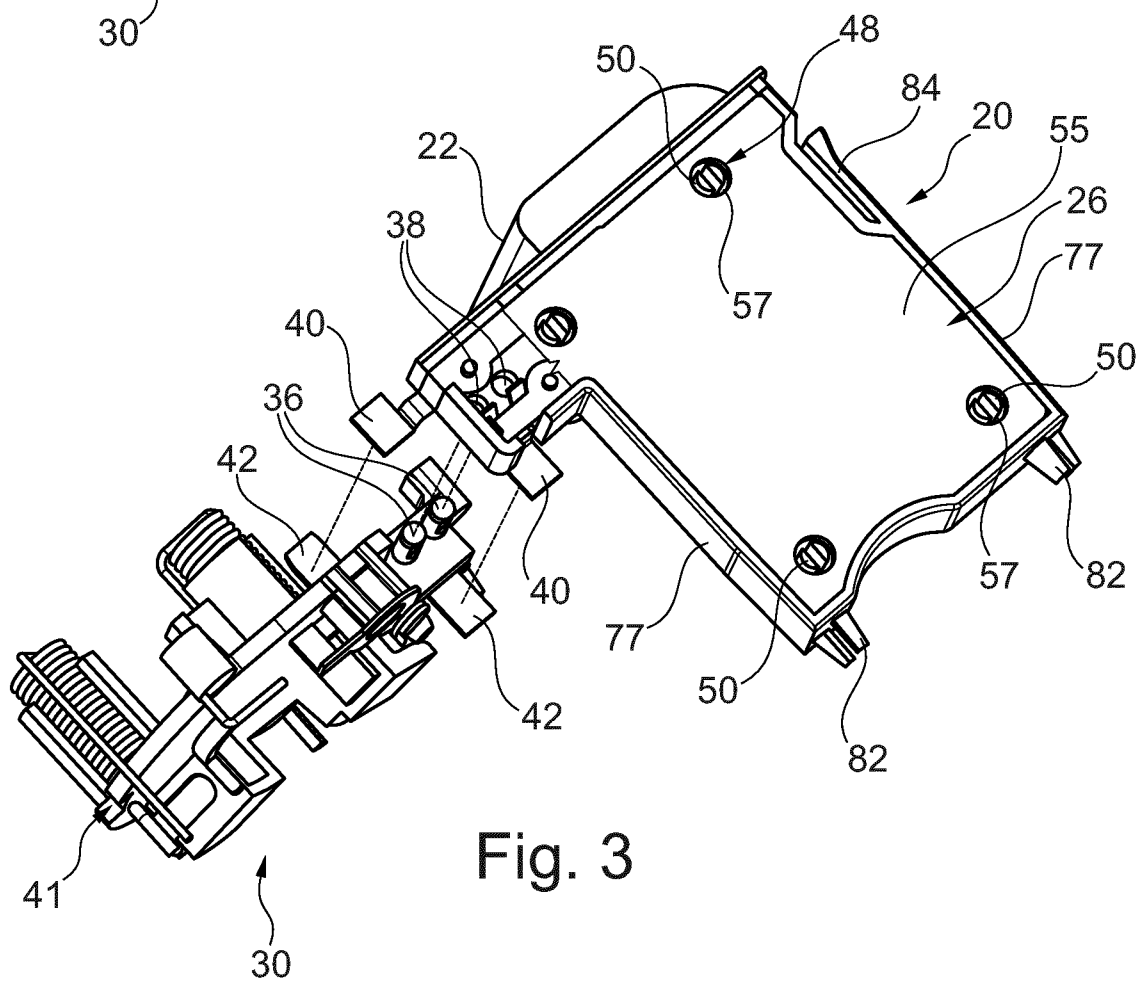


Fig. 3

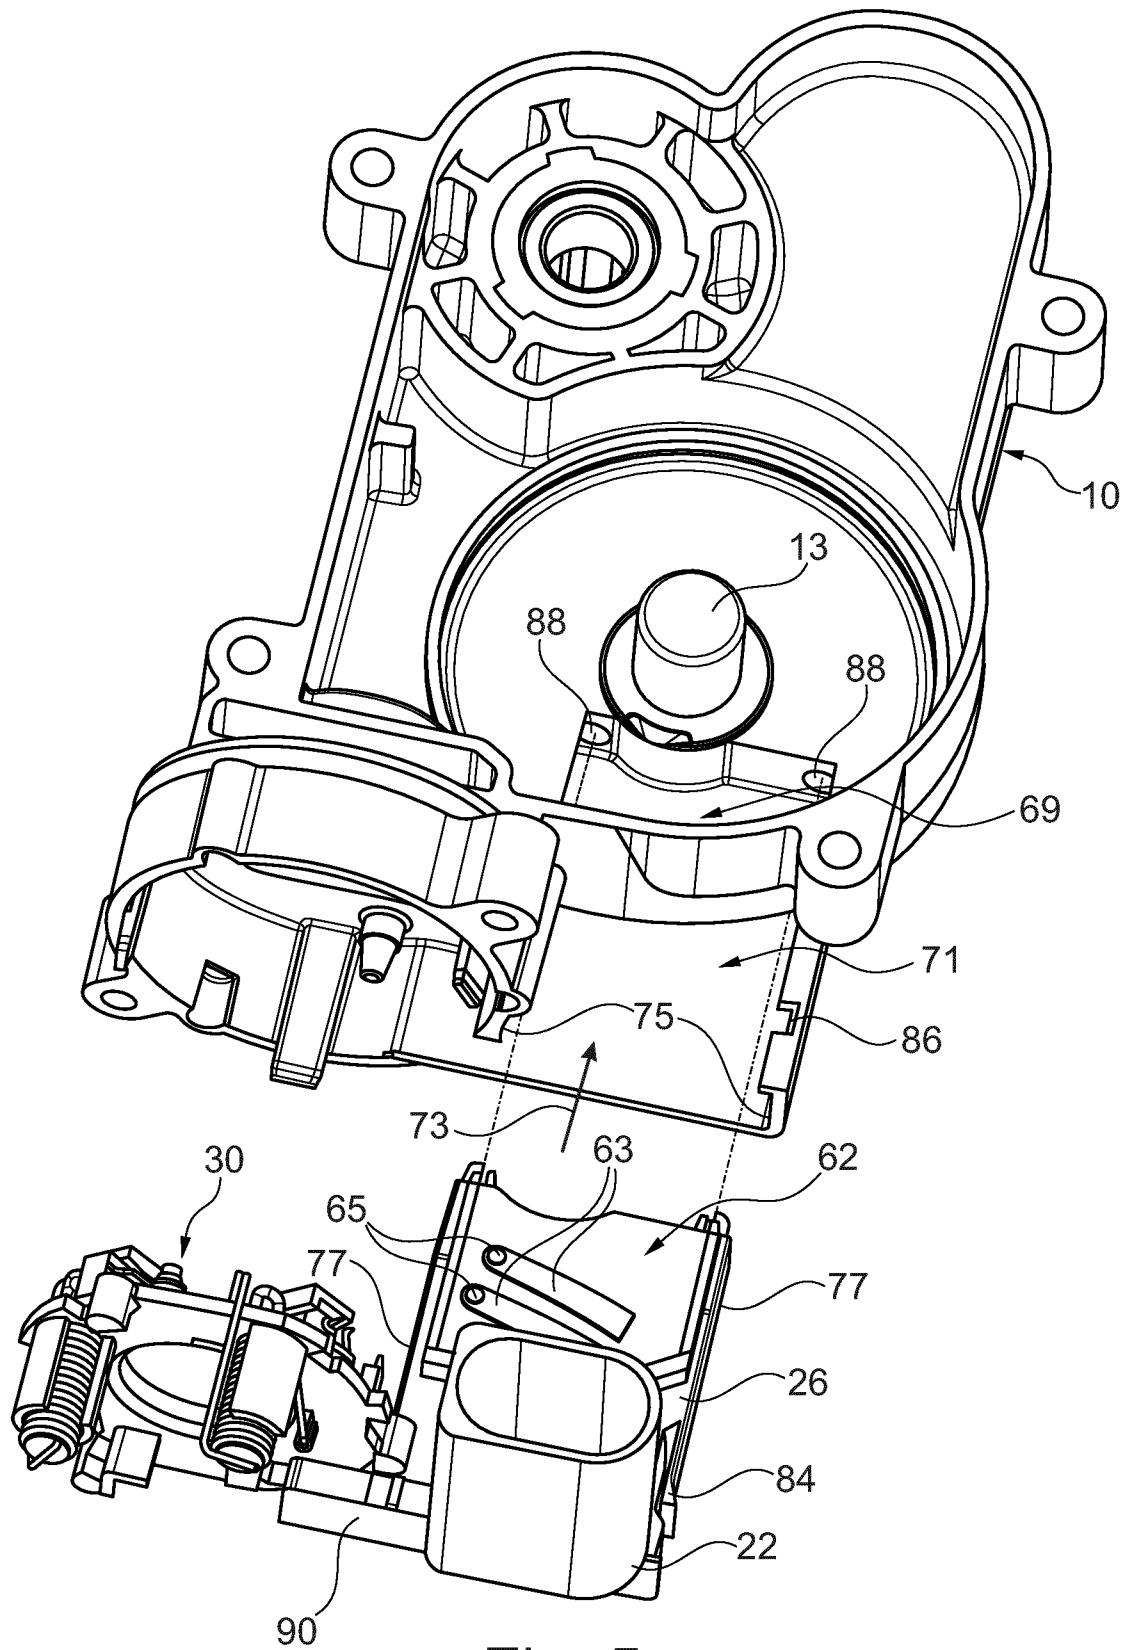


Fig. 5

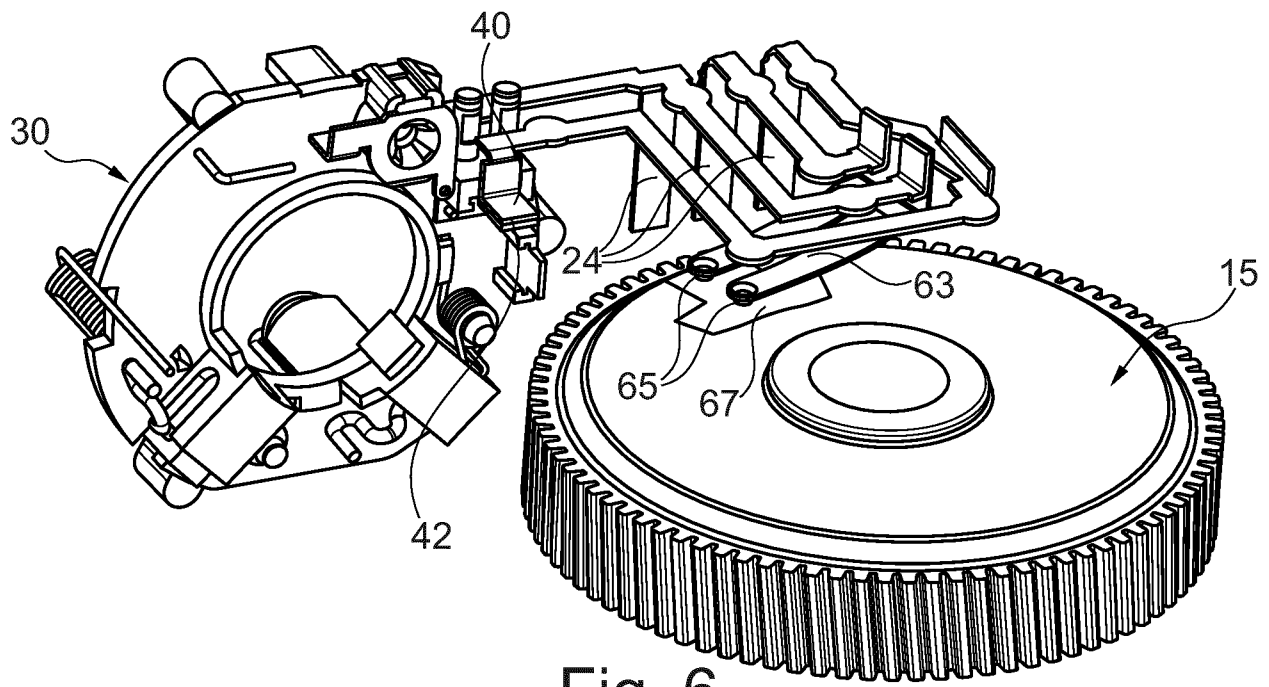


Fig. 6

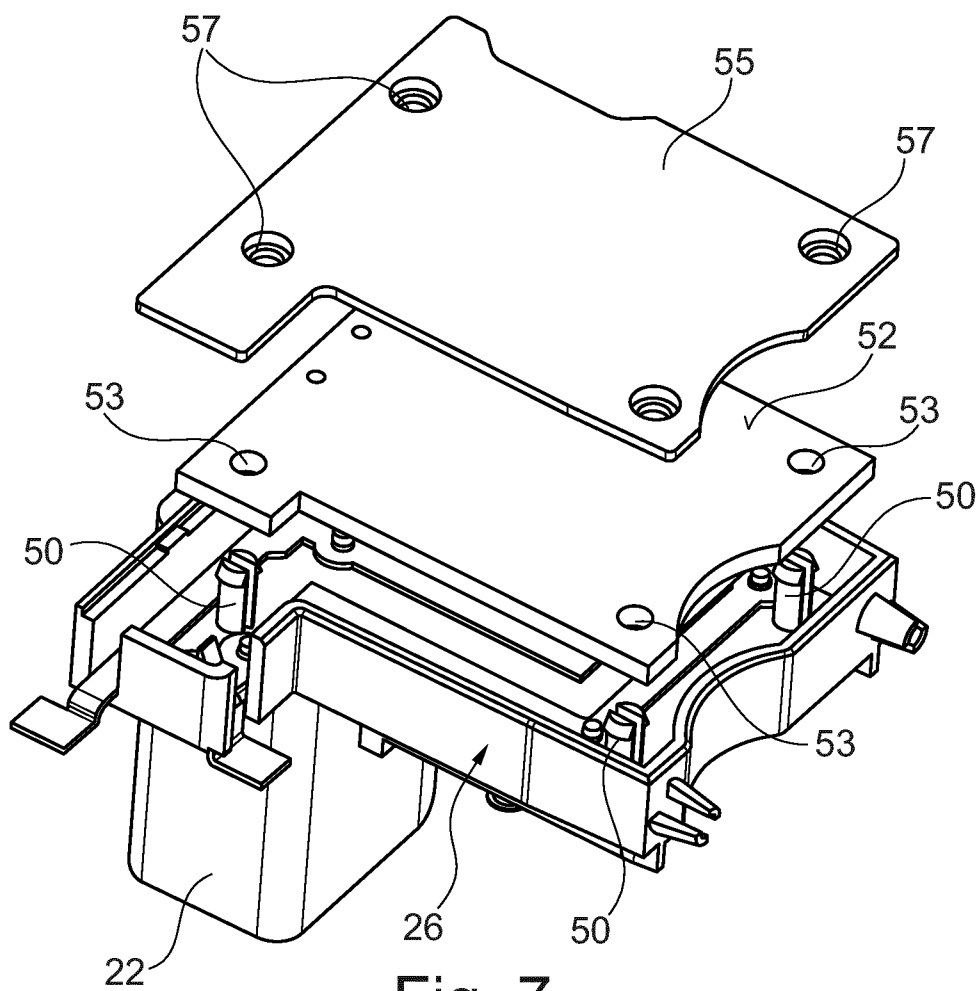


Fig. 7

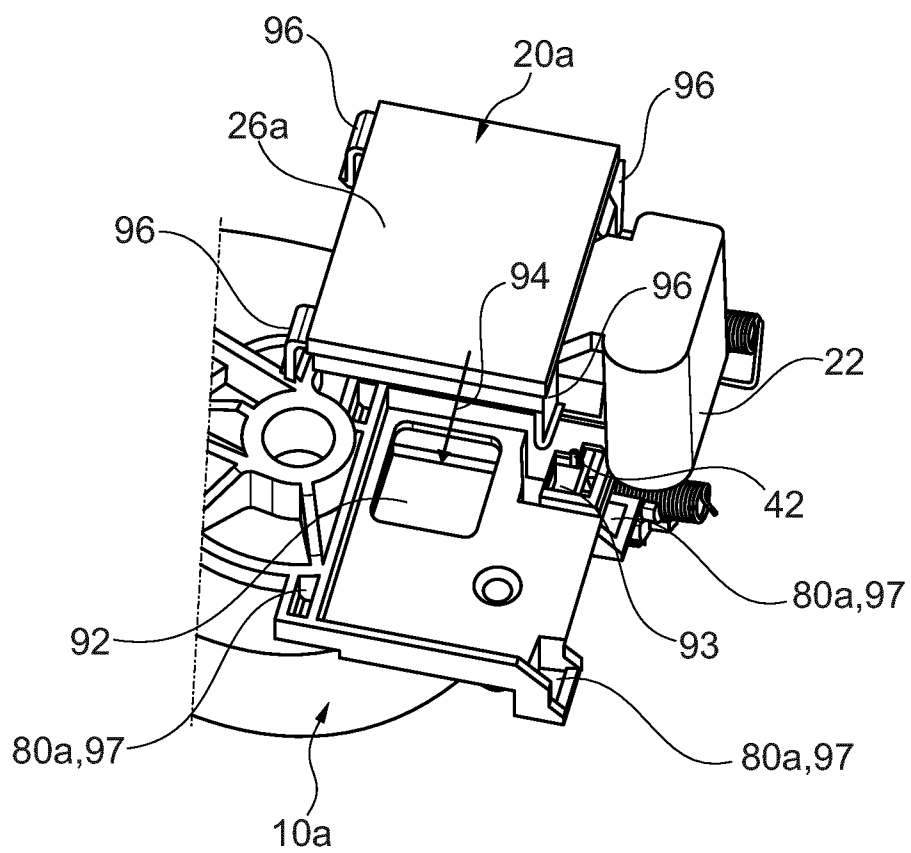


Fig. 8

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2016/080881

A. CLASSIFICATION OF SUBJECT MATTER

INV. H02K11/38 H02K5/14
 ADD. H02K11/21 H02K5/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 H02K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 10 2005 047428 A1 (BOSCH GMBH ROBERT [DE]) 5 April 2007 (2007-04-05) abstract; figures -----	1-15
X	DE 10 2010 056464 A1 (VALEO SYSTEMES ESSUYAGE [FR]) 5 July 2012 (2012-07-05) abstract; figures -----	1
X	FR 2 821 214 A1 (MERITOR LIGHT VEHICLE SYS LTD [FR]) 23 August 2002 (2002-08-23) abstract; figures -----	1
X	JP 2007 006549 A (MITSUBA CORP) 11 January 2007 (2007-01-11) abstract; figures -----	1



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

8 March 2017

Date of mailing of the international search report

15/03/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Ramos, Horacio

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2016/080881

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 102005047428 A1	05-04-2007	DE 102005047428 A1	05-04-2007
		EP 1935077 A1	25-06-2008
		JP 2009510987 A	12-03-2009
		KR 20080051149 A	10-06-2008
		US 2009134743 A1	28-05-2009
		WO 2007039341 A1	12-04-2007

DE 102010056464 A1	05-07-2012	NONE	

FR 2821214 A1	23-08-2002	NONE	

JP 2007006549 A	11-01-2007	NONE	
