




(86) Date de dépôt PCT/PCT Filing Date: 2002/05/22
(87) Date publication PCT/PCT Publication Date: 2002/12/05
(45) Date de délivrance/Issue Date: 2011/06/28
(85) Entrée phase nationale/National Entry: 2003/11/25
(86) N° demande PCT/PCT Application No.: US 2002/016552
(87) N° publication PCT/PCT Publication No.: 2002/098181
(30) Priorité/Priority: 2001/05/26 (US60/293,707)

(51) Cl.Int./Int.Cl. *H05B 37/00* (2006.01),
H05B 37/02 (2006.01), *H05B 41/36* (2006.01)
(72) Inventeur/Inventor:
WILHELM, WILLIAM GEORGE, US
(73) Propriétaire/Owner:
NEXTEK POWER SYSTEMS, INC., US
(74) Agent: MCFADDEN, FINCHAM

(54) Titre : TELECOMMANDE DE BALLASTS ELECTRONIQUES ET AUTRES DISPOSITIFS
(54) Title: REMOTE CONTROL OF ELECTRONIC LIGHT BALLAST AND OTHER DEVICES

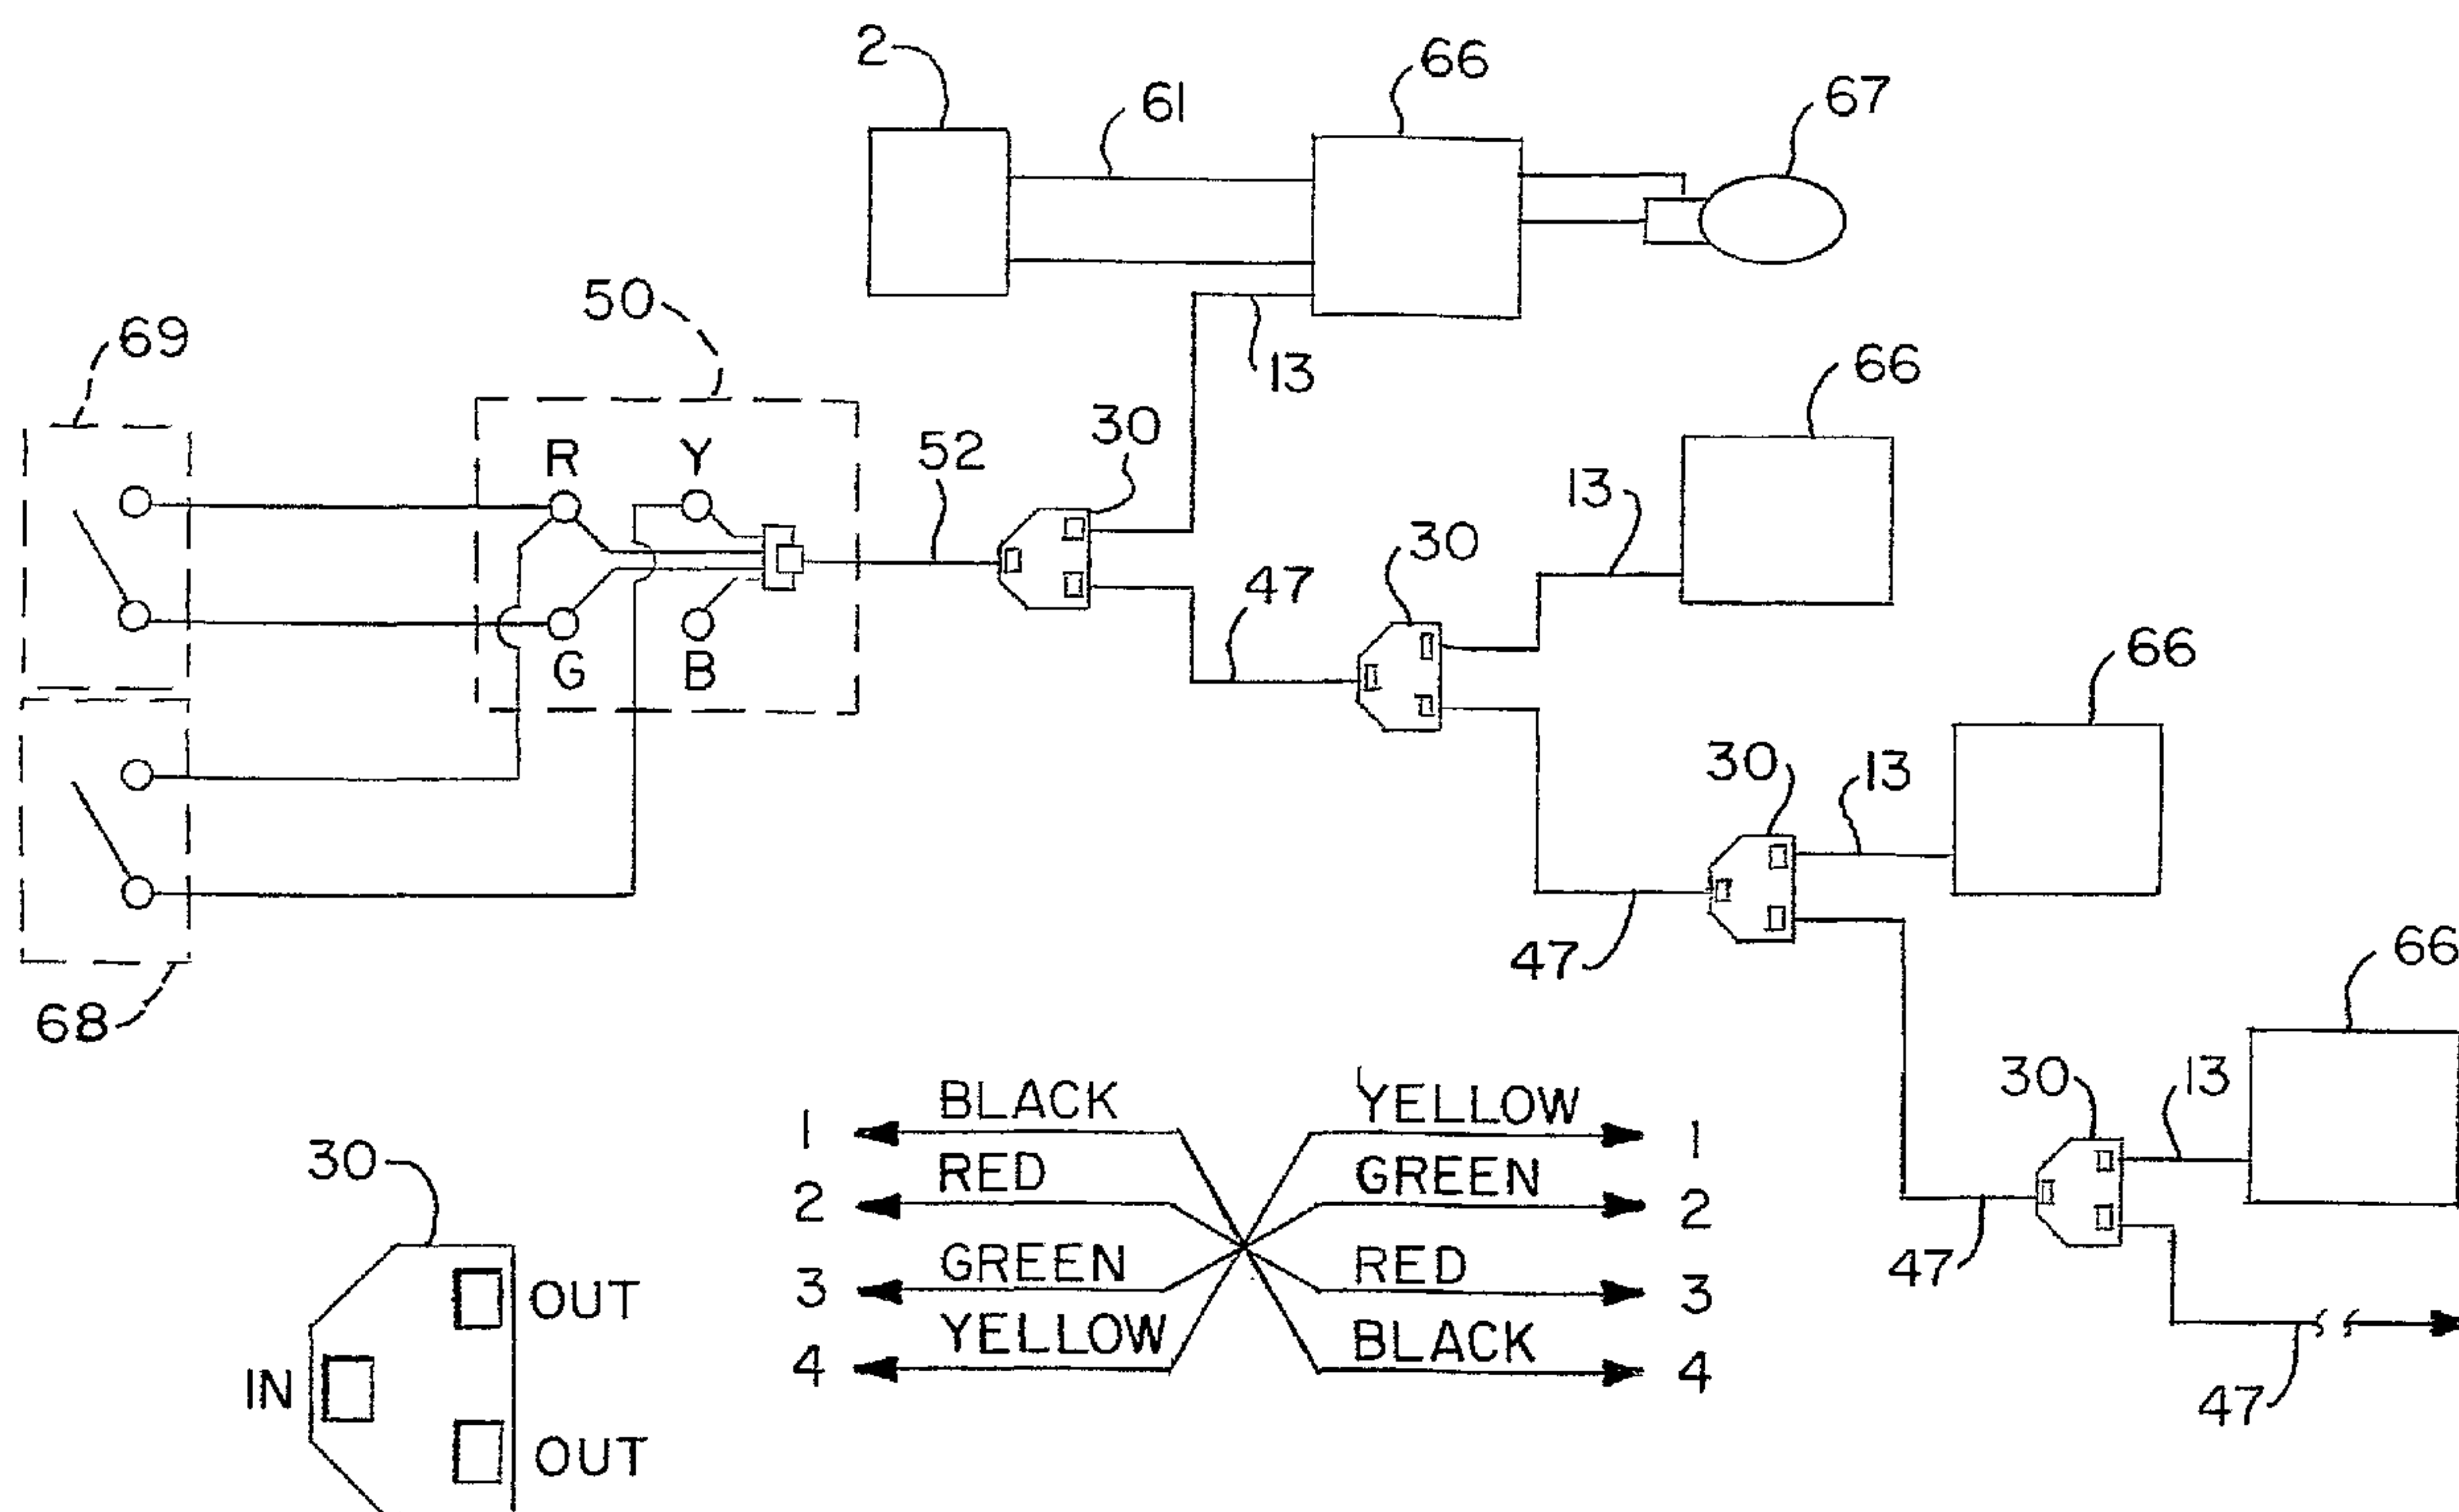

(57) Abrégé/Abstract:

An electronic ballast system controls one or more ballasts of HID or fluorescent lamps, which are controlled in an "on/off" manner by a ultra low power controller that is isolated for a primary power circuit or derives its very low switch power from the ballast itself. The on/off control provides a near lossless control system. This system may be applied to electronic ballast for operates at fractional power levels corresponding to different lighting intensities and with conventional occupancy sensors. The system may also be applied to other electronically compatible end-use devices and applications.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 December 2002 (05.12.2002)

PCT

(10) International Publication Number
WO 02/098181 A1

(51) International Patent Classification⁷: **H05B 37/00**

(21) International Application Number: PCT/US02/16552

(22) International Filing Date: 22 May 2002 (22.05.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/293,707 26 May 2001 (26.05.2001) US

(71) Applicant: **NEXTEK POWER SYSTEMS, INC.**
[US/US]; 992 South Second Street, Ronkonkoma, NY
11779 (US).

(72) Inventor: **WILLHELM, William, George**; 34 Pine
Court, Riverhead, NY 11901 (US).

(74) Agent: **WALKER, Alfred, M.**; 225 Old Country Road,
Melville, NY 11747 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN,
YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

Declarations under Rule 4.17:


- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

Published:

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: REMOTE CONTROL OF ELECTRONIC LIGHT BALLAST AND OTHER DEVICES FIELD OF THE INVENTION

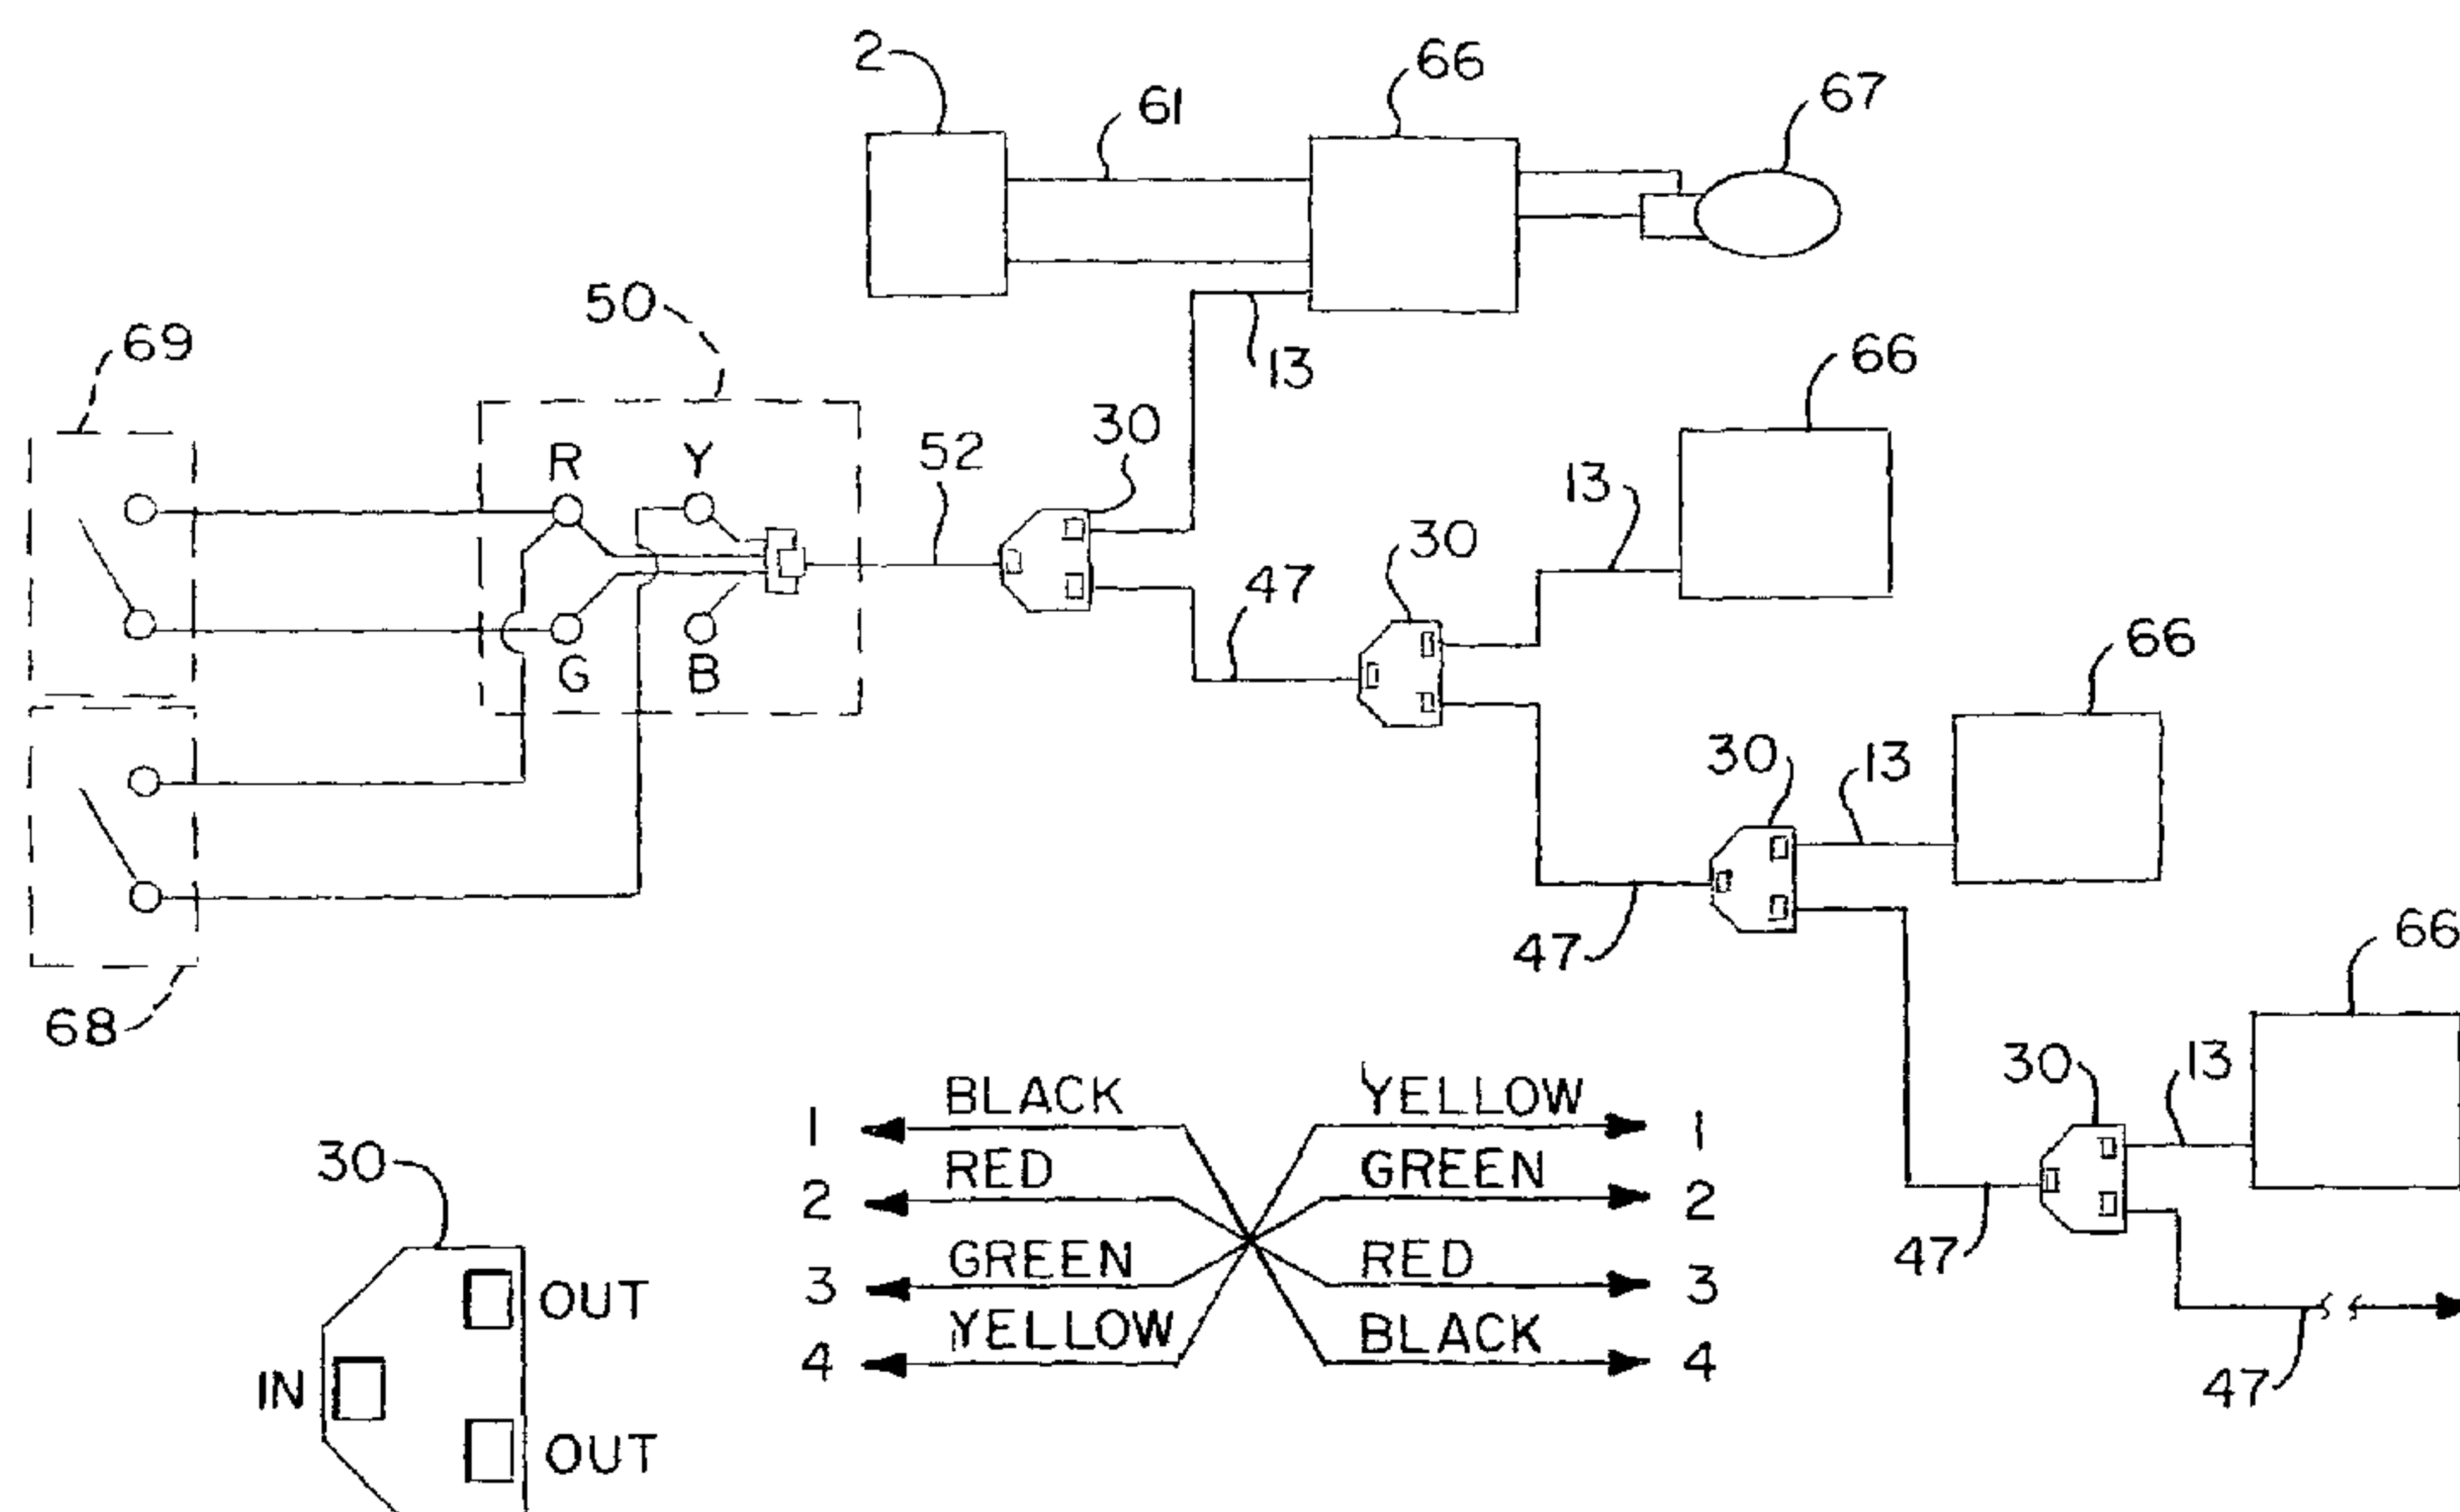

(57) Abstract: An electronic ballast system controls one or more ballasts of HID or fluorescent lamps, which are controlled in an "on/off" manner by a ultra low power controller that is isolated for a primary power circuit or derives its very low switch power from the ballast itself. The on/off control provides a near lossless control system. This system may be applied to electronic ballast for operates at fractional power levels corresponding to different lighting intensities and with conventional occupancy sensors. The system may also be applied to other electronically compatible end-use devices and applications.

WO 02/098181 A1

REMOTE CONTROL OF ELECTRONIC LIGHT BALLAST AND OTHER DEVICES
FIELD OF THE INVENTION

The present invention relates to a system and device for low power consumption of on/off control of a single or a plurality of electronic ballasts that can be used for a variety of lighting functions.

BACKGROUND

Electronic ballasting of gas discharge lighting has become the leading option over passive reactive ballasting. Gas discharging lighting includes fluorescent and high intensity discharge (HID) lamps. Electronic ballasts are constructed with active electronic components such as transistors that allow functional electrical control. The normal operation of the ballasted lights requires them to be energized or de-energized corresponding to "on and off" operation. This is usually accomplished by an external mechanical switch, which applies or interrupts electrical power to the ballast and corresponding causes the lamp(s) to go on or off.

The ballast operating current and voltage that powers the ballast must be experienced by this power switch which for safety reasons is under restrictions governed by building code wiring requirements for safety. Because of the special knowledge associated with such power wiring a costly professional electrician is normally required to alter any switching control within a given building space.

There are a number of limitations associated with this common means for on/off control. First the control switch must support the current requirements of all the lighting in a given area, so for large areas, the current carrying capacity of the switch must be raised to accommodate the greater load currents of the lighting. When this happens the power switching arrangement becomes complex with power switching implemented through a combination of mechanical and electric relays (contactors) that increase to hardware needs, increase expense and reduced reliability of the system.

Another limitation occurs if the switch is very remote

and distant for the lights, requiring the lighting load current to pass to and from the remote switch causing an undesirable electrical loss corresponding to resistive voltage drops. Additionally, such a system is inflexible to alterations and modifications, essentially requiring the special training and experience of higher cost electric contract service assistance, to alter a switching arrangement, or to add automated remote functions to the lights.

10 OBJECTS OF THE INVENTION

It is therefore an object of this invention to cause a ballast to be energized in satisfaction of the "on/off" control, by an ultra low power controller that may be essentially isolated for primary power circuit or derive its very low switch power from the ballast itself. With this invention it is possible to effect on/off control with the lowest voltage and current for an essentially near lossless control means. The invention can be used with lighting ballasts, but also for any devices with on/off switches, such as motors, appliances, heaters and the like.

It is also an object of this invention to use its on/off control means to effect other desirable functions in the electric ballast. Such functions include but are not limited to electronic action that would cause the electronic ballast to operate at fractional power levels corresponding to different lighting intensities and/or with conventional occupancy sensors.

It is a further object of this invention to utilize wiring components in the on/off control that correspond to the domain of signal or control wiring and which are characterized by very low power requirements and do not have the restrictions associated with power wiring. Such wiring is common in the telecommunications industry and may be applied to external programmed control.

35 SUMMARY OF THE INVENTION

In keeping with these objects and others which may become apparent, the present invention is a ballast or power

electronics module which is controlled by a remotely located switch function with a low amount of control current and little power loss. This is effected by means of a photo-isolator interfacing circuit within the ballast or within the power electronics module that provides high electrical isolation between an external control signal current and the power electronics of the ballast. The photo-isolator is the switch interface from signal level to power level control.

The on/off switching system can be used for one or more electronic ballasts for one or more lamps, of one or more lighting fixtures. The system includes the one or more ballasts having power electronics, wherein the system further includes a remote switch function in each ballast, which remote switch function is remotely located apart from each ballast. The remote switch function operates with a low amount of control current and little power loss. This on/off switching system further includes one or more connections connecting the remotely located switch to a ballast resident opto-isolator circuit, with associated interfacing electronics within each ballast. Therefore, each ballast provides high electrical isolation between the external switch function and the ballast power electronics to each lamp.

Besides its use with lighting ballasts, the remote on/off switching function system can also be used for one or more electronically interfaceable end-use appliance devices which function through on/off control. For example, the devices can include motors, heaters, appliances, industrial electrical equipment or other appliances which benefit from proportional on/off control as a means for power modulations. In these embodiments for other devices, each device has an on/off switch function, as well as power electronics, wherein the remote switch function is remotely located apart from the device's resident power electronics, wherein further the remote switch function operates with a low amount of control current and little power loss. This on/off switching system further includes one or more connections connecting the

remotely located switch function to an opto-isolator circuit with high electrical isolation to the power electronics. The power electronics provides electrical computability between the switch function and the operation of the device.

5 The remote on/off switching system can be applied for proportional light dimming control having as its interface an optically isolated on/off function interfacing with remote circuitry, providing pulse width modulation to the optically isolated interface control, to cause proportional light
10 dimming. The remote circuitry includes a fixed frequency oscillator influenced by a pulse-width modulator controlled by a voltage setting, wherein proportional pulses cause constant current to flow remotely through a light emitting diode in an optical isolator in the electronic ballast,
15 wherein a constant current driver insures a predetermined proper current to the light emitting diode in compensation for variable cable lengths. A phototransistor/switch of the optical isolator complies with the periodic "on" duty cycle set remotely and causes the power in the ballast circuitry to
20 be applied to the lamp with variable intensity.

A similar on/off switching system can be applied to one or more electrical end-use appliances compatible with electronic on/off control in which a similar optically isolating interface utilizing circuitry influences very low
25 power remote control of power levied in the various end-use appliances such as motor driven devices, electrical heaters, industrial equipment and any other device that might benefit from proportional on/off control as a means for power modulation.

30 The singular switch can also control a plurality of ballasts including but not limited to ballasts applied to a plurality of HID or fluorescent lamps. This switching function can also be applied to programmed interruption such as in controlled blinking functions which are used as an
35 attraction in lighted advertising signs.

Optionally, an external repetitive control may be applied that causes the "on" periods to be different from the

"off" period such that power to the lamp is proportional to the on period. The said interface thus becomes a means for dimming with external singular functional control eliminating costly internal dimming control circuitry.

5 Furthermore, the external remote switch function may be provided through active electronic, such as, in part, a transistor. In addition, the remote switching function can be provided by a programmable electronic system, with or without feedback.

10 A plurality of lead wires connects the remote switch function, a low current power source, and the light emitting diode (LED) is available at the input of the opto-isolator. The low current power source can be derived from the ballast, or it can be supplied externally.

15 Although the connectors for the control of the ballast may be any signal type connector, a modular phone jack and plug and the use of the flat 4-conductor cable, common to telephone systems, as the plurality of lead wires facilitates installation.

20 Through the use of a common four wire 3-way RJ11 telephone coupler at each ballast and a length of flat 4-conductor telephone cable with reversed RJ11 plugs at each end (i.e. a reversed cable net) any number of ballasts can be connected in daisy-chain fashion to be controlled by a single
25 remote switch. Adding, rerouting, or reconfiguring switches to control a network of light fixtures can be accomplished without the need of an electrician.

The electrically isolated photo-transistor portion of the opto-isolator is controlled by light emitted by the LED
30 within the opto-isolator. The state of conduction of its collector-emitter junction is used to electronically control the operation (in an on/off fashion) of any standard high frequency electronic inverter circuitry used to derive AC power of any frequency to the fluorescent or HID lamps.

35 BRIEF DESCRIPTION OF THE DRAWINGS

The present invention can best be understood in connection with the accompanying drawings, in which:

Fig. 1 is a Prior art block diagram of the common method for switching a lighting ballast;

Fig. 2 is a Schematic diagram of an electronic ballast of this invention with optically isolated power control;

5 Fig. 3 is a Top plan schematic view of a common type RJ11 four wire 3-way coupler;

Fig. 4 is a Schematic Contact representation of a reversed 4-wire reversed cable set common to the telephone industry;

10 Fig. 5 is a Side elevation view of a reversed cable set;

Fig. 6 is a Block diagram of multiple ballast network controlled by one switch;

Fig. 7 is a physical layout of a electronic ballast with electrical connection for this invention;

15 Figure 8 is a block diagram of an alternate embodiment offering remote proportional dimming of a simple low cost electronic ballast using the on/off optically isolated interface embodied in the invention.

Figure 9 is a block diagram showing use of low power external ballast control for on/off control and bi-level HID dimming functions, showing the control cabling with RJ11 connectors; and,

Figure 10 shows a block diagram of a fully isolated remote switch.

25 DETAILED DESCRIPTION OF THE INVENTION

A block diagram of a prior art lighting circuit 1 is shown in Figure 1. A power source 2 is used to power ballast 4 which operates two gas discharge (fluorescent) lamps 5. On/off control of the lamps is influenced by mechanical
30 switch 3 which must be rated for the full supply voltage and current requirements of the lamp load, when multiple ballasts are used in parallel. A long distance from switch 3 to ballast 4 requires evaluation of the effects of the consequent voltage drop. In most jurisdictions, the initial
35 switch wiring as well as any alterations is legally performed only by a licensed electrician.

Figure 2 is a schematic diagram of an electronic ballast

9 of this invention. A control switch 10 is wired to connector 11. A cable (not shown) connects connector 11 to connector 12; this could be a long distance. A length of flat 4-conductor telephone or any corresponding signal type cable 13 goes from connector 12 to connections within ballast 9. Terminals 14 and 15 supply input power to ballast 9. Output terminals 16 and 17 connect to each of two lamps (not shown.) while connector 18 is common to each of the lamps.

Figure 2 also shows that the key element that distinguishes this ballast from, other electronic ballasts is the use of an electronic optical isolator component 19 which includes a matched pair of light emitting diode (LED) 20 and photo transistor 21. A internal low voltage and low current supply source for energizing LED 20 may be optionally derived from resistors R5 and R6 which are connected in the ballast internally to the power input supply terminals 14 and 15. When using the internal power source LED 20 is energized when remote switch 10 is closed causing limited power supply current to flow through supply terminals 14 and 15, resistor R1 and LED 20, causing LED 20 to forward bias transistor 21 into conduction. Conducting transistor 21 causes transistor Q3 to stop conducting which reverses biases diodes D1 and D2 conduct, allowing the gates of the transistors in the power oscillator portion of the circuitry 23 in ballast 9 to function in an un-impeded or power "on" mode.

Schematic section 23 (indicated by a dashed line box) serves to typify a standard high frequency inverter circuit used to energize a fluorescent lamp. A similar circuit may be applied to the operation of a HID lamp with emphasis applied to the essential functions of this invention.

Schematic section 22 (indicated also by a dashed line box) is new circuitry related to remote on/off switching, control of one or more ballasts, except for subcircuit 19, which is depicted within the confines of schematic section 22, which is a reverse polarity protector.

Ballast 9 is designed for use with DC power input at terminals 14 and 15.

Reference numeral 19 is a commercial photo-isolator integrated circuit that is capable of providing high electrical isolation between an external control signal and the power electronics in ballast 9.

5 To turn on ballast 9, a voltage which is either internally generated (as shown) or externally supplied (shown in drawing Figure 8 herein) is applied to isolator 19 LED 20 and current limited by resistor (R1); light is emitted by LED 20 which excites photo transistor 21 to conduct (i.e.- reduce
10 resistance). This causes current to flow in resistor R2. With resistor R2 and isolator transistor 21 forming a voltage divider, the conducting opto-isolator 19 transistor 21 causes the base-emitter voltage on transistor Q3 to go below conduction, causing the collector-emitter junction on
15 transistor Q3 to become highly resistive (non-conducting). With transistor Q3 non-conducting, there is no current path for diodes D4 and D5 to the power supply return allowing the gates of transistors Q1 and Q2 to remain in a high impedance state and thus unencumbered to function as part of the self-
20 excited power oscillation inverter servicing the gas discharge lamps. A typical example of a transistor, such as transistor Q1 and transistor Q2, is a field effect transistor.

Alternatively, no voltage on the input of opto-isolator
25 19 reverses the process described above and causes the gates of transistors Q1 and Q2 to be clamped to the potential of the power supply return.

This effectively causes transistors Q1 and Q2 to be placed in a non-conductive state. This action interrupts the
30 power oscillator/inverter causing the lamps to go off.

Thus it can be seen that a low voltage, low current interface controlled by a remotely located wall-mounted switch 10 can be used to control the operation of an electronic ballast to turn lamps on or off. Since each LED 20
35 just draws a few milliamperes of current, long distance to a remote switch are irrelevant since any voltage drops is insignificant.

While any low voltage connector wire can be used, for convenience and low cost, the use of modular connectors and light weight 4-conductor cable from the telephone industry is part of the preferred embodiment of this invention. For

5 example, Figure 3 shows a standard telephone RJ11 four wire 3-way coupler 30. This has an input port 31 and two identical output ports 32 and 33 internally wired to maintain terminal correspondence for each of the four terminals in each port.

Cable 13 spans between cable end connectors 45 and 46,

10 forming together reversed cable 47 of Figure 5. Reversed cable 47 includes flat four wire cable 13 with opposing end connectors 45 and 46, wired as shown in Figure 4, such that reference numerals 40 and 41 refer to the physical order of the respective colored wire connections 40 in cable end

15 connector 45, and to the reversed order of colored wire connections 41 in cable end connector 46, of reversed cable 47 of Figure 5. For example, Figure 4 shows the configurations of opposite end contact wire connections 40 and 41 of the four colored wires of reversed cable 47,

20 labeled "Black", "Red", "Green" and "Yellow", such that the physical order shown at contact connections 40 is used in cable end connector 45, whereas the reversed order shown at contact connections 41, labeled "Yellow", "Green", "Red" and "Black", is used in cable end connector 46. Other wire

25 patterns can be used.

The reversed cable 47 is shown in Figure 5 (a reversing telephone cable is common and used here, but is not required to effect this invention) while the terminal wiring is shown schematically in Figure 4. The RJ11 cable end connectors 45

30 and 46 are attached to four wire cable 13 in opposite orientation (see Fig. 5) to maintain the conductor/terminal integrity shown in Figure 4.

Figure 6 shows a wiring diagram of multiple ballasts 9 controlled by a single remote switch 10. A modular phone

35 plate 50 is locally wired to wall switch 10 which attaches to the red and green wires. A long cable 52 with RJ11 cable end connectors attaches phone plate 50 to the first 3-way coupler

30. Short single-ended cable 13 plugs into either output port of coupler 30 while the other end is hard wired to ballast 9 as shown in Figure 2. The other output port of coupler 30 is used to connect to a second ballast through reversed cable 47 and a second coupler 30 as shown.

Additional ballasts are similarly added in "daisy-chain" fashion as shown in Figure 6. The network is extendable to a large number of individual ballasts since the only load experienced by switch 10 and long cable 52 is that of the parallel load of the LED's 20 in each of the opto-isolators 19 in each ballast 9. In this manner, 3-way couplers 30 in the vicinity of each ballast are used as extension elements to create an easy connection to the next ballast in the chain.

Figure 7 shows a physical layout of a lighting fixture using ballast 9 powering lamps 5. Short single-ended cable 13 with RJ-11 connector 60 extends from the housing of ballast 9; red and black power input leads 61 also extend from ballast 9. As shown in figure 6, cable 13 is plugged into 3-way coupler 30 via RJ-11 connector 60.

The block diagram of Figure 8 is an alternate embodiment utilizing the enhanced electronic ballast 9 of Figure 2 with the optically isolated ON/OFF control interfacing with remote circuitry providing pulse width modulation to the optically isolated ballast interface for proportional dimming control. Figure 8 also shows a device 75 controlled by circuitry of Figure 10.

A fixed frequency oscillator 103 feeds pulse-width modulator 102 which is controlled by a voltage setting provided by the wiper 101 on potentiometer 100.

By varying the setting, duty cycles from close to 0% to almost 100% can be derived. These pulses are fed to constant current driver 104 which interfaces remotely with the light emitting diode in optical isolator 19 which is part of electronic ballast 9. This is the same optical isolator that is used for the remote ON/OFF control described previously.

Constant current driver 104 for a series connected

control system insures the proper current to the remote ballast interface 19 and any voltage drops in the long control cable. The phototransistor output of optical isolator 19 then complies with the duty cycle set remotely and varies
5 the average power to the ballast circuitry resulting in proportional changes in light intensity.

Figure 9 shows the wiring of a network of ballasts 66. In this case, switch 68 is used for dimming and switch 69 is used for on/off control while utilizing the same 4-wire
10 signal cable system.

Figure 10 shows a block diagram of a fully isolated remote switch 78 with remote battery 77 and remote current limiting resistor 76 selectively supplying power to control a device 75 with function 89 therein. Long low power/voltage
15 cables 85 and 86 operate light emitting diode (LED) 81 through further current limiting resistor 79. Resistor 76 maybe substituted with any electronic current limiting means. Phototransistor 82 is controlled by light from LED 81 into either a conducting or non-conducting state to control
20 function 84. Device 75 is supplied with DC power by positive (+) terminal 87 and negative (-) terminal 88. Current limiting resistors 80 and 83 may be used to support any low power remote equipment (not shown) which may not require totally isolated power.

25 It is further noted that other modifications may be made to the present invention, without departing from the scope of the invention, as noted in the appended Claims.

CLAIMS:

1. An electronic on/off power switching system comprising:
 - a plurality of electronic ballasts for operating at least one lamp of at least one lighting fixture, each electronic ballast comprising a self-excited power oscillator inverter comprising two transistors;
 - a switching element wired to a connector and adapted to control the plurality of electronic ballasts; and
 - a plurality of ballast-resident electronic optical isolator components, each isolator component providing an interface between the switching element and a corresponding electronic ballast, whereby when a voltage is applied to the electronic optical isolator components the respective gates of the two transistors of the self-excited power oscillator inverter of said corresponding electronic ballasts are unclamped permitting the oscillator inverter to oscillate, while when no voltage is applied to the electronic optical isolator components, the respective gates of the two transistors of the self-excited power oscillator inverter of said corresponding electronic ballasts are clamped to the potential of the power supply return preventing oscillation of the oscillator inverter;wherein the system is characterized by:
 - a plurality of 3-way telephone couplers, said switching element being coupled to an input of a first 3-way telephone coupler by a first cable, and each of said electronic ballasts being coupled to an output of a respective one of the 3-way telephone couplers, and another output of each 3-way telephone coupler being coupled to the input of a next 3-way telephone coupler to form a cascade of 3-way telephone couplers.
2. The electronic on/off power switching system as in claim 1, wherein said switching element is powered from the power supplied to at least one of said electronic ballasts.





3. The electronic on/off power switching system as in claim 1, wherein said switching element is powered externally by a power source.

4. The electronic on/off power switching system as in claim 1, wherein said switching element is a switch for on/off control of said at least one lamp of said at least one lighting fixture.



5. The electronic on/off power switching system as in claim 1, wherein the first cable is a long telephone industry cable coupling said first 3-way telephone coupler to a phone plate which is coupled to said switching element.

6. The electronic on/off power switching system as in any one of claims 1 to 5, wherein said 3-way telephone coupler is a RJ-11 3-way coupler.

1/5

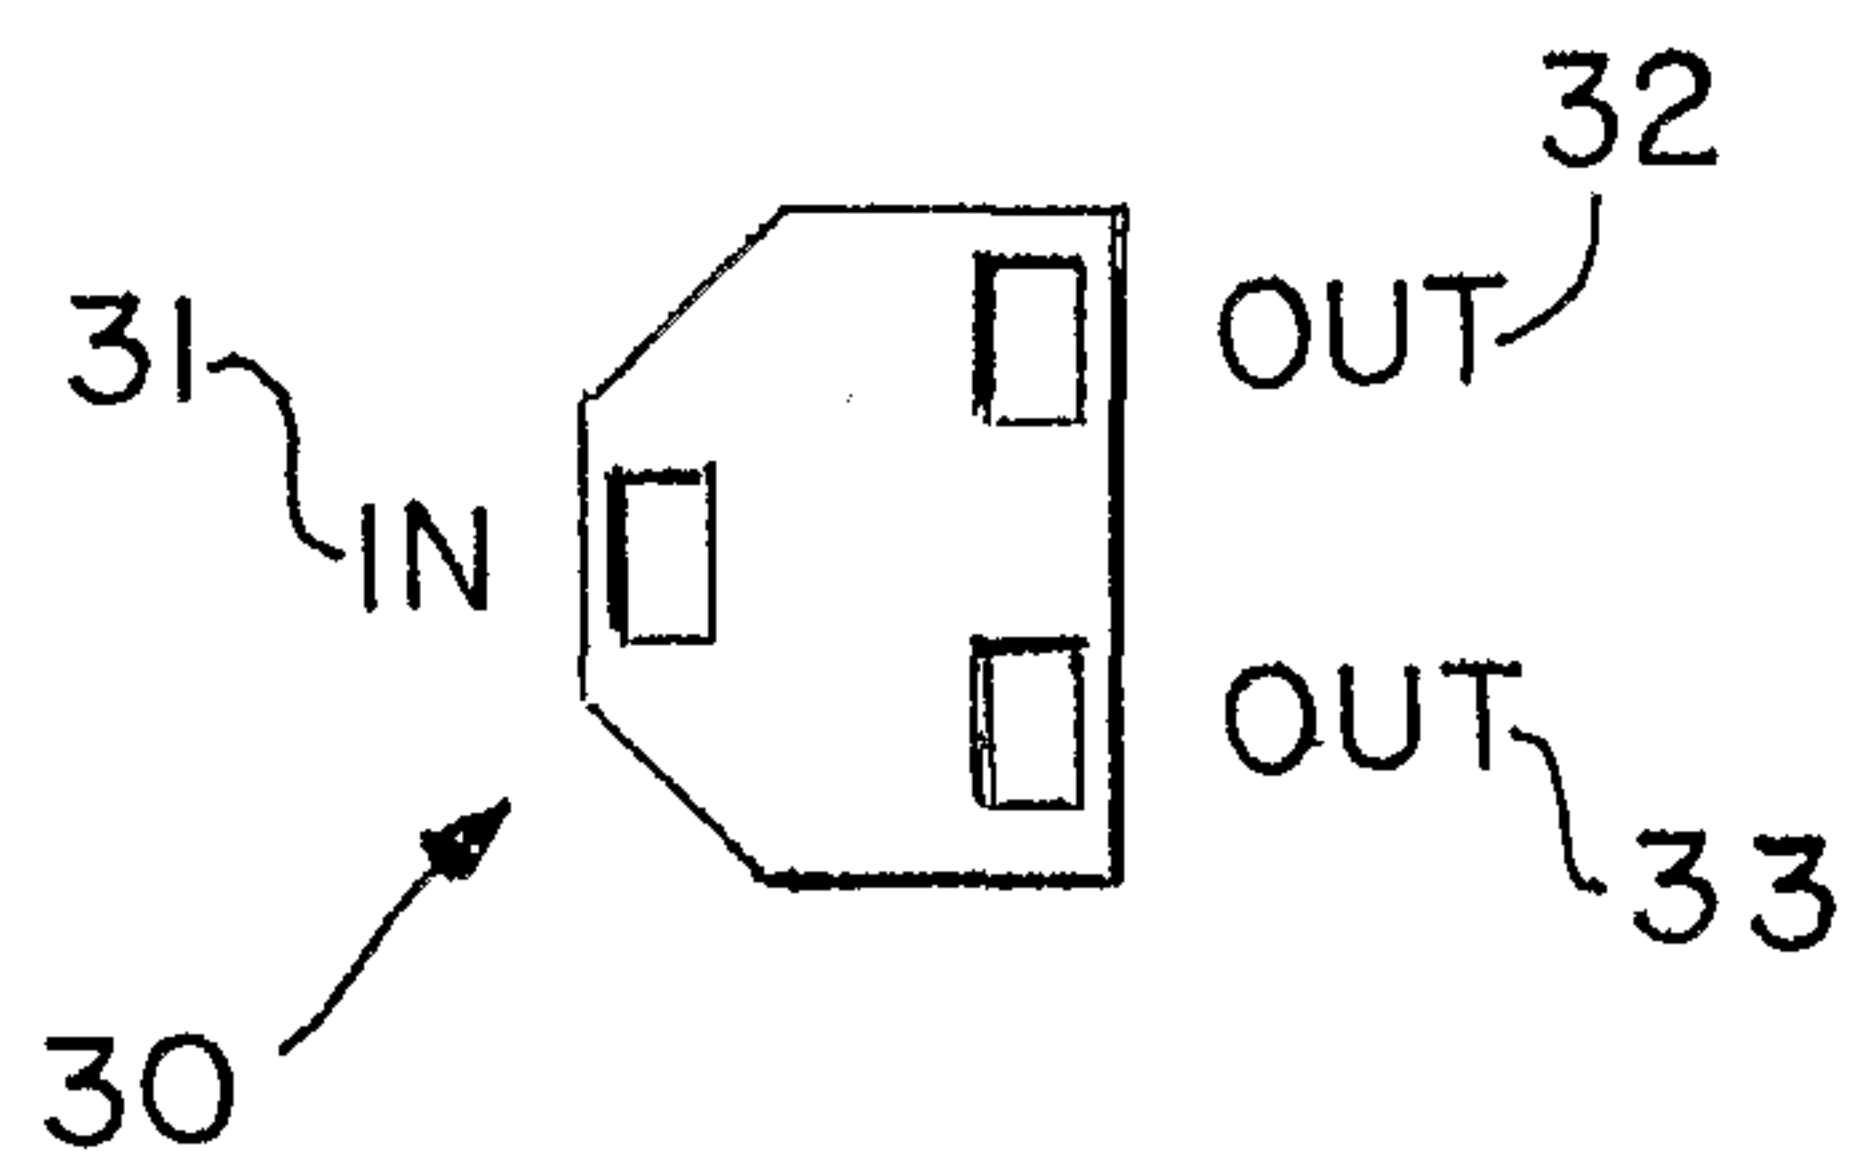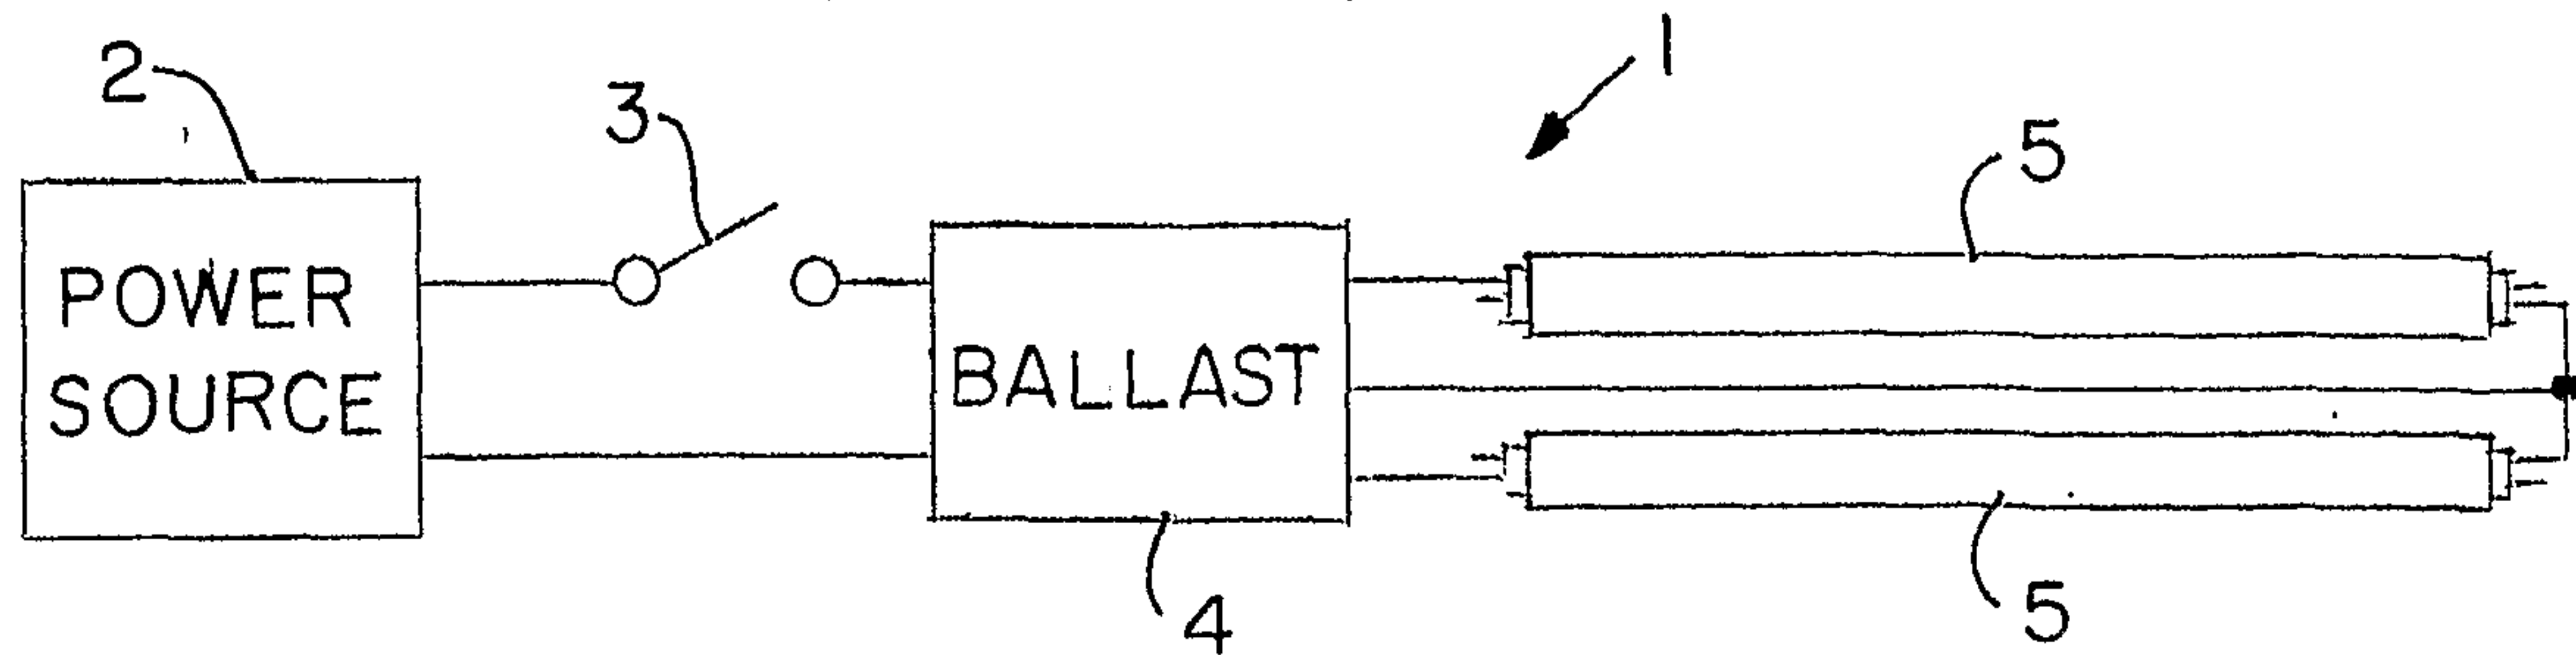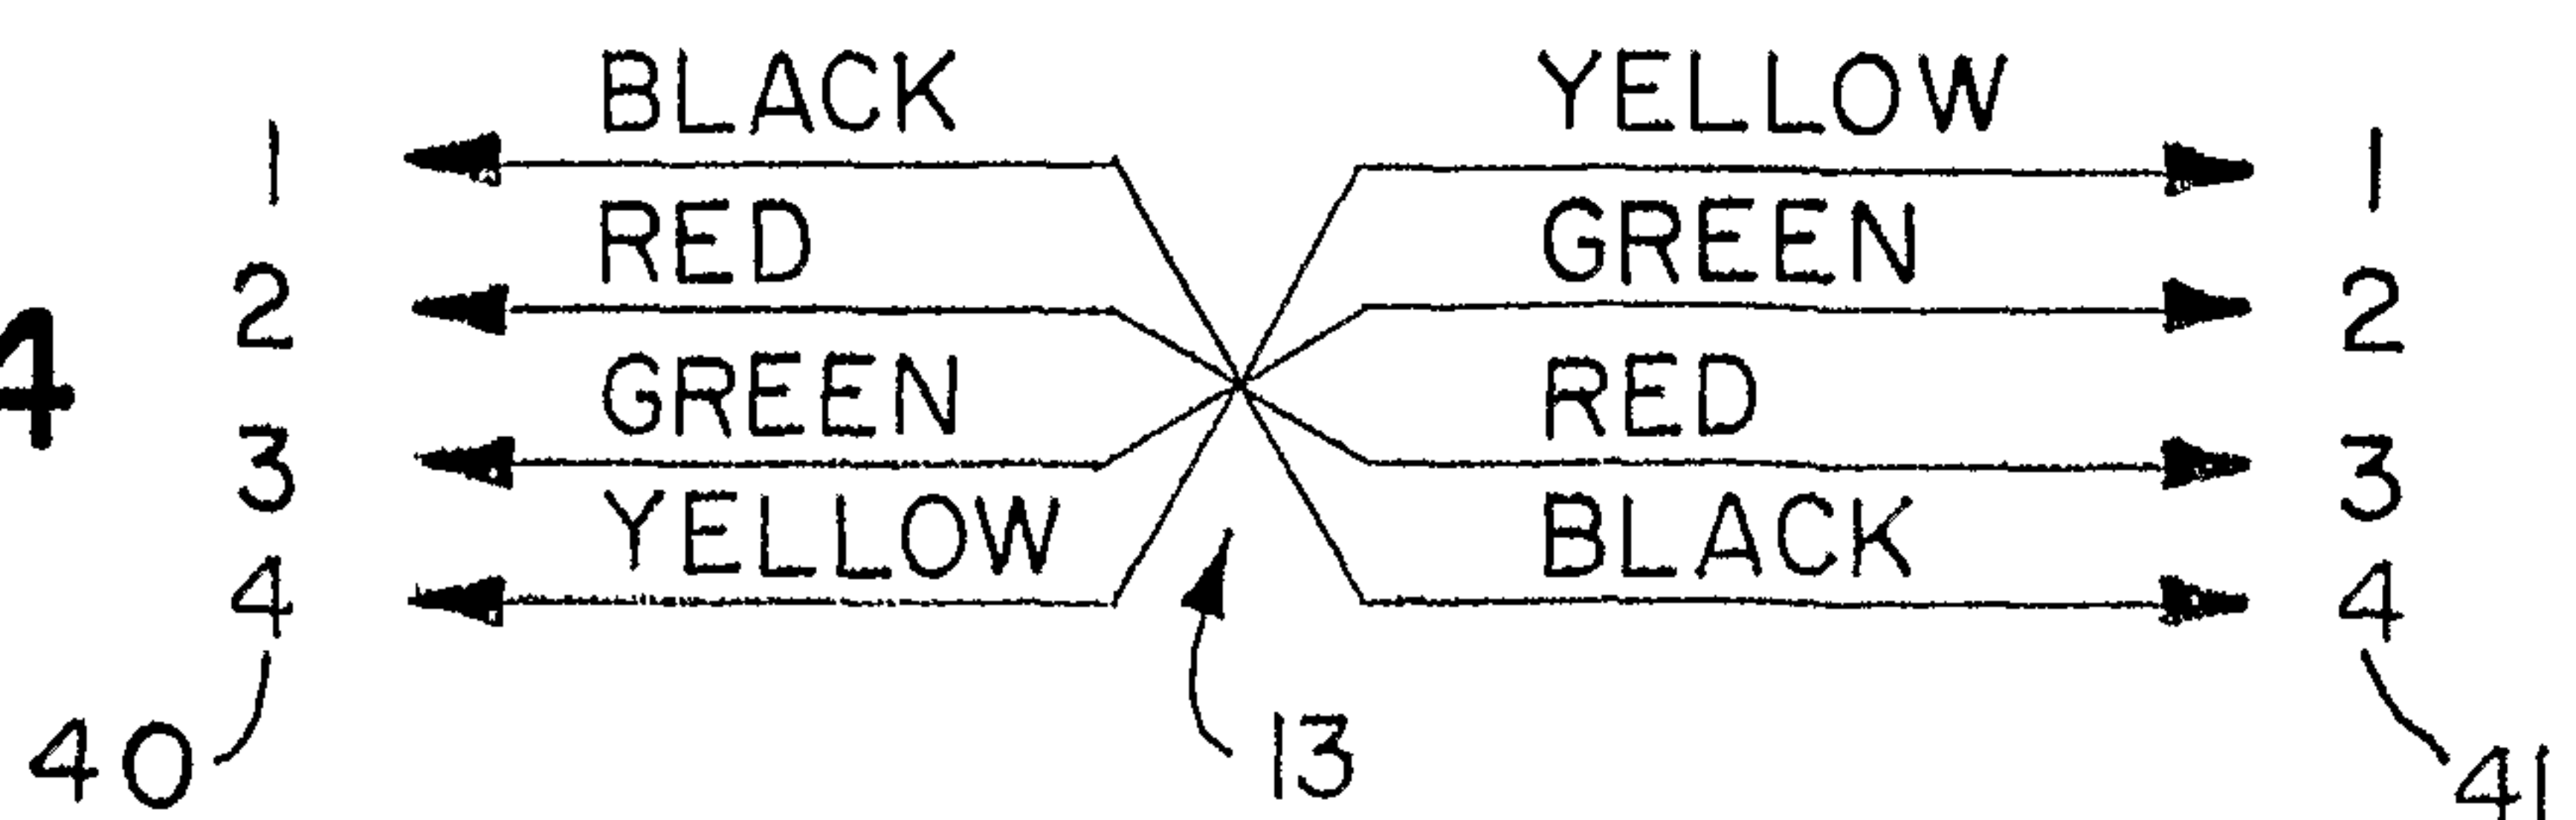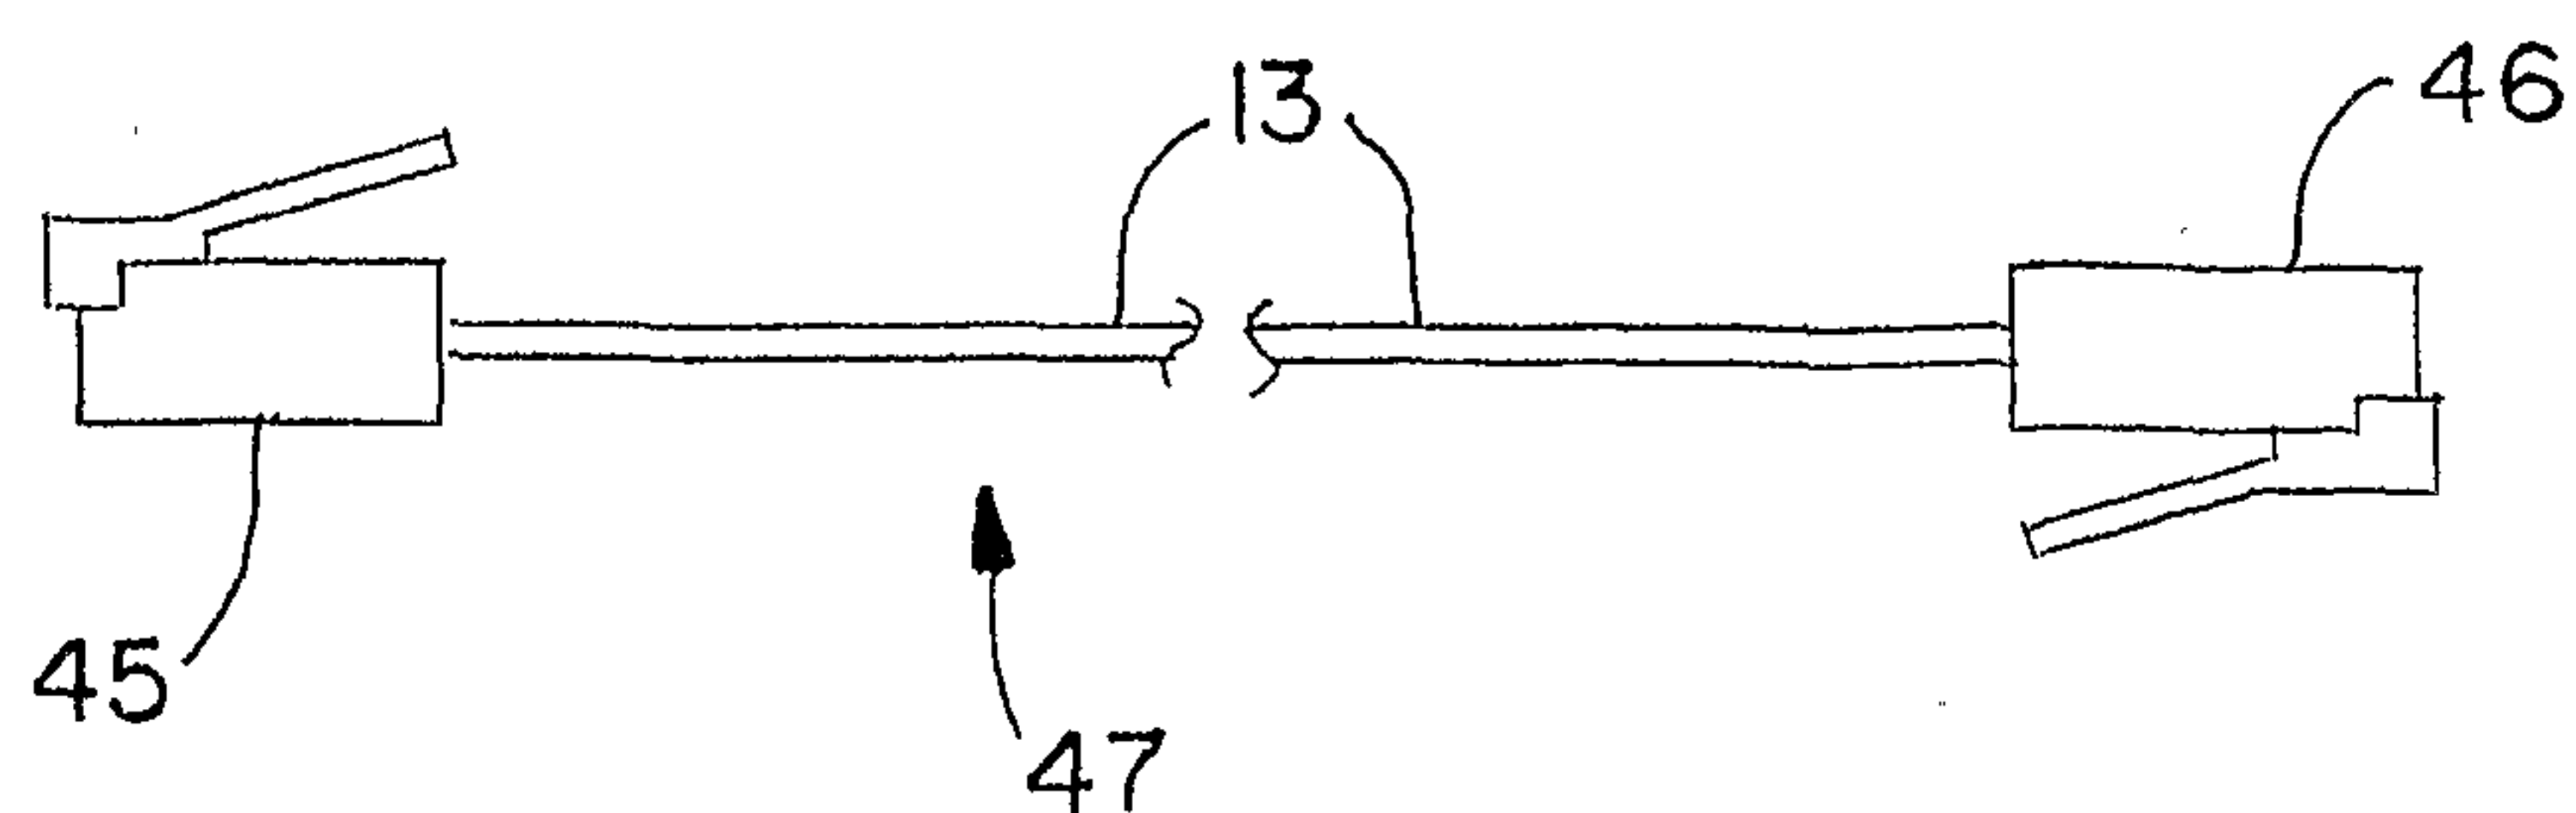FIG. 1
(PRIOR ART)**FIG. 4****FIG. 5**

3/5

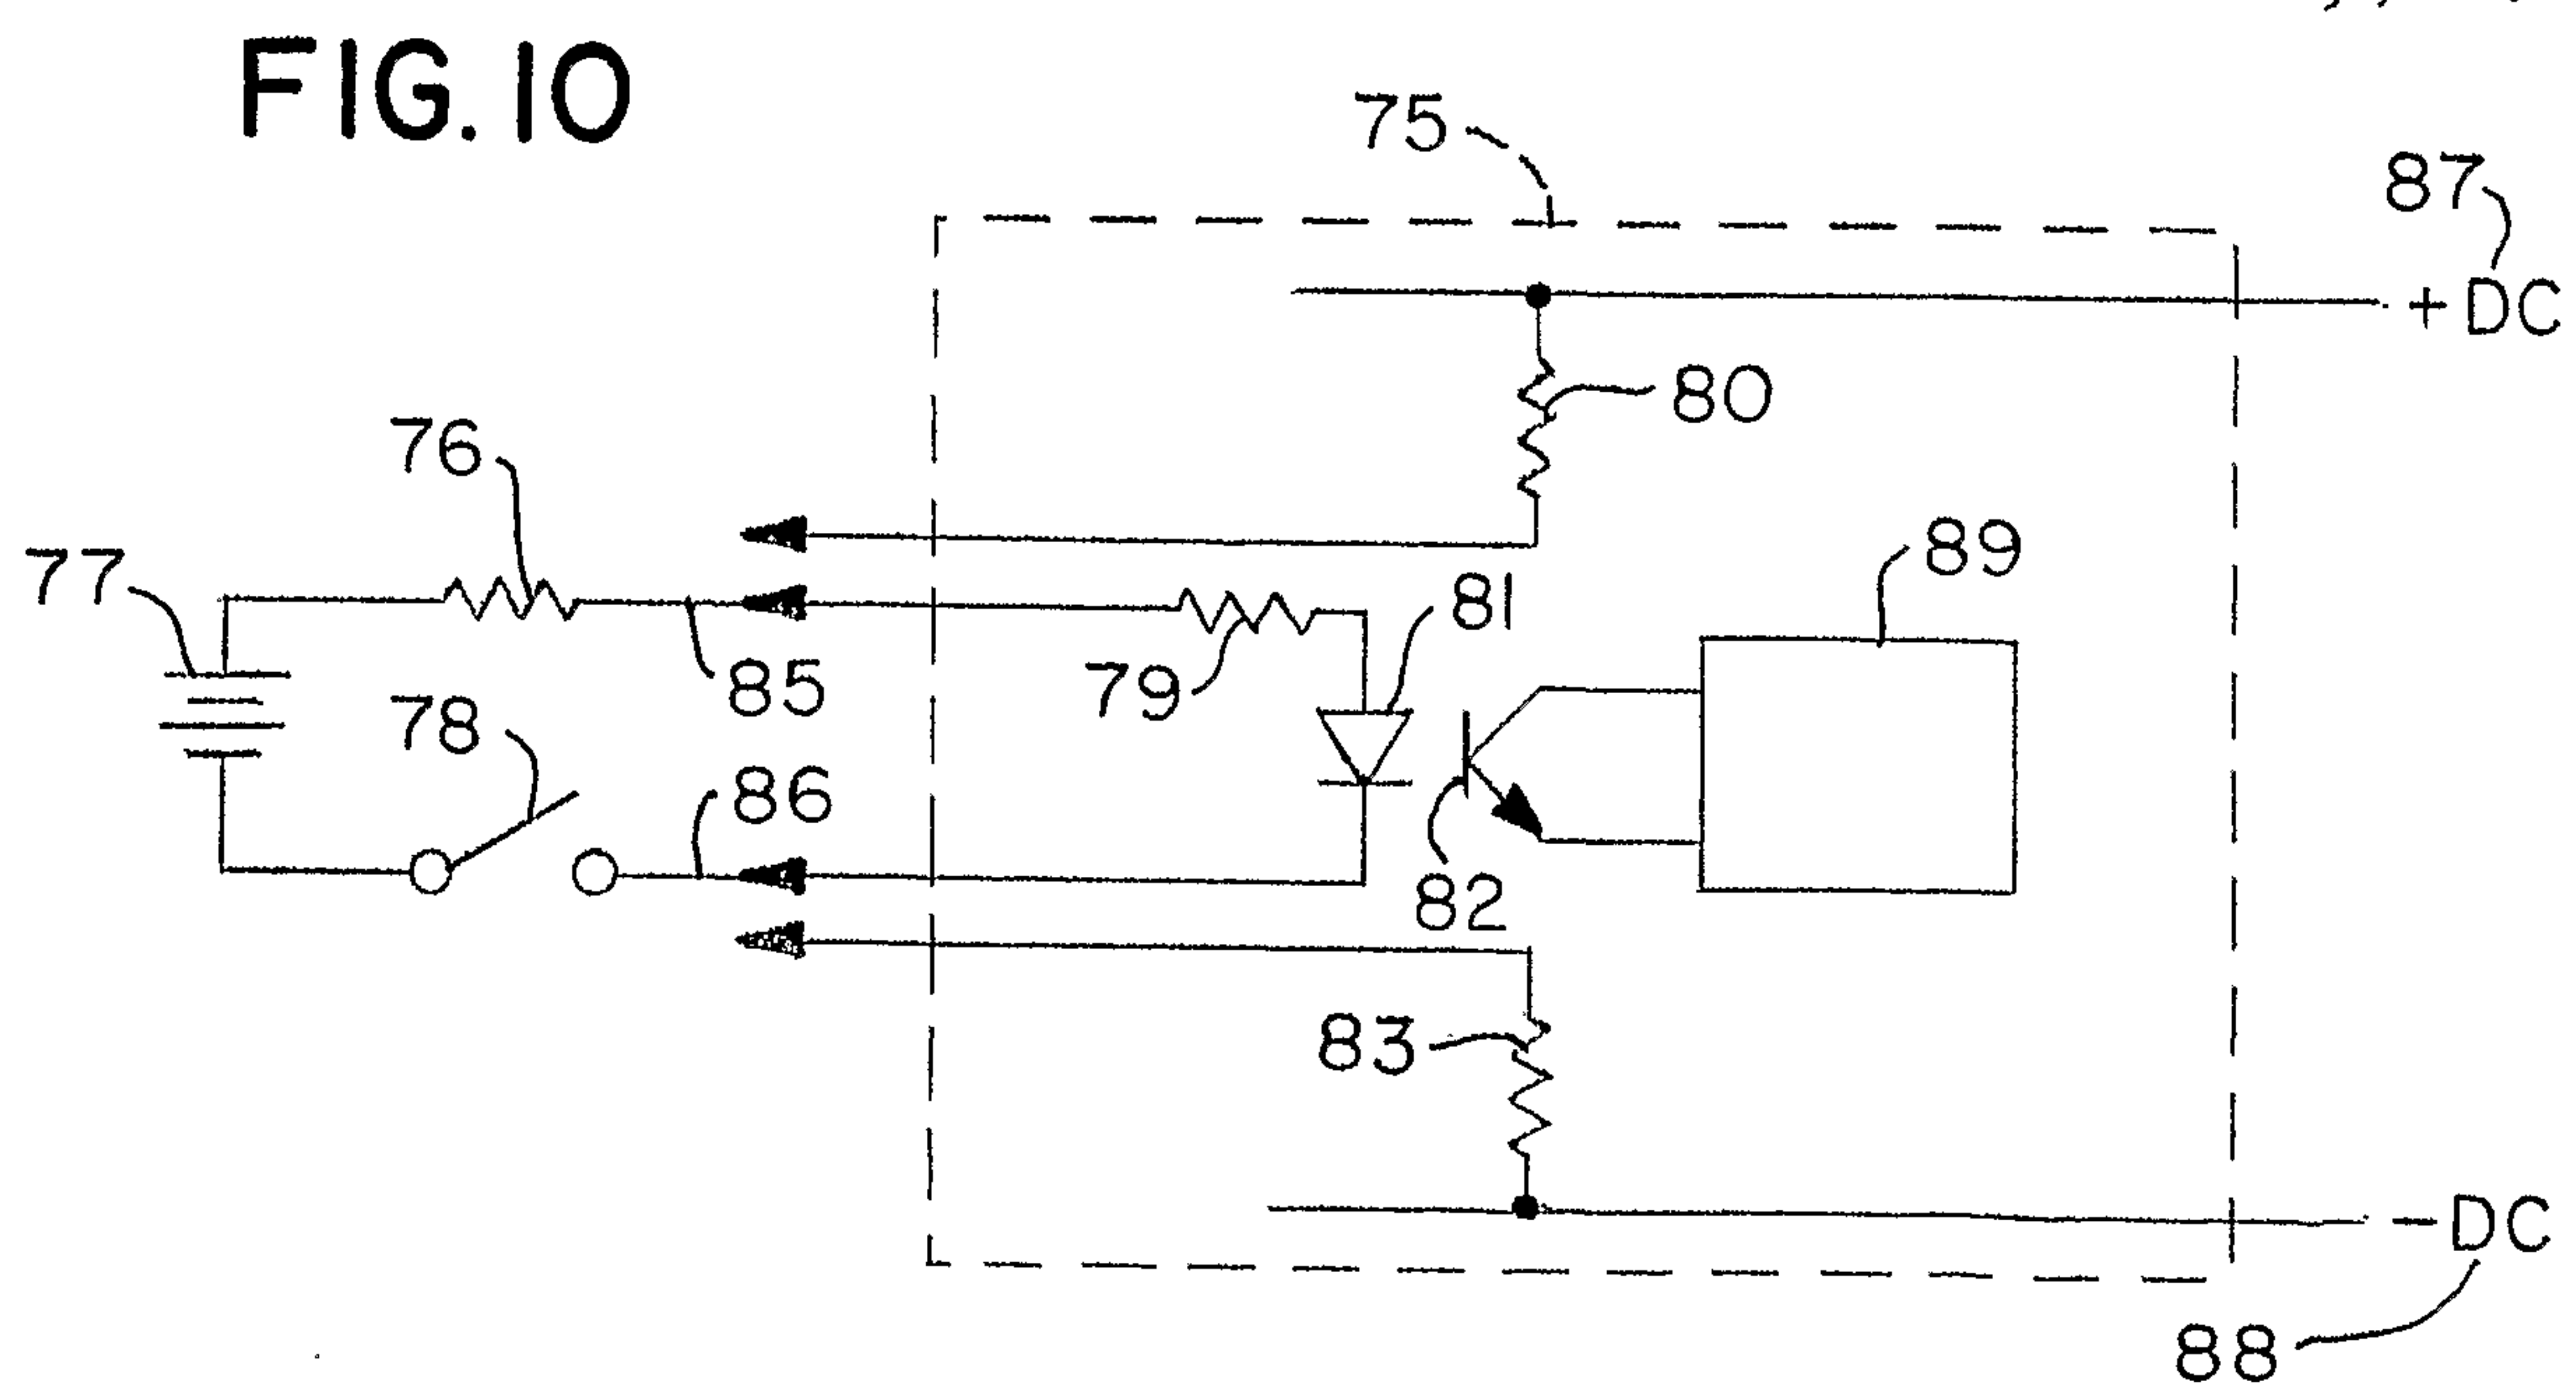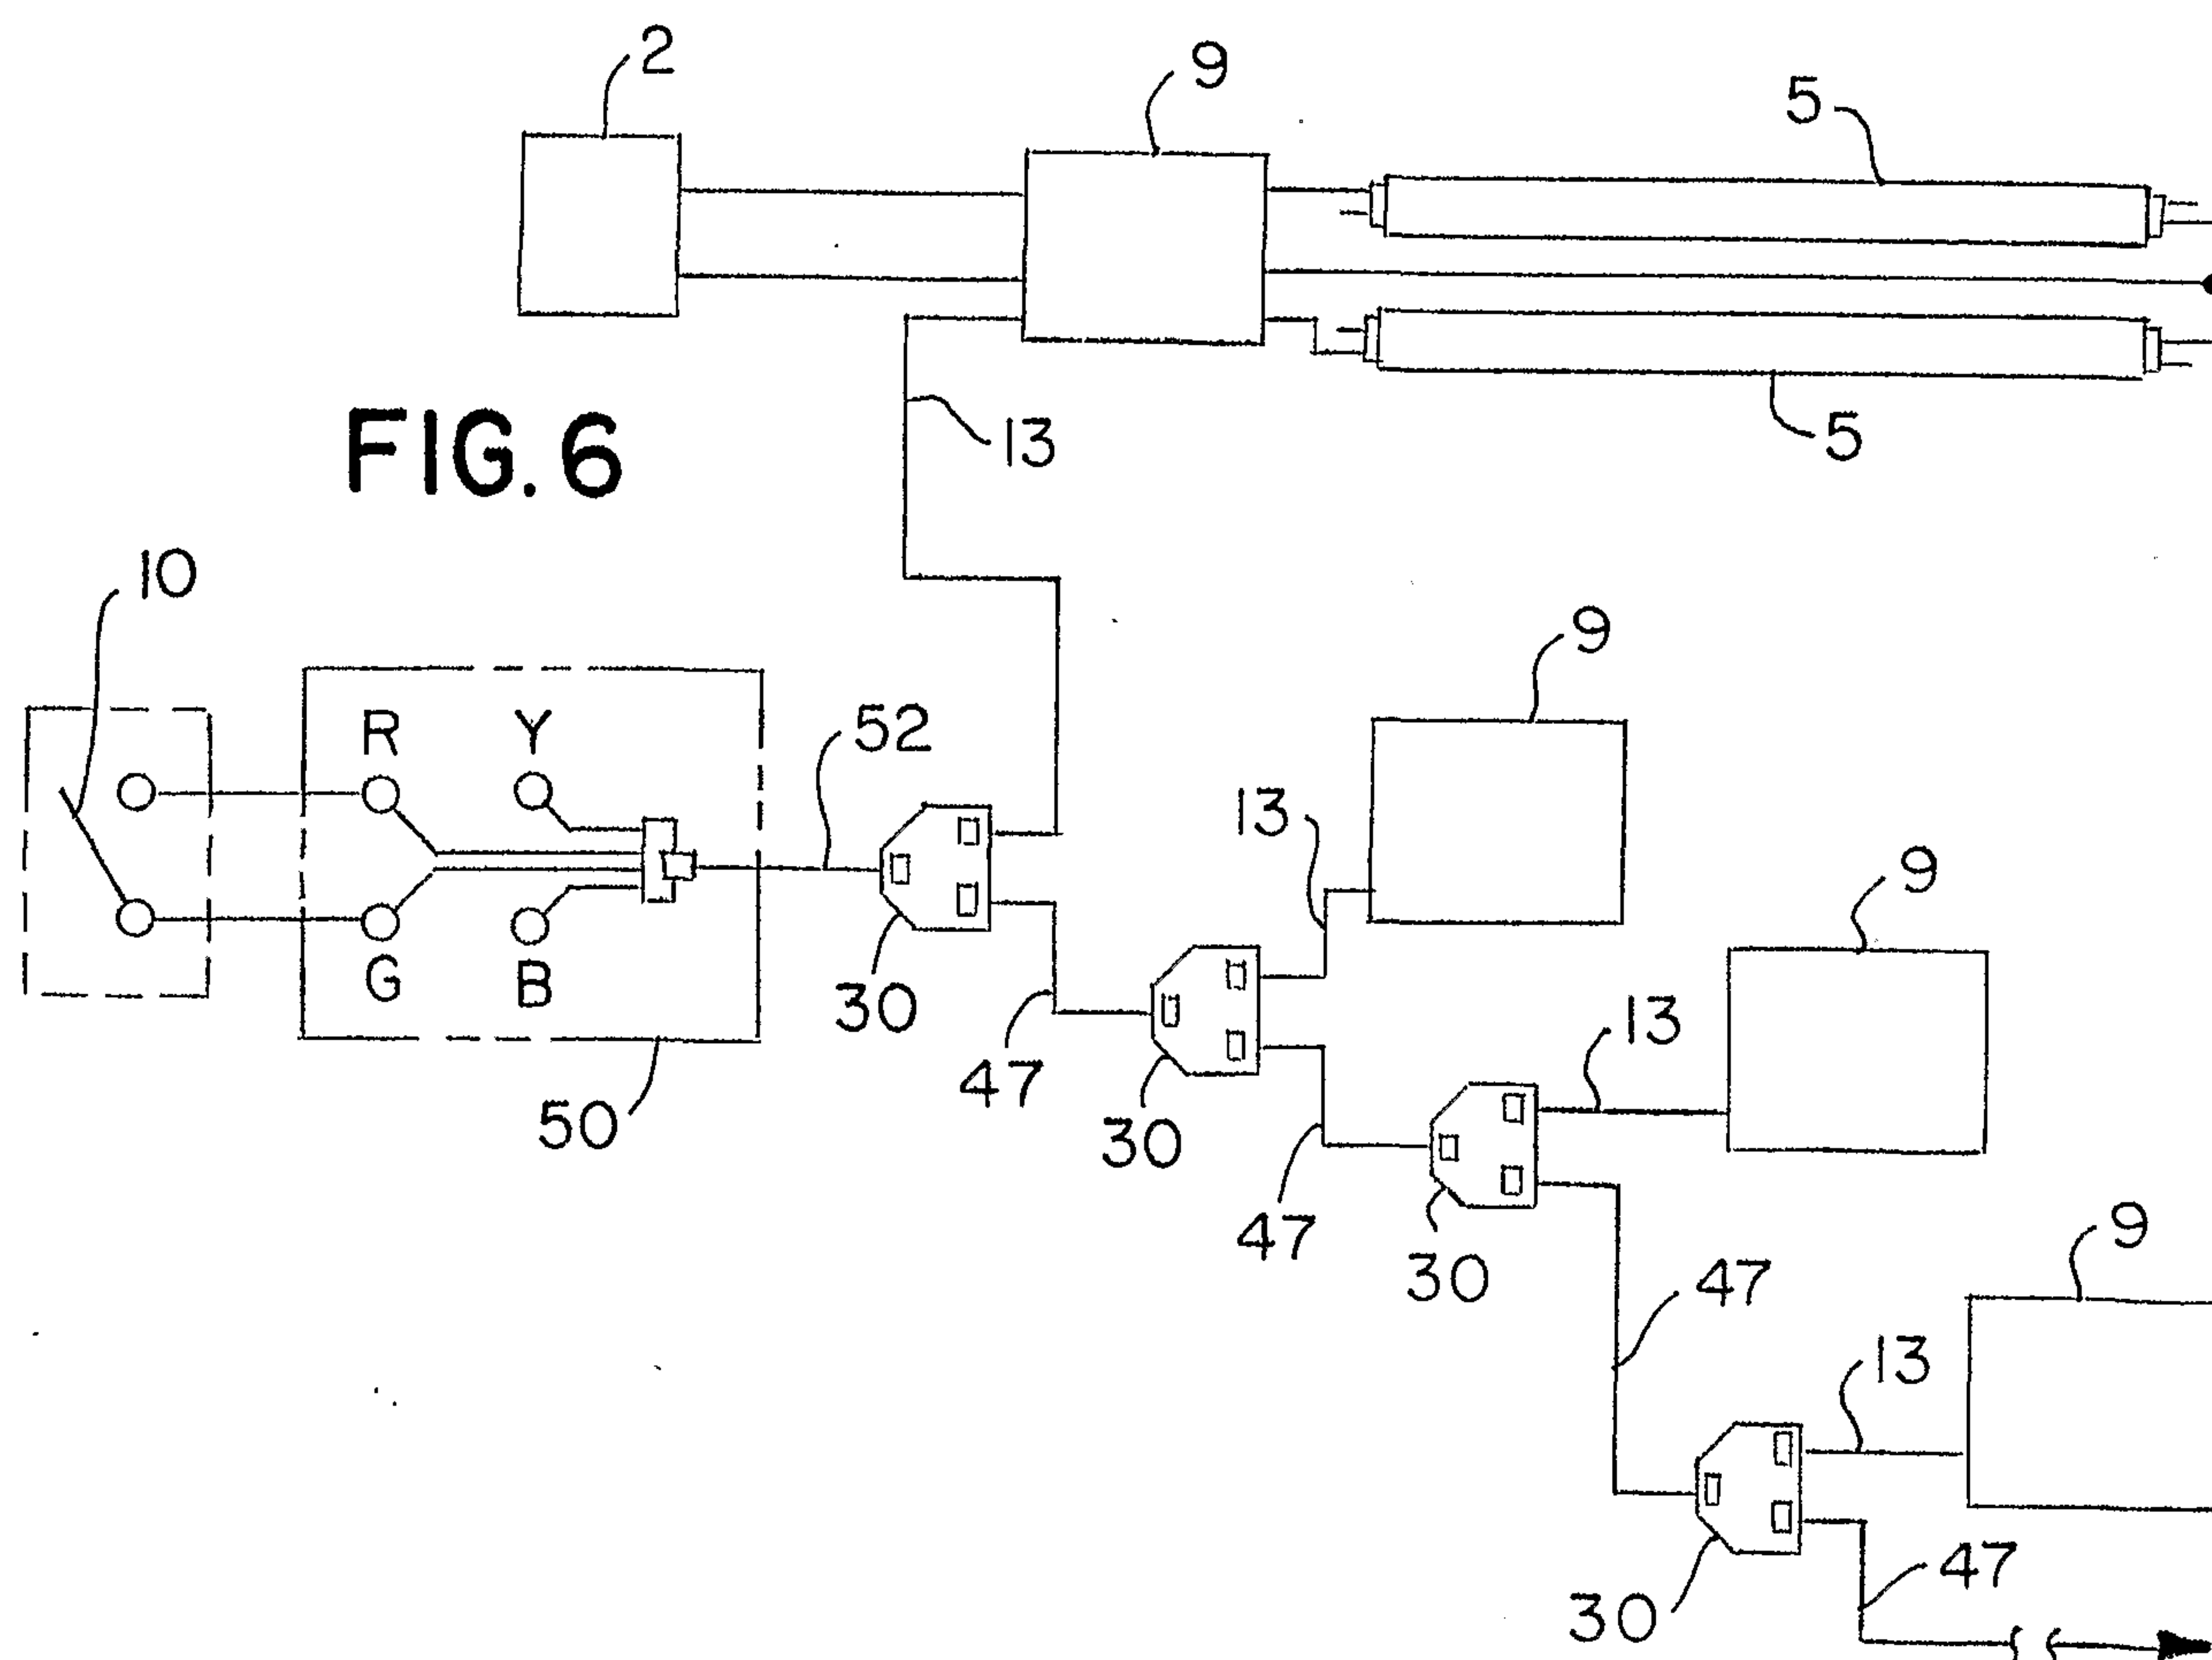

4/5

FIG. 7

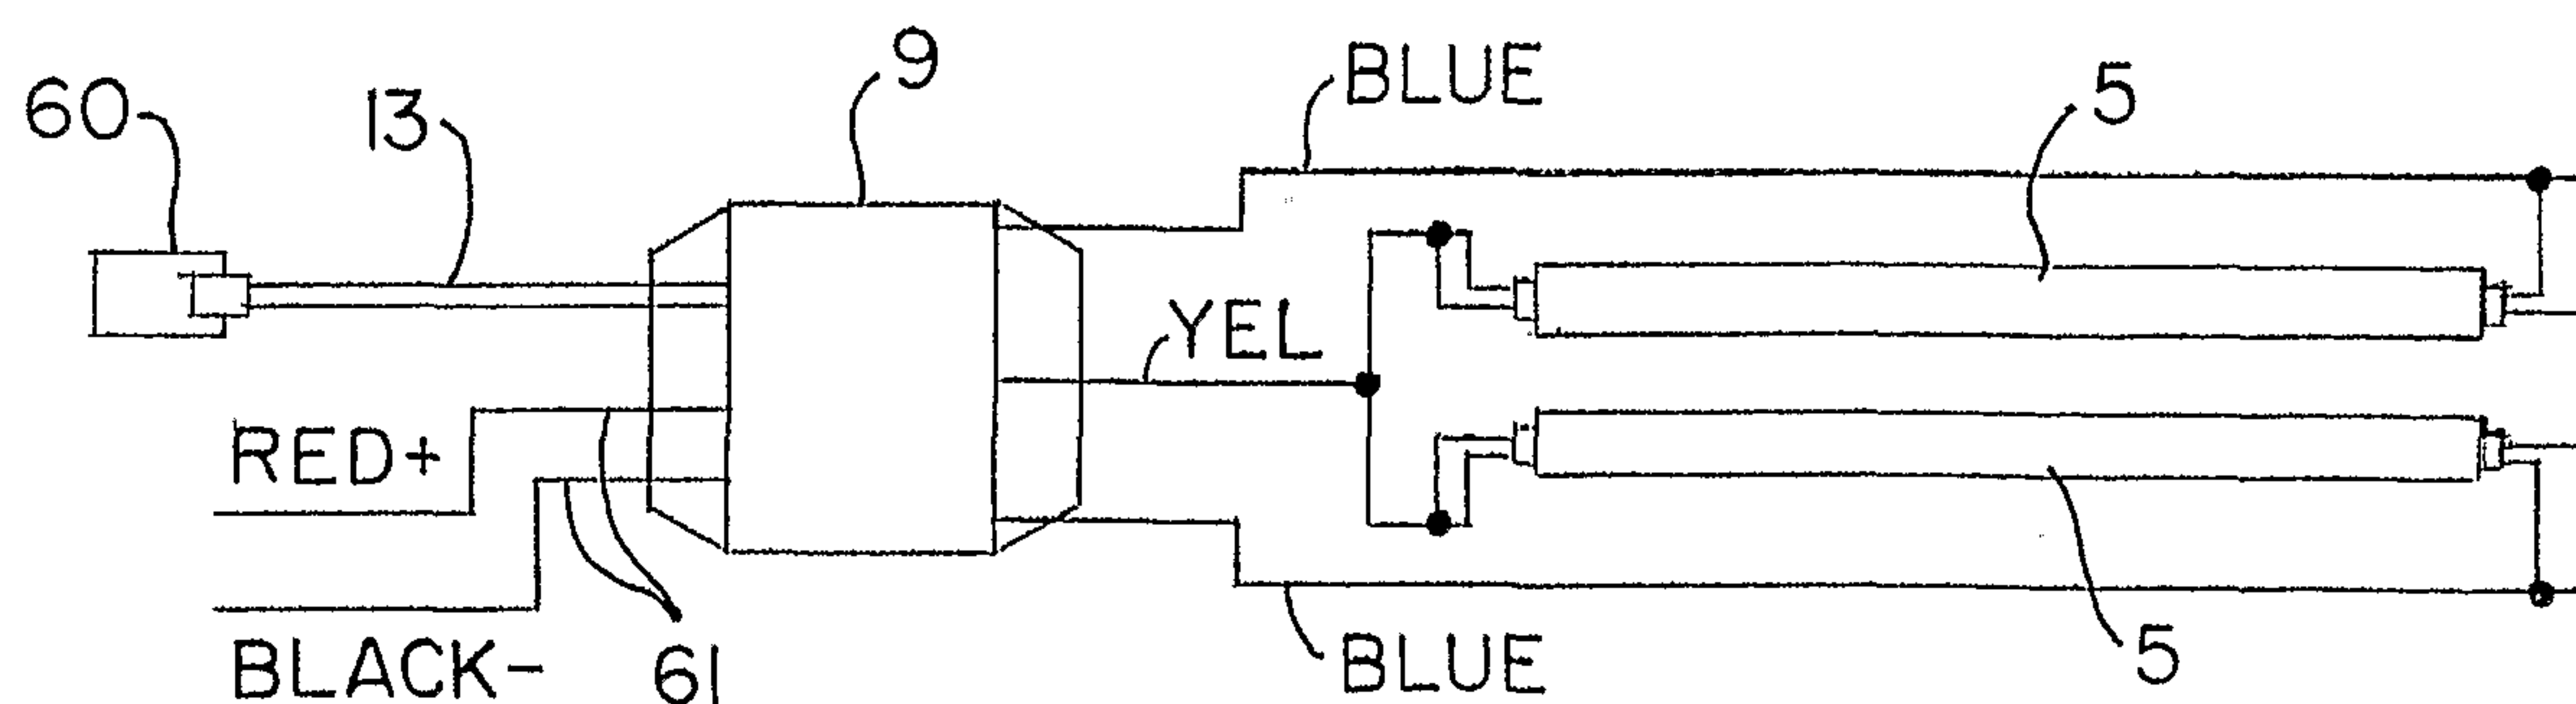


FIG. 8

