



(86) Date de dépôt PCT/PCT Filing Date: 1991/11/20

(87) Date publication PCT/PCT Publication Date: 1992/05/29

(45) Date de délivrance/Issue Date: 2003/06/17

(85) Entrée phase nationale/National Entry: 1993/05/18

(86) N° demande PCT/PCT Application No.: CA 1991/000413

(87) N° publication PCT/PCT Publication No.: 1992/008380

(30) Priorité/Priority: 1990/11/20 (616,068) US

(51) Cl.Int.⁵/Int.Cl.⁵ A42B 3/04


(72) Inventeurs/Inventors:
COPELAND, STEVE, CA;
BALL, ROGER, CA

(73) Propriétaire/Owner:
ITECH SPORT PRODUCTS INC., CA

(74) Agent: OGILVY RENAULT


(54) Titre : CASQUE DE SECURITE ET PROTECTEUR FACIAL DETACHABLE

(54) Title: PROTECTIVE HEADGEAR AND DETACHABLE FACE PROTECTOR

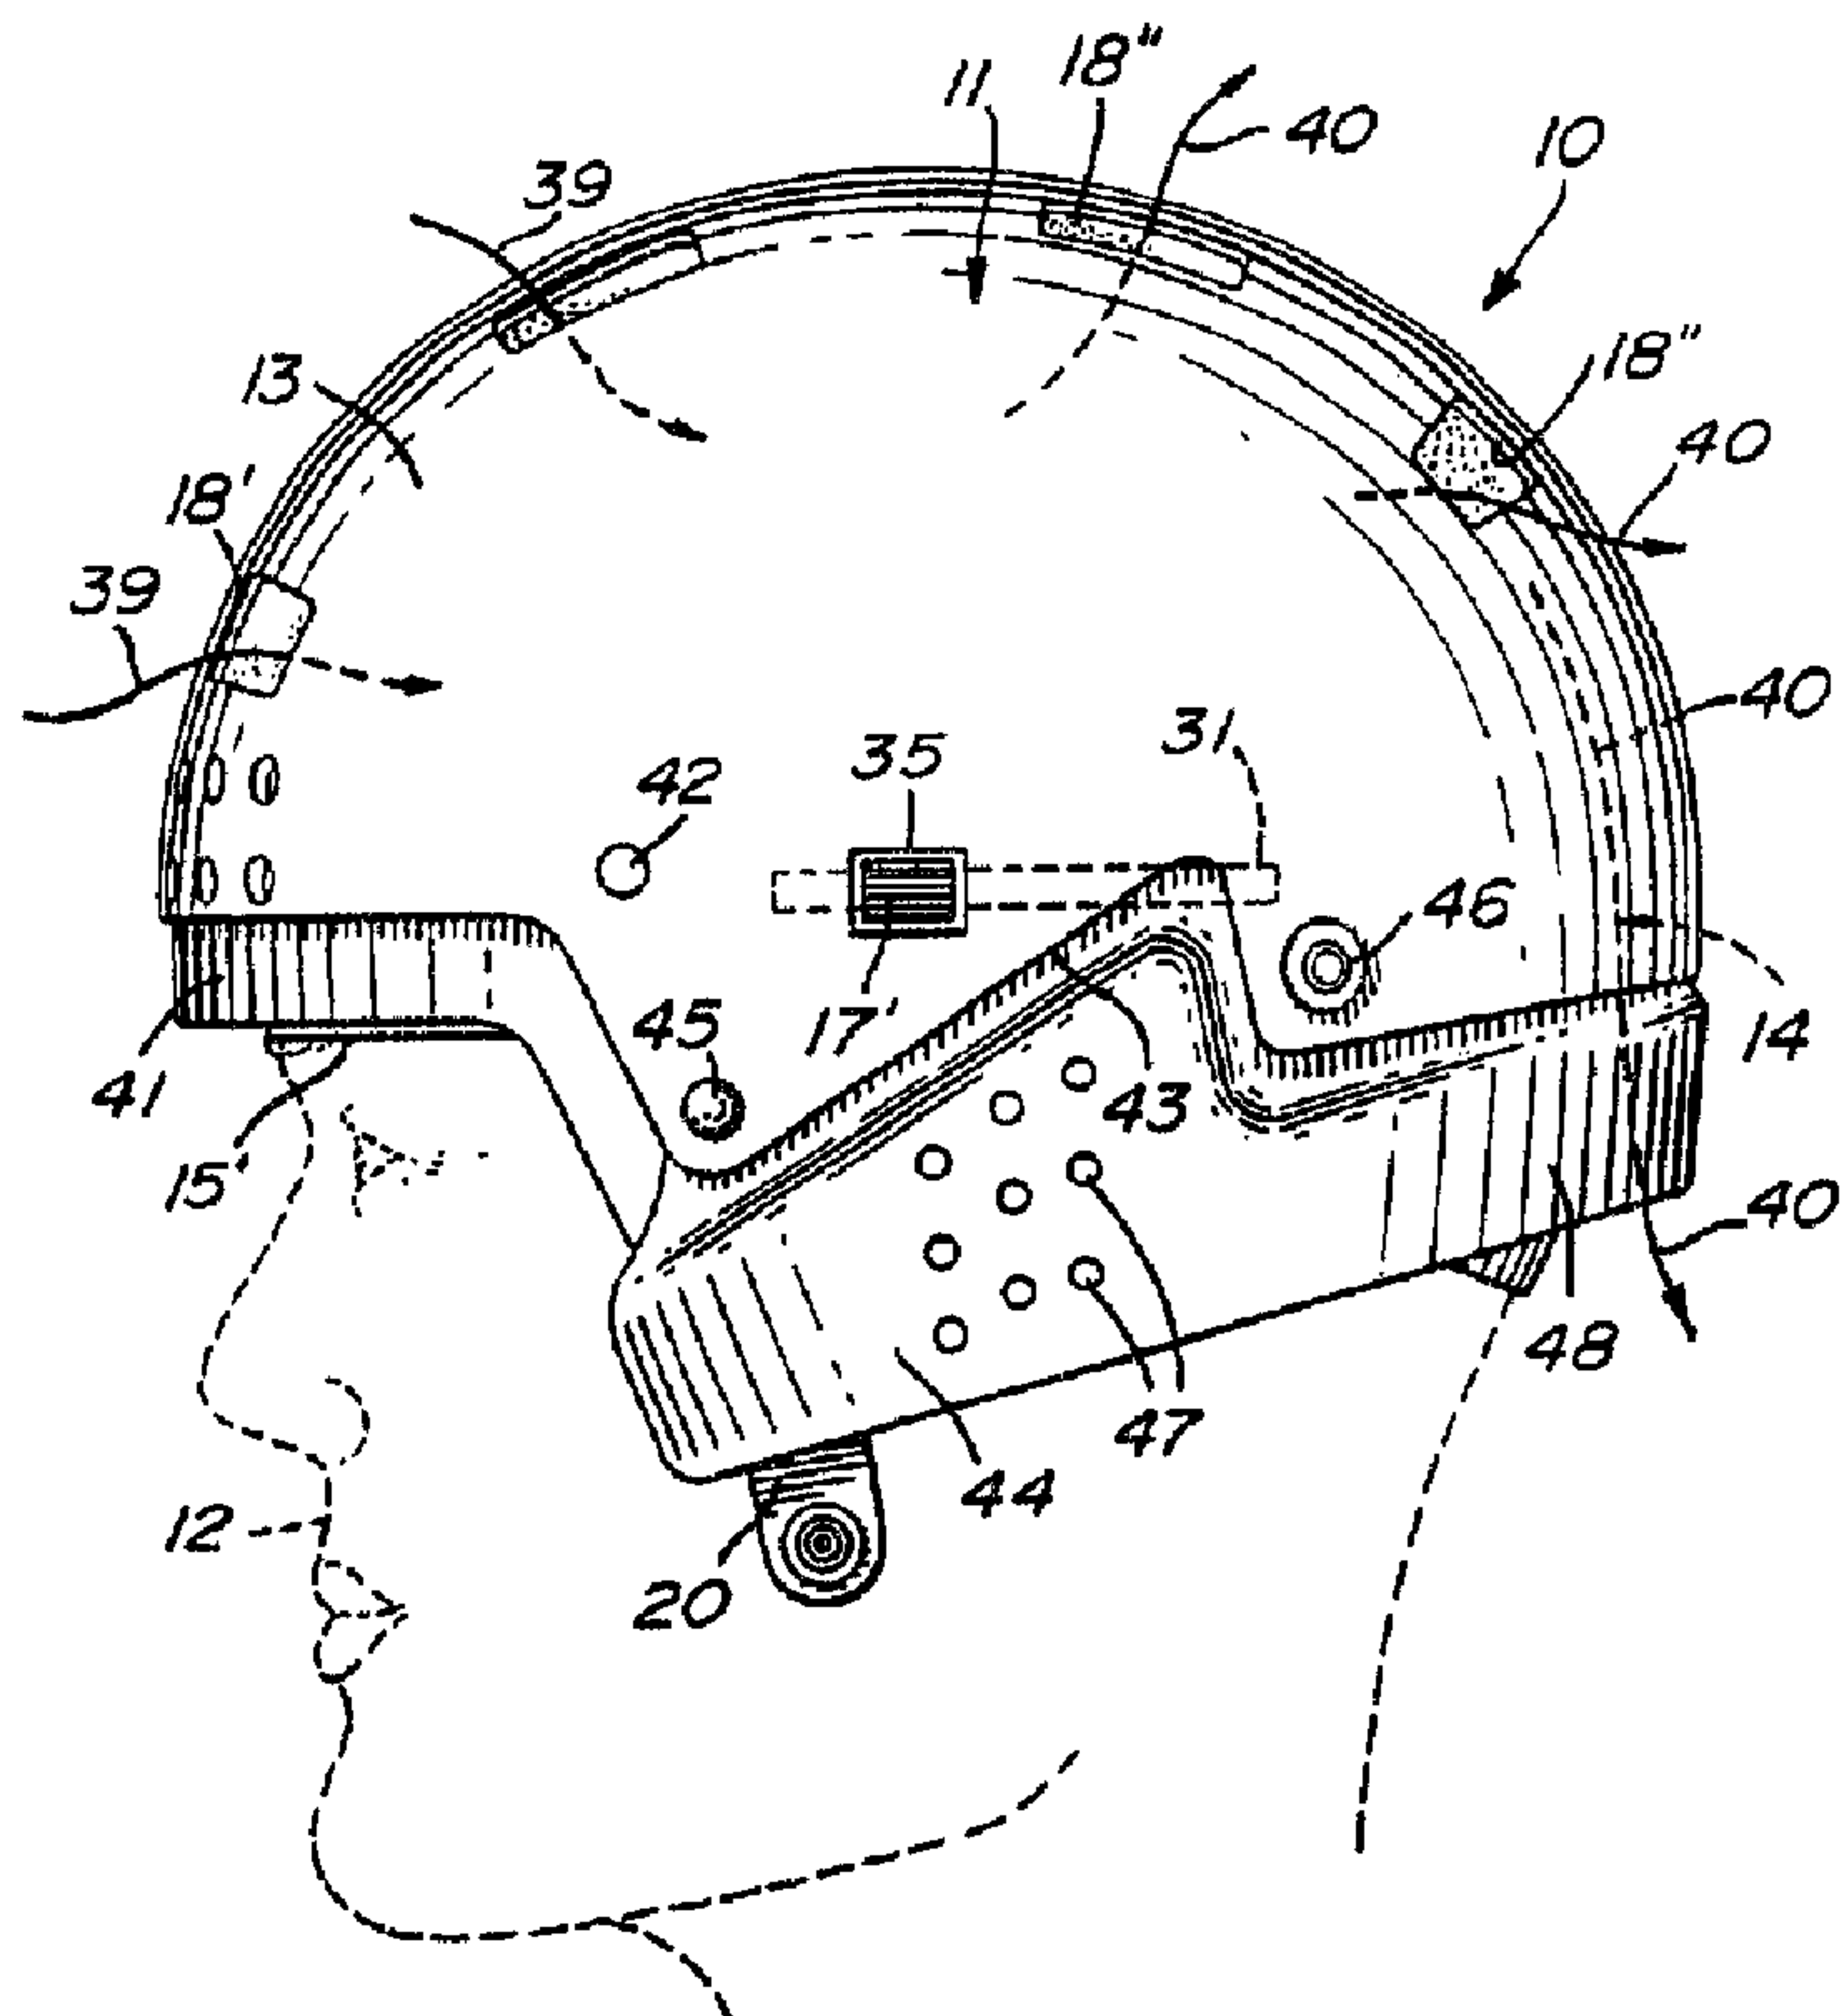

(57) Abrégé/Abstract:

A protective sports headgear (10) comprised of a helmet member (11) shaped to protect the top, rear, front and sides of a wearer's head (12). The helmet member (11) has a rigid outer shell (13) with an inner protective lining (14) of shock absorbing material. A sizing harness (15) is secured to the helmet and disposed inwardly thereof. The harness (15) has a height adjusting

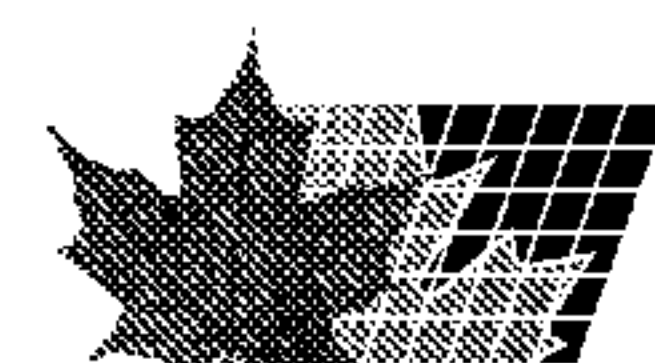

(57) Abrégé(suite)/Abstract(continued):

band (15'') and a horizontal contour adjusting band (15'). Adjustable sizing members (17) are secured to the helmet and the adjusting bands to fit the bands on the head of a wearer to thereby space the head from the protective lining (14) in at least some inner areas of the helmet member. The helmet is secured to the wearer's head by conventional retention members (20). In order to cover the protective lining (14) extending beyond at least forehead and neck portion of said outer shell (13), the headgear (10) comprises further a protective shield (41) and ear shields (44) connected together with a band section (48), said shields (41, 44, 48) being immovably secured in position by means of fasteners (42, 45, 46). The headgear (10) is also provided with a faceguard frame (70) and a visor (88) hingedly connected to said frame (70).




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : A42B 3/10, 3/28, 3/06 A42B 3/20	A2	(11) International Publication Number: WO 92/08380
		(43) International Publication Date: 29 May 1992 (29.05.92)
(21) International Application Number: PCT/CA91/00413 (22) International Filing Date: 20 November 1991 (20.11.91) (30) Priority data: 616,068 20 November 1990 (20.11.90) US (71) Applicant: 636729 ONTARIO LTD. [CA/CA]; 522 Pape Avenue, Toronto, Ontario M4K 3R3 (CA). (72) Inventors: COPELAND, Steve ; 675 Foxwood Trail, Pickering, Ontario L1V 3Y1 (CA). BALL, Roger ; 522 Pape Avenue, Toronto, Ontario M4K 3R3 (CA). (74) Agents: MITCHELL, Robert et al.; Swabey Ogilvy Renault, Suite 800, 1001 de Maisonneuve West, Montreal, Quebec H3A 3C8 (CA).		2096541 (81) Designated States: AT, AT (European patent), AU, BB, BE (European patent), BG, BR, CA, CH, CH (European patent), CS, DE, DE (European patent), DK, DK (European patent), ES, ES (European patent), FI, FR (European patent), GB, GB (European patent), GR (European patent), HU, IT (European patent), JP, KP, KR, LK, LU, LU (European patent), MC, MG, MN, MW, NL, NL (European patent), NO, PL, RO, SD, SE, SE (European patent), SU ⁺ . Published <i>Without international search report and to be republished upon receipt of that report.</i>

(54) Title: PROTECTIVE HEADGEAR AND DETACHABLE FACE PROTECTOR**(57) Abstract**

A protective sports headgear (10) comprised of a helmet member (11) shaped to protect the top, rear, front and sides of a wearer's head (12). The helmet member (11) has a rigid outer shell (13) with an inner protective lining (14) of shock absorbing material. A sizing harness (15) is secured to the helmet and disposed inwardly thereof. The harness (15) has a height adjusting band (15'') and a horizontal contour adjusting band (15'). Adjustable sizing members (17) are secured to the helmet and the adjusting bands to fit the bands on the head of a wearer to thereby space the head from the protective lining (14) in at least some inner areas of the helmet member. The helmet is secured to the wearer's head by conventional retention members (20). In order to cover the protective lining (14) extending beyond at least forehead and neck portion of said outer shell (13), the headgear (10) comprises further a protective shield (41) and ear shields (44) connected together with a band section (48), said shields (41, 44, 48) being immovably secured in position by means of fasteners (42, 45, 46). The headgear (10) is also provided with a faceguard frame (70) and a visor (88) hingedly connected to said frame (70).

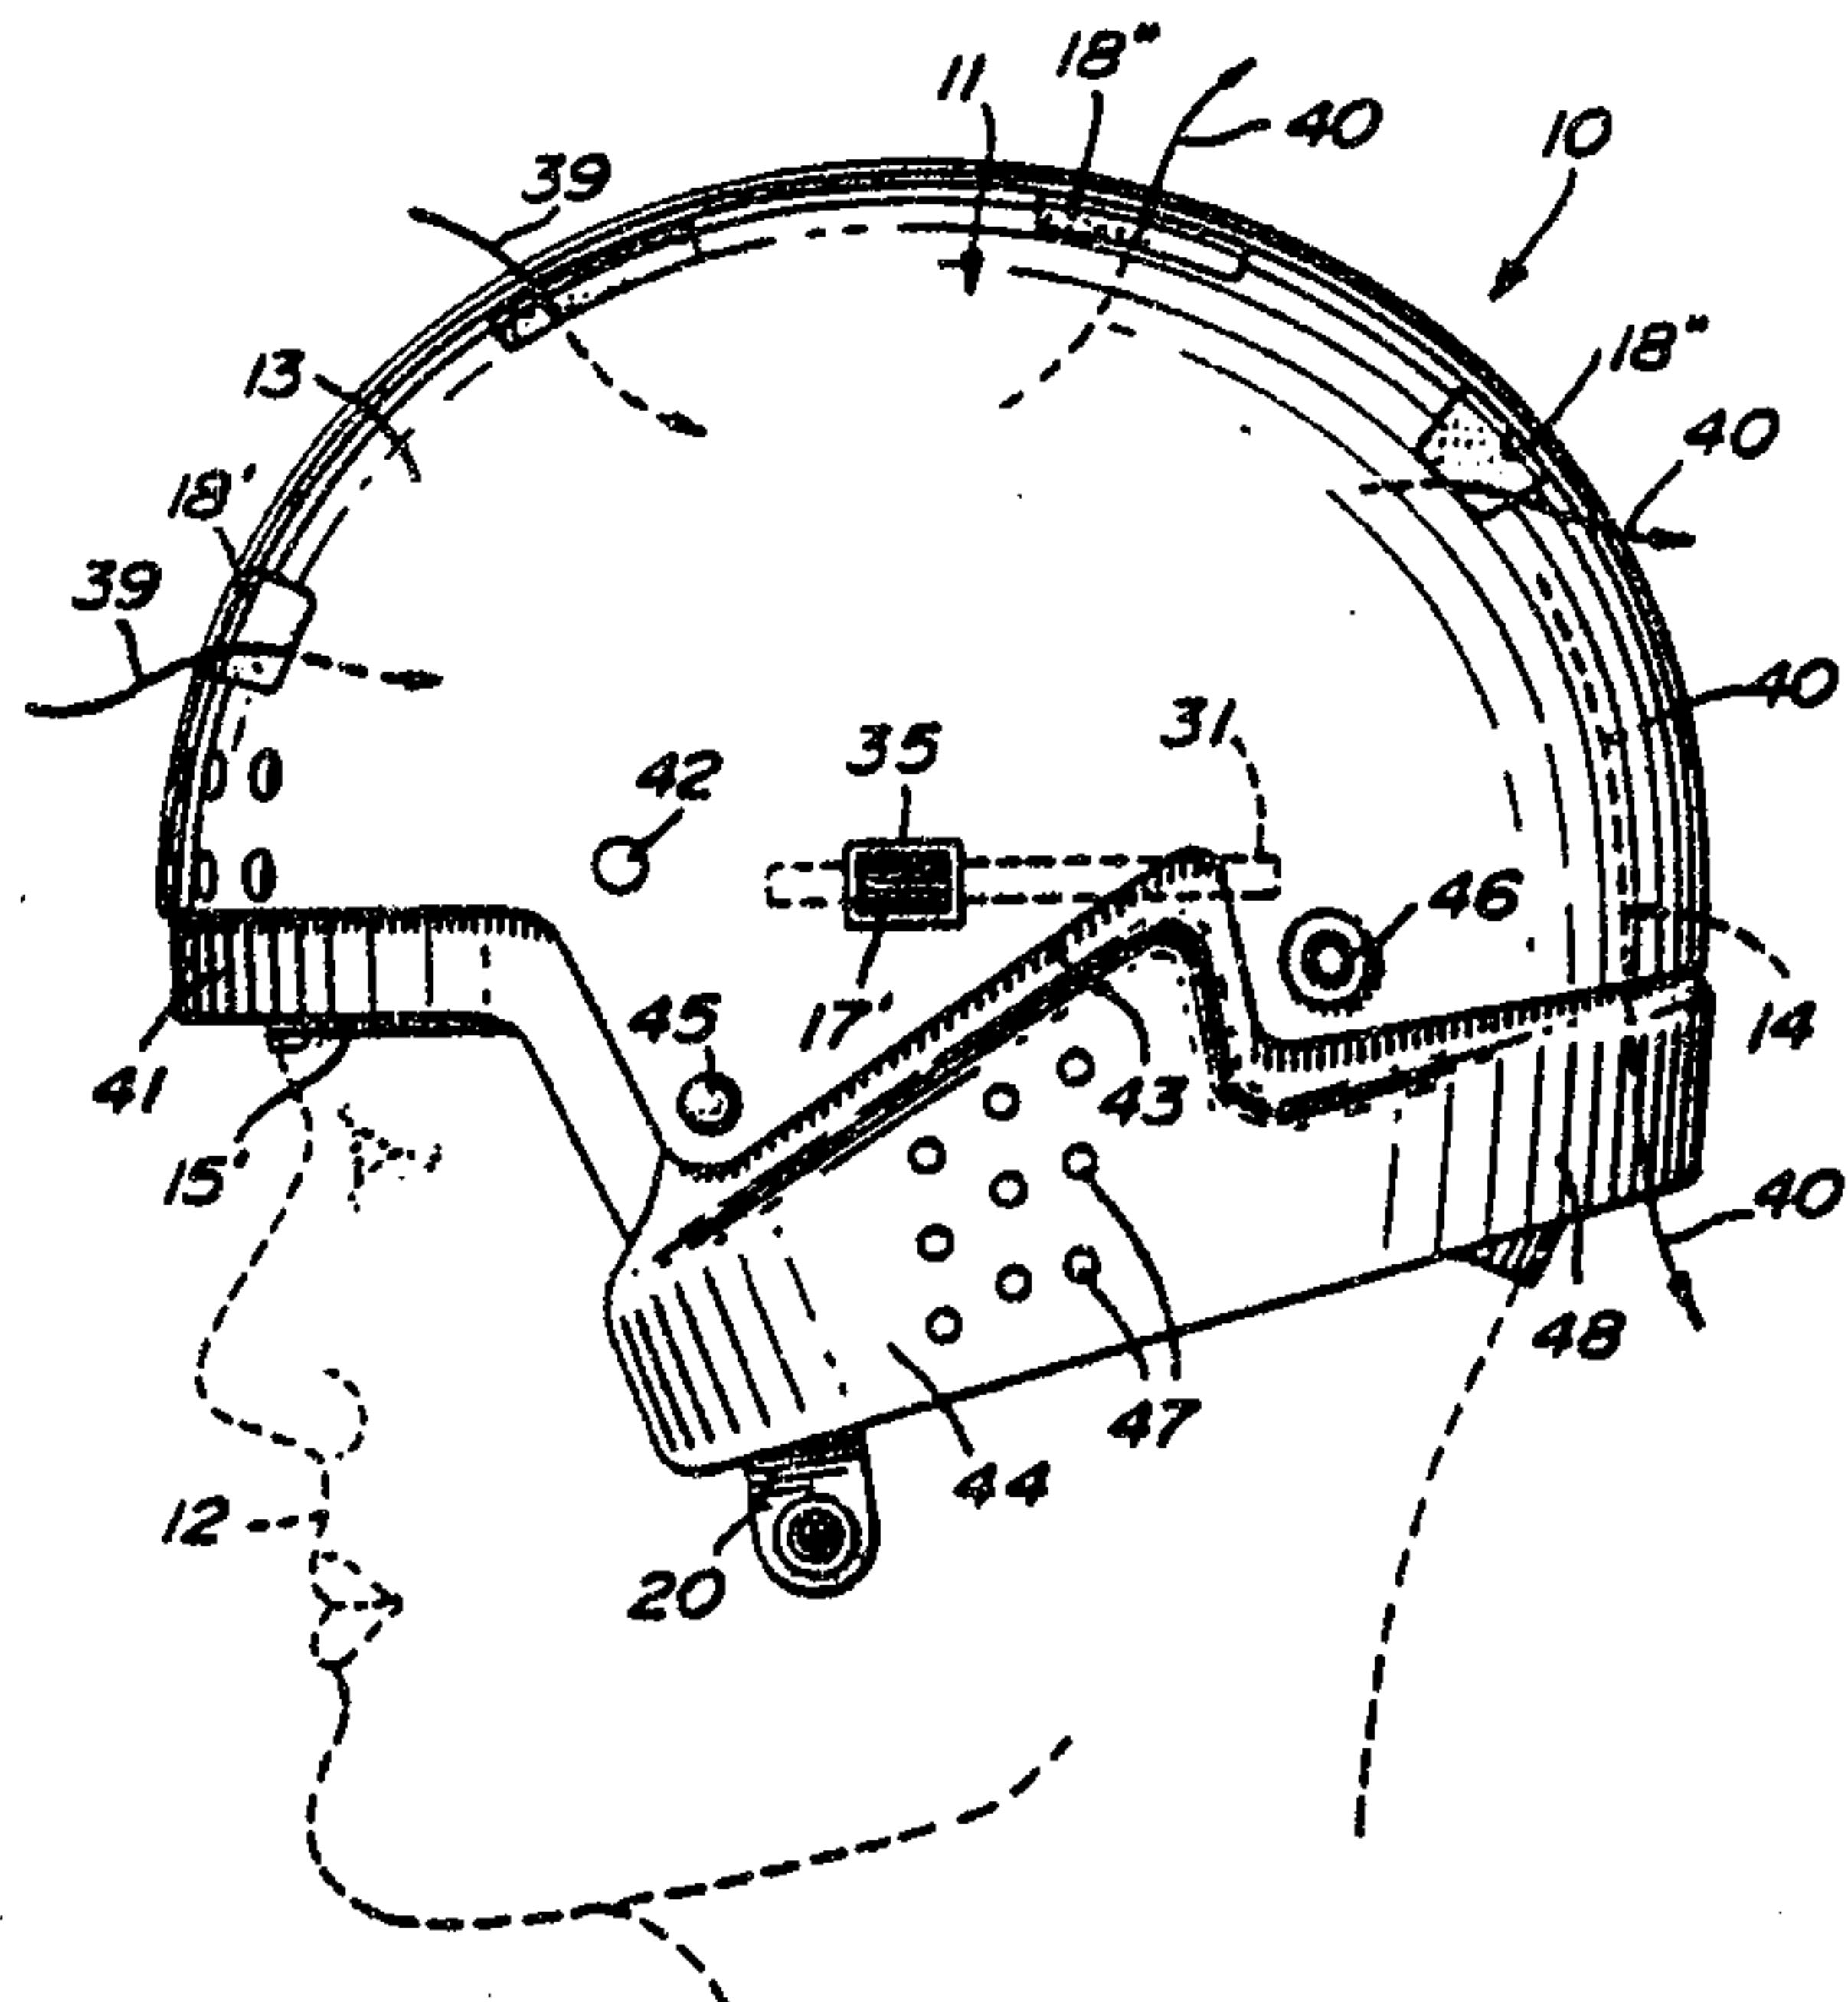

- 1 - 2096541

PROTECTIVE HEADGEAR AND
DETACHABLE FACE PROTECTOR

TECHNICAL FIELD

5 The present invention relates to a protective
sports headgear which comprises a helmet member
having a sizing harness secured in the helmet and
adjustable to fit the wearer's head by means of
finger adjusting members secured to the helmet and
10 accessible from the outer face of the helmet.

BACKGROUND ART

Protective headgears are worn in various types
of sports such as hockey, football, cycling, just to
15 name a few, and these have various shapes and forms
and are provided with or without face protecting
devices. Such known helmets have various disadvan-
tages which have heretofore not been remedied. One
of the disadvantages is that certain of these helmets
20 do not provide adequate protection to the head of the
wearer and one cause of this is usually because the
helmet is not properly fitted to the head of the
wearer. Another disadvantage of known helmets is
that when they are snugly fit on the head of a
25 wearer, they do not provide head ventilation and,
accordingly, the wearer will sweat profoundly from
the head often impairing his vision as well as making
the wearer feel very uncomfortable. This is particu-
larly so when the helmet is fit with a protection
30 visor. The sweat will fog the visor and thereby
impair the wearer's vision which could again be a
cause of injury due to poor visibility. Another
disadvantage of known helmets is that in certain

2096541

- 2 -

sports, they are provided with faceguards which are attached by metal rivets or other type fasteners and such fasteners can cause injury to the wearer, particularly when they protrude inside the helmet.

5 Referring now more specifically to helmets utilized in the sport of hockey, it has become common practice to provide visors and faceguard frames secured to the helmet whereby to protect the eyes and nose of the wearer or the entire face of the wearer
10 including the ears. The majority of known visors often need to be cleaned when they fog up due to sweat generated by the wearer, it is often necessary to remove the entire helmet and to hinge the faceguard in order to have access to the inside
15 surface of the visor. This is time-consuming and often the hockey player will continue playing the game with impaired vision thereby diminishing his abilities as well as making him more susceptible to injury.

20

DISCLOSURE OF INVENTION

It is a feature of the present invention to provide a protective sports headgear which substantially overcomes all of the above-mentioned disadvantages of the prior art.
25

Another feature of the present invention is to provide a protective sports headgear having a helmet member with a sizing harness secured inwardly thereof with adjustable bands which can be adjusted with the
30 helmet positioned on the wearer's head by adjustable members provided on the outer surface of the helmet.

Another feature of the present invention is to provide a protective sports headgear which comprises a helmet having a sizing harness secured inwardly
35 thereof to space the wearer's head from an inner protective lining in at least some inner areas of the helmet member and wherein vent holes are provided in

- 3 -

the helmet to ventilate the wearer's head to reduce sweating and to make the helmet more comfortable. The sizing harness will accommodate any head size due to its flexibility in adjustment.

5 Another feature of the present invention is to provide a protective sports headgear having a faceguard frame and a visor hingedly secured to the frame whereby the visor can be easily hinged away from a sighting opening so as to clean the visor or
10 to simply place it in a position of non-use when the wearer does not require same.

 Another feature of the present invention is to provide an improved protective sports headgear having plastic-type fasteners secured thereto to retain
15 various parts of the helmet construction and wherein the fasteners provide added protection to the wearer and wherein the construction and design of the helmet is an improvement over known helmets of the prior art.

20 According to the above features, from a broad aspect, the present invention provides a protective headgear which comprises a helmet member shaped to protect the top, rear, front and sides of a wearer's head. The helmet member has a rigid outer shell with
25 an inner protective lining of shock absorbing material. A sizing harness is secured to the helmet and disposed inwardly thereof. The harness has a height adjusting band and a horizontal contour adjusting band. Adjustable sizing means is secured
30 to the helmet and the adjusting bands to fit the bands on the head of a wearer and thereby spacing the head from the protective lining in at least some inner areas of the helmet member. Means is provided to secure the helmet to a wearer's head.

35

2096541

- 4 -

Another feature of the present invention is to provide an improved protective sports headgear for use in the sport of hockey and wherein an ear shield is secured to the helmet member and extends over an ear clearance area whereby to cover a substantial portion of a wearer's ear.

Another feature of the present invention is to provide an improved protective sports headgear having a helmet member comprised of a rigid outer shell and an inner protective lining of shock absorbing material secured to the shell by ribbed fasteners constructed of plastics material and which do not transfer impact.

Another feature of the present invention is to provide a faceguard frame securable to a helmet member to protect a wearer's face and wherein the faceguard frame is of mesh-like construction and has a sighting opening in an eye and nose region of the face of the wearer. A visor of clear plastics material is hingedly connected to the faceguard frame and hingeable upwardly of the sighting opening. Lock means is provided to immovably secure the visor in its position of use across the sighting opening. A half faceguard frame is also provided.

Another feature of the present invention is to provide a thermoformed plastic frame secured to a helmet member of a protective sports headgear to protect a goaltender's face. The thermoformed plastic frame has a face opening across which is secured a protective member. A pivoting throat guard is formed as a solid molded piece and secured to the frame by opposed pivot connectors and pivotal from a lower chin band section of the frame.

- 5 -

BRIEF DESCRIPTION OF DRAWINGS

A preferred embodiment of the present invention will now be described with reference to the accompanying drawings in which:

5 FIGURE 1 is a side view of the protective sports headgear of the present invention;

FIGURE 2 is an inside view of the protective sports headgear of Figure 1;

10 FIGURE 3 is a perspective inside view illustrating the positioning of the head sizing harness;

FIGURE 4 is a plan view illustrating the shape and construction of the sizing harness;

15 FIGURE 5 is a fragmented perspective view showing the manner in which the sizing harness is secured to an adjustment member accessible from the outer surface of the helmet;

FIGURES 6A, 6B and 6C are plan, side and end views, respectively, of the sizing band connectors;

20 FIGURES 7A, 7B and 7C are plan, side and end views, respectively, showing how the sizing band connector is secured to the housing in which an adjustment knob is retained;

25 FIGURES 8A and 8B are side and end views, respectively, of the adjustment knob;

FIGURES 9A and 9B are side and top views, respectively, of the trough-like housing;

30 FIGURES 10A and 10B are side and top views, respectively, of rib fasteners and stem-engaging cup member as seen from the end edge thereof;

FIGURES 11A and 11B are similar views to Figures 10A and 10B but showing the rib fastener from the side thereof;

35 FIGURE 12 is a section view of a female lug fastener constructed of plastics material;

FIGURE 13 is a side view of a male snap fastener;

2096541

- 6 -

FIGURES 14A, 14B and 14C are side, section and plan views of a frame attachment hinge member constructed of plastics material;

5 FIGURE 15 is a side view of a faceguard frame constructed in accordance with the present invention;

FIGURE 16 is a fragmented front view of the faceguard frame of Figure 1;

FIGURE 17 is a top inside view of the rib cage section of the faceguard frame;

10 FIGURES 18A and 18B along section lines A-A and B of Figure 16;

FIGURE 19A is a side view showing the hinge connection and detachable lock means of the faceguard frame;

15 FIGURE 19B is a section side view of the flexible retention finger of Figure 19A;

FIGURE 20 is a side view, partly sectioned, showing the construction of the visor and its attachment means to secure to the faceguard frame;

20 FIGURE 21 is a front view of a visor;

FIGURE 22 is a top view of the visor;

FIGURE 23 is a fragmented section view of the retention bore which engages with the retention head of the flexible retention finger;

25 FIGURES 24 and 25 are side views showing the manner in which the visor is hinged to the faceguard frame;

FIGURE 26 is a view similar to Figures 24 and 25 but showing the visor secured to a half faceguard; and

30 FIGURE 27 is a perspective view of a thermoformed plastic goalie faceguard frame for securement to a helmet member.

- 7 -

MODES FOR CARRYING OUT THE INVENTION

Referring now to the drawings, and more particularly to Figures 1 to 3, there is shown generally at 10, the protective sports headgear of the present invention and particularly, but not exclusively, a sports headgear. The headgear comprises a helmet member 11 which is shaped to protect the top, rear, front and sides of a wearer's head 12. The helmet member has a rigid outer shell 13 with an inner protective lining 14 formed of thick polyurethane foam or other rigid foam-like material being light weight and having shock absorbing properties. The shell has a uniform outer surface with no ridges to catch when the wearer's head hits objects. The uniform surface also deflects blows imparted to it.

A sizing harness 15 is secured to the helmet by fasteners 16, which will be described later, at various predetermined locations along the band, so as to secure same to the helmet member while still providing adjustability about the wearer's head. As shown in Figure 4, the sizing harness 15 is made as a one-piece band of flexible material, herein a flexible plastics material, and defines a horizontal contour-adjusting band section 15' and a height-adjusting band section 15".

Adjustable sizing means, herein in the form of adjustment knobs 17, are provided on each side of the helmet and accessible from the outer face of the rigid outer shell 13. The knob 17' as shown in Figure 1 is utilized to adjust the horizontal contour band section 15' while the adjustment knob 17, as shown in Figure 3, is utilized to adjust the height-adjusting band section 15". Accordingly, the bands can be fitted comfortably about the wearer's head and by such means can space the wearer's head in at least some section of the helmet member to provide a

2096541

- 8 -

comfortable fit and also to permit ventilation through the helmet through the vent holes 18' and 18" extending through the outer shell 13 and the inner protective lining 14. Also, when an impact is absorbed by the helmet, it is easy to readjust the harness if it loosens during impact as the blow is absorbed.

Referring again to Figure 4, it can be seen that certain parts of the band are provided with holes 18 which reduces the formation of sweat against the wearer's head. Lugs 19 are also formed integral with the band to provide securement of same to the helmet member. Chin strap connecting bands 20 are also formed integral with the harness. Also formed integral with the adjustment horizontal and height adjustment band sections 15' and 15" is a connector bridge 21 having an elevated top wall 24 as shown at 22. A pair of connecting holes 23 are provided in the top wall 24 of the connector bridge 21 whereby to connect to adjustment members 25 as shown in Figure 5.

Referring now additionally to Figures 5 to 9B, there will be described the manner in which the harness is adjustable. As shown in Figures 6A to 6C, the adjustment members comprise a band connector 26 provided with an attachment element 27 securable to a respective one of the adjusting band sections 15' and 15". An elongated flexible threaded member 28 is integrally formed with the attachment element 27. One or more prongs 29 are formed in the attachment element 27 and protrude thereabove to engage within the connecting holes 23 provided in the connector block 21 of the harness. The securement of the attachment element 27 to the connector block could also be made by other fastening means, such as a separate connector pin.

- 9 -

5 A flat wing element 30 is formed integral with the attachment element 27 and is retained captive between an inner face of the outer shell 13 and the protective lining 14 and extends to each side of a guide channel 31, as shown in Figure 5. The guide channels are formed within the inner protective lining 14 and extend therethrough. The location of the horizontal guide channel 31 is shown in phantom lines in Figure 1 and the vertical guide channel 31' is shown in phantom lines in Figure 3. The size of this channel is selected so that the connector bridge 31 is closely guided therein so as to maintain the adjustable band sections in proper position inside the helmet.

15 Figures 8A and 8B illustrate the construction of the adjusting knobs 17 and as herein shown, they are comprised as a cylindrical wheel 32 having an inner threaded bore 33 and a plurality of finger engaging ribs 34 formed in an outer surface thereof and extending parallel to the through bore 33 for rotating the cylinder knob 32 about the elongated threaded member 28, as shown in Figure 7C.

20 Referring additionally to Figures 9A and 9B, there is shown the construction of a trough-like housing 35 which is secured in locating holes provided in the outer shell 13 and inner protective lining 14. The trough-like housing 35 has an arcuate side wall 36 and opposed U-shaped end walls 37. Holes 38 are provided in the end walls to accommodate the passage of the elongated flexible threaded member 28 therethrough, as shown in Figures 7A to 7C. The adjusting cylinder knob 32 is located within the housing 35 and is in threaded engagement with the threaded member 28 extending therethrough, as shown in Figure 7C. Accordingly, by turning the knob 32, the threaded member 28 is displaced axially through the housing and thereby displaces the adjusting band

- 10 -

sections 15' and 15" which are connected to the attachment element 27. Figure 7C shows the position of the adjustable band section 15' riding on the top inner surface of the inner protective lining 14 with the wing element 30 being positioned in sliding fit between the outer shell 13 of the helmet and the protective lining 14 and extending beyond the edges of the guide channel 31. Accordingly, by rotating the adjusting knobs 17 and 17', the band is fitted about the wearer's head and this can be done while the helmet is positioned on the wearer's head. The adjustment knobs 17 also provide for very finite adjustment of the band and thus adding to the comfort and proper sizing. It is also not necessary to remove the helmet to make the sizing adjustment. It is also pointed out that the cylinder knobs are disposed along different axes to indicate to which of the bands it is connected and as hereinshown, the adjustment knob of Figure 1 is disposed horizontally to indicate it is attached to the horizontal band section 15' whilst the adjustment knob 17 is disposed vertically to indicate that it is connected to the vertical or height adjustment band section 15".

Referring to Figure 1, it can be seen that a plurality of vent holes 18 are provided within the outer shell and the inner protective lining with the front vent holes 18' being disposed horizontally to admit more air inside the helmet member 11. Accordingly, as the wearer displaces himself, air enters the helmet through the frontal air holes in the direction of arrows 39 and exit through the top holes 18" as shown by arrows 40. Some ventilation also takes place through the back of the neck as illustrated by arrow 40' due to the spacing provided by the harness. This permits the wearer's head to be cooled thereby generating less sweat and maintaining the wearer more comfortable to perform his sports

- 11 -

activity. The height adjusting band maintains a clearance between the inner surface of the inner protective lining 14 and the top of the wearer's head to achieve this feature. Of course, this clearance will vary depending on the size of the wearer's head and the size of the helmet being worn. The vent holes 18 are herein shown as disposed along a central band portion of the helmet from a frontal head area to a rear head area. Although these are shown as being of substantially rectangular configuration, they could also be shaped differently and disposed in spaced-apart pairs or again differently. Channels (not shown) could also be formed inside the lining and disposed in alignment with the vent holes.

Referring again to Figures 1 to 3, it can be seen that the inner foam protective lining 14 extends beyond at least the forehead and neck portion of the rigid outer shell. A protective shield 41 formed of flexible plastics material extends over a portion of the rigid foam material 14 in the forehead portion of the headgear to protect the foam in this area. This shield is immovably secured in position by means of plastic fasteners 42.

As can be seen from Figure 1, the helmet member defines an ear clearance area 43 on each side thereof. An ear shield 44 is secured to the helmet by suitable fasteners such as at 45 and 46 and extends over the ear clearance area and depends therefrom to cover a substantial portion of a wearer's ear. The ear shield 44 is molded from a flexible plastics material and protrudes outwardly of the plane of the rigid outer shell. Vent holes 47 are provided in the shield to vent this area and also not to shield the ear from sounds so that the wearer's audibility is not impaired. This ear shield is molded as a U-shaped member with an ear shield section 44 at opposed ends of the member and a

2096541

- 12 -

connecting band section 48 being disposed intermediate of the ear shields and overlying a rear extension portion of the inner protective lining 14 in a rear portion of the helmet. This provides added protection for the inner protective lining in this area of the wearer's head. Accordingly, this construction provides added protection to the wearer's head in the ear and neck portion areas.

Referring now to Figures 10A, 10B, 11A and 11B, there is shown the construction of rib fasteners 50 which are constructed of plastics or nylon-type material. The rib fasteners are provided with a rib stem member 51 and a stem-engaging cup member 52. The stem member 51 is an elongated straight flat stem member, as shown in Figure 11A, and is provided with opposed transverse, equidistantly spaced attachment ribs 52 on opposed flat side walls 53 of the stem. A flat transverse head 54 is provided at one end of the stem. A tapered locating free end 55 is provided at the opposed end of the stem. The cup member 52 has a recessed bottom wall 56 with a straight rectangular slot 57 provided centrally therein for receiving the free end and a portion of the ribbed stem member therethrough. A circumferential flange 58 extends about the side wall 59 of the cup member which is herein shown as a circular cup member. A pair of retention flexible shoulders 60 are disposed on opposed sides of a rectangular slot 57 and have an inward inclination to engage with the stem between the ribs, as shown in Figure 10A.

The ribs 51 are provided with outwardly sloping side walls 51' and a transverse retention rear wall 51". The flexible shoulders 60 of the cup member are displaced outwardly by the sloping side wall 51' when the stem is pushed through the rectangular slot 57. Each of the flexible shoulders 60 have a flat engaging top edge 61. This top edge 61 engages with

- 13 -

the transverse retention rear wall 51" of the ribs to prevent the stem from being pulled back from the rectangular slot of the stem engaging cup. It is also pointed out that the side walls 59 of the cup member are longer than the distance from the leading edge of a rib sloping side wall 51' disposed on top of the pair of retention shoulders 60 so that the stem can be severed at the rib leading edge so that the severed stem does not protrude beyond the circumferential flange 58 of the cup. This provides added security inside the lining of the headgear not to touch the wearer's head. The stem and cup members are molded from pliable plastic material. As shown in Figure 10A, the cup member 52 is disposed in a circular bore 62 formed in the inner surface of the protective material 14. The head 54 of the stem rests on an outer surface of the rigid outer shell 13.

Figure 12 shows the construction of a female-type lug fastener 63 which is utilized to secure various parts to the helmet member. The female lug fastener is constructed from a plastics material and provided with an inner flexible rim 64 which flexes outwardly to allow the passage of a male snap fastener 65 therein. The male snap fastener is provided with a retention head 66 and a flat outer head 67. These fasteners are all constructed of plastics material to provide added security to the wearer and are preferable over metal fasteners.

Referring now to Figures 14 to 18, there is shown the construction of a one-piece molded clear plastic faceguard frame 70 constructed in accordance with the present invention. The faceguard frame is of mesh-like construction and is comprised of a ribbed cage section 71 disposed below the eye and nose region 72 of a wearer's face whereby to protect the mouth, chin, neck and lower face of the wearer.

2096541

- 14 -

5 A forehead section 73 is disposed in line with the forehead of a wearer and is provided for hinge attachment with the helmet member 11. A large sighting area 74 is defined between the forehead section 73 and the ribbed cage section 71.

10 The ribbed cage section 71 is constructed of a plurality of horizontal and transverse ribs 75 and 76 respectively, as can be seen from Figures 18A and 18B and which are spaced apart a predetermined distance to provide adequate protection. The ribs are also of substantially triangular cross-section, as shown in Figures 18A and 18B, with the apex 77 of these ribs being located exteriorly of the cage section and aligned with the cone of vision of the sighting opening not to impair the wearer's vision. The forehead section 73 is provided with a rear rib 78 rearwardly of a top edge thereof. This rib is received within an integrally formed frame attachment hinge member 79 as shown in Figures 14A to 14C.

20 As shown in Figures 14A to 14C, the frame attachment hinge member is an integrally formed member of flexible plastics material and defines a female connector section 80 for receiving a male snap member, such as the member 65 shown in Figure 13, whereby to secure the frame attachment member 79 to the helmet member. Retention loop section 81 is formed integral with the female connector and is positioned about the rib member 78 on the forehead section of the faceguard frame 70. The retention loop 81 has a flexible throat opening 82 disposed rearwardly thereof and extends about the female connector 80 to lock the opening 82 when the male snap member 65 is engaged with the female connector 80. In this manner, the faceguard frame is hingedly retained by the frame attachment member to the front

35

2096541

- 15 -

forehead portion of the helmet member. Preferably, two of such frame attachment hinge members are provided one on each side of the central rib 83 provided in the forehead rib section 73.

5 The faceguard frame 70 is also provided with integrally formed opposed rear wall sections 84 disposed behind the cone of vision of the headgear and a slot 85 is formed in a bottom corner thereof through which an attachment strap is secured to
10 connect the faceguard frame 70 to opposed sides of the helmet member, in a manner well known in the art. A visor hinge connecting hole 86 is provided in an upper area of the rear wall sections 84 whereby to receive a visor hinge member, as will be described
15 later. A lock retention finger 87 is also formed integral with the rear wall section 84 and its function will also be described later.

Referring now additionally to Figures 19A to 26, and more particularly to Figures 24 to 26, it can
20 be seen that a clear plastics visor 88 is hingedly connected on the hinge pin fastener 89 to the faceguard frame 70 whereby to overlies the sighting opening 74 to protect the eye and nose region of the face of a wearer. As shown in Figures 20 to 23, the
25 visor 88 is provided with an elongated slot 90 formed on opposed side end portions thereof for connection with the pivot connector 89. The slot 90 has a top vertical section 91 to permit the visor to be displaced vertically for nesting and removal from
30 locating ledges 92 formed along the top edge of the ribbed cage section 71 below the sighting opening 74. The slot 90 further defines a rearwardly extending depending section 93 to permit the visor to hinge upwardly and outwards as shown in Figures 25 and 26,
35 respectively. A retention bore 94 is disposed below the slot 90 and has a straight bottom sloping edge 95, as better seen in Figure 23, for mating retention

2096541

- 16 -

5 with an undercut edge 96 of the lock retention finger 87, as better shown in Figure 19B. As shown in Figure 19A, the lock retention finger is integrally molded with the faceguard frame which is constructed of a clear plastics material. The head section 97 of the retention finger 87 is provided with an outwardly protruding wall 98 so that the retention ledge 96 extends outwardly of the outer face of the rear wall section 84 of the faceguard frame 70. The hinge connection 89 maintains the retention bore 94 of the visor perfectly aligned with the head 97 of the lock retention finger 87 so that the head sloping wall 98 will cause the finger 87 to flex slightly inwardly of the faceguard frame when hinged thereover and as soon as the retention bore 94 is aligned with the head 97, it will snap or click into position locking the visor to the faceguard frame with the lower edge 99 of the visor resting on the support ledges 92. The clicking sound assures the wearer that the visor is locked in position.

20 The visor 88 is also provided with a locating flange 100 in a top edge thereof to guidingly position the visor relative to the vertical ribs 83 and 101 provided in the forehead section 73 of the faceguard frame 70. Slots 102 are defined between flange sections 100' to accommodate the ribs 83 and 101. Accordingly, the locating flange 100 also sits on the horizontal frontal rib 103 of the forehead section 73.

30 As can be seen in Figures 24 to 26, in order to hinge the visor 88 upwardly of the sighting opening 74, it is firstly necessary to depress the head 97 of the lock retention finger 87 to disengage the ledge 96 from the ledge 95. The visor can then be pushed upwardly off its nesting ledges, as shown in Figure 35 25. The hinge pin 89 has thus moved to the bottom of the vertical section 91 of the visor connecting slot

- 17 -

93. The visor is then pushed outwardly and upwards, as shown in Figure 26, and the hinge pin 89 is then located in the bottom portion of the rearwardly depending slot section 93. In this position, the
5 wearer has clear vision and this permits the visor to clear itself by ventilation of the fogged up area. It also permits better ventilation of a wearer's face permitting the wearer to wipe his forehead or eyes. The hinge pin 89 may be formed from the connector
10 described in Figures 12 and 13 or otherwise and provide a rigid frictional retention fit so as to maintain the visor in its retracted position as shown in Figure 26. Alternatively, it is conceivable that the bottom portion of the slot section 93 be provided
15 with an upper end section 93' (see Fig. 24) in which the hinge pin 89 would enter to maintain the visor supported as shown in Figure 26.

As is shown in Figure 26, the faceguard frame 70' is herein shown as a half-frame to support the
20 visor 88 only. The fastener 89 in this application goes into the helmet as well as through the frame 70' and the visor 88. With this frame, the eyes and nose area of the face only is protected.

Referring now to Figure 27, there is shown a
25 thermoformed plastic frame 110 secured to the helmet member 11 whereby to protect a goaltender's face. The plastic frame 110 has a face opening 111 across which is secured a protective grill member 112, well known in the art, and which is usually formed from
30 steel wires welded together. The plastic frame 110 of the present invention is pivotally secured to the helmet member 11 by the pivot fastener 113 whereby the frame 110 can be displaced rearwardly along the direction of arrows 114 to clear the face of the
35 wearer. A pivoting throat guard 115 is pivotally

2096541

- 18 -

secured by connector 116 to the thermoformed plastic frame 110 and pivots downwardly from the lower chin band section 117 of the frame 110 in the direction as shown by double arrowhead 118.

5 The throat guard 115 has an integrally formed bib section 119 which extends outwardly of an upwardly extending ledge section 120 which mates or which is closely spaced to the chin band 117 whereby the chin band will restrict the upward displacement
10 of the throat guard 115 so that it does not pivot above the chin band.

 The thermoformed plastic frame 110 is provided with an integrally formed rearwardly sloping forehead section 121 which overlies the frontal portion of the
15 helmet member 114 and outwardly flared side wings 122 which protects and overlaps the ears of a wearer. A plurality of holes 123 are provided in the side wings for ventilation and not to impair the audibility of the wearer.

20 It is within the ambit of the present invention to cover any obvious modifications of the invention described herein provided such modifications fall within the scope of the appended claims.

25

30

35

- 19 -

CLAIMS

1. A protective headgear comprising a helmet member shaped to protect the top, rear, front and sides of a wearer's head; said helmet member having a rigid outer shell with an inner protective lining of shock absorbing material, a sizing harness secured to said helmet and disposed inwardly thereof, said harness having a height adjusting band and a horizontal contour adjusting band, and adjustable sizing means secured to said helmet and said adjusting bands to fit said bands on the head of a wearer and thereby spacing said head from said protective lining in at least some inner areas of said helmet member, said adjustable sizing means having two adjustment members secured to said outer shell and spaced from an inner surface of said protective lining and accessible outwardly of said shell, said sizing harness being a one-piece flexible band having a head contour band section constituting said horizontal contour band, and a transverse integral band section constituting said height adjusting band, and connecting means secured to each said band sections and a respective one of said two adjustment members, each said adjustment member having an attachment element securable to a respective one of said connecting means and an elongated flexible member having thread engaging means at least along a section thereof, and a thread engaging stationary adjustment knob secured to said outer shell and in threaded engagement with said elongated flexible member to pull said flexible member therethrough and displace its associated band section, said thread engaging stationary adjustment knob being located in a trough-like housing secured to said outer shell, said elongated flexible member extending across opposed end walls of said housing with said adjust-

SUBSTITUTE SHEET

2096541

- 20 -

ment knob in threaded engagement therewith and retained between said opposed side walls by said elongated flexible member, and means to secure said helmet to a wearer's head.

5

2. A headgear as claimed in claim 1 wherein said adjustment knob is a cylinder knob having an inner threaded bore and a plurality of finger engaging ribs formed on an outer surface thereof and extending parallel to said through bore for rotating said cylinder knob about said elongated flexible member to cause said elongated flexible member to be displaced axially through said cylinder.

10

15

20

3. A headgear as claimed in claim 1 wherein said attachment element comprises at least one prong projecting adjacent an attachment end of said elongated flexible member, each of said at least one prong engages with one of a plurality of holes provided in a connector bridge secured adjacent a free end of said band sections, said connector bridge being located in a guide channel formed in said inner protective lining.

25

30

4. A headgear as claimed in claim 3 wherein a flat wing element is formed integral with said attachment end of said elongated flexible member and being captive between an inner face of said outer shell and said protective lining and extending to each side of said guide channel.

35

5. A headgear as claimed in claim 3 wherein said connector bridge is formed integral with said band sections adjacent said free ends and having an elevated top wall in which said plurality of holes are located.

- 21 -

6. A headgear as claimed in claim 5 wherein said band connector is integrally molded from a plastics material.

5 7. A headgear as claimed in claim 2 wherein there are two of said adjustment knobs each located in a respective one of said trough-like housings and disposed on a respective side of said outer shell, said shells being disposed such that said cylinder
10 knobs extend along different axes to indicate to which of said bands it is connected.

8. A headgear as claimed in claim 1 wherein said one-piece flexible flat band is further provided with
15 a pair of chin strap attachment arms having fastener locating holes adjacent free ends thereof.

9. A headgear as claimed in claim 8 wherein there is further provided band securing lugs formed
20 integral with said band to secure said band inside said inner protective lining.

10. A headgear as claimed in claim 8 wherein a plurality of vent holes are provided in at least some
25 sections of said band.

11. A headgear as claimed in claim 1 wherein said helmet member is a sports helmet and wherein vent holes are provided in said helmet member and extend-
30 ing through said outer shell and said protective lining, said height adjusting band maintaining the head of a wearer spaced from at least a top inner area of said protective lining so that the wearer's head is ventilated by air flowing through said helmet
35 through said vent holes.

2096541

- 22 -

12. A headgear as claimed in claim 11 wherein said vent holes extend along a central band portion of said helmet from a frontal head area to a rear head area.

5

13. A headgear as claimed in claim 12 wherein said vent holes are of substantially rectangular configuration and disposed in spaced apart pairs along said central portion, a front and rear pair of vent holes being disposed transverse to said central band portion, and at least one intermediate pair of vent holes disposed axially with said central portion.

10

14. A headgear as claimed in claim 1 wherein said helmet member has a uniform outer surface, said protective lining being formed of rigid foam material and extends beyond at least a forehead and neck portion of said rigid outer shell, said helmet being a hockey helmet.

15

20

15. A headgear as claimed in claim 14 wherein a protective shield extending over a portion of said rigid foam material extends beyond said forehead portion and immovably secured in position to protect said foam material.

25

16. A headgear as claimed in claim 1 wherein said helmet member defines an ear clearance area on each side thereof, and an ear shield secured to said helmet and extending over said ear clearance area and depending therefrom to cover a substantial portion of a wearer's ear.

30



17. A headgear as claimed in claim 16 wherein said ear shield is a molded shield protruding outwardly of the plane of said rigid outer shell, and vent holes disposed in said ear shield.

35

- 23 -

18. A headgear as claimed in claim 17 wherein said ear shield is a one-piece molded plastic shield defining a U-shaped member having said ear shield in opposed free end regions thereof, and a connecting band intermediate said ear shield, said connecting band overlying a rear extension portion of said inner protective lining in a rear portion of said helmet, and fastener means to secure said shield to said helmet.

1/8

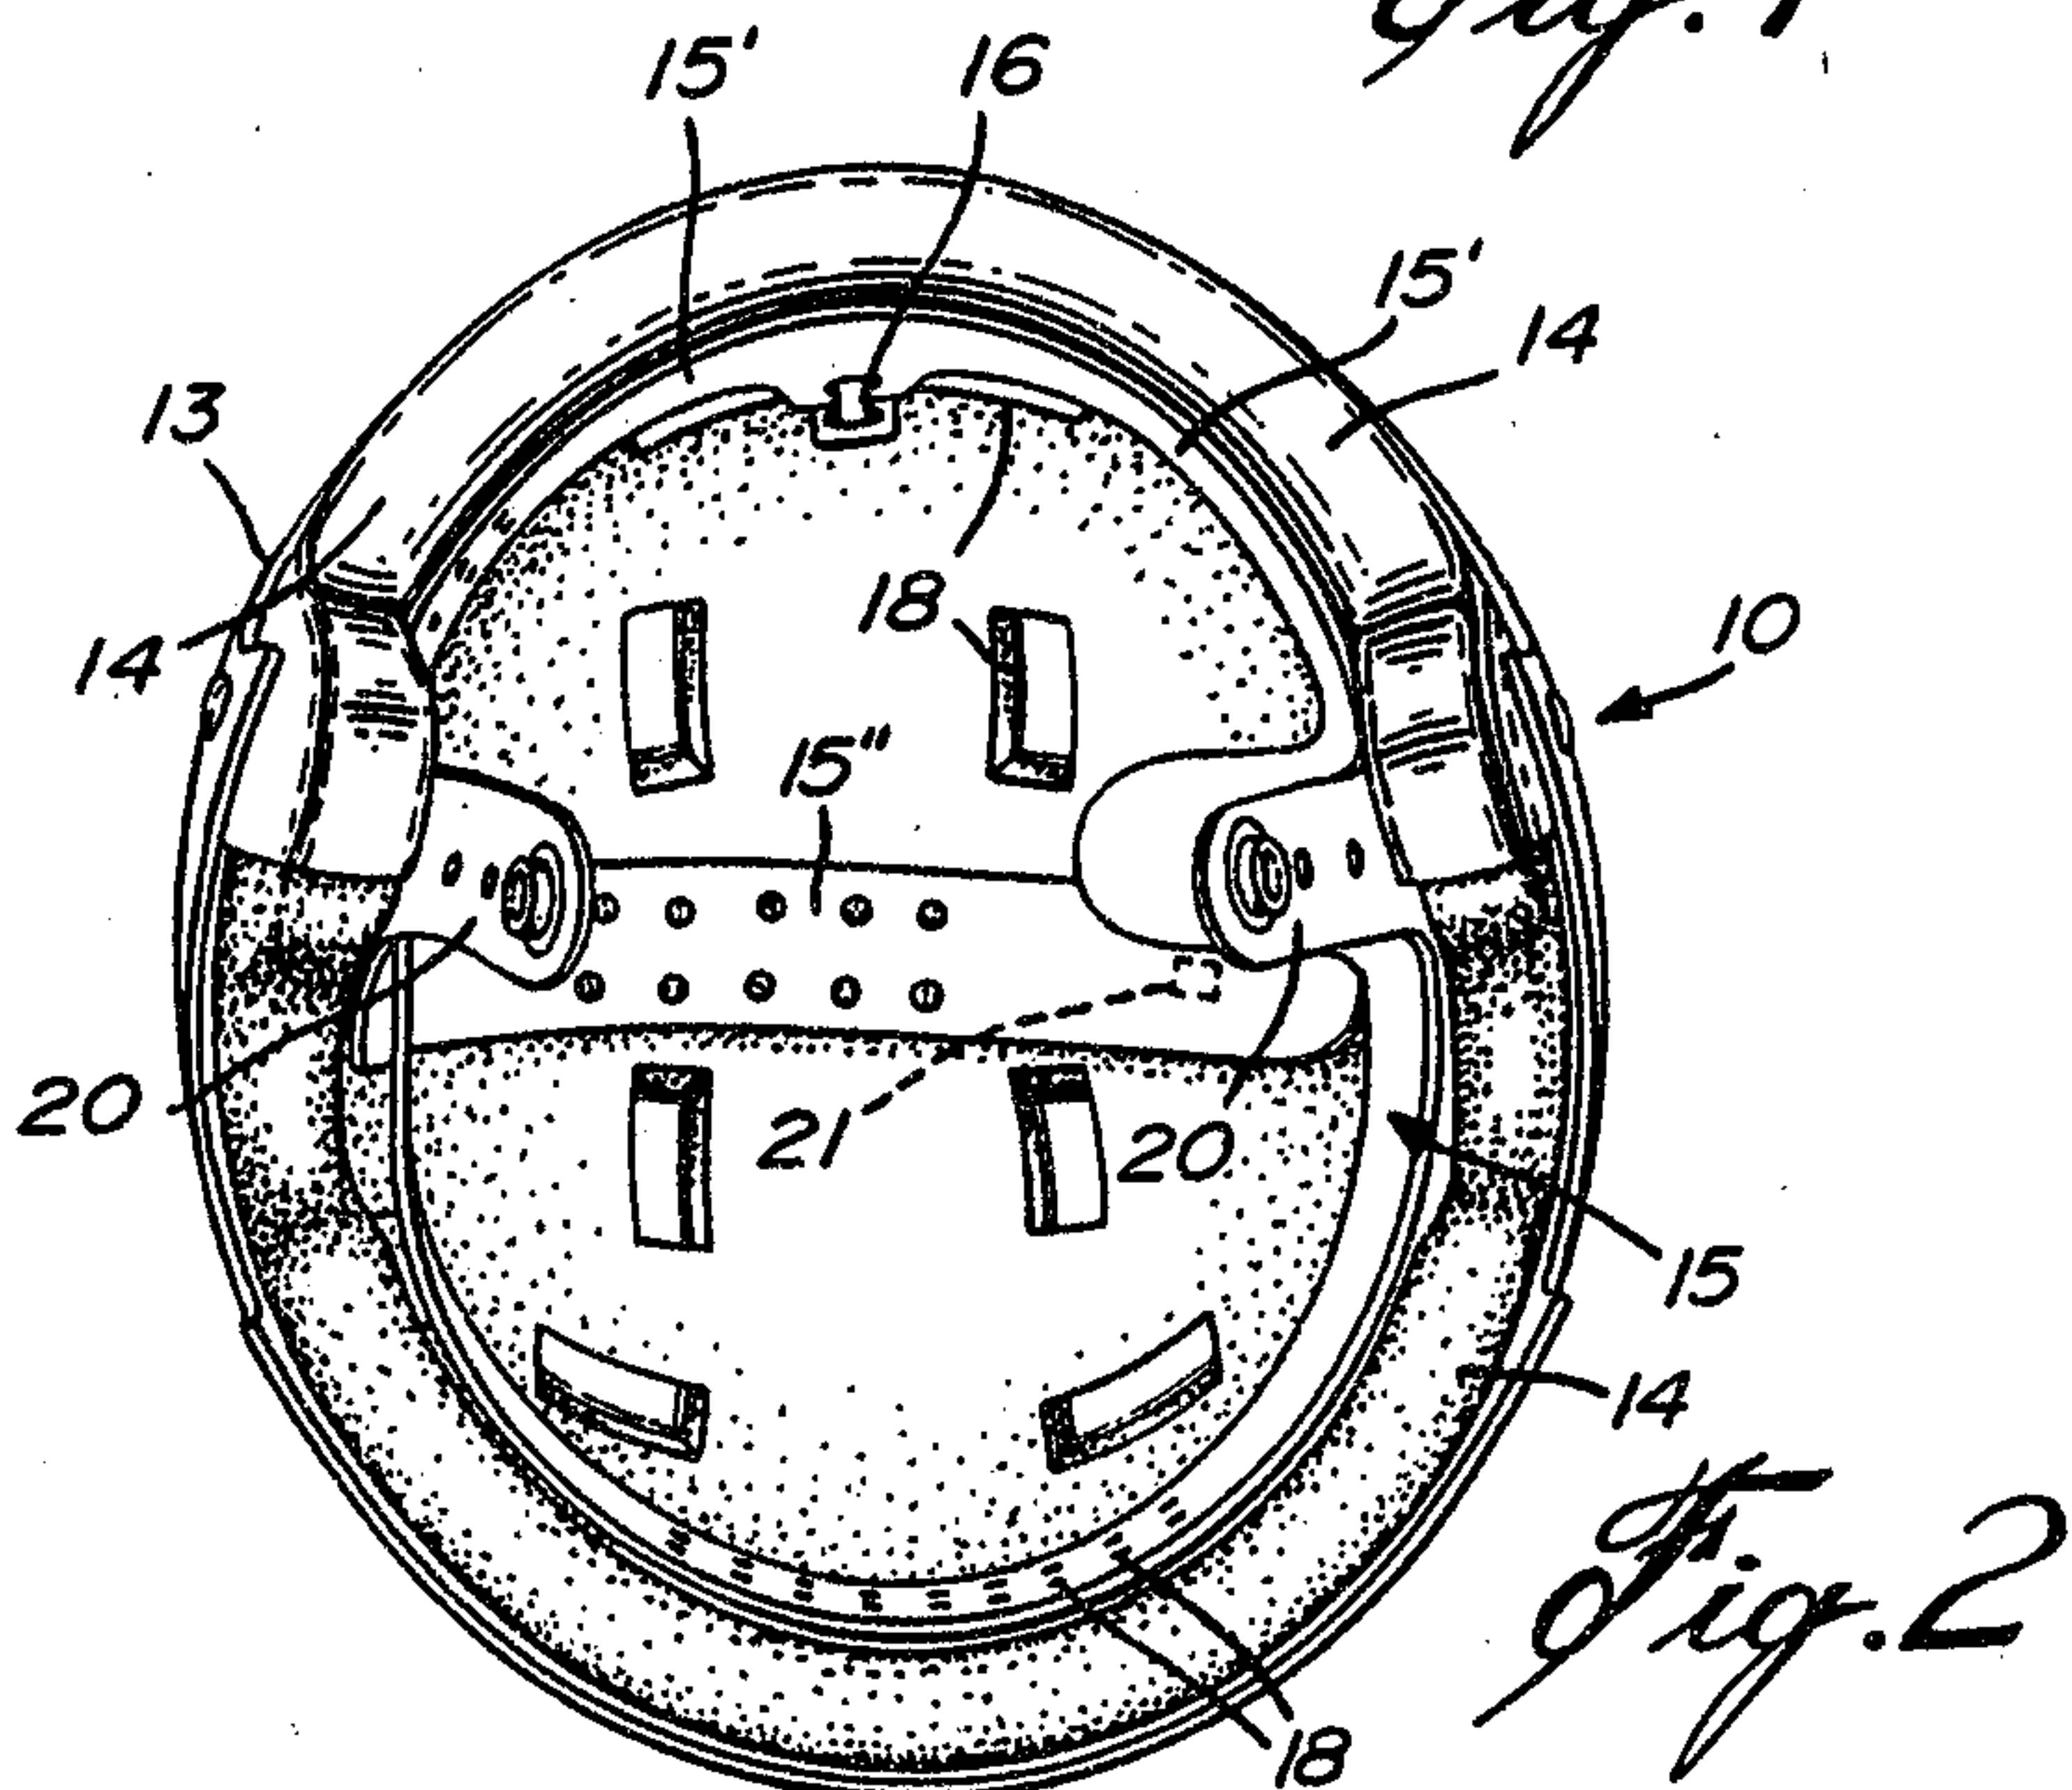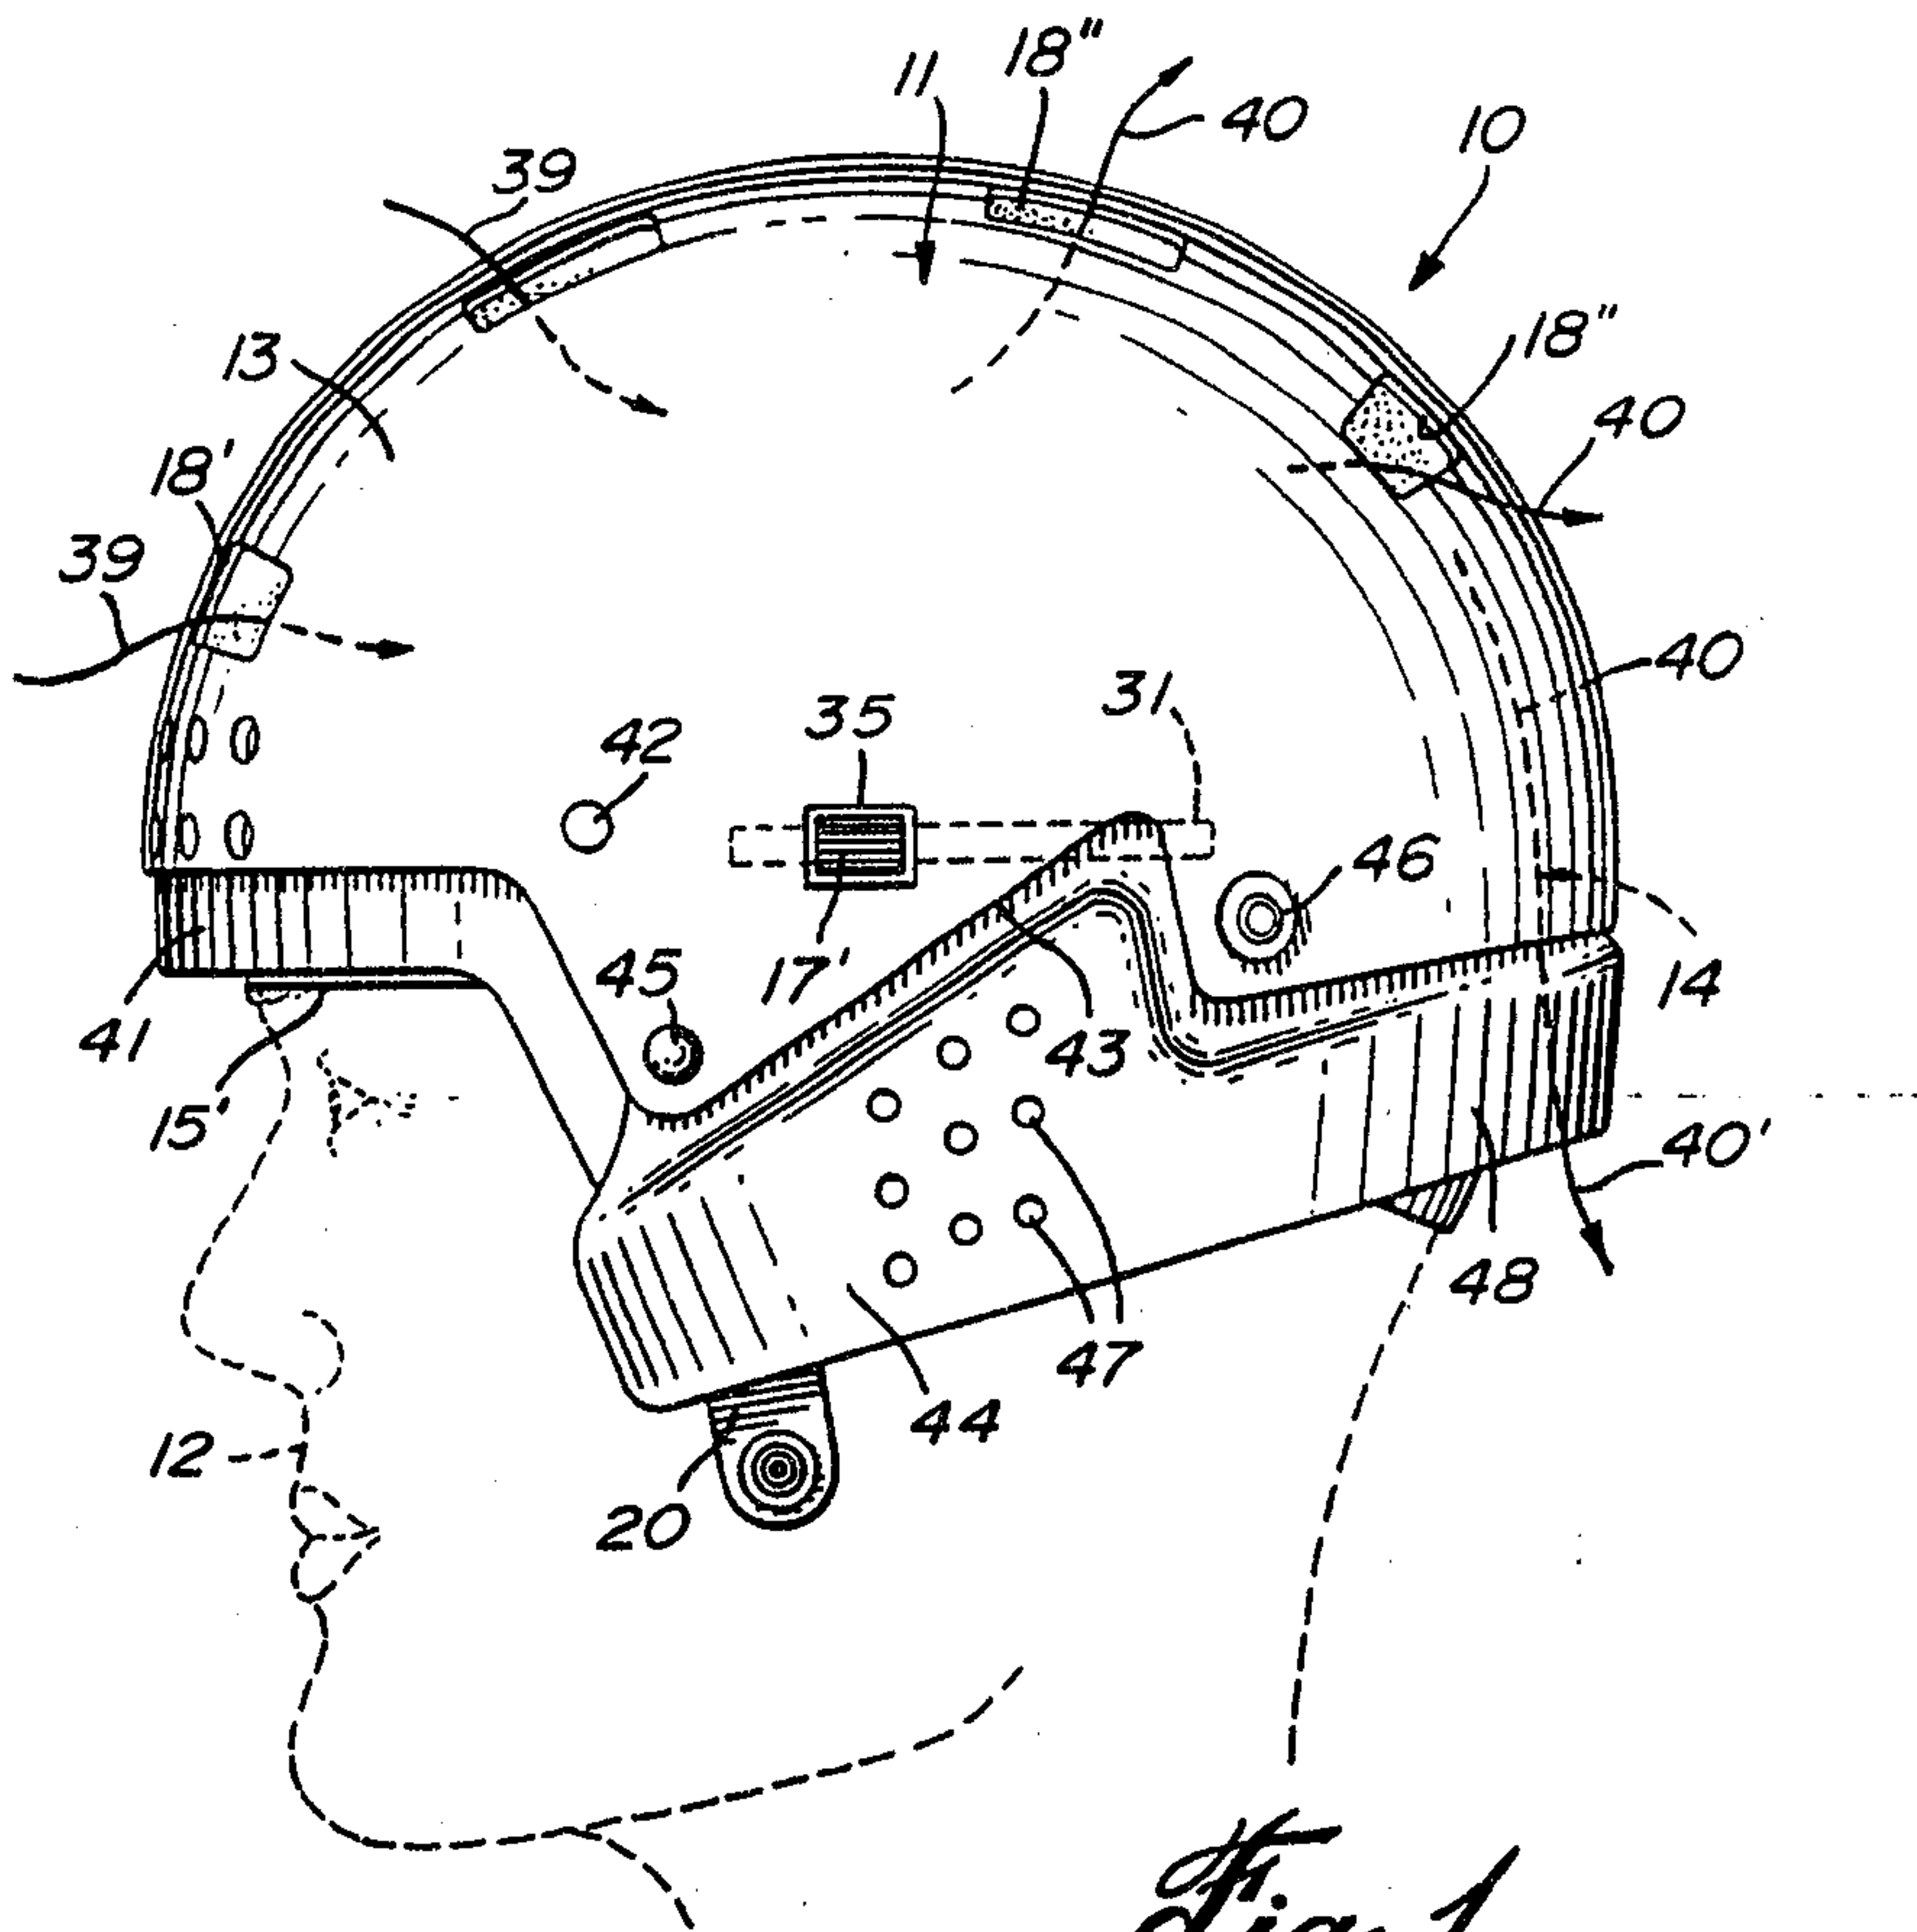

2096541

2/8



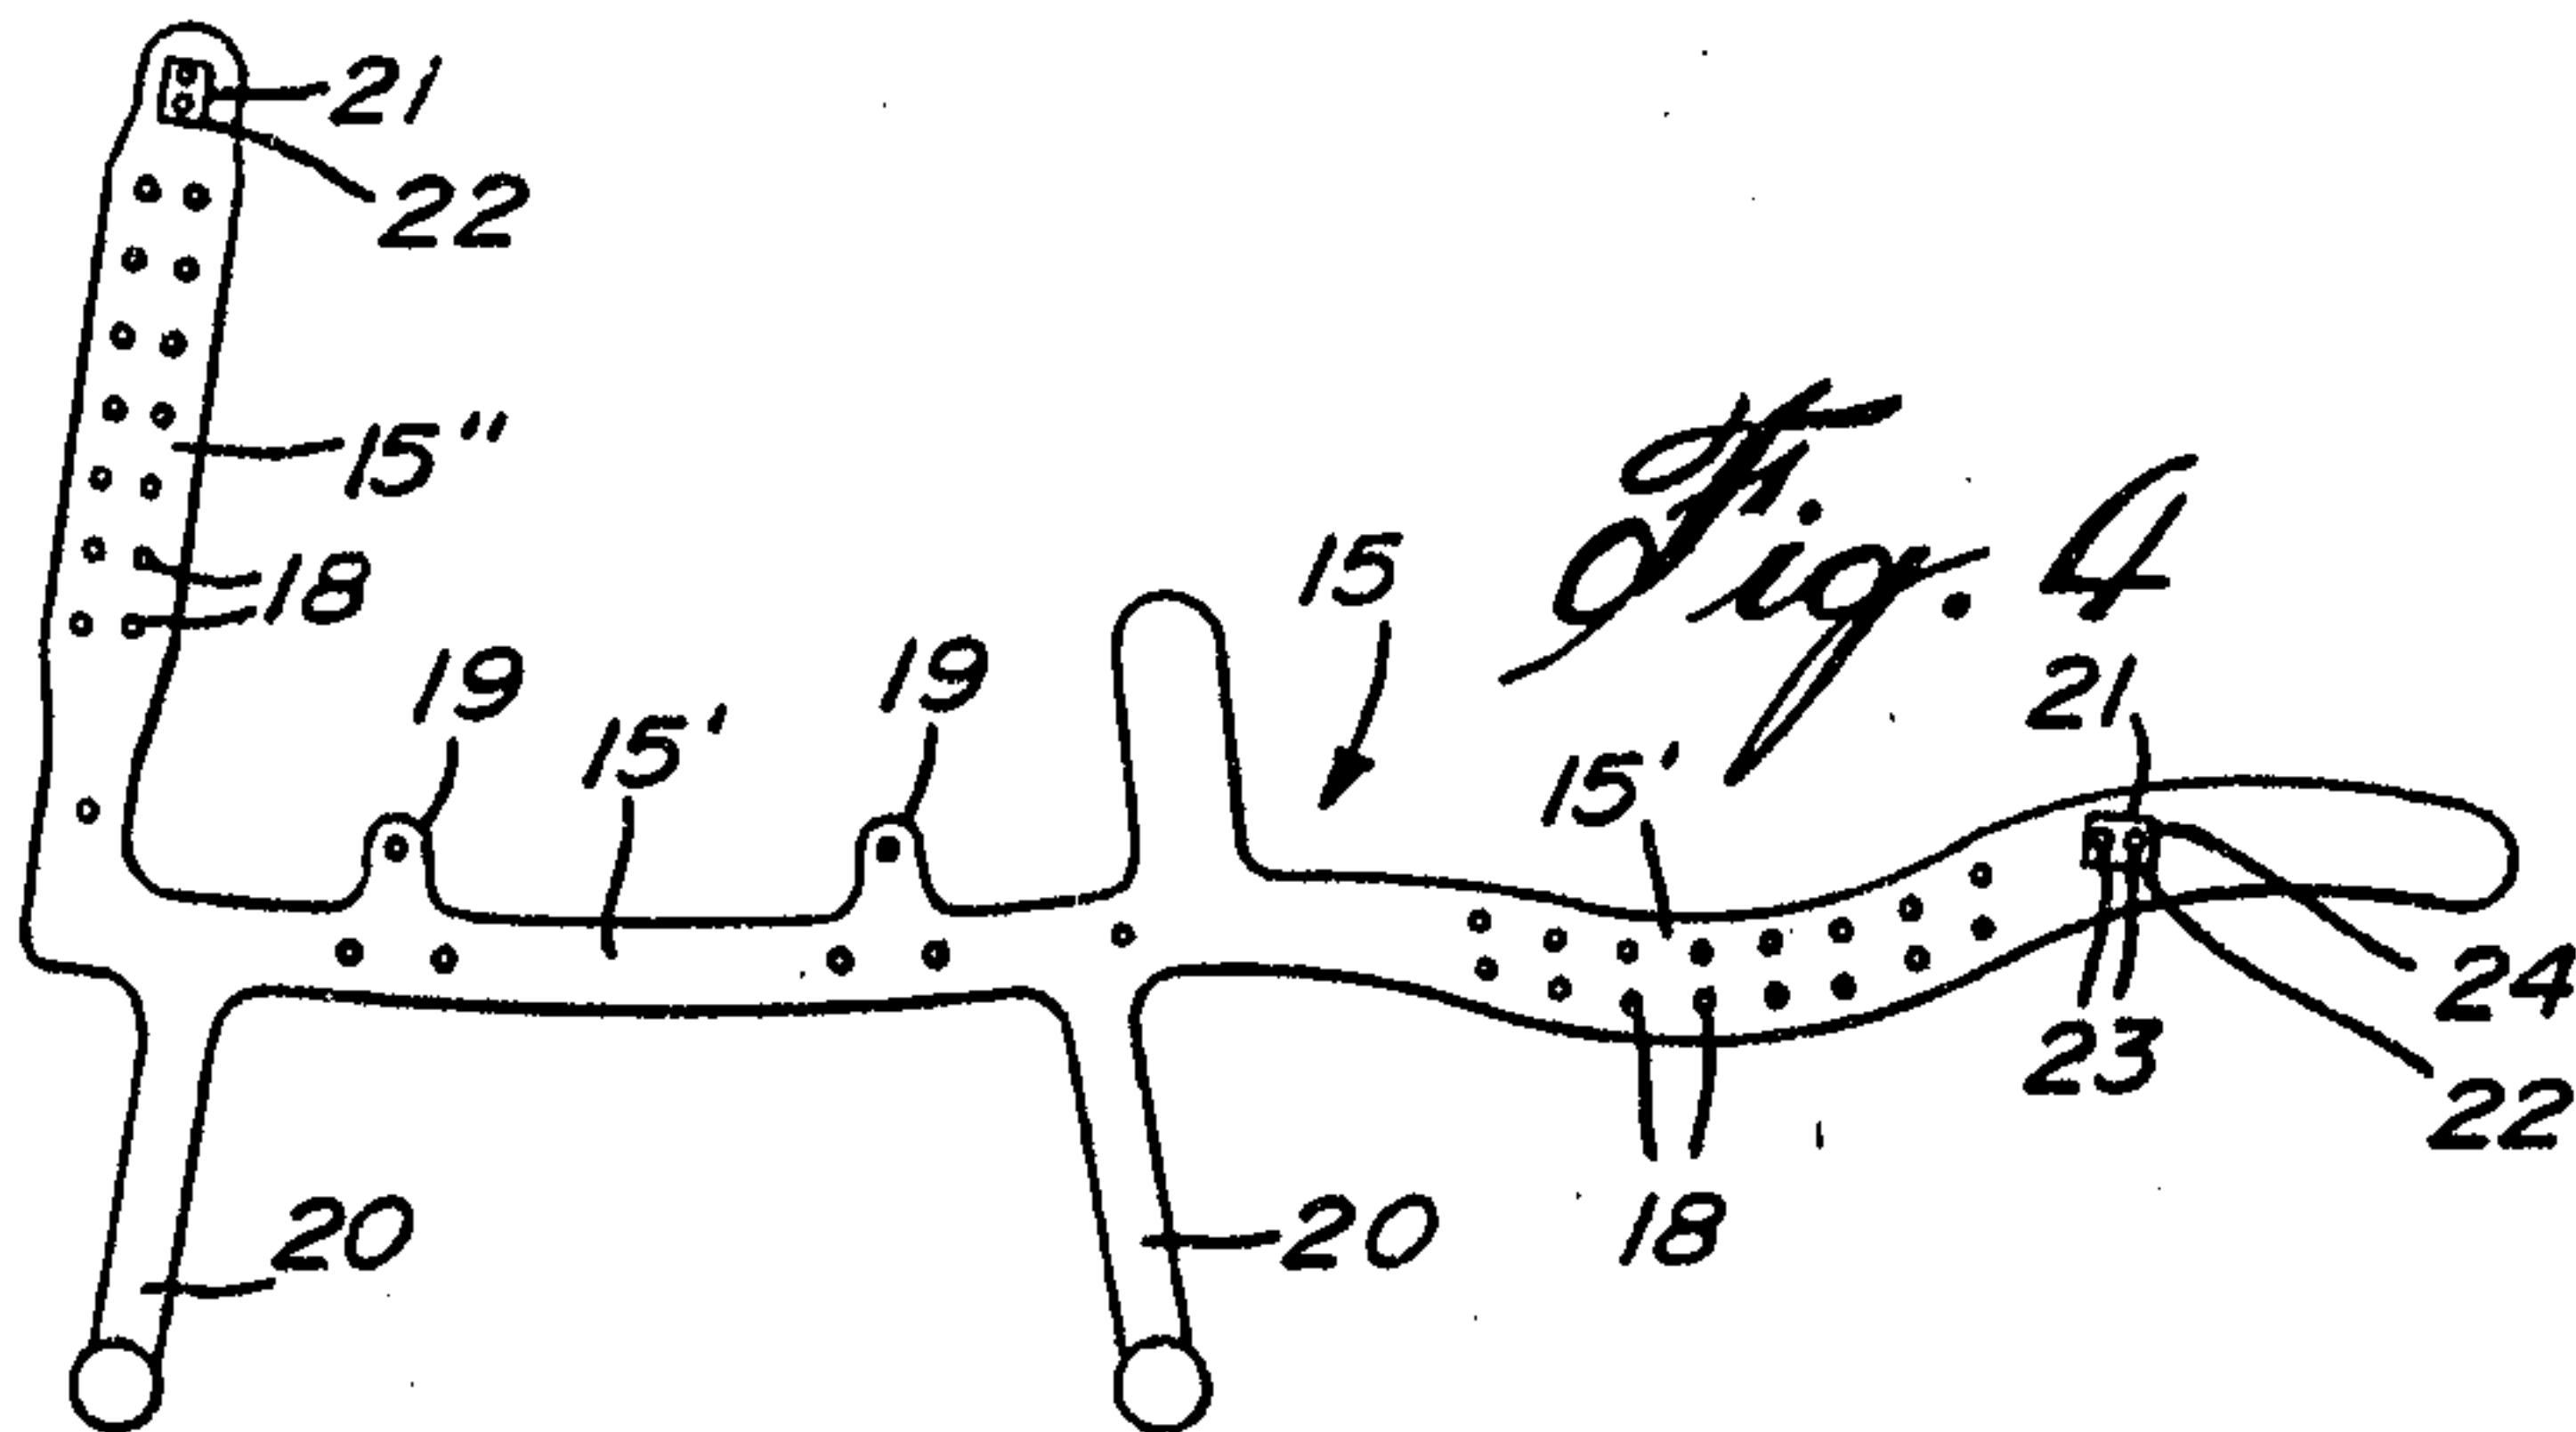


Fig. 5

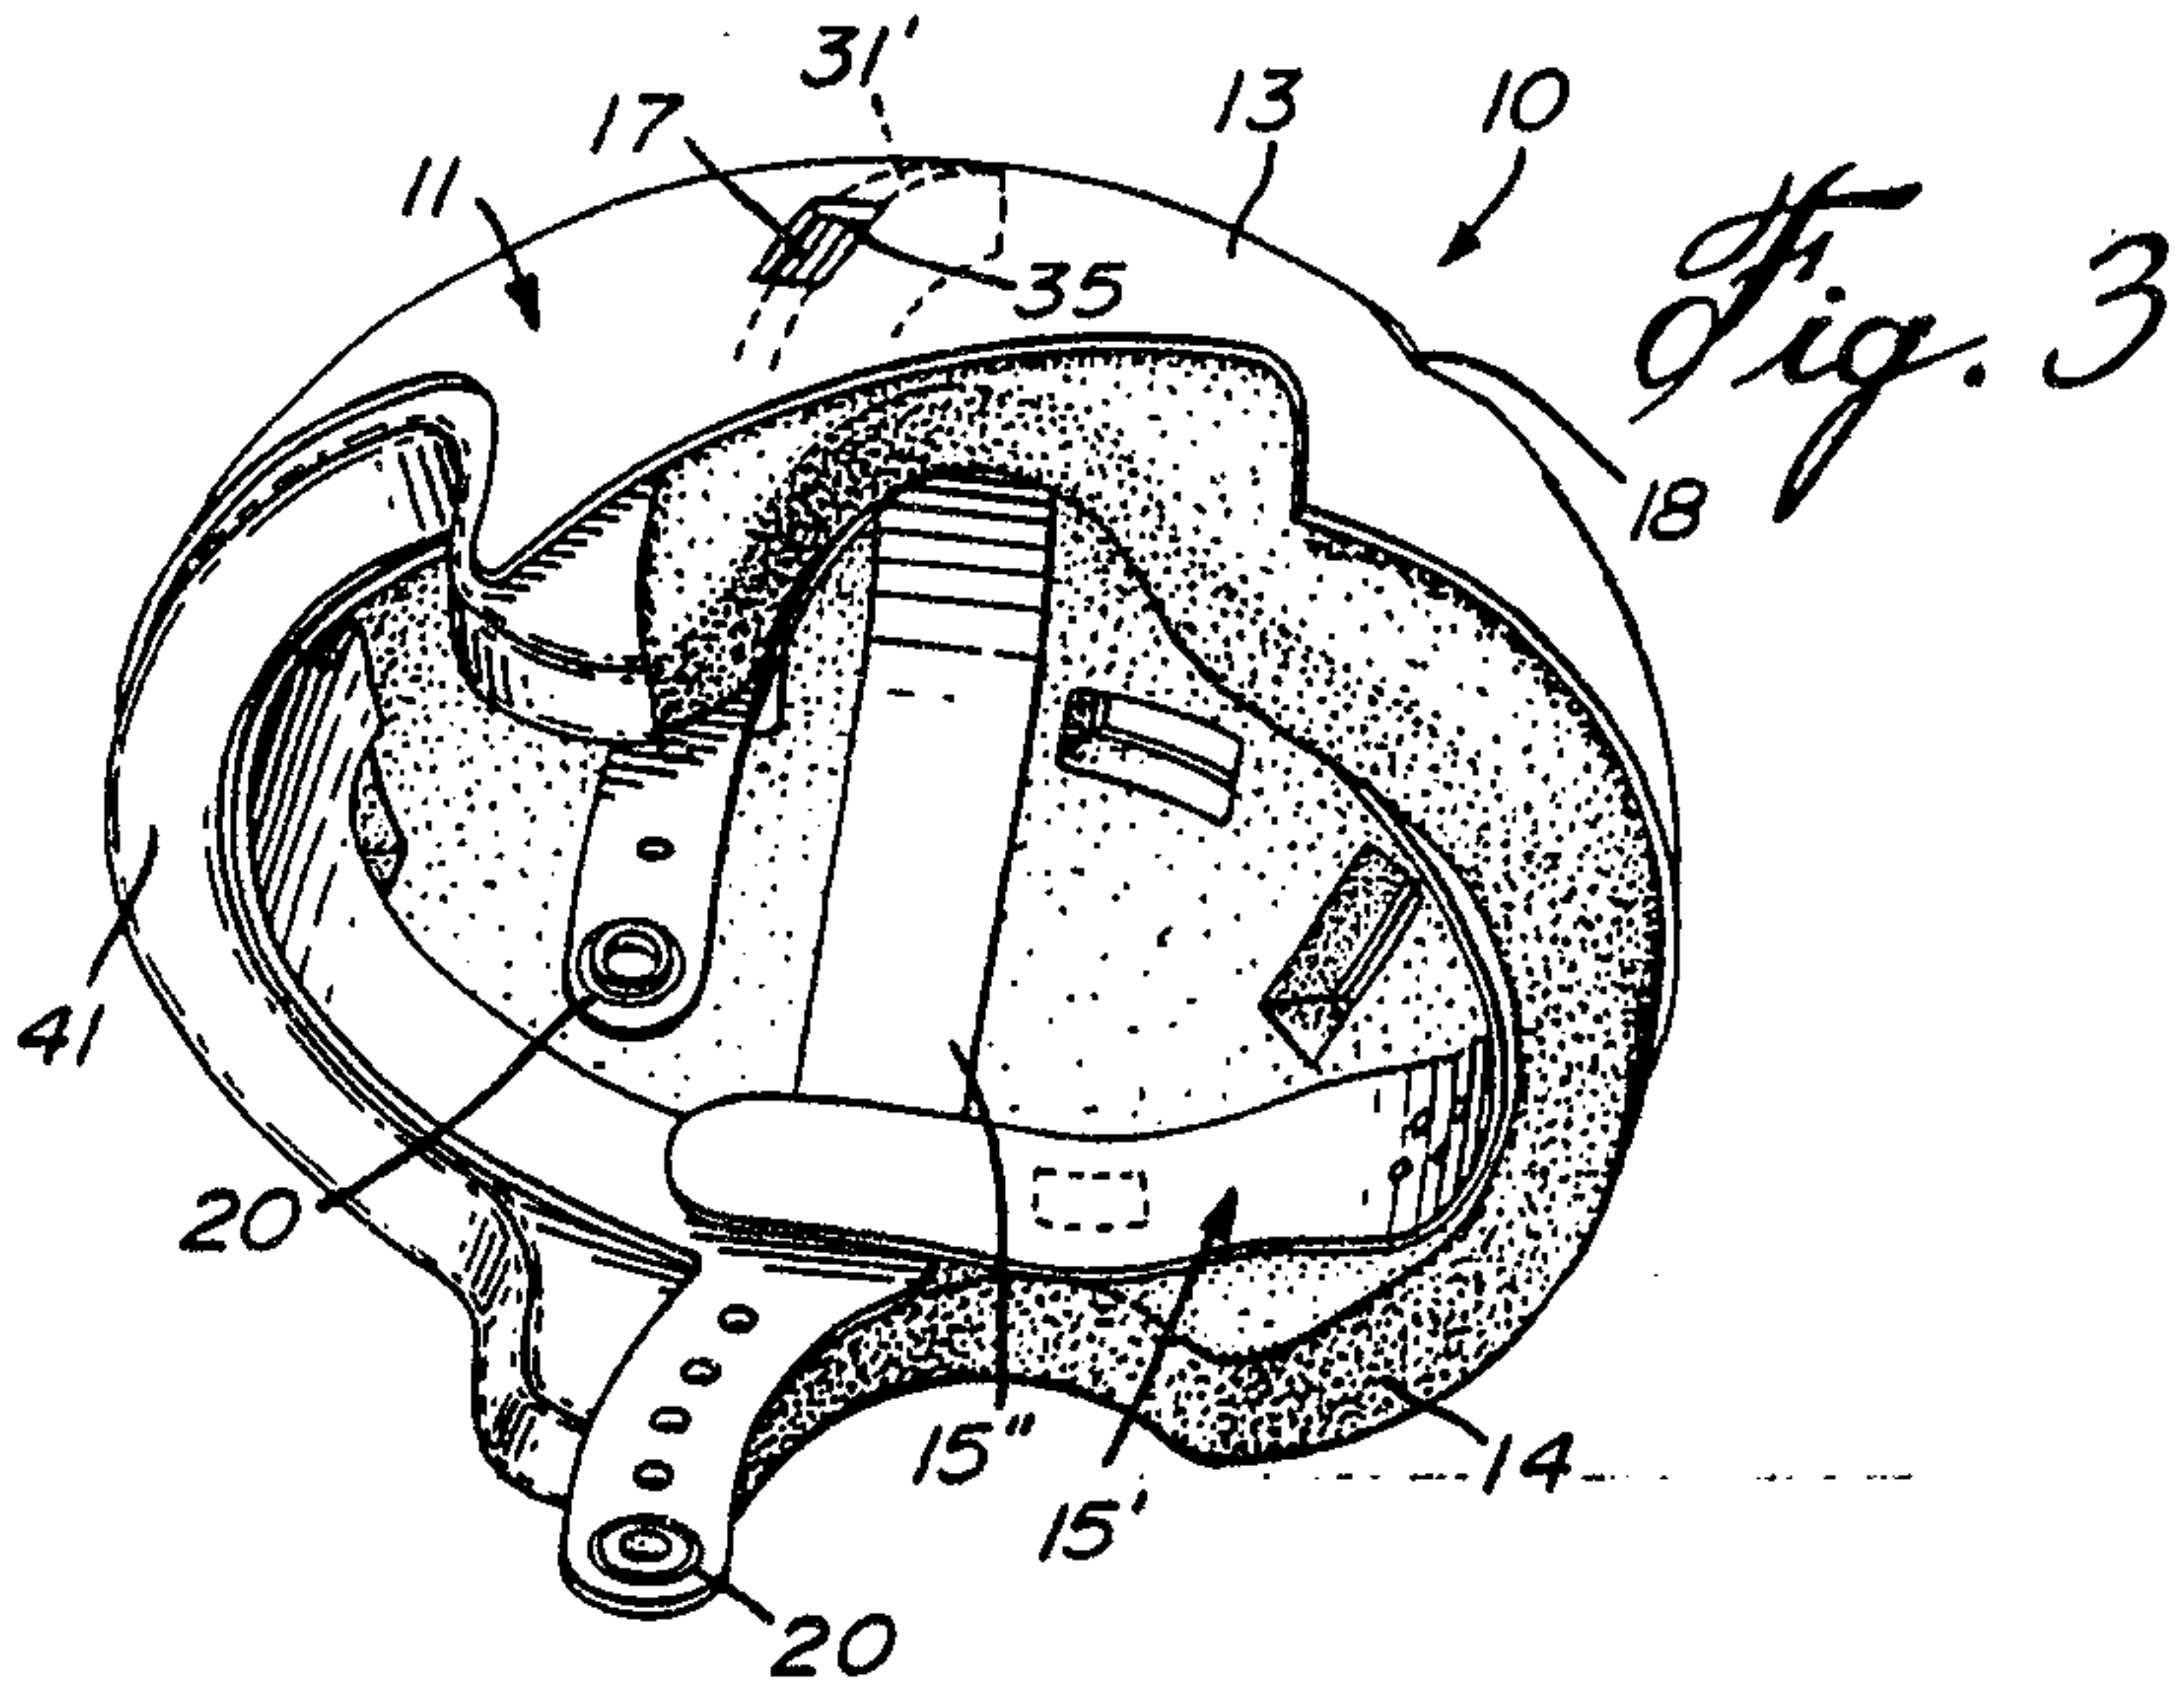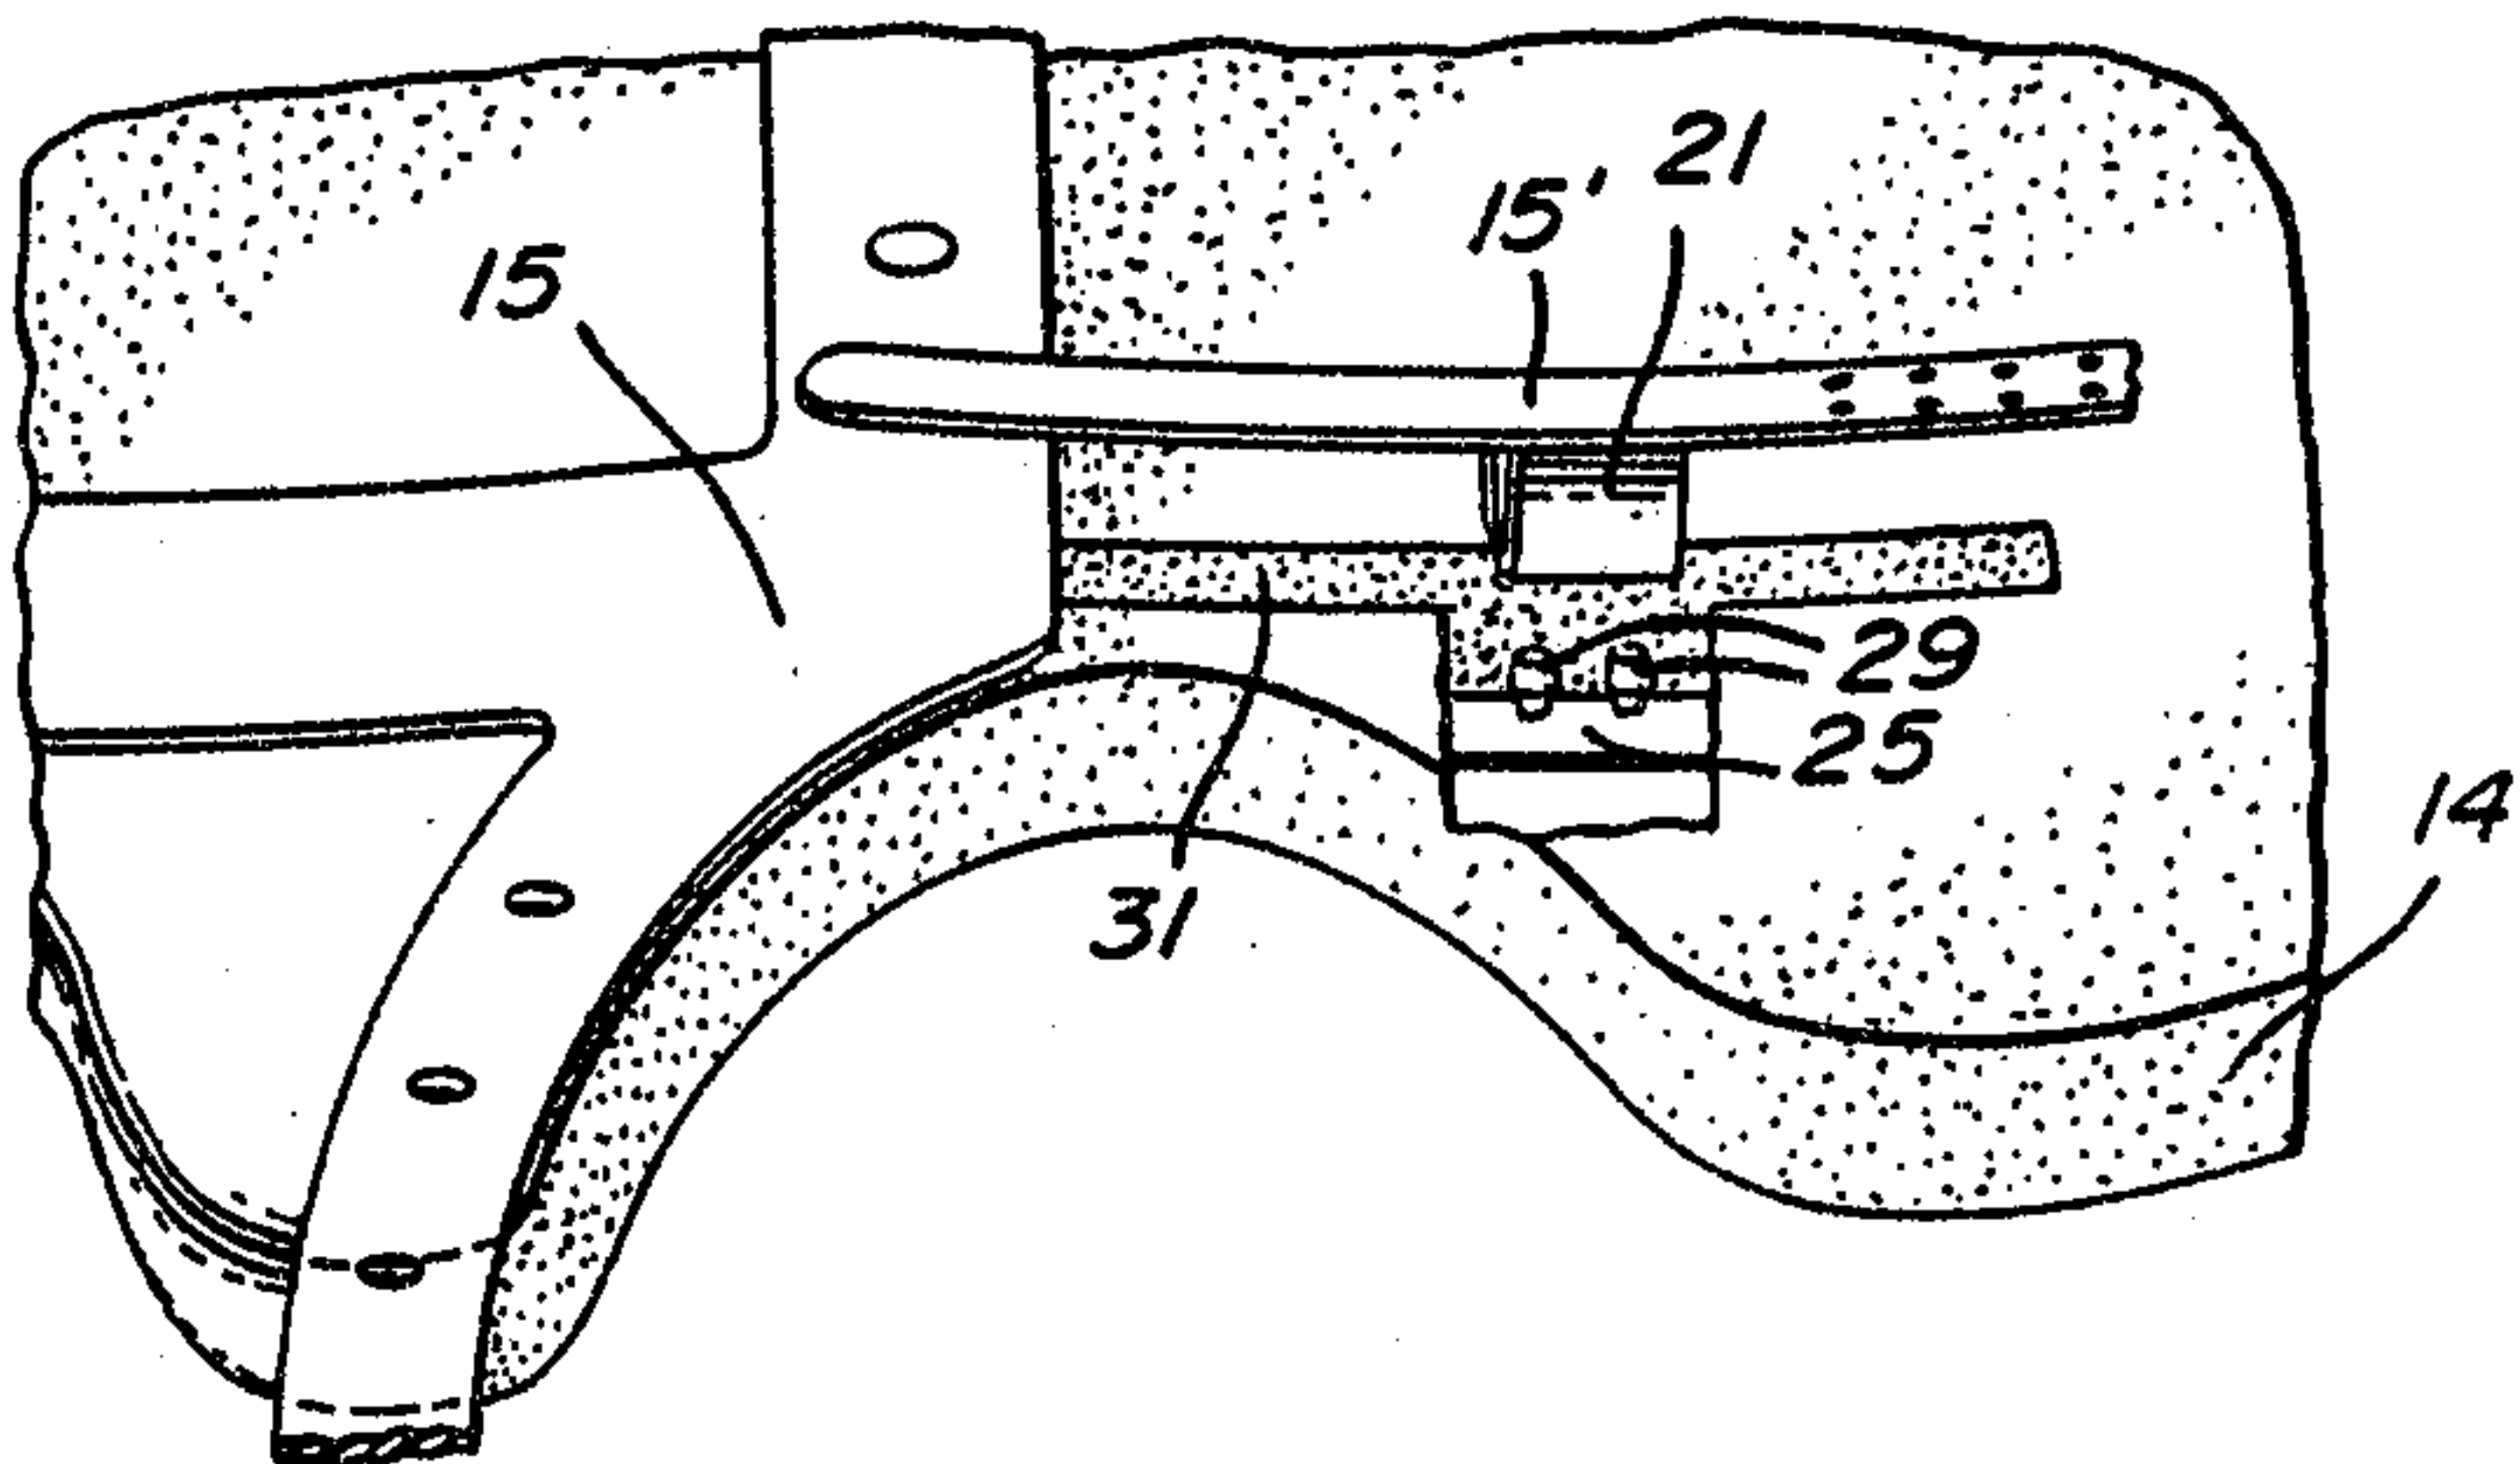

2096541

3/8

Fig. 6A

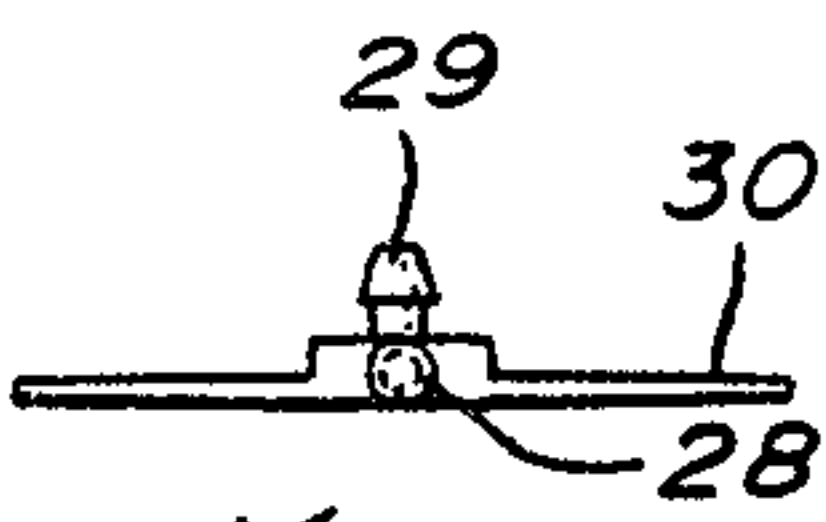
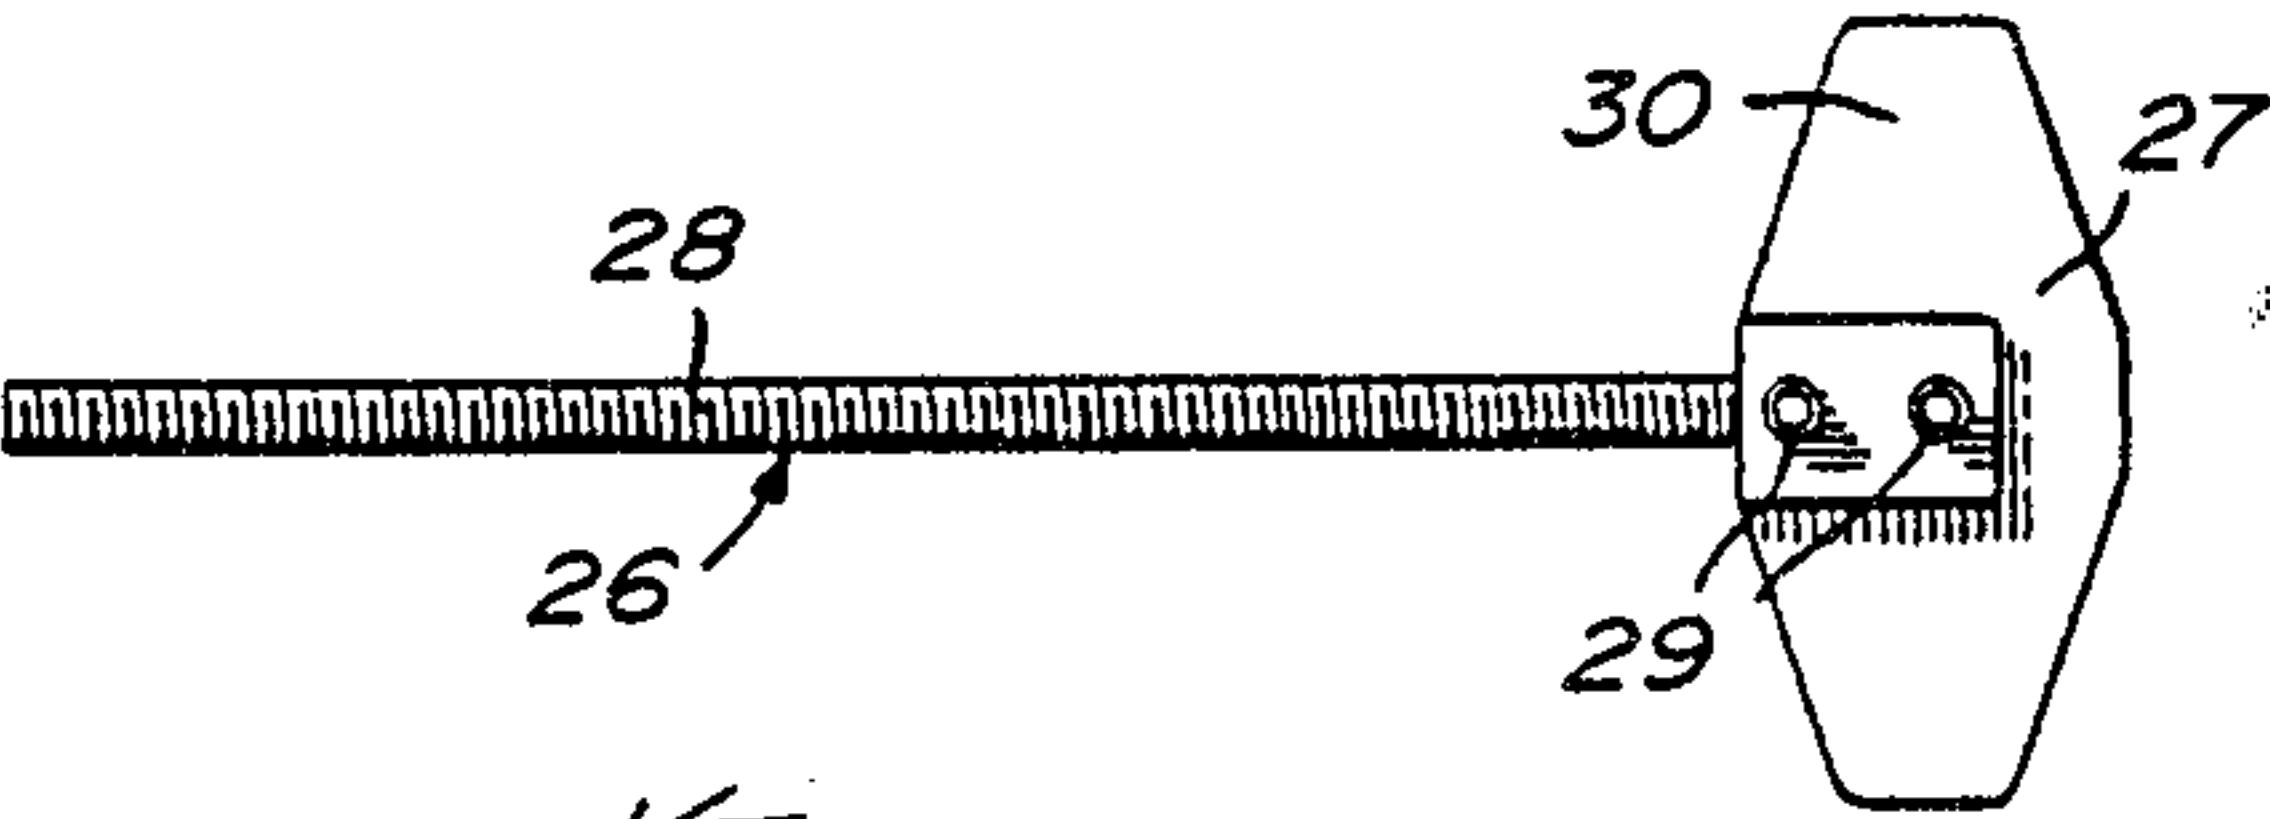


Fig. 6C

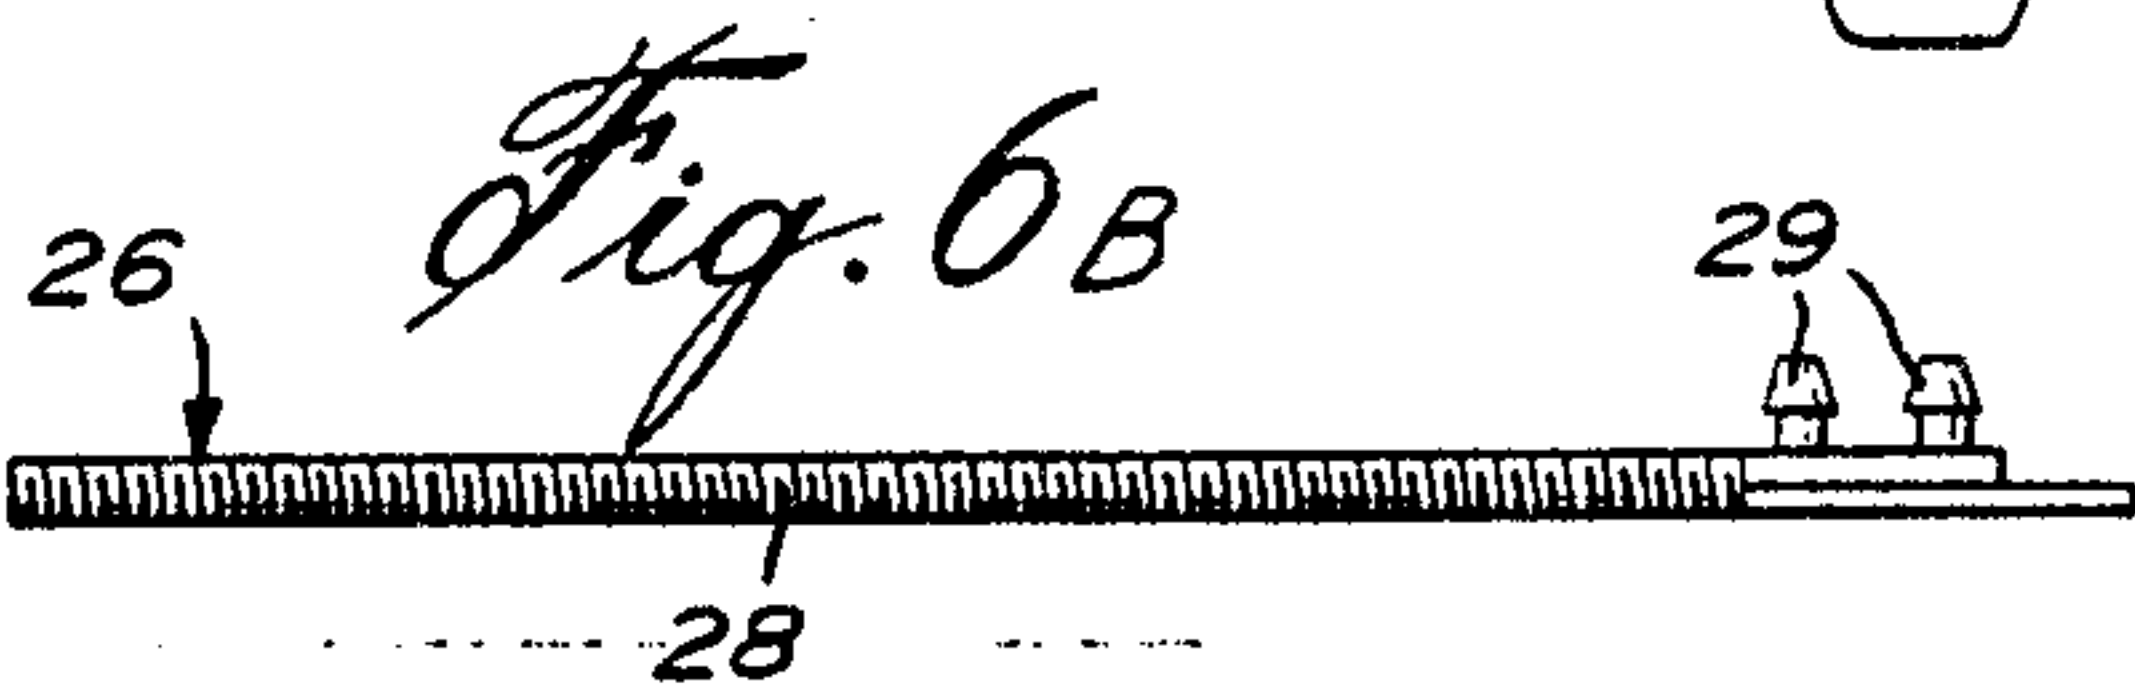


Fig. 6B

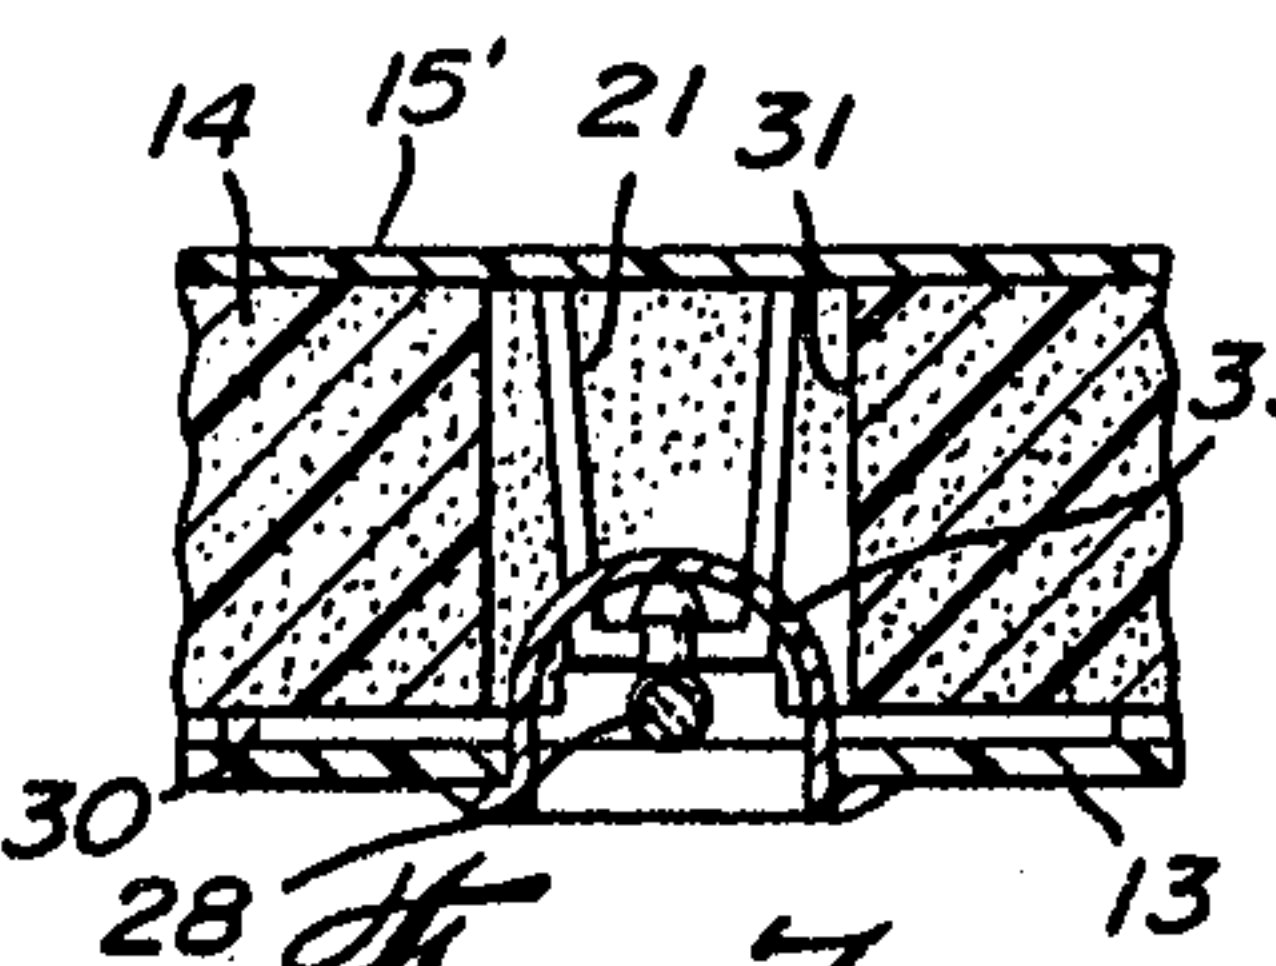


Fig. 7C

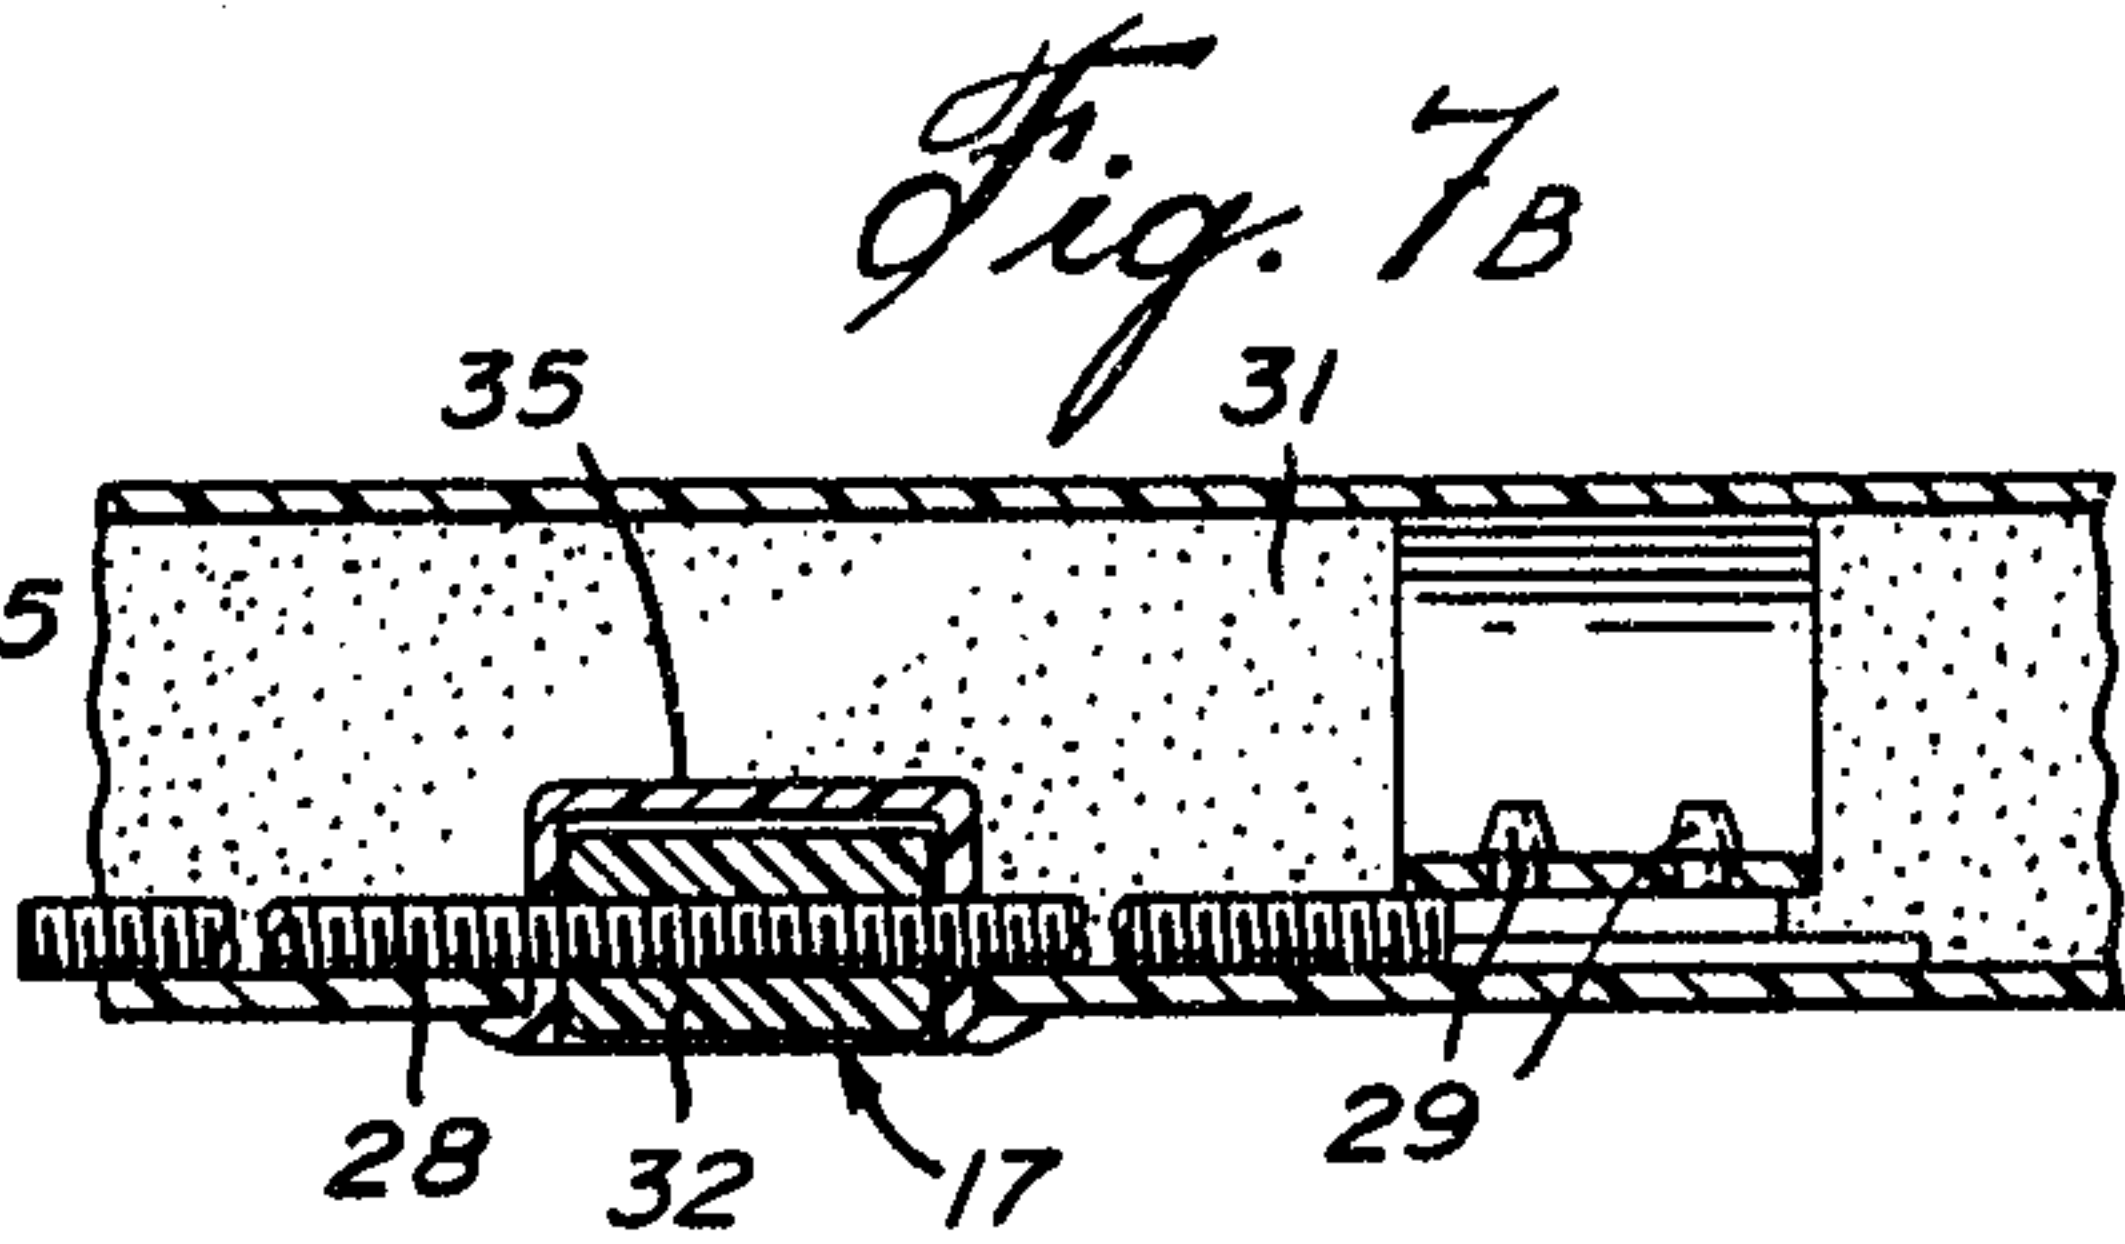


Fig. 7B

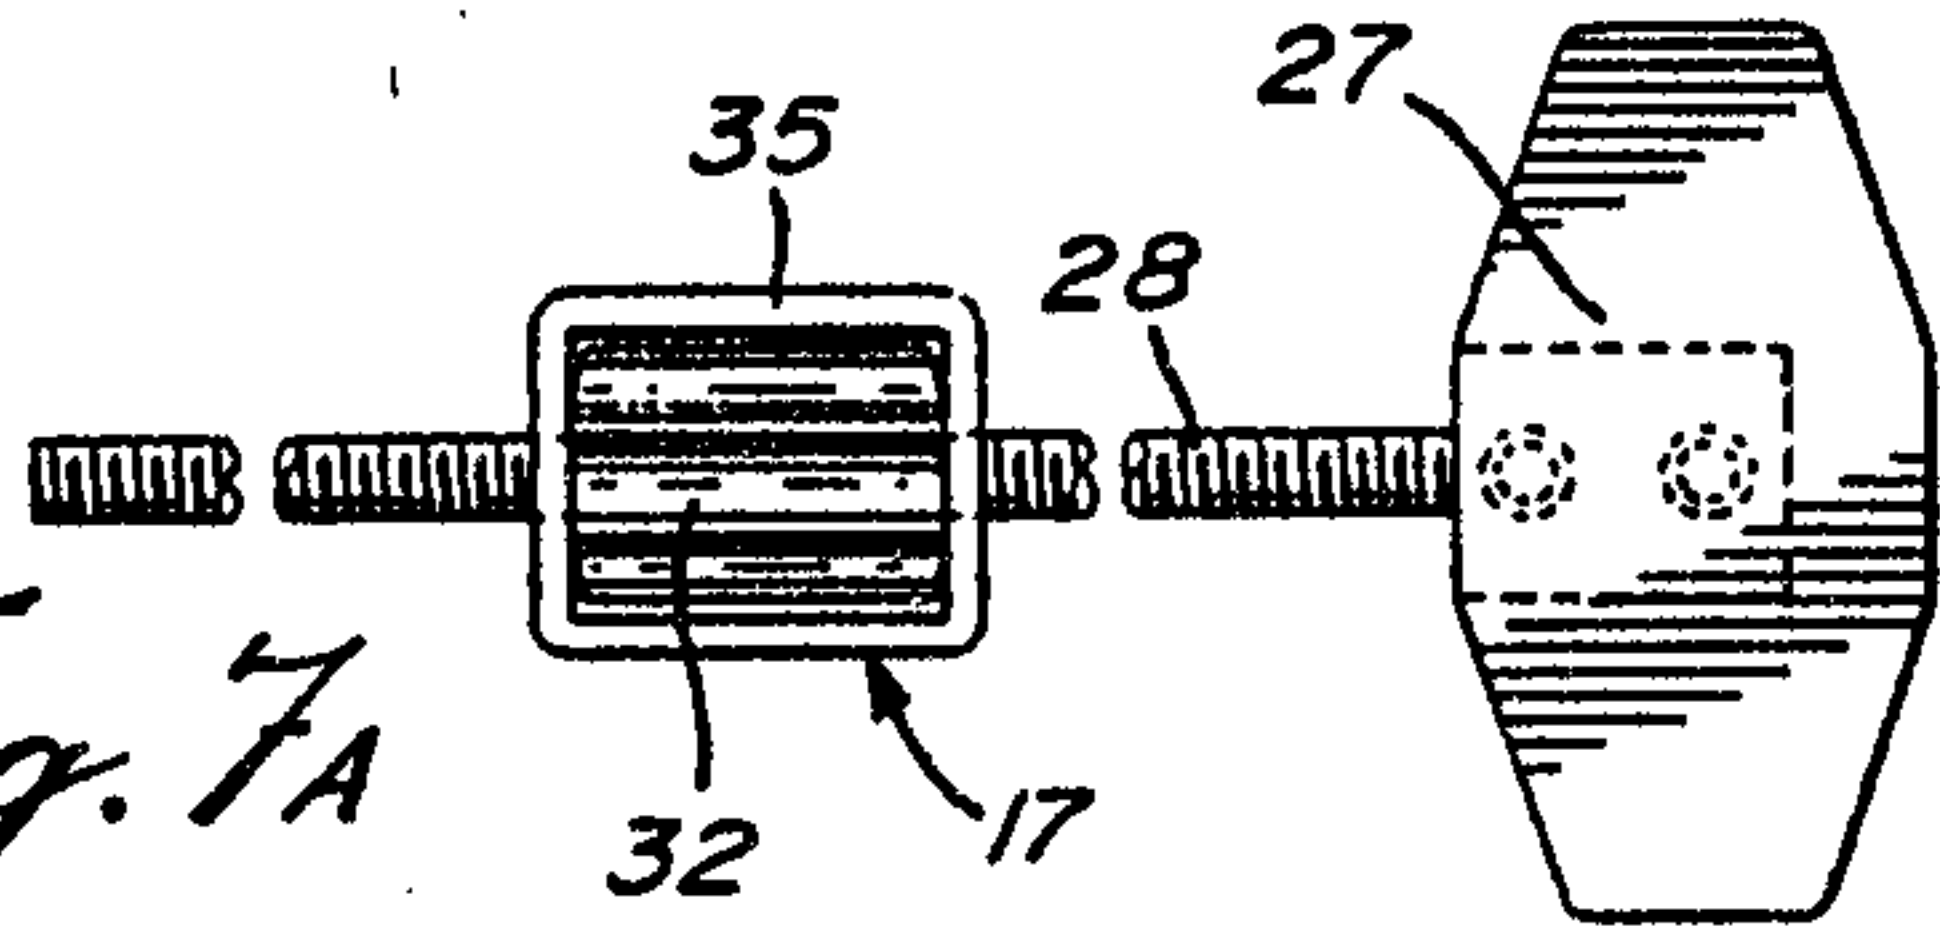


Fig. 7A

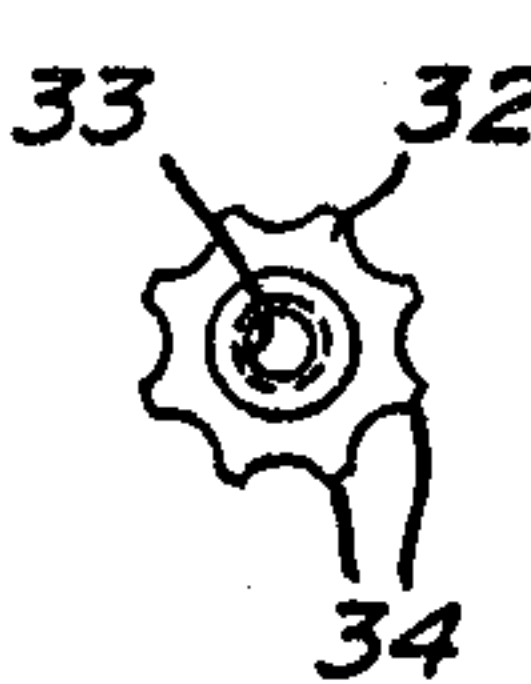


Fig. 8B

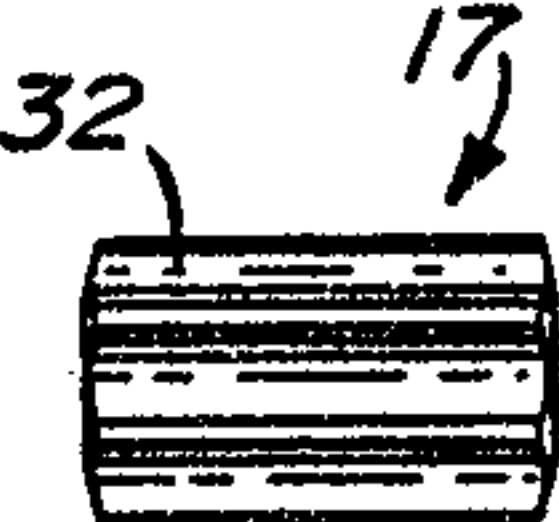


Fig. 8A

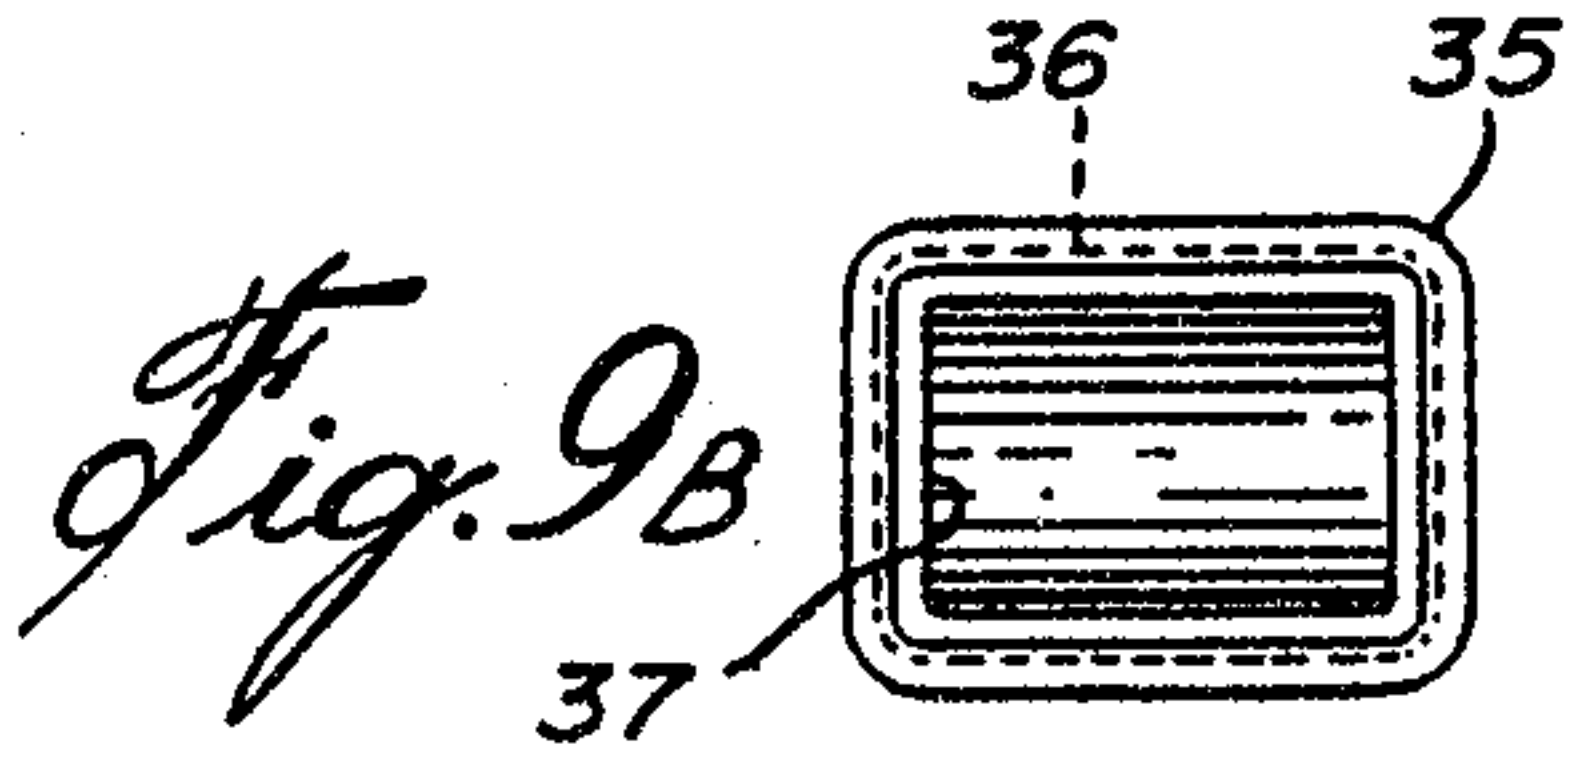


Fig. 9B









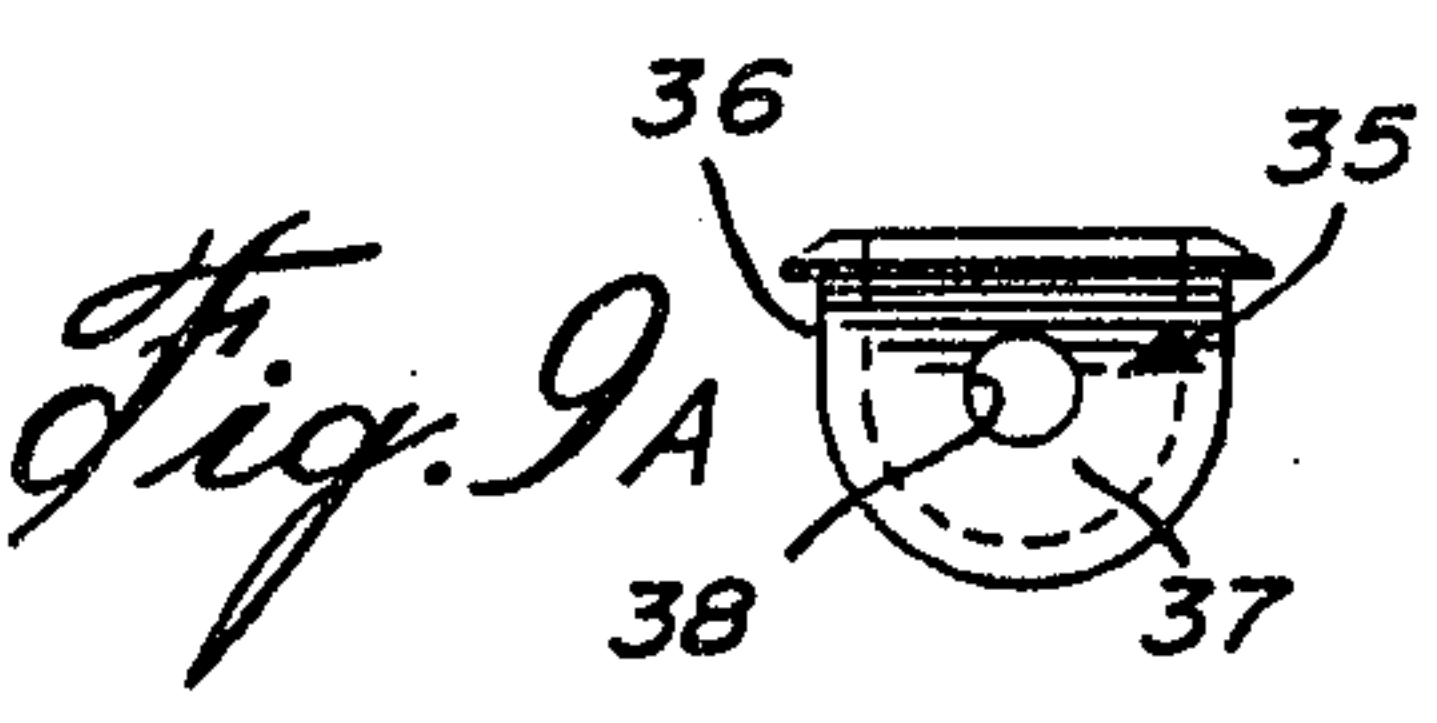






Fig. 9A

2096541







4/8

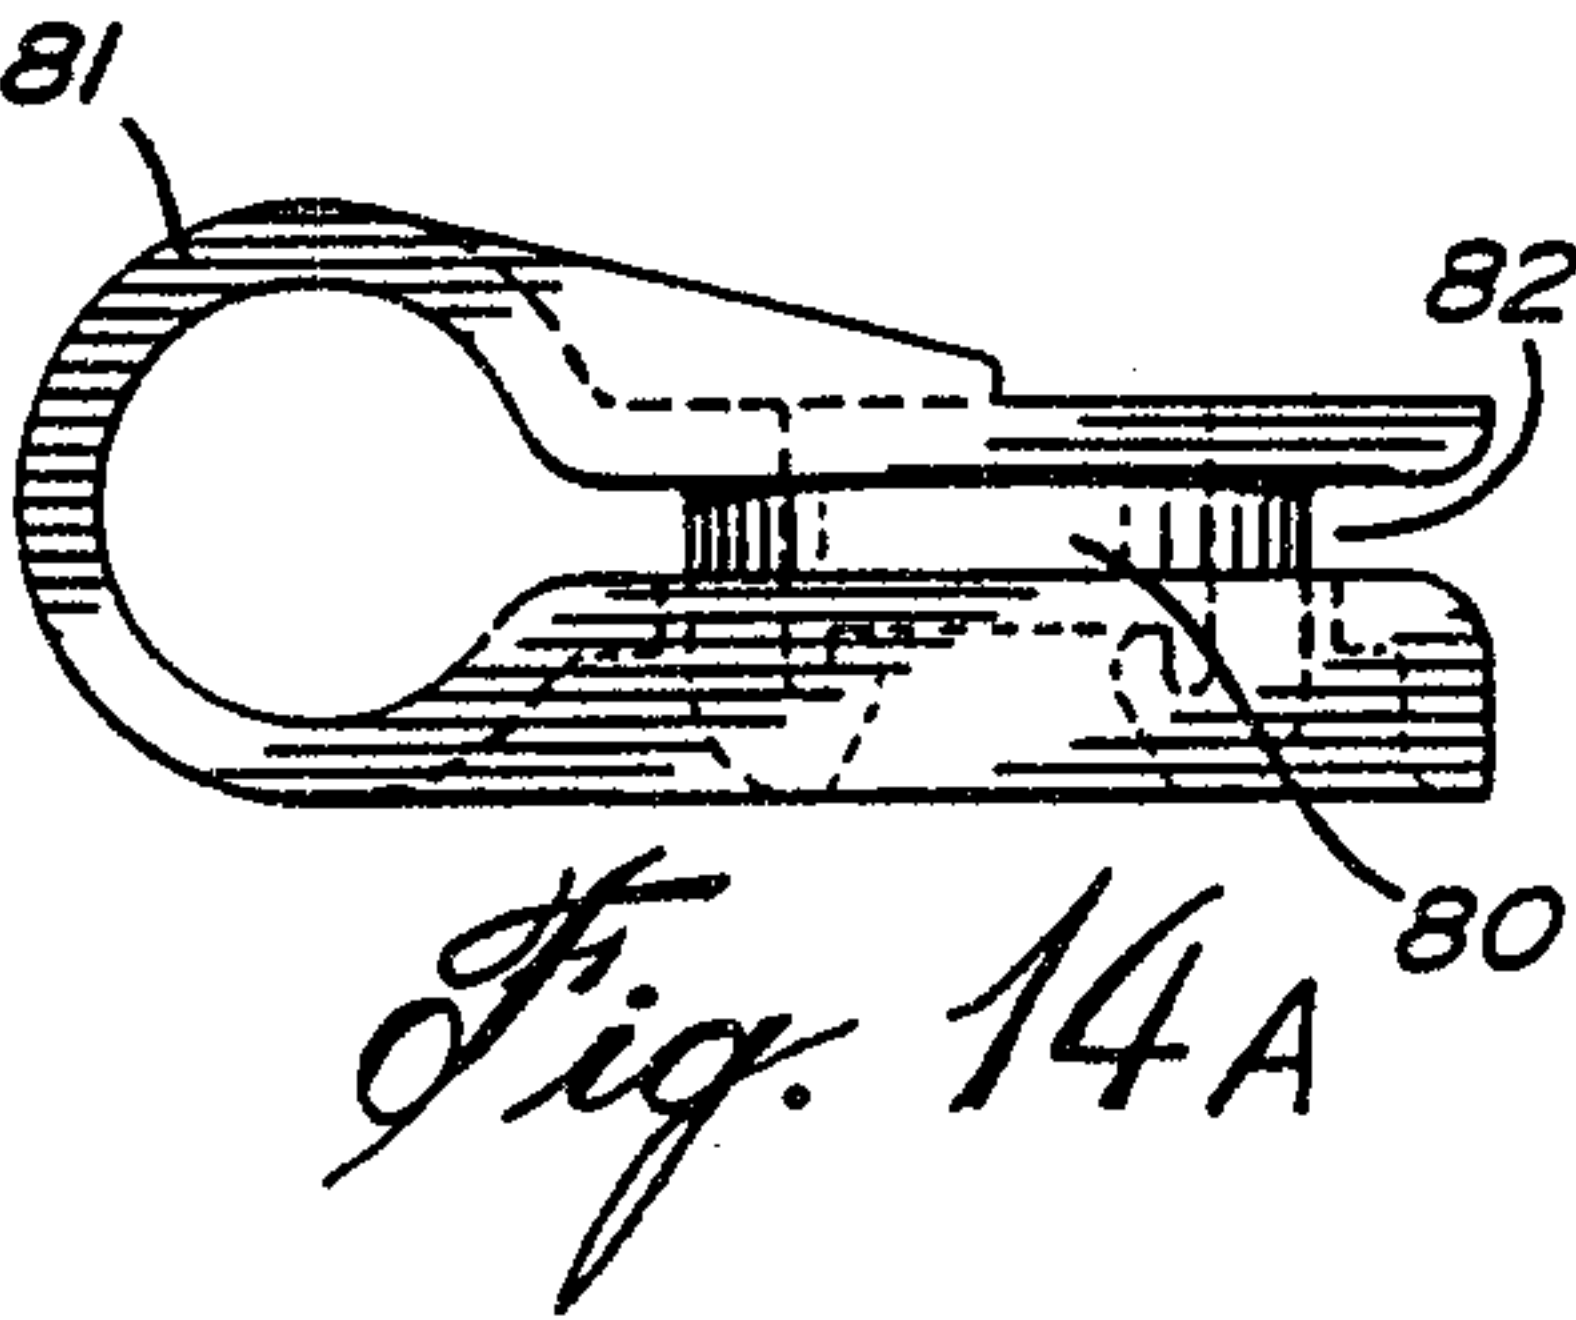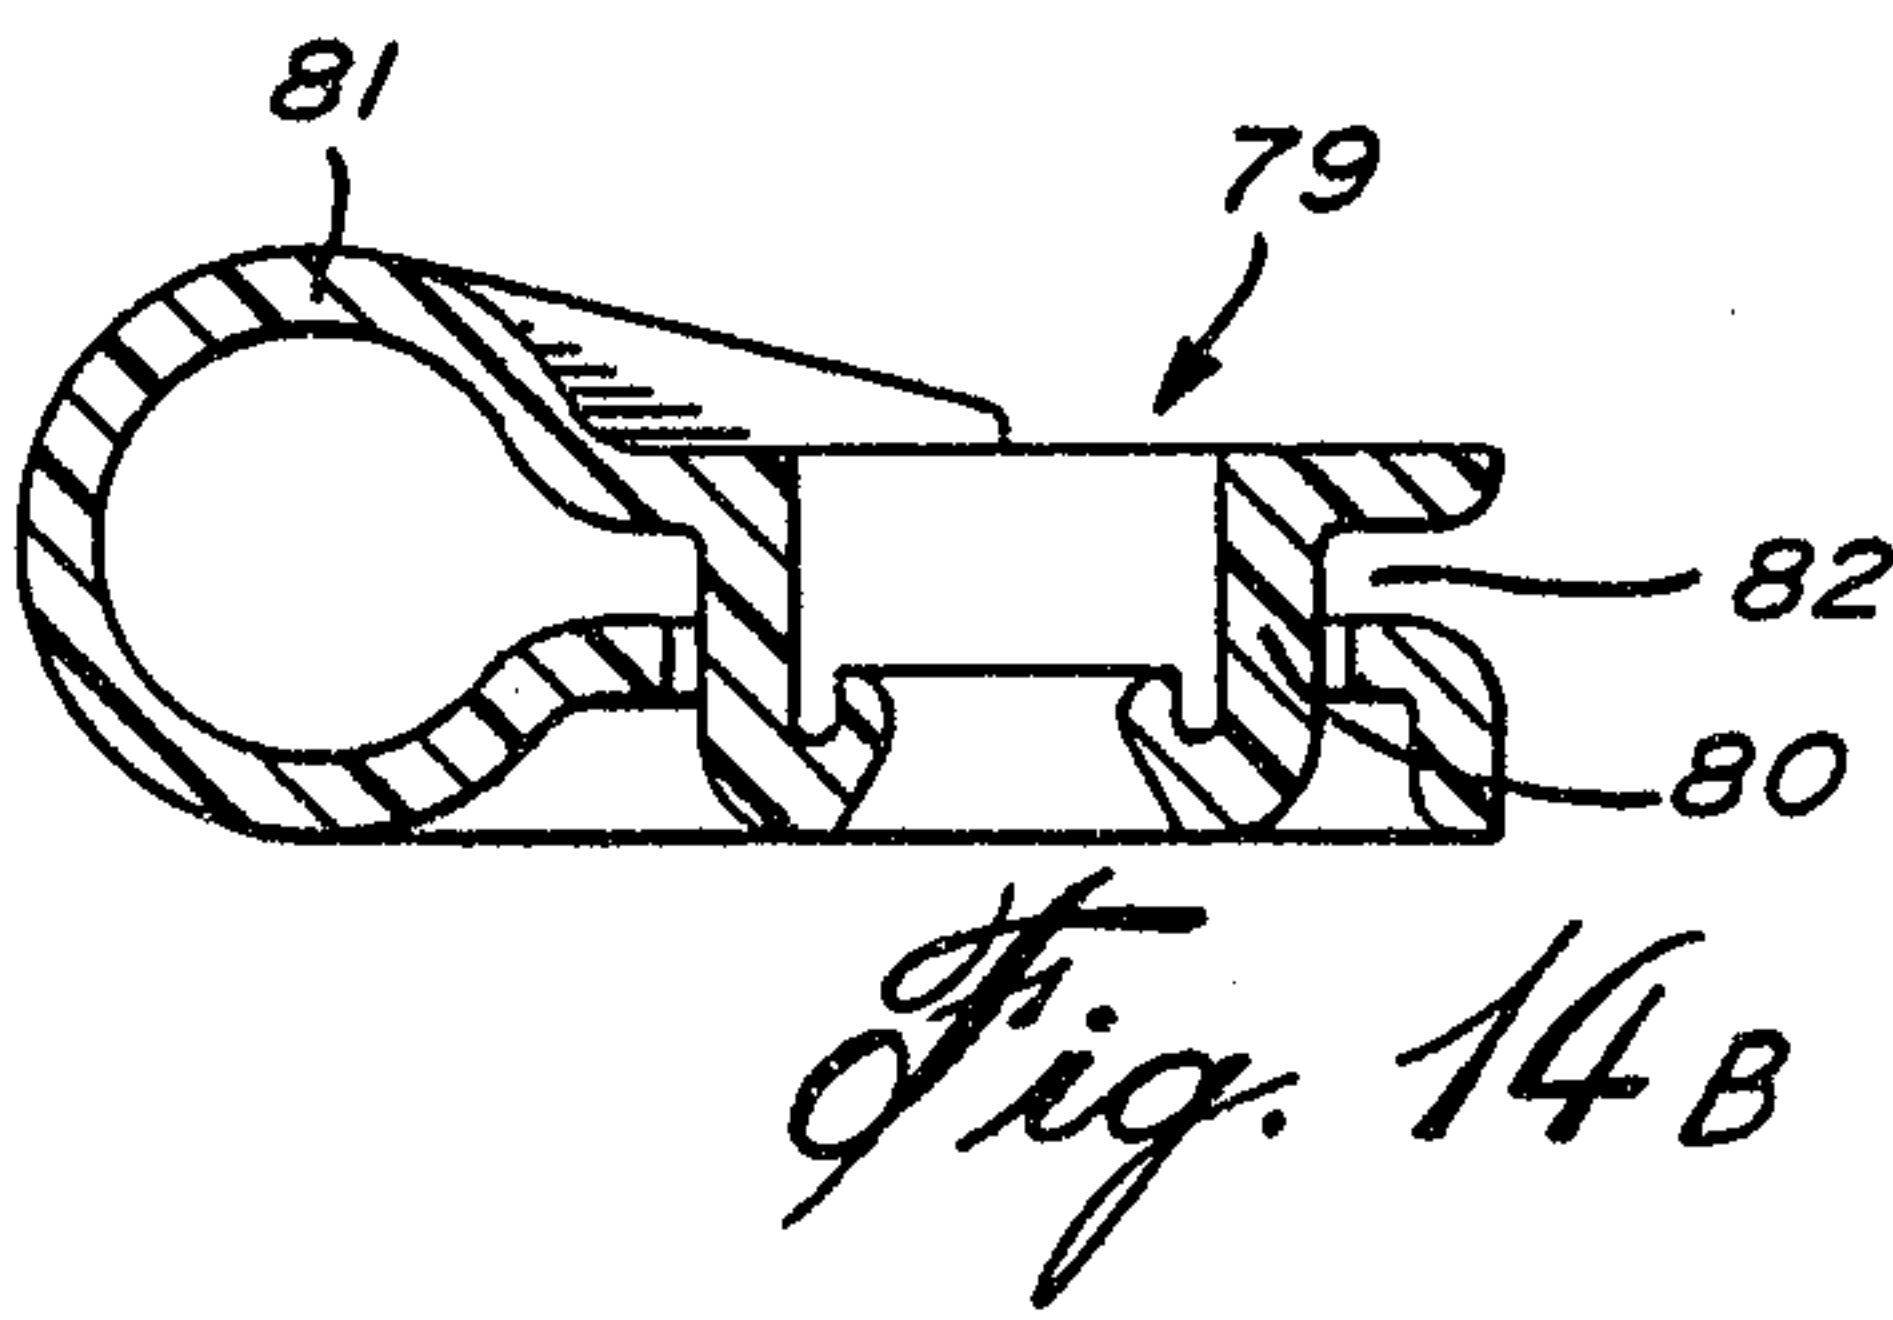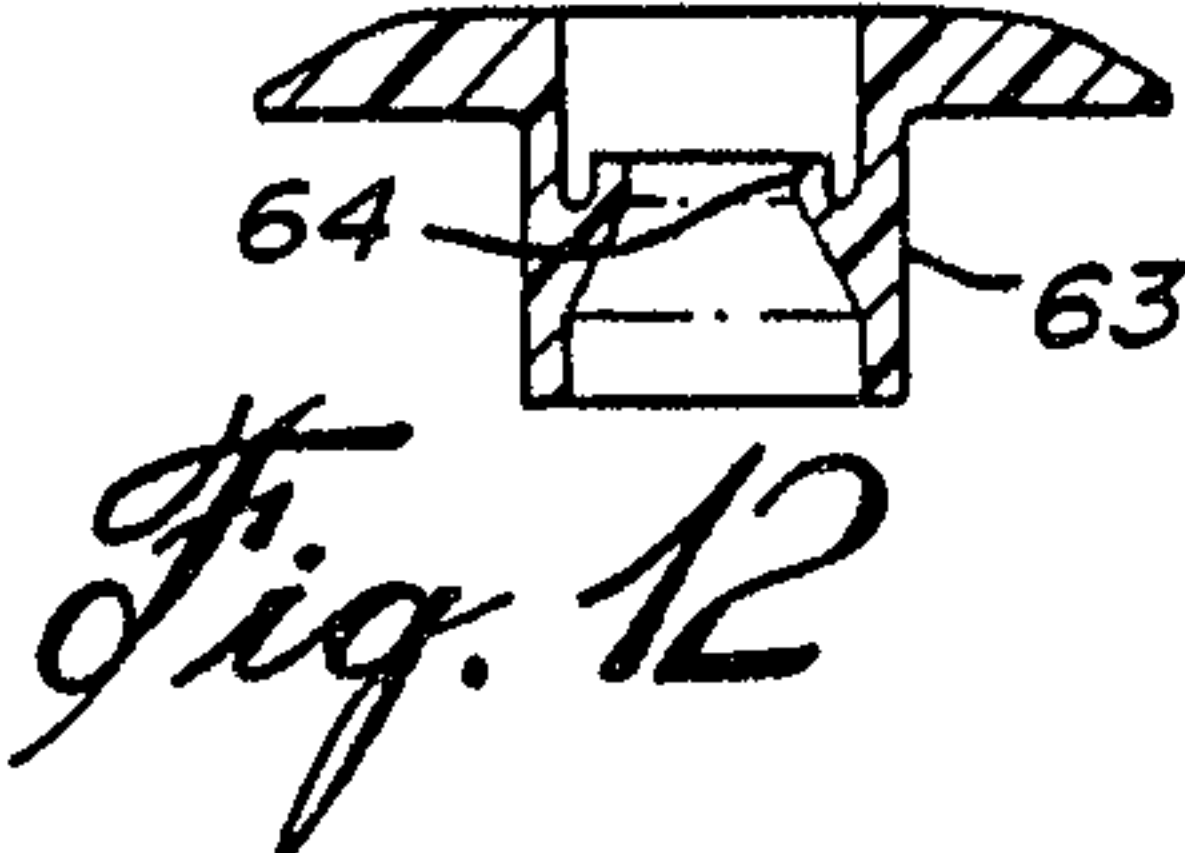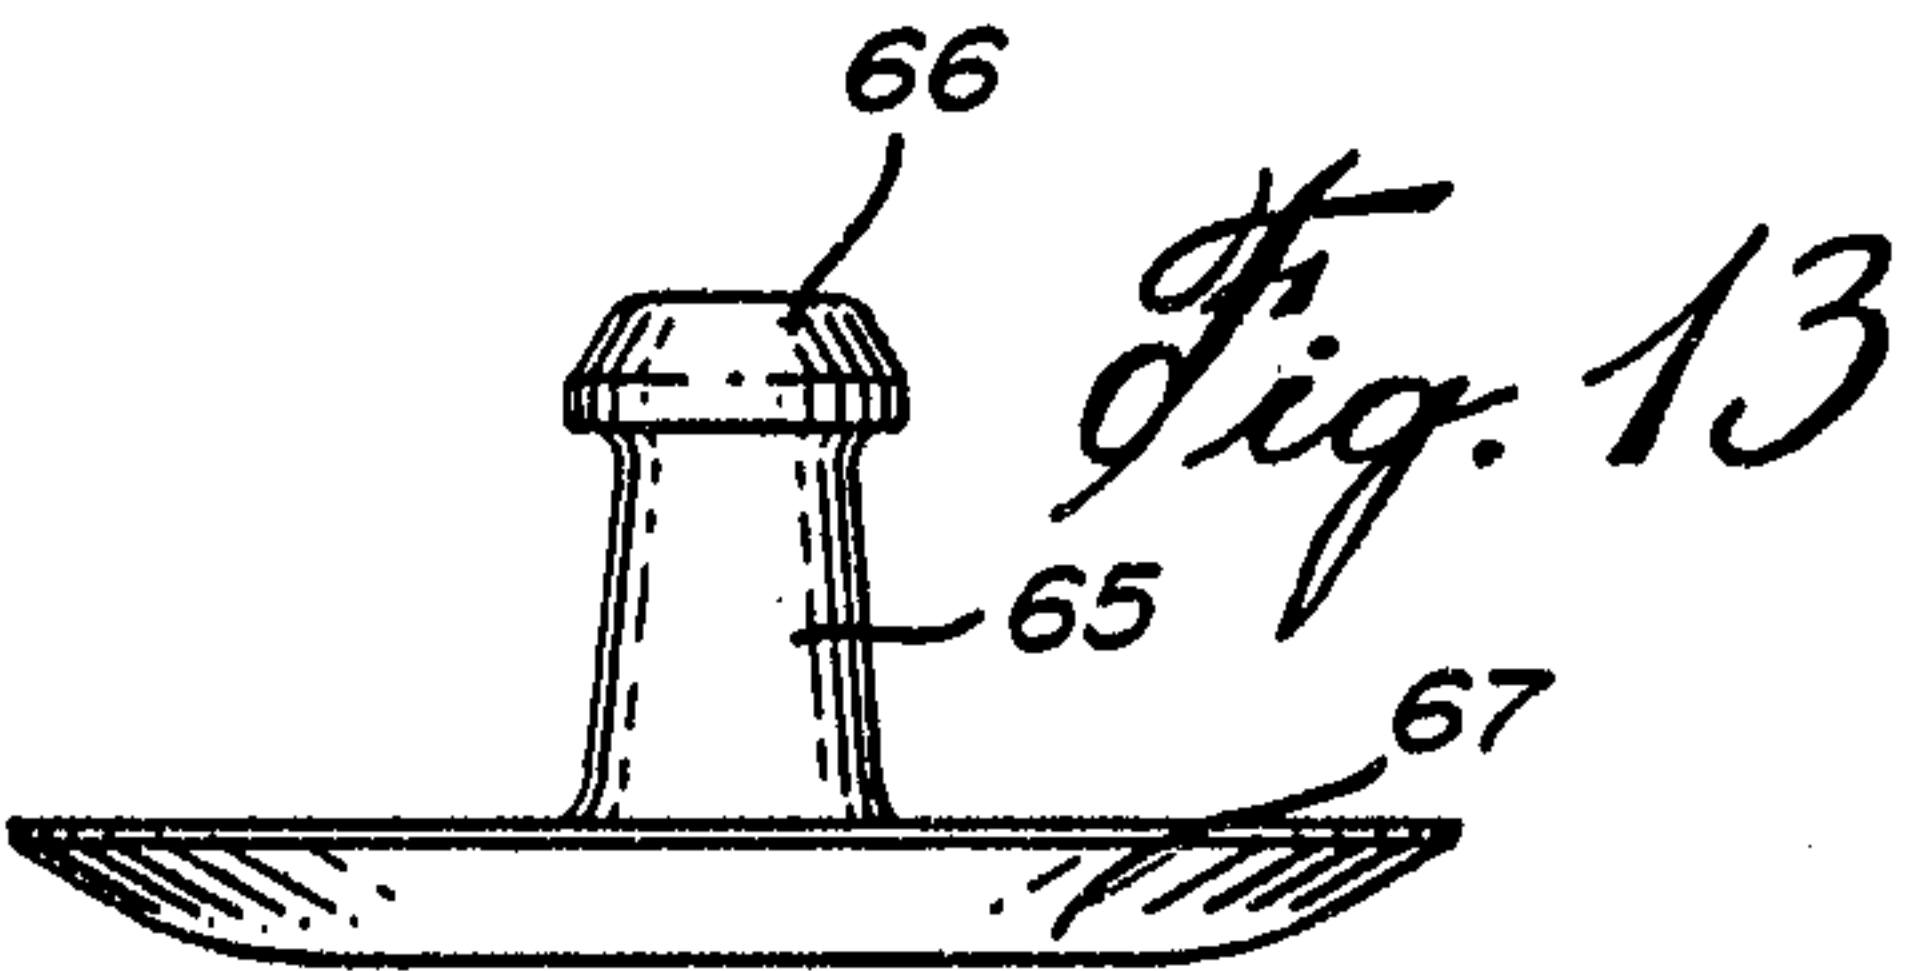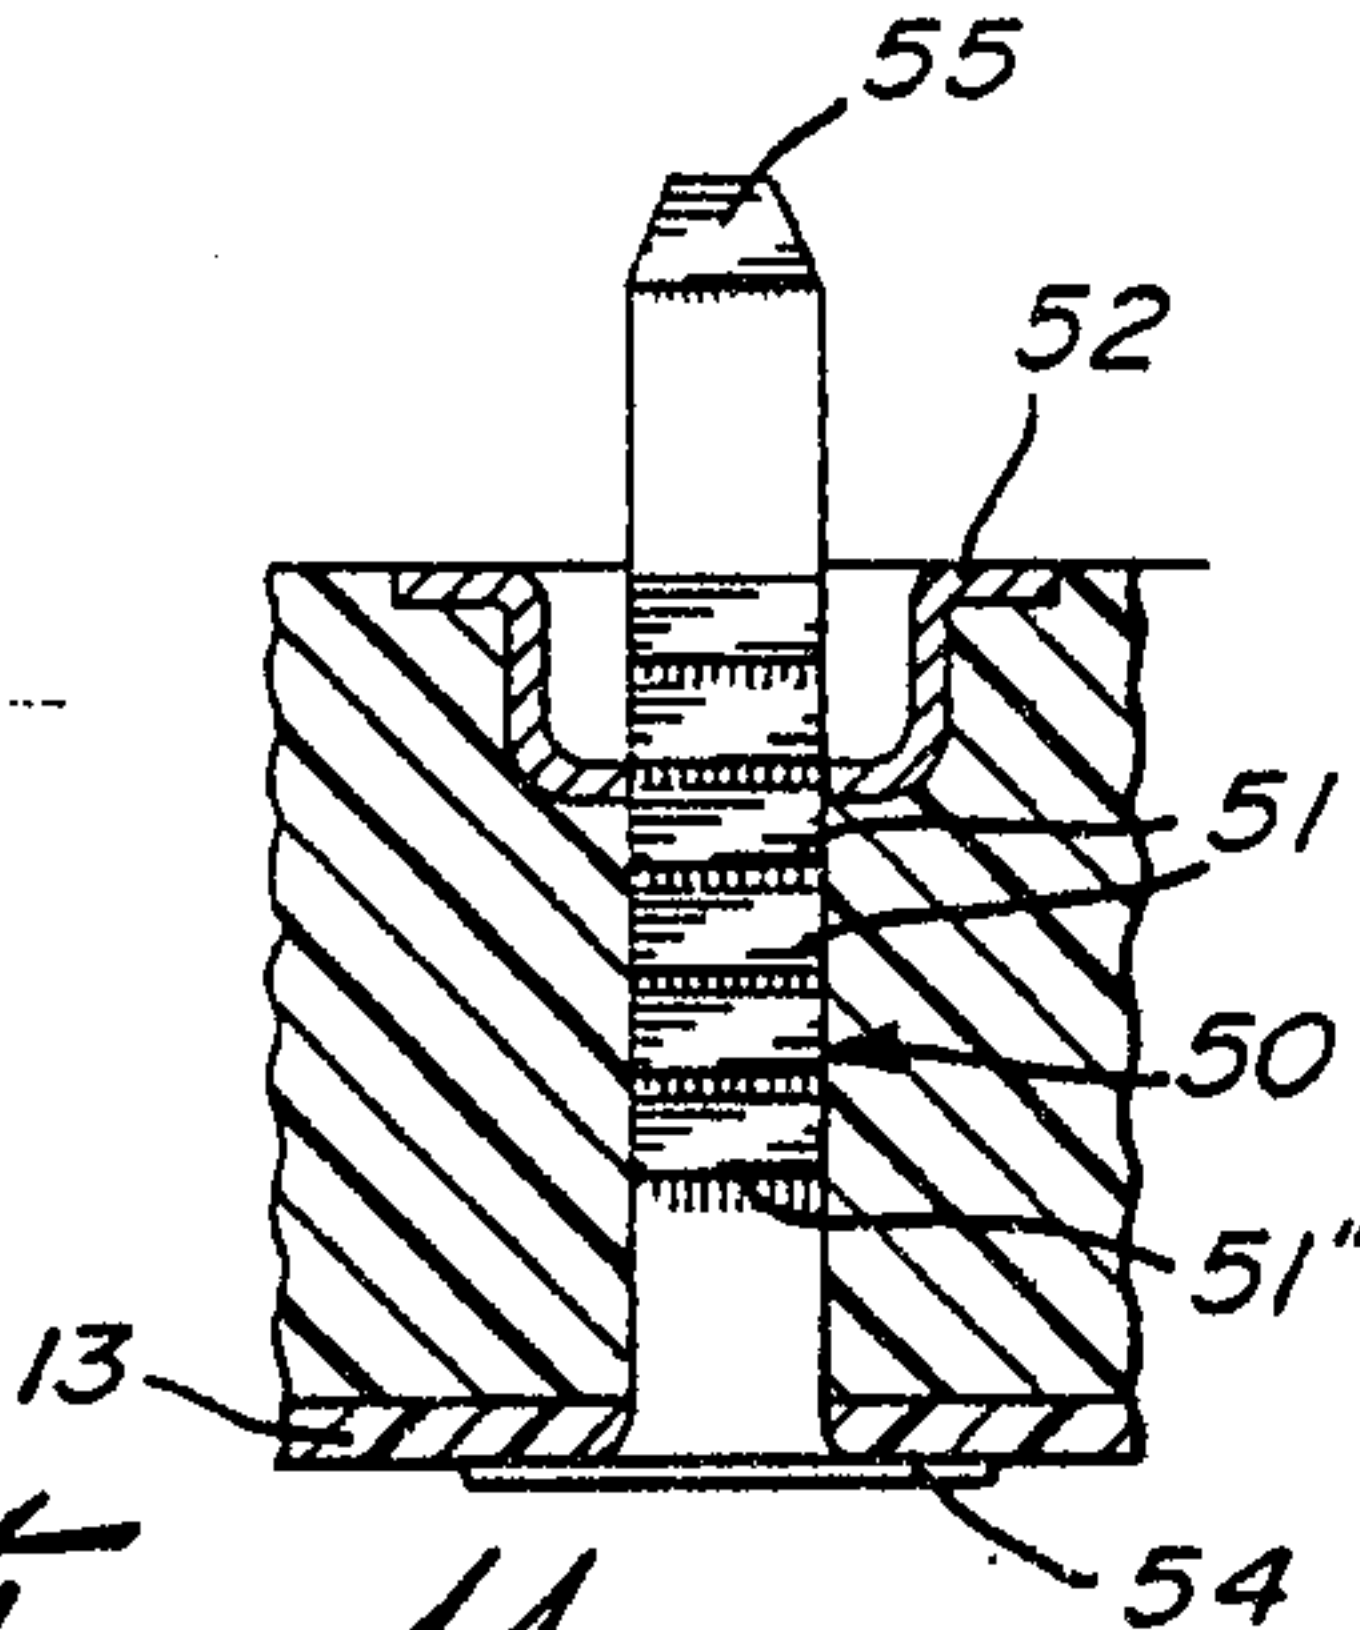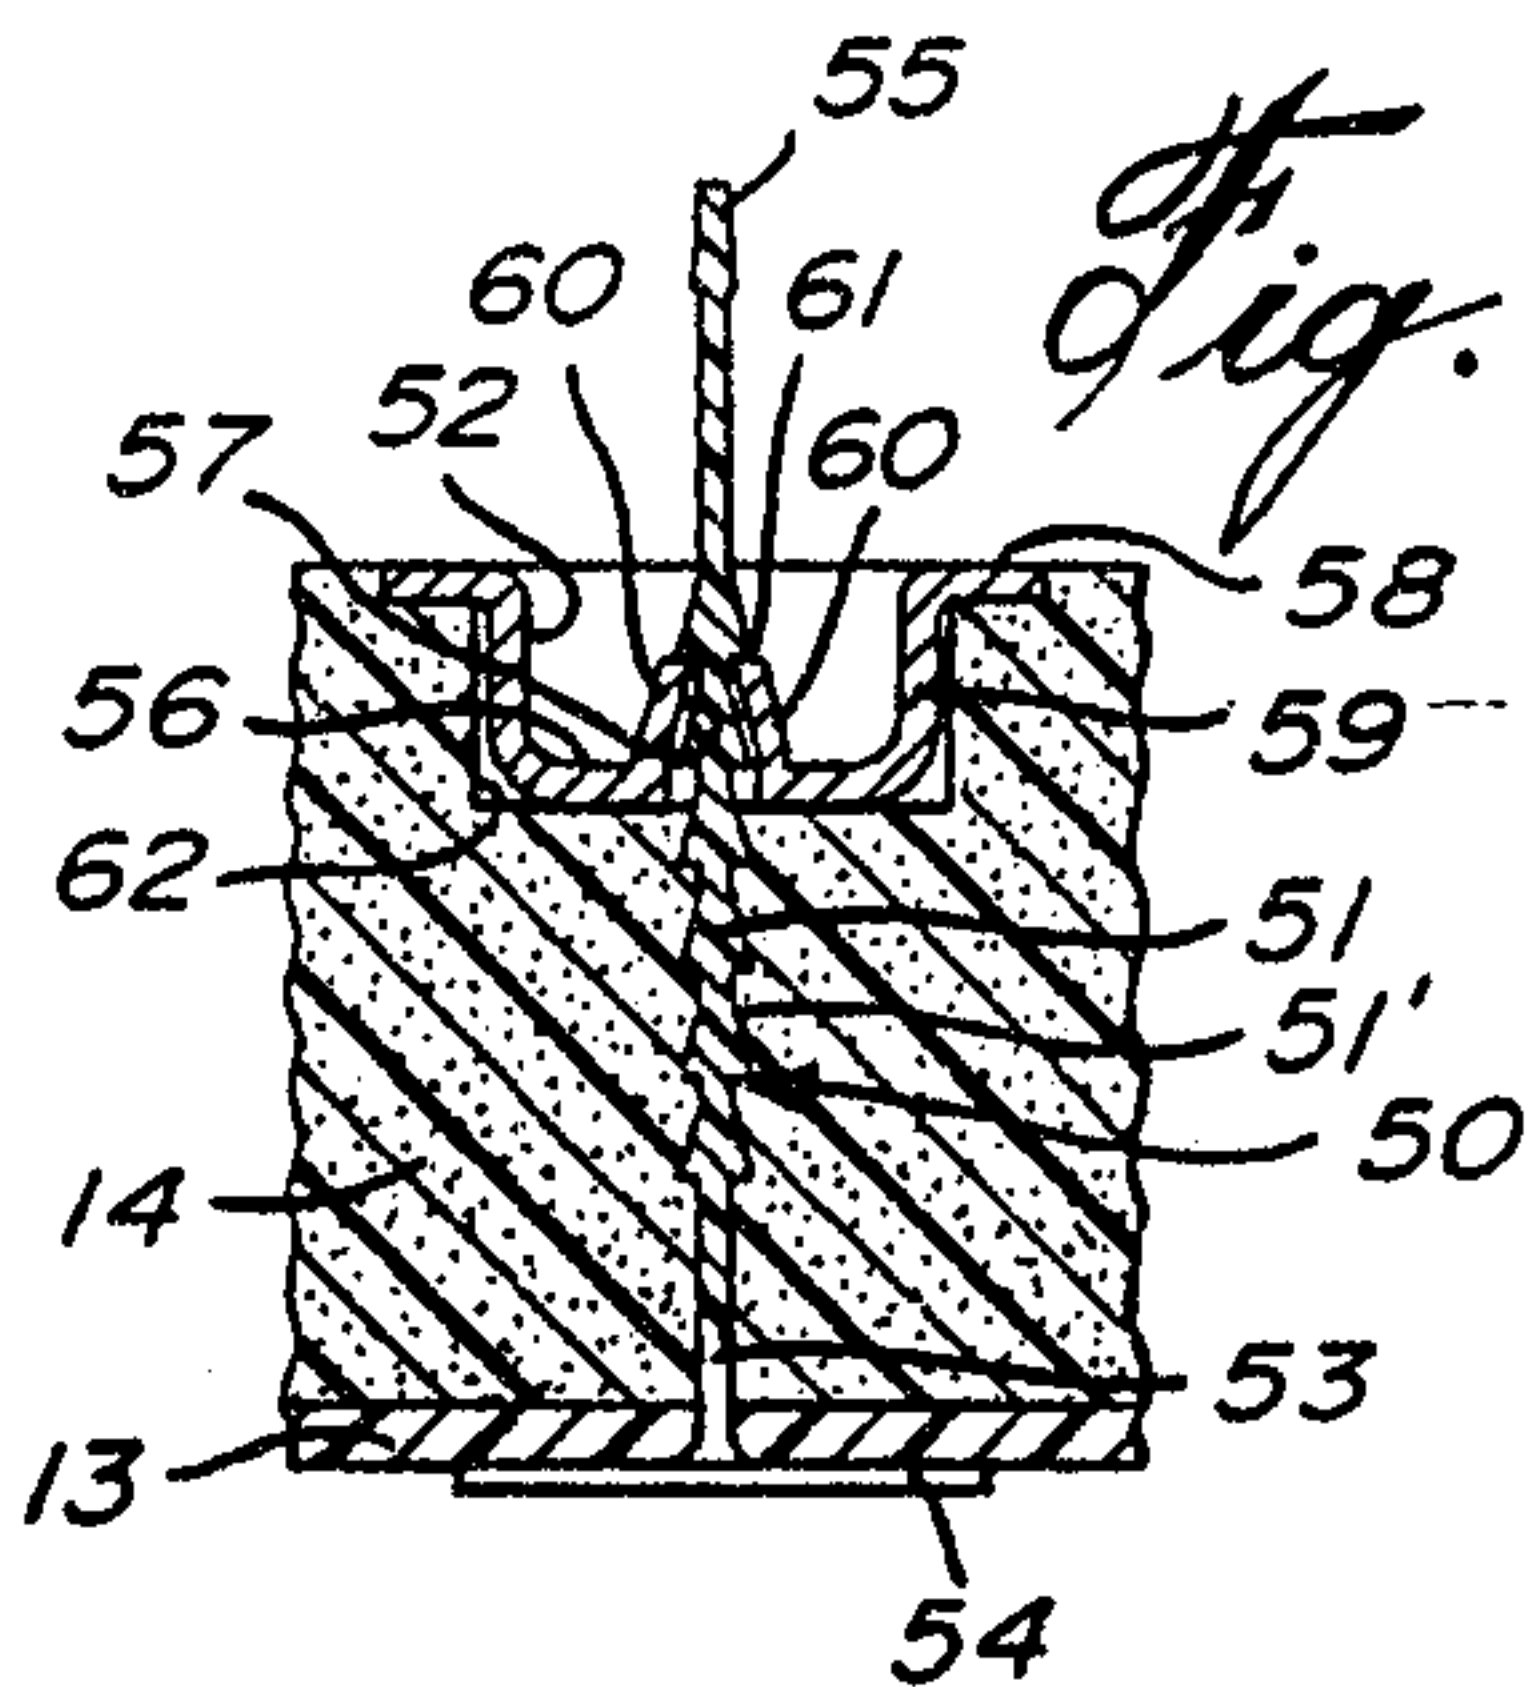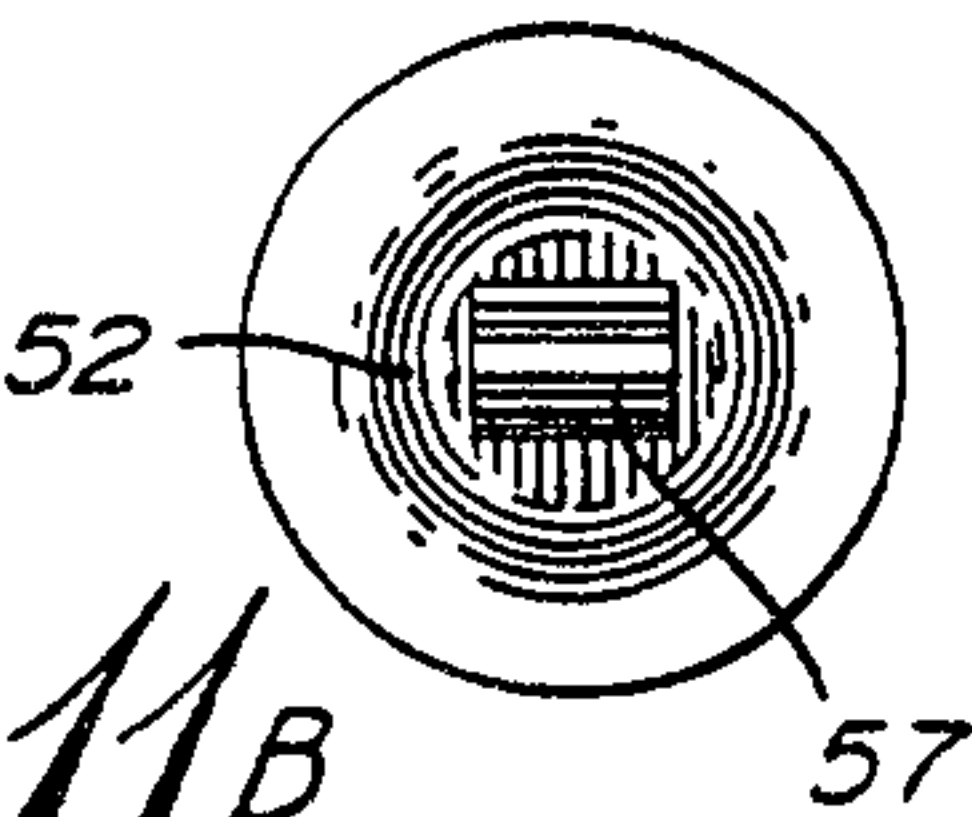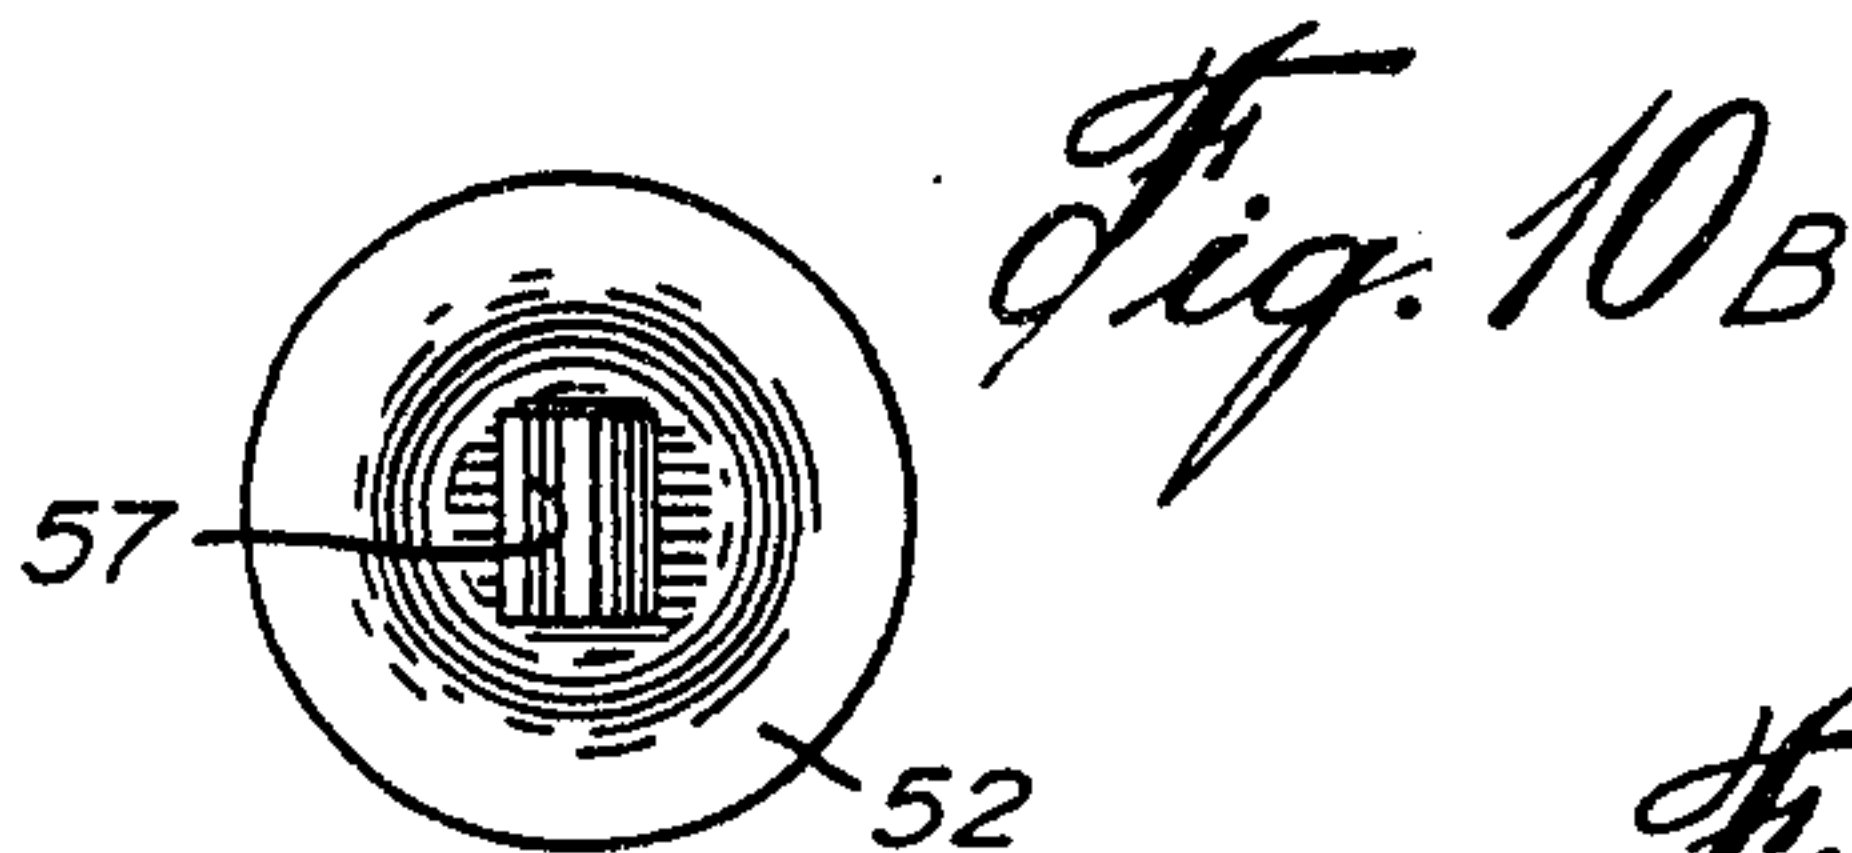

5/8

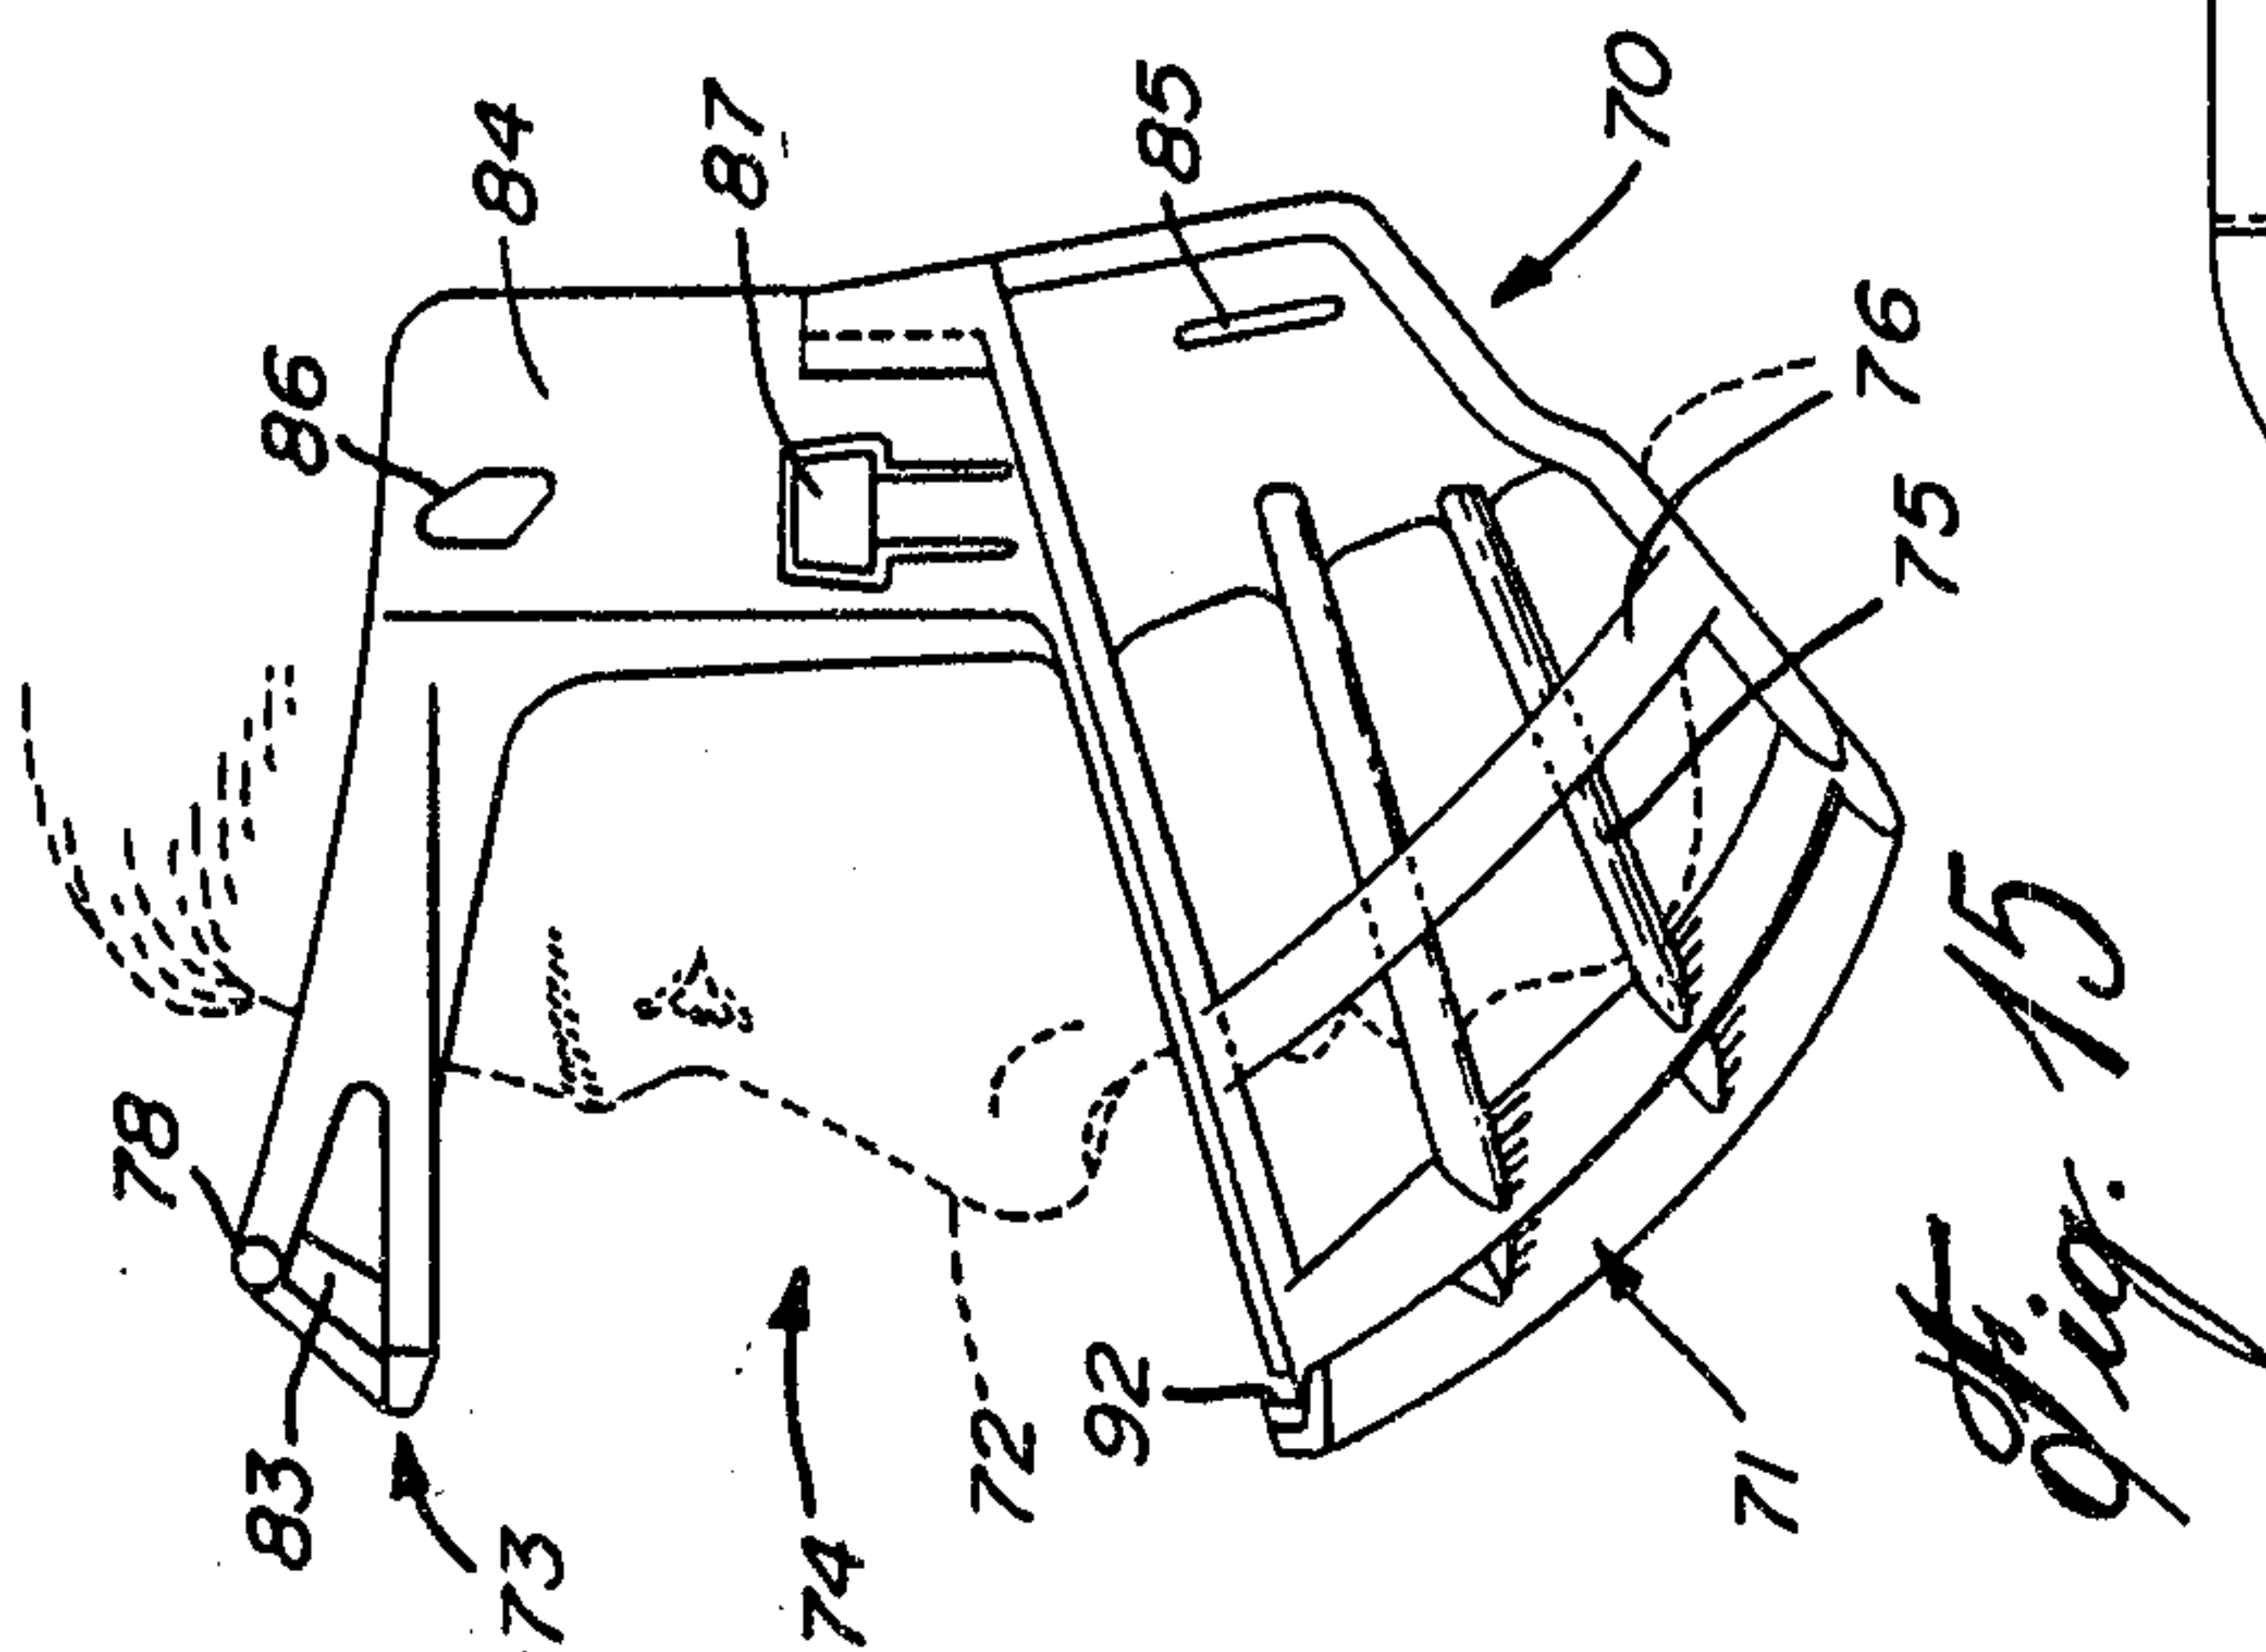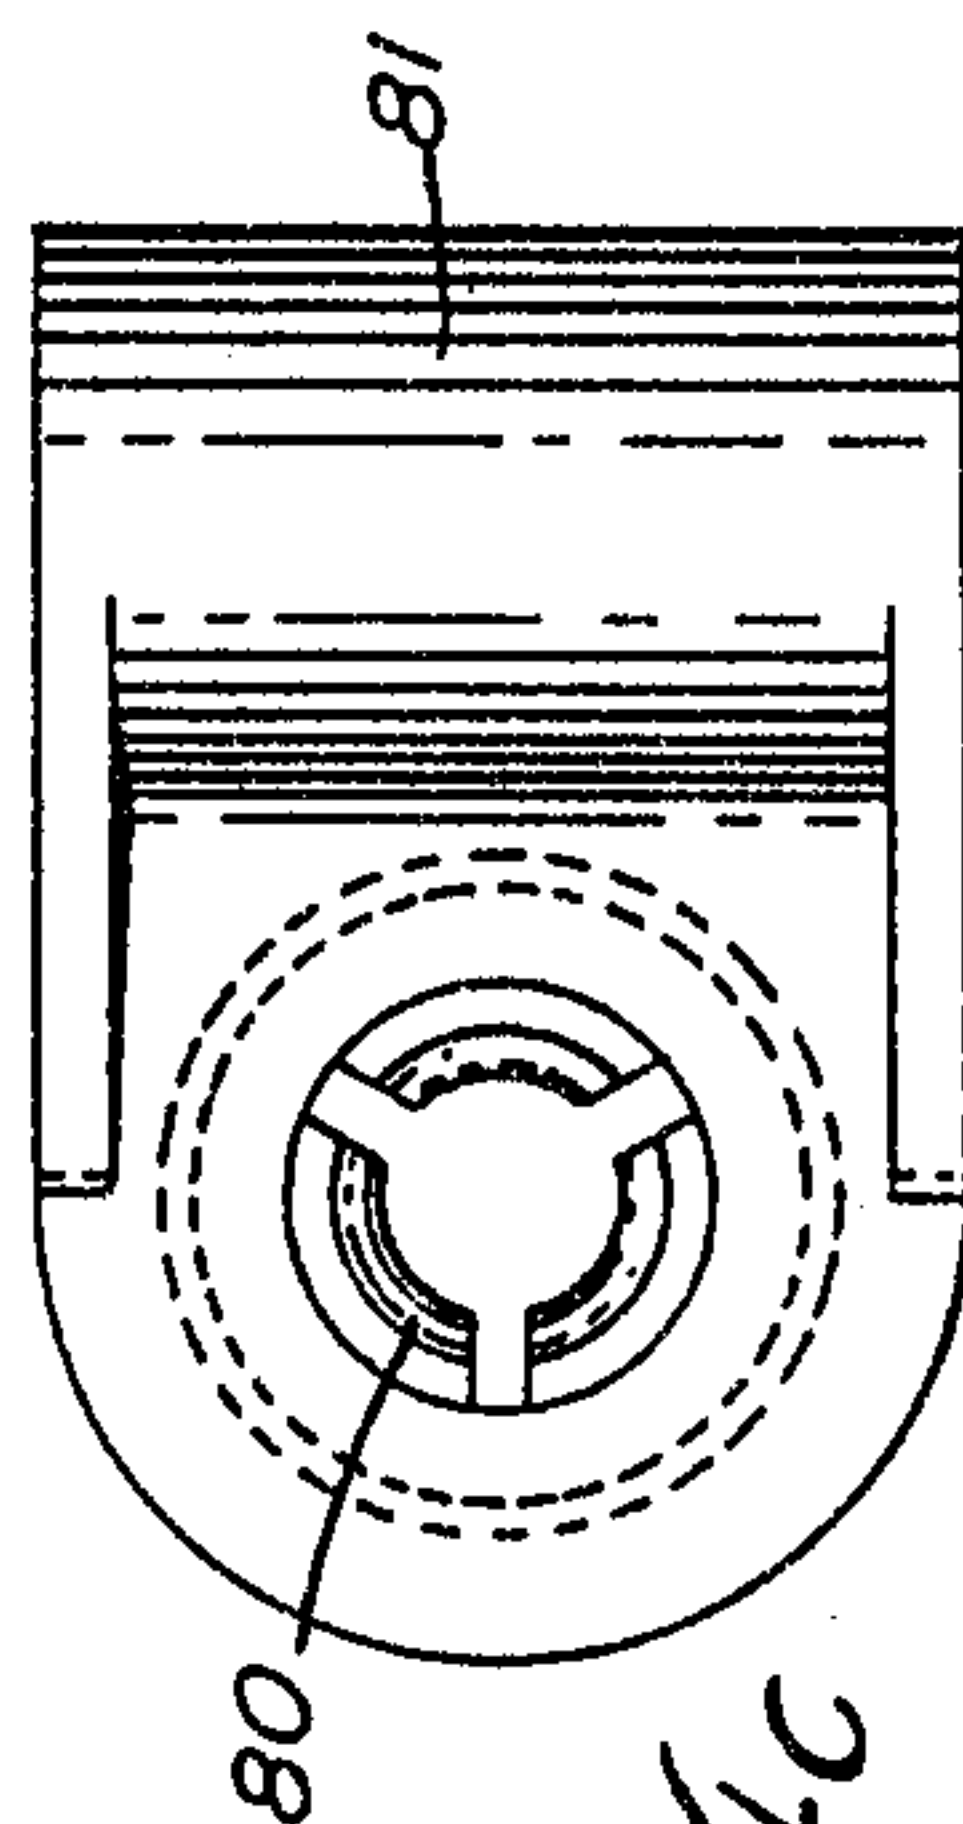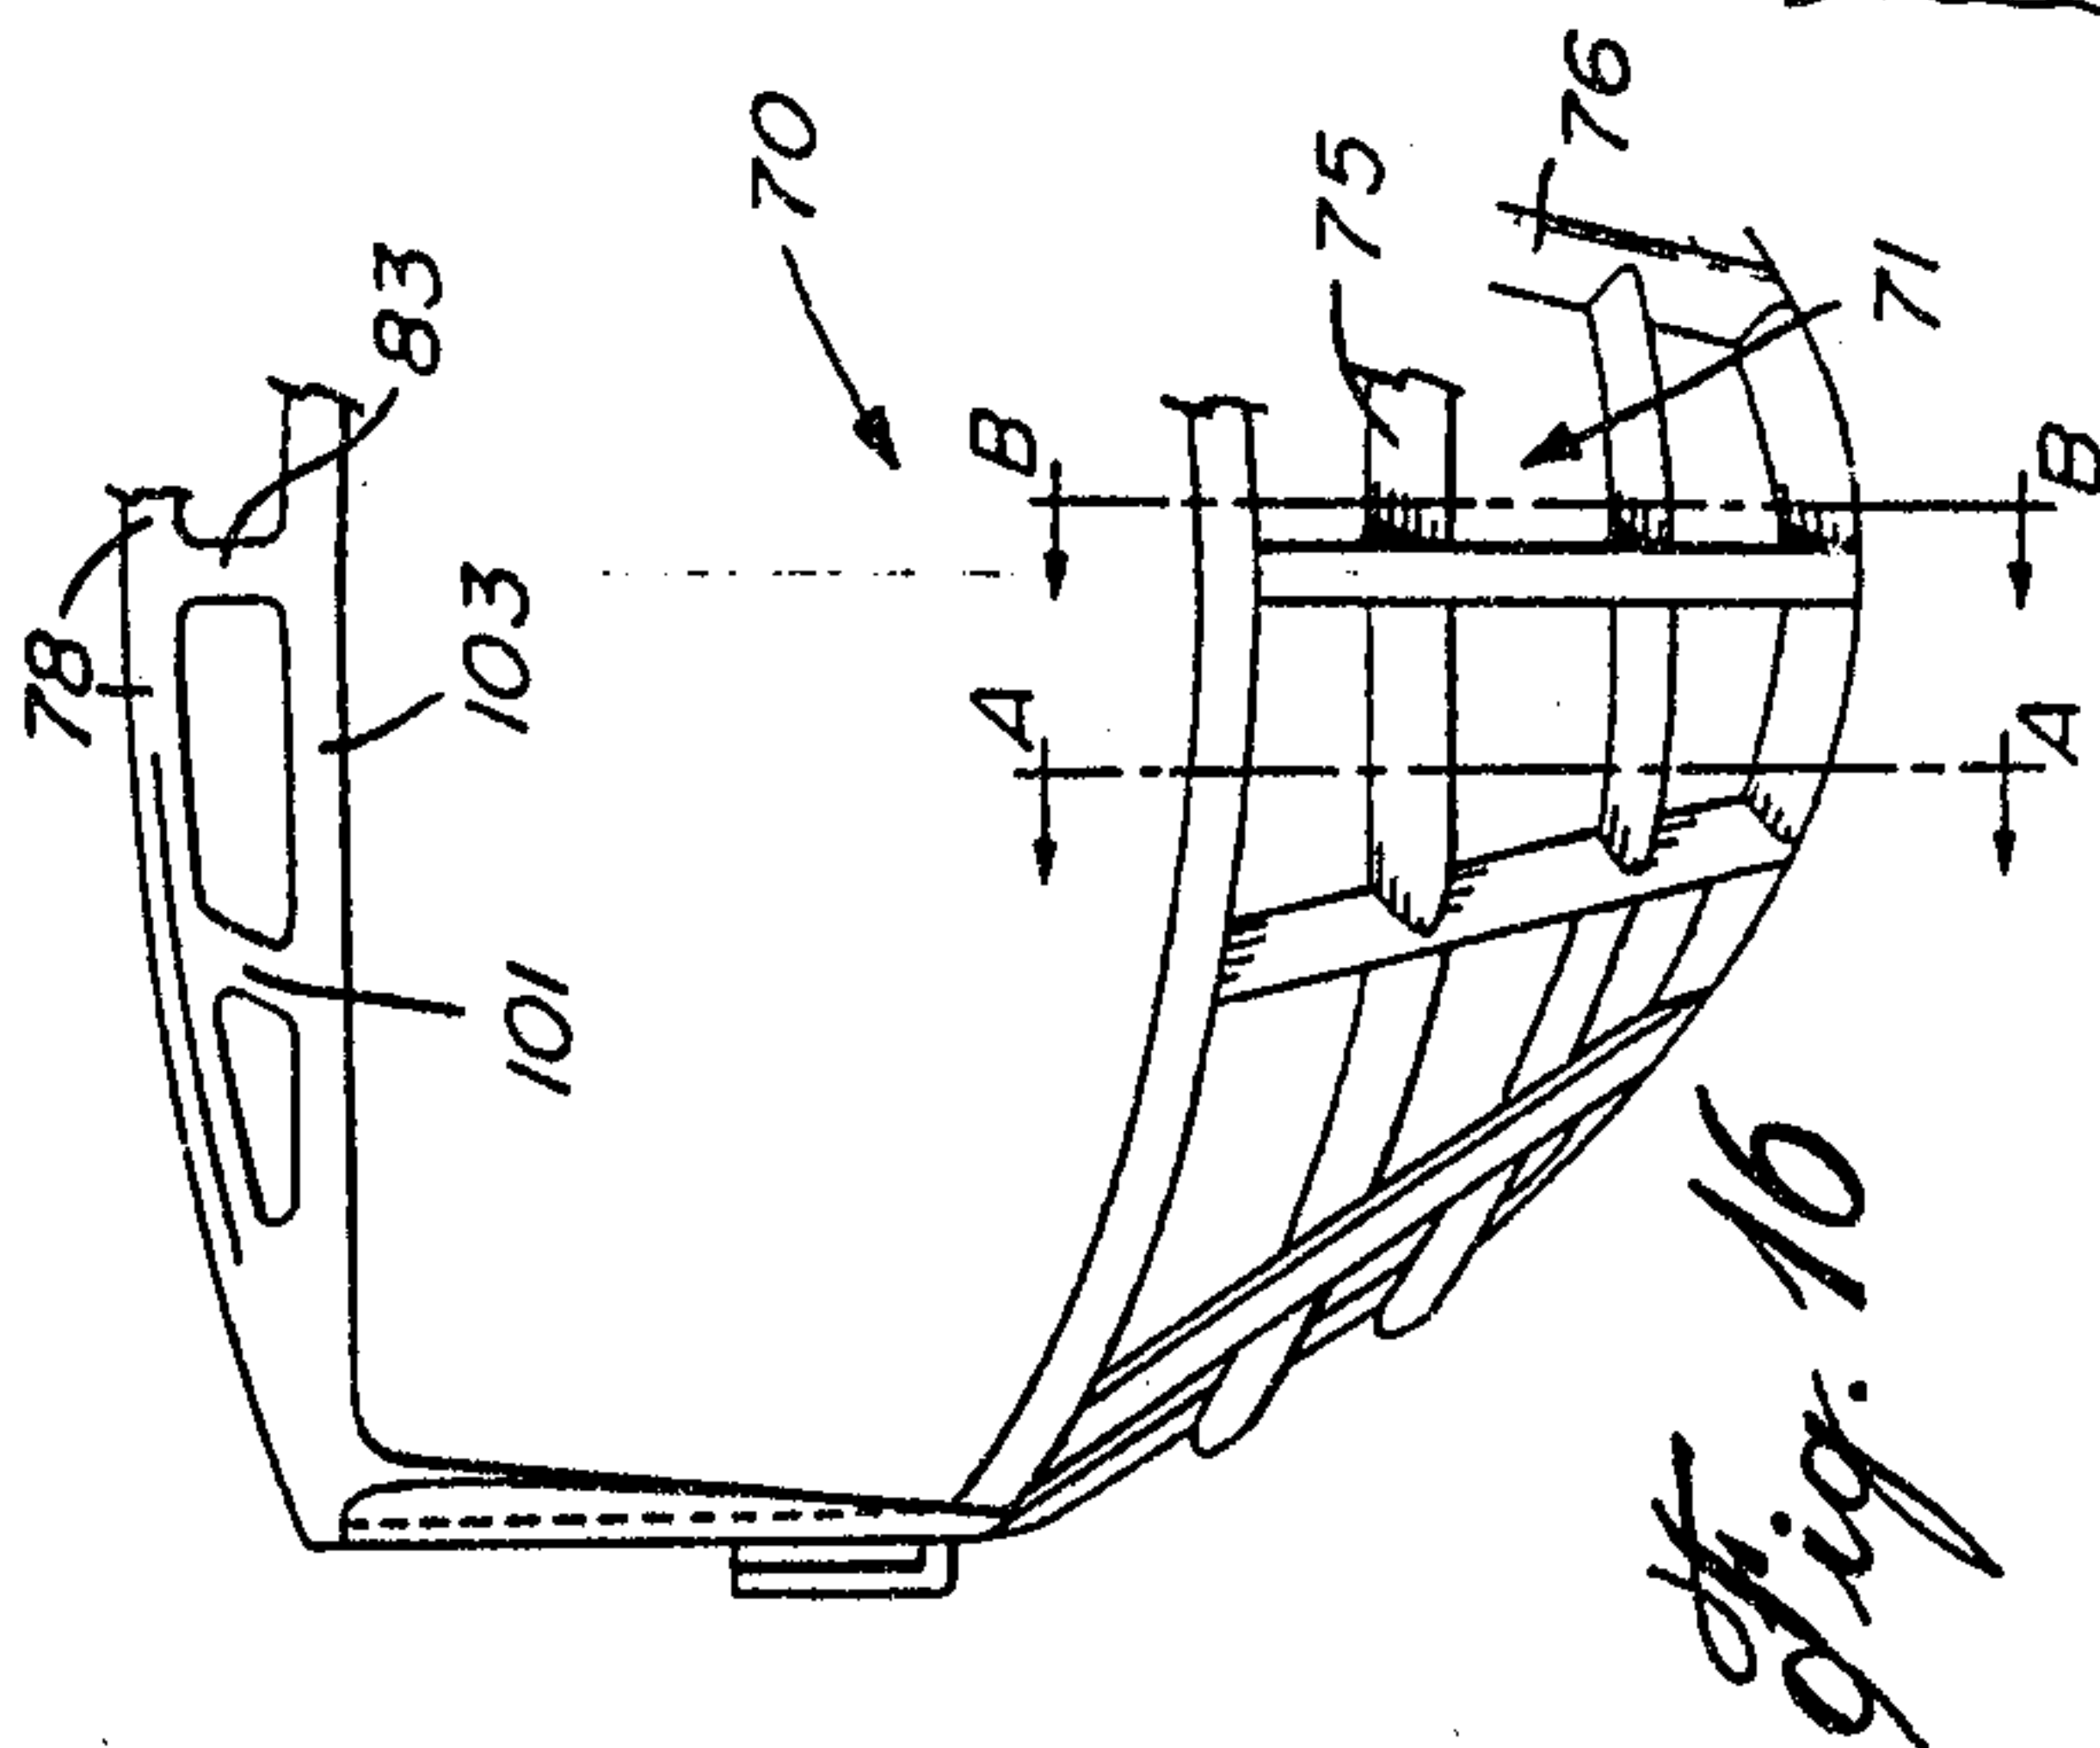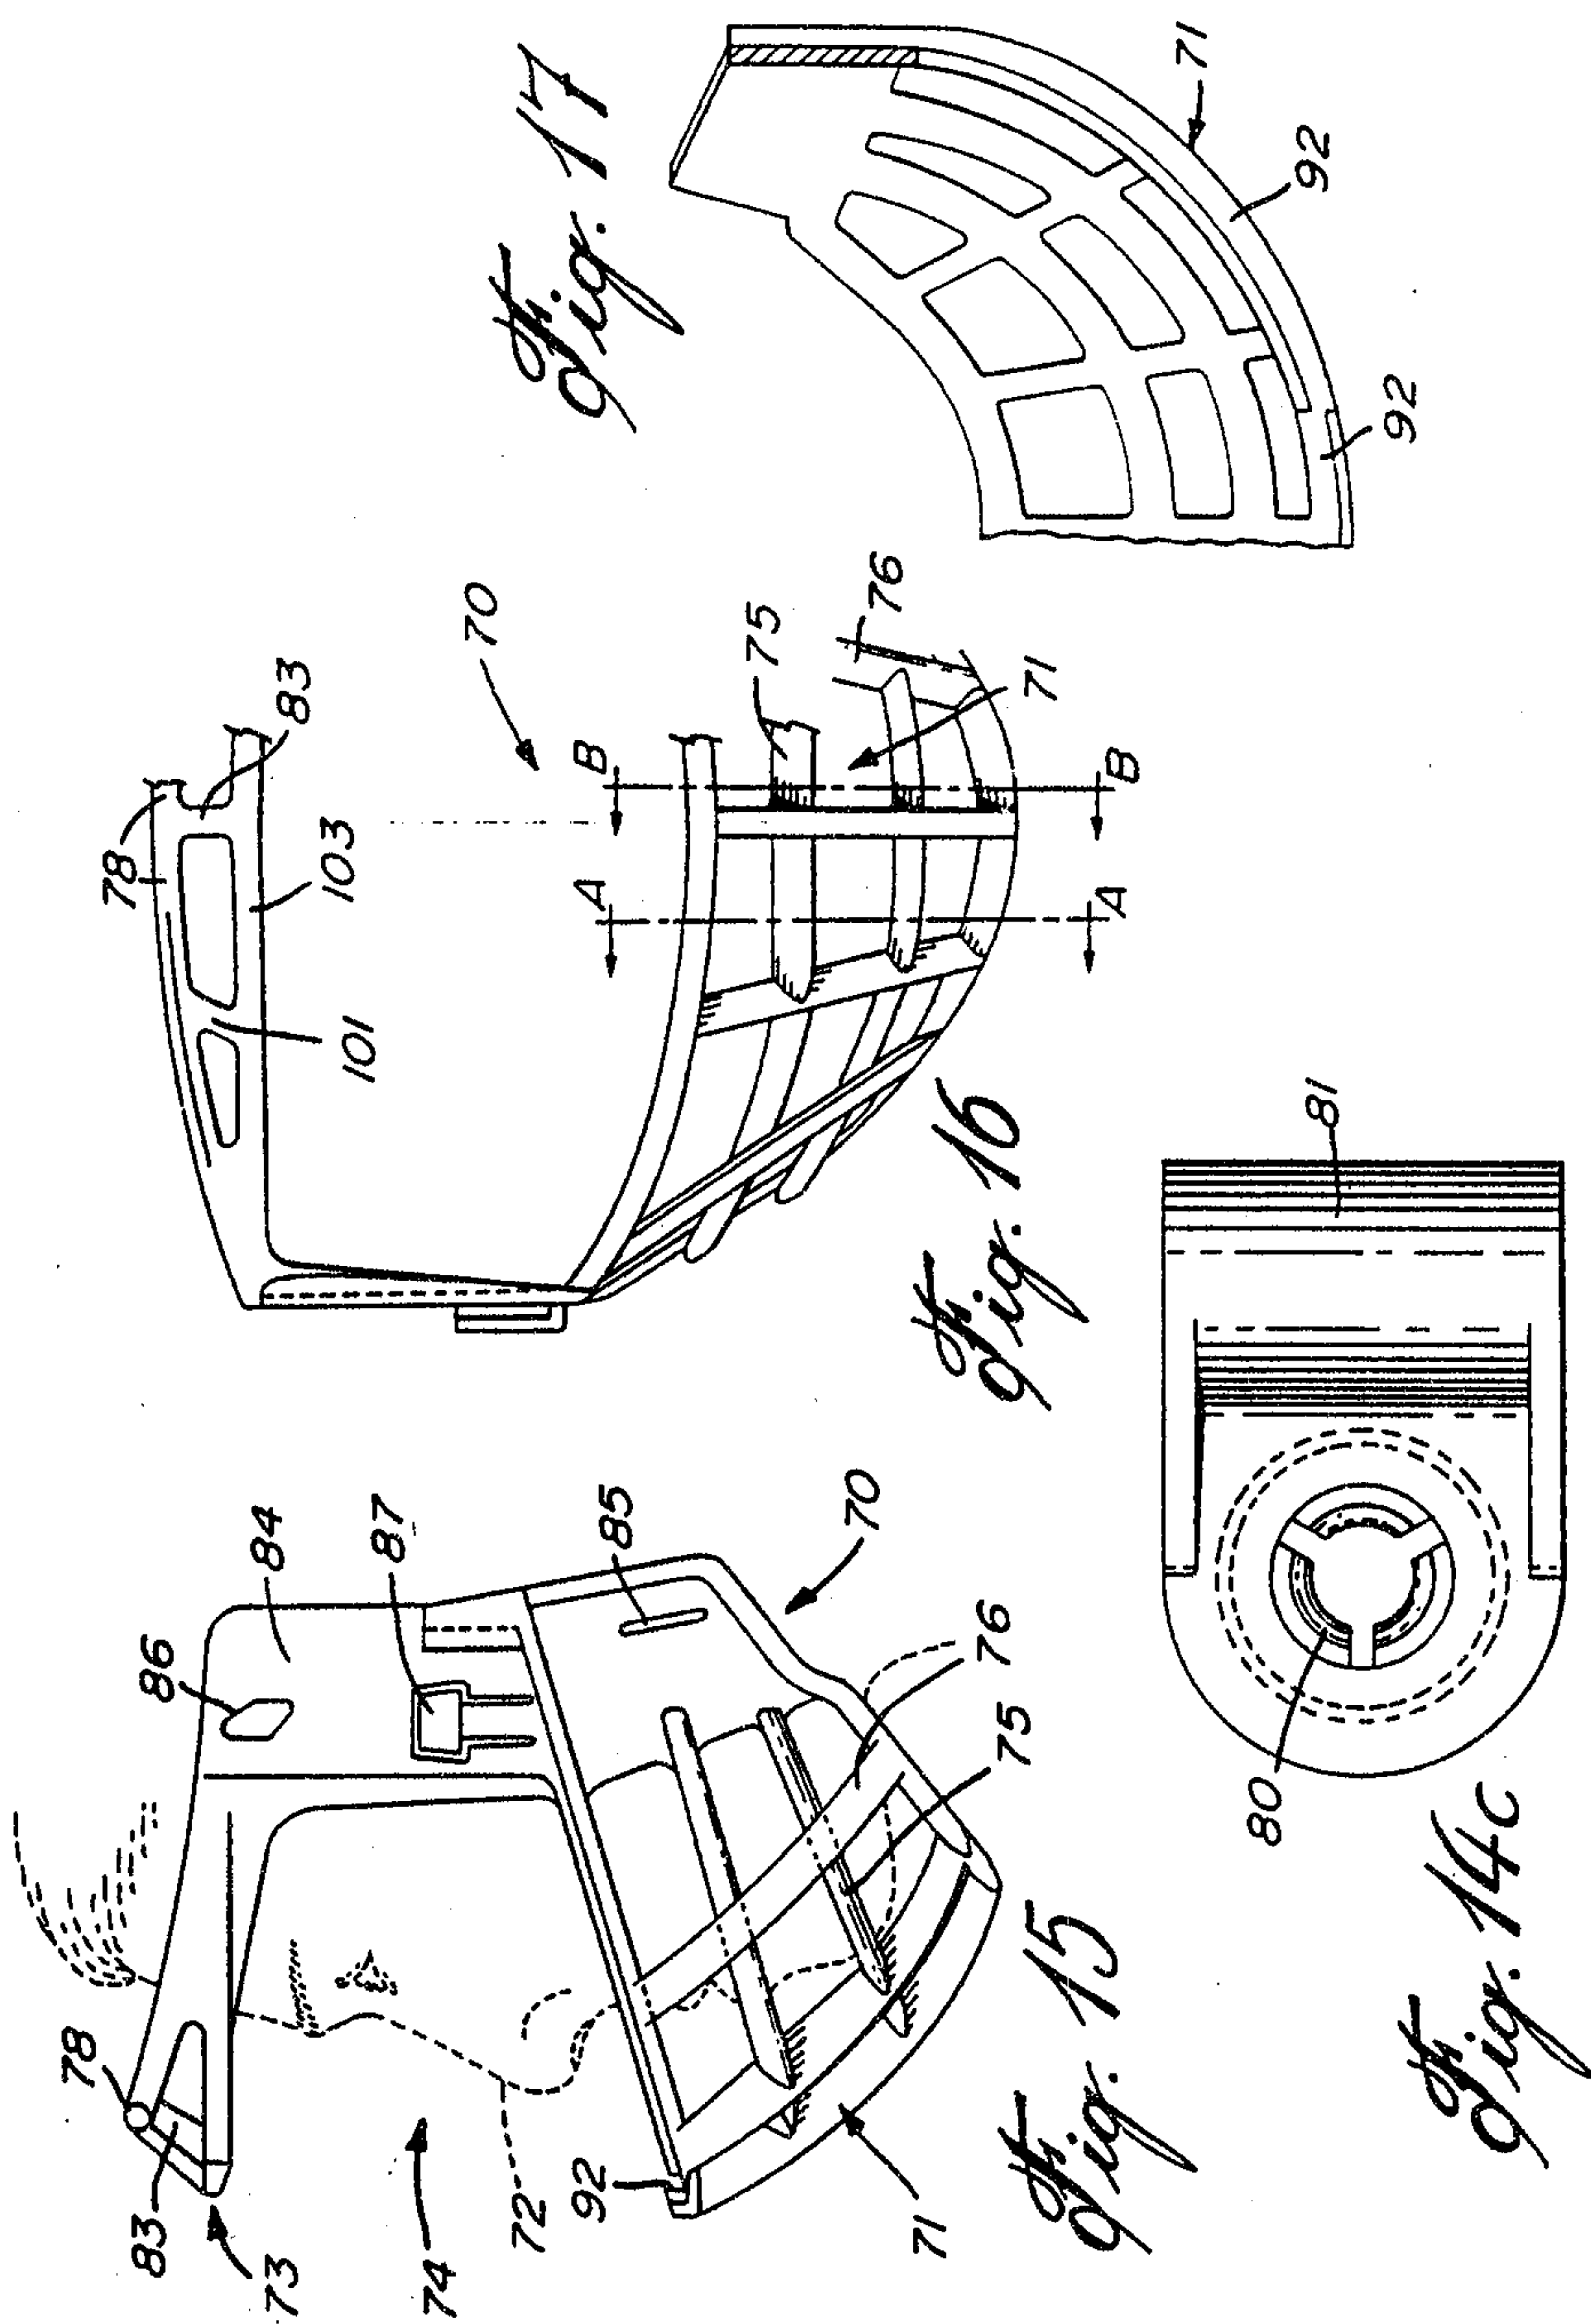

6/8

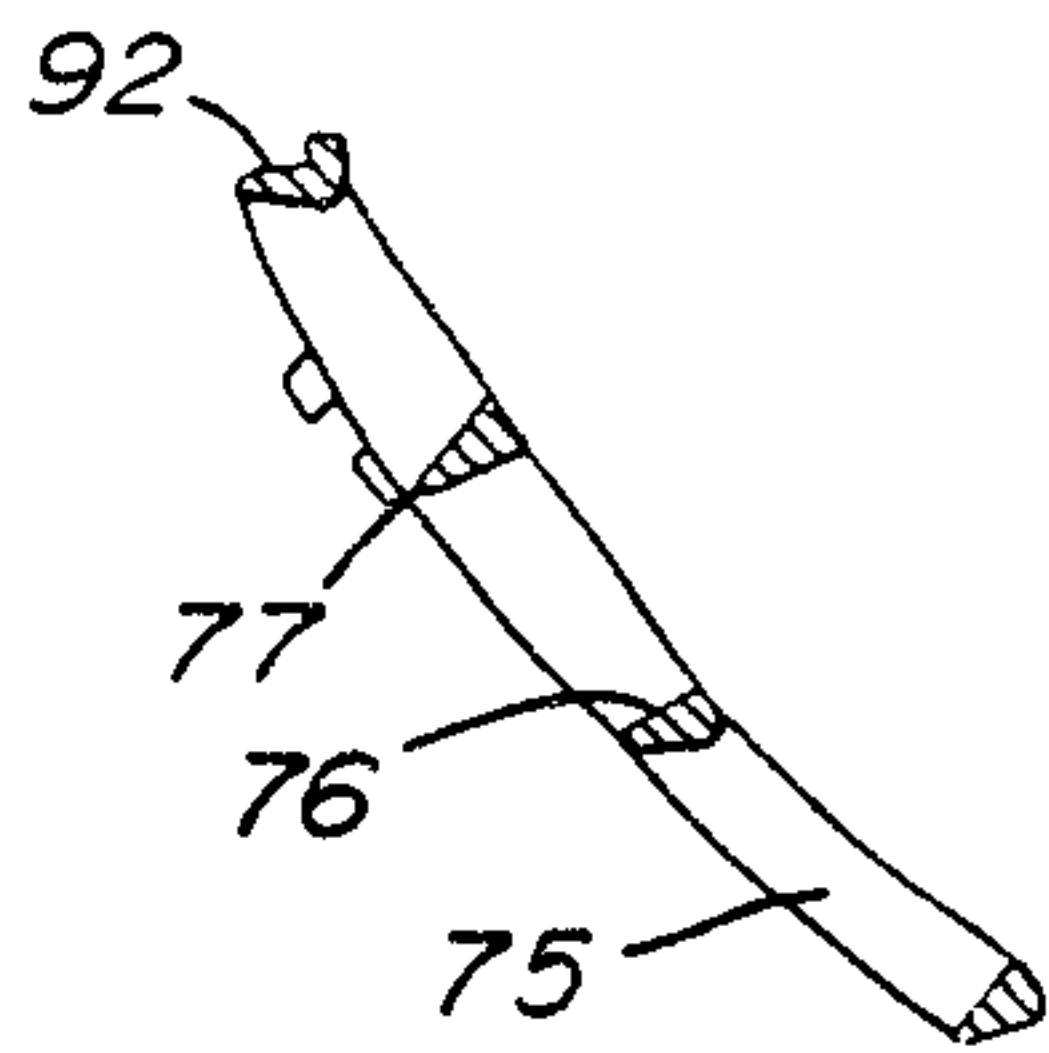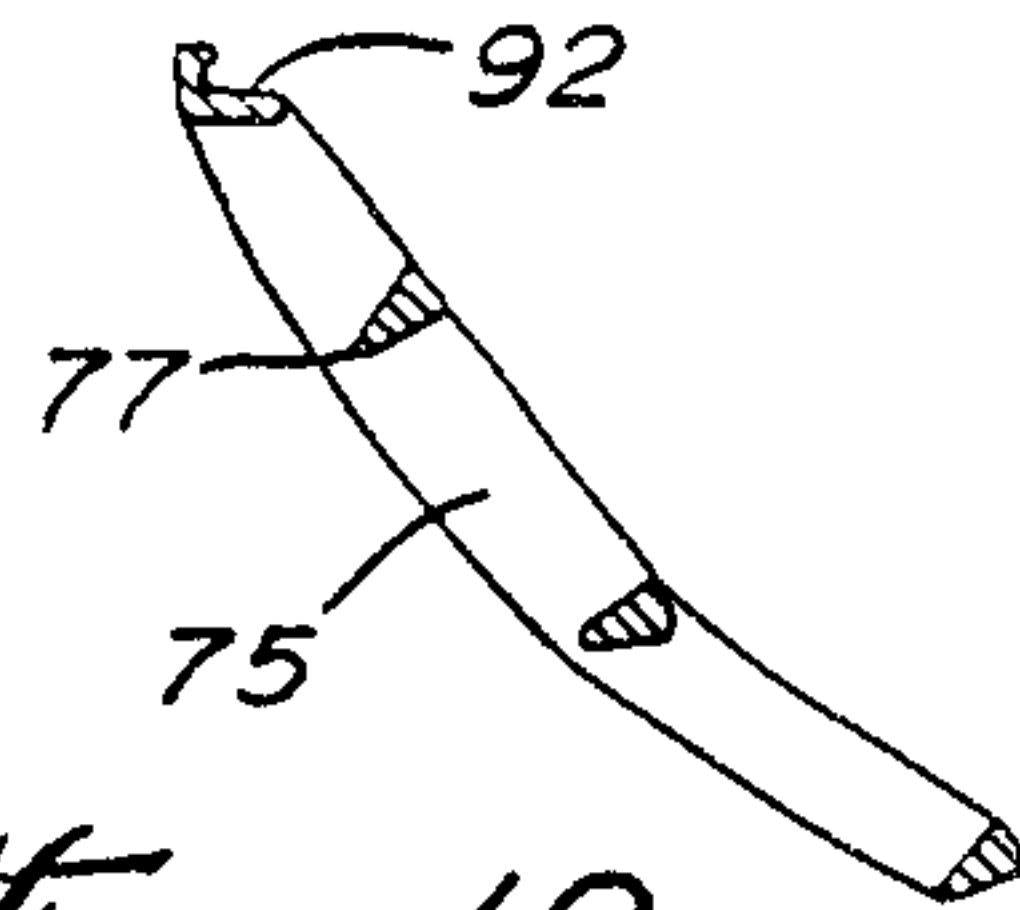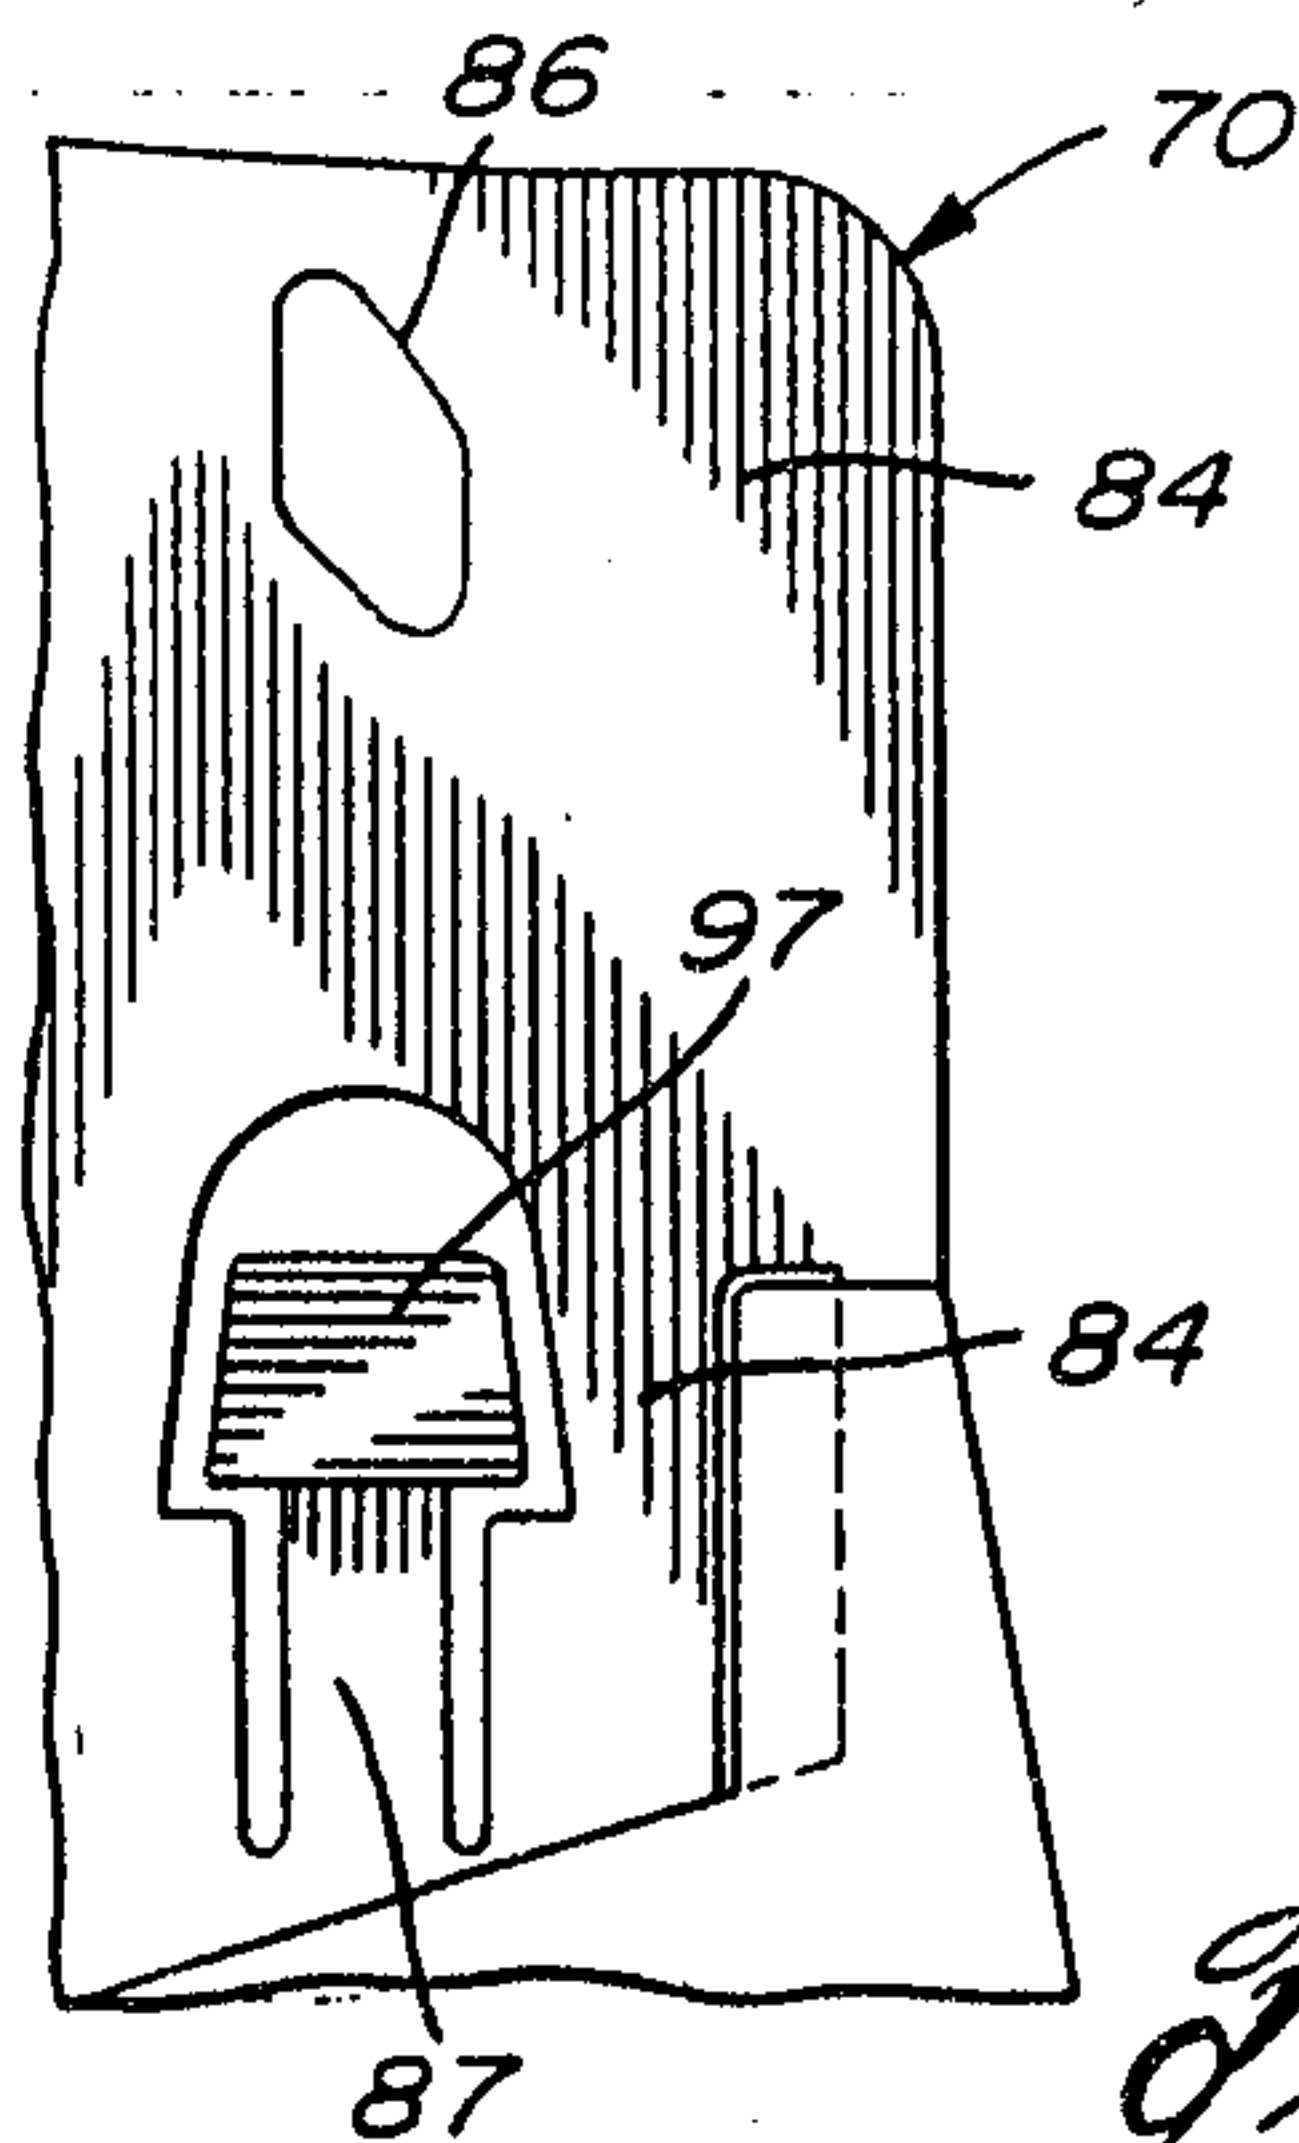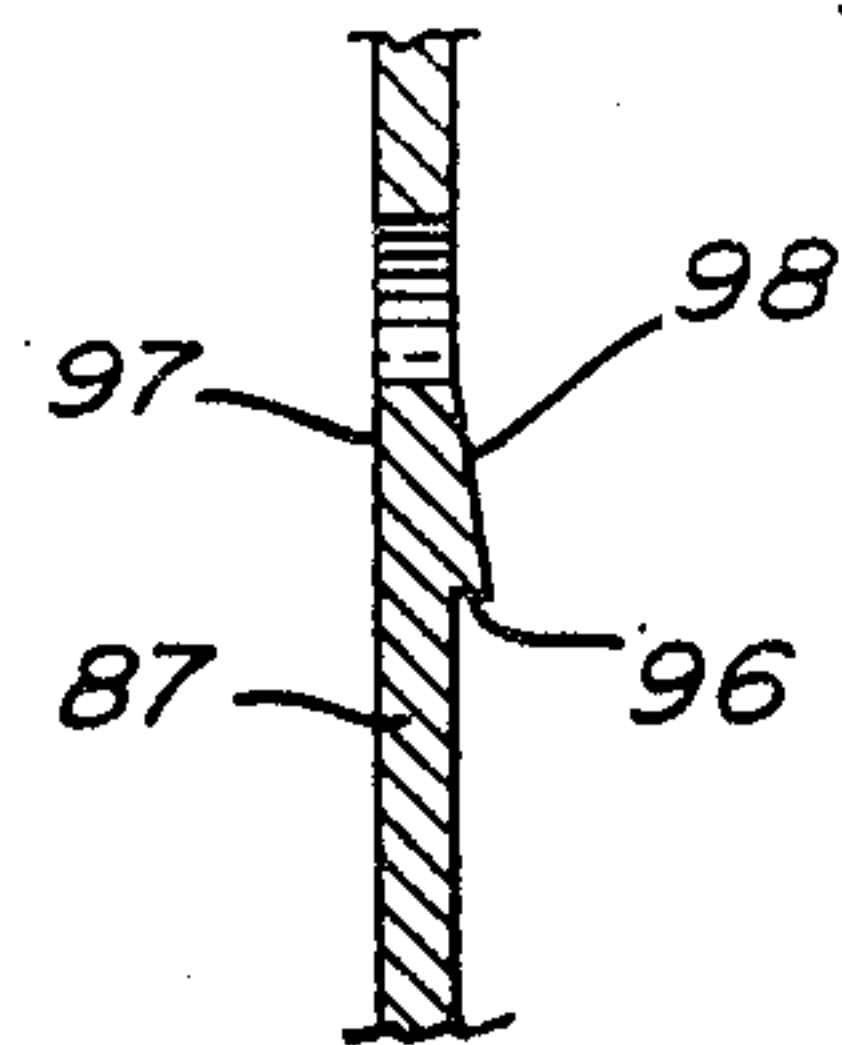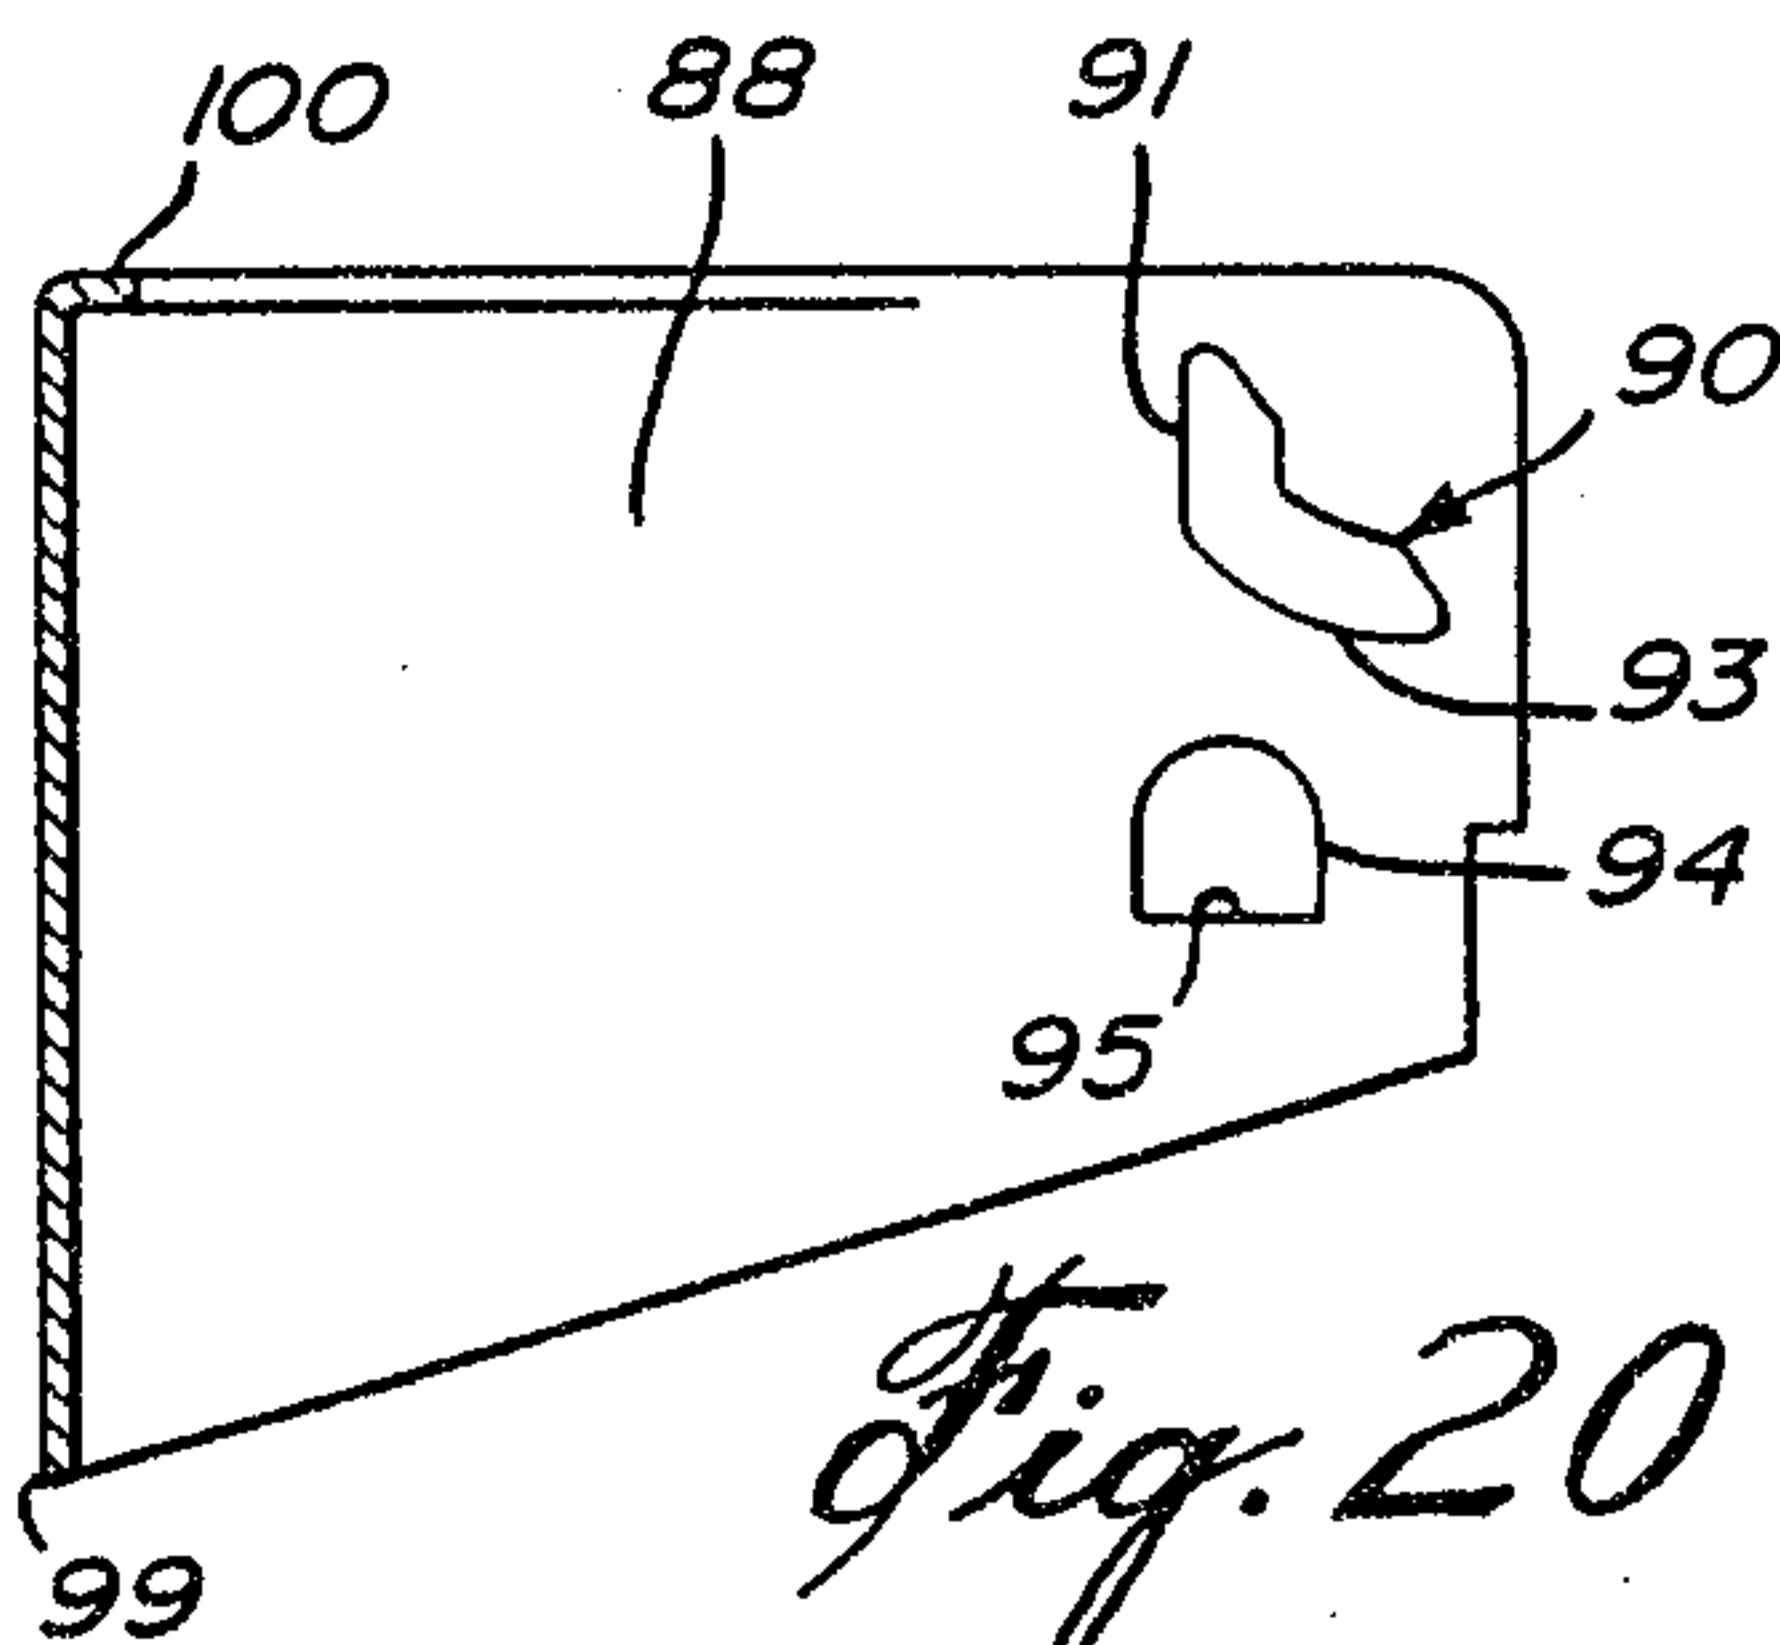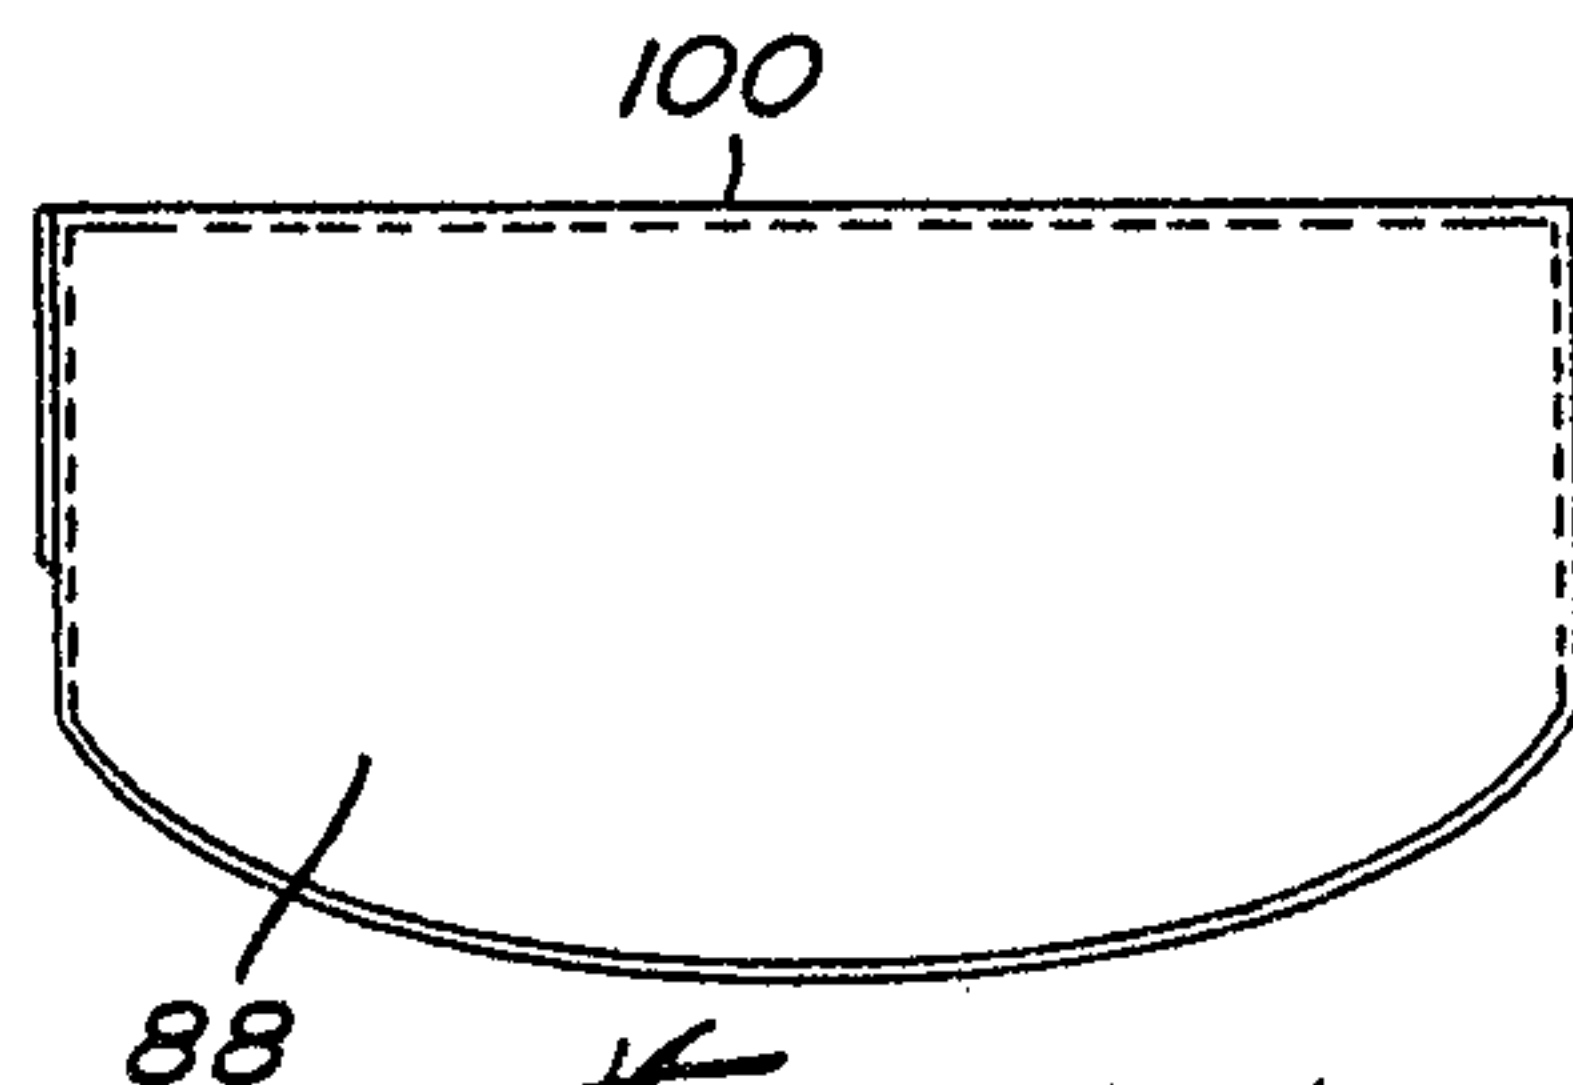*Fig. 18A**Fig. 18B**Fig. 19A**Fig. 19B**Fig. 20**Fig. 21*

2096541

7/8

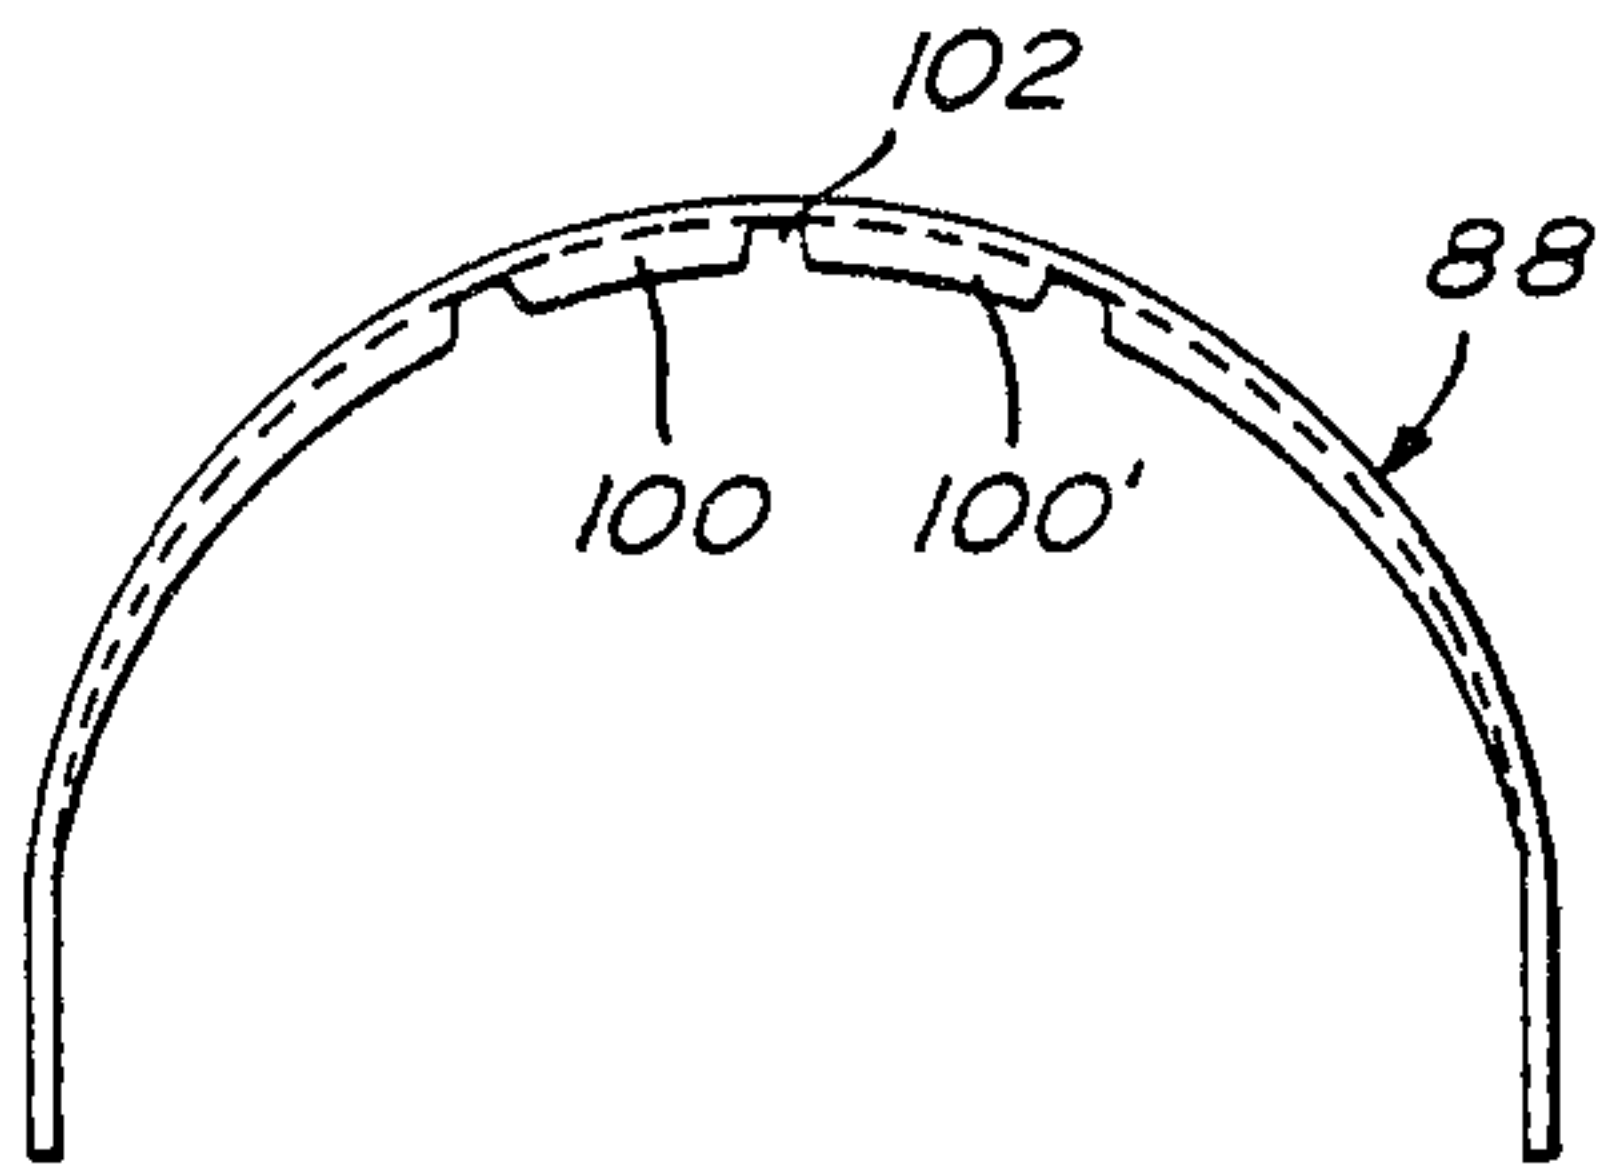


Fig. 22

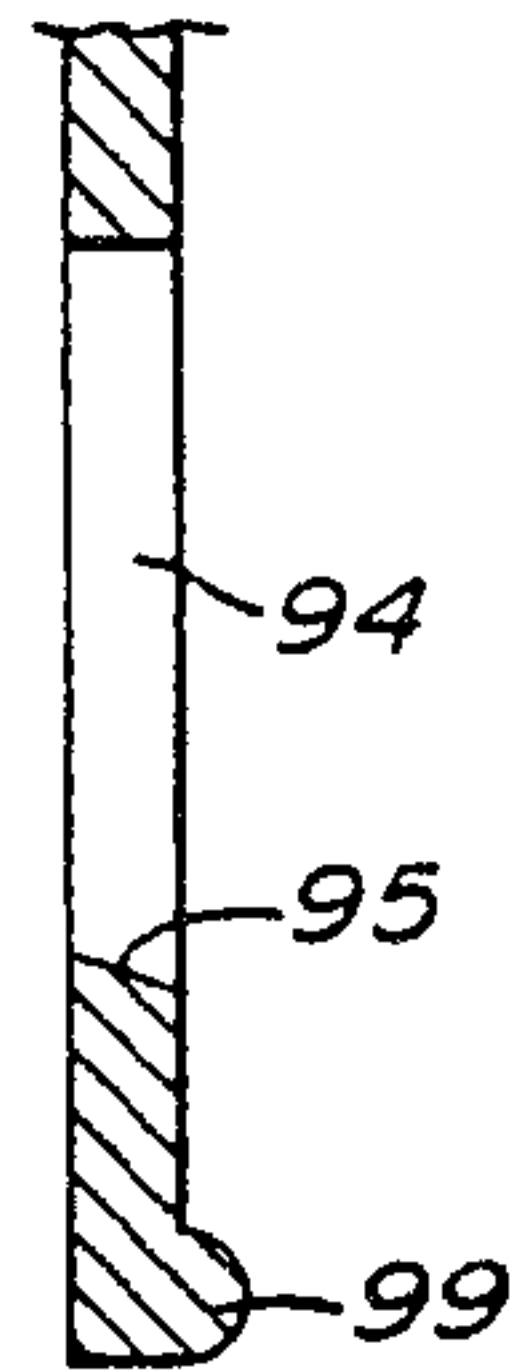


Fig. 23

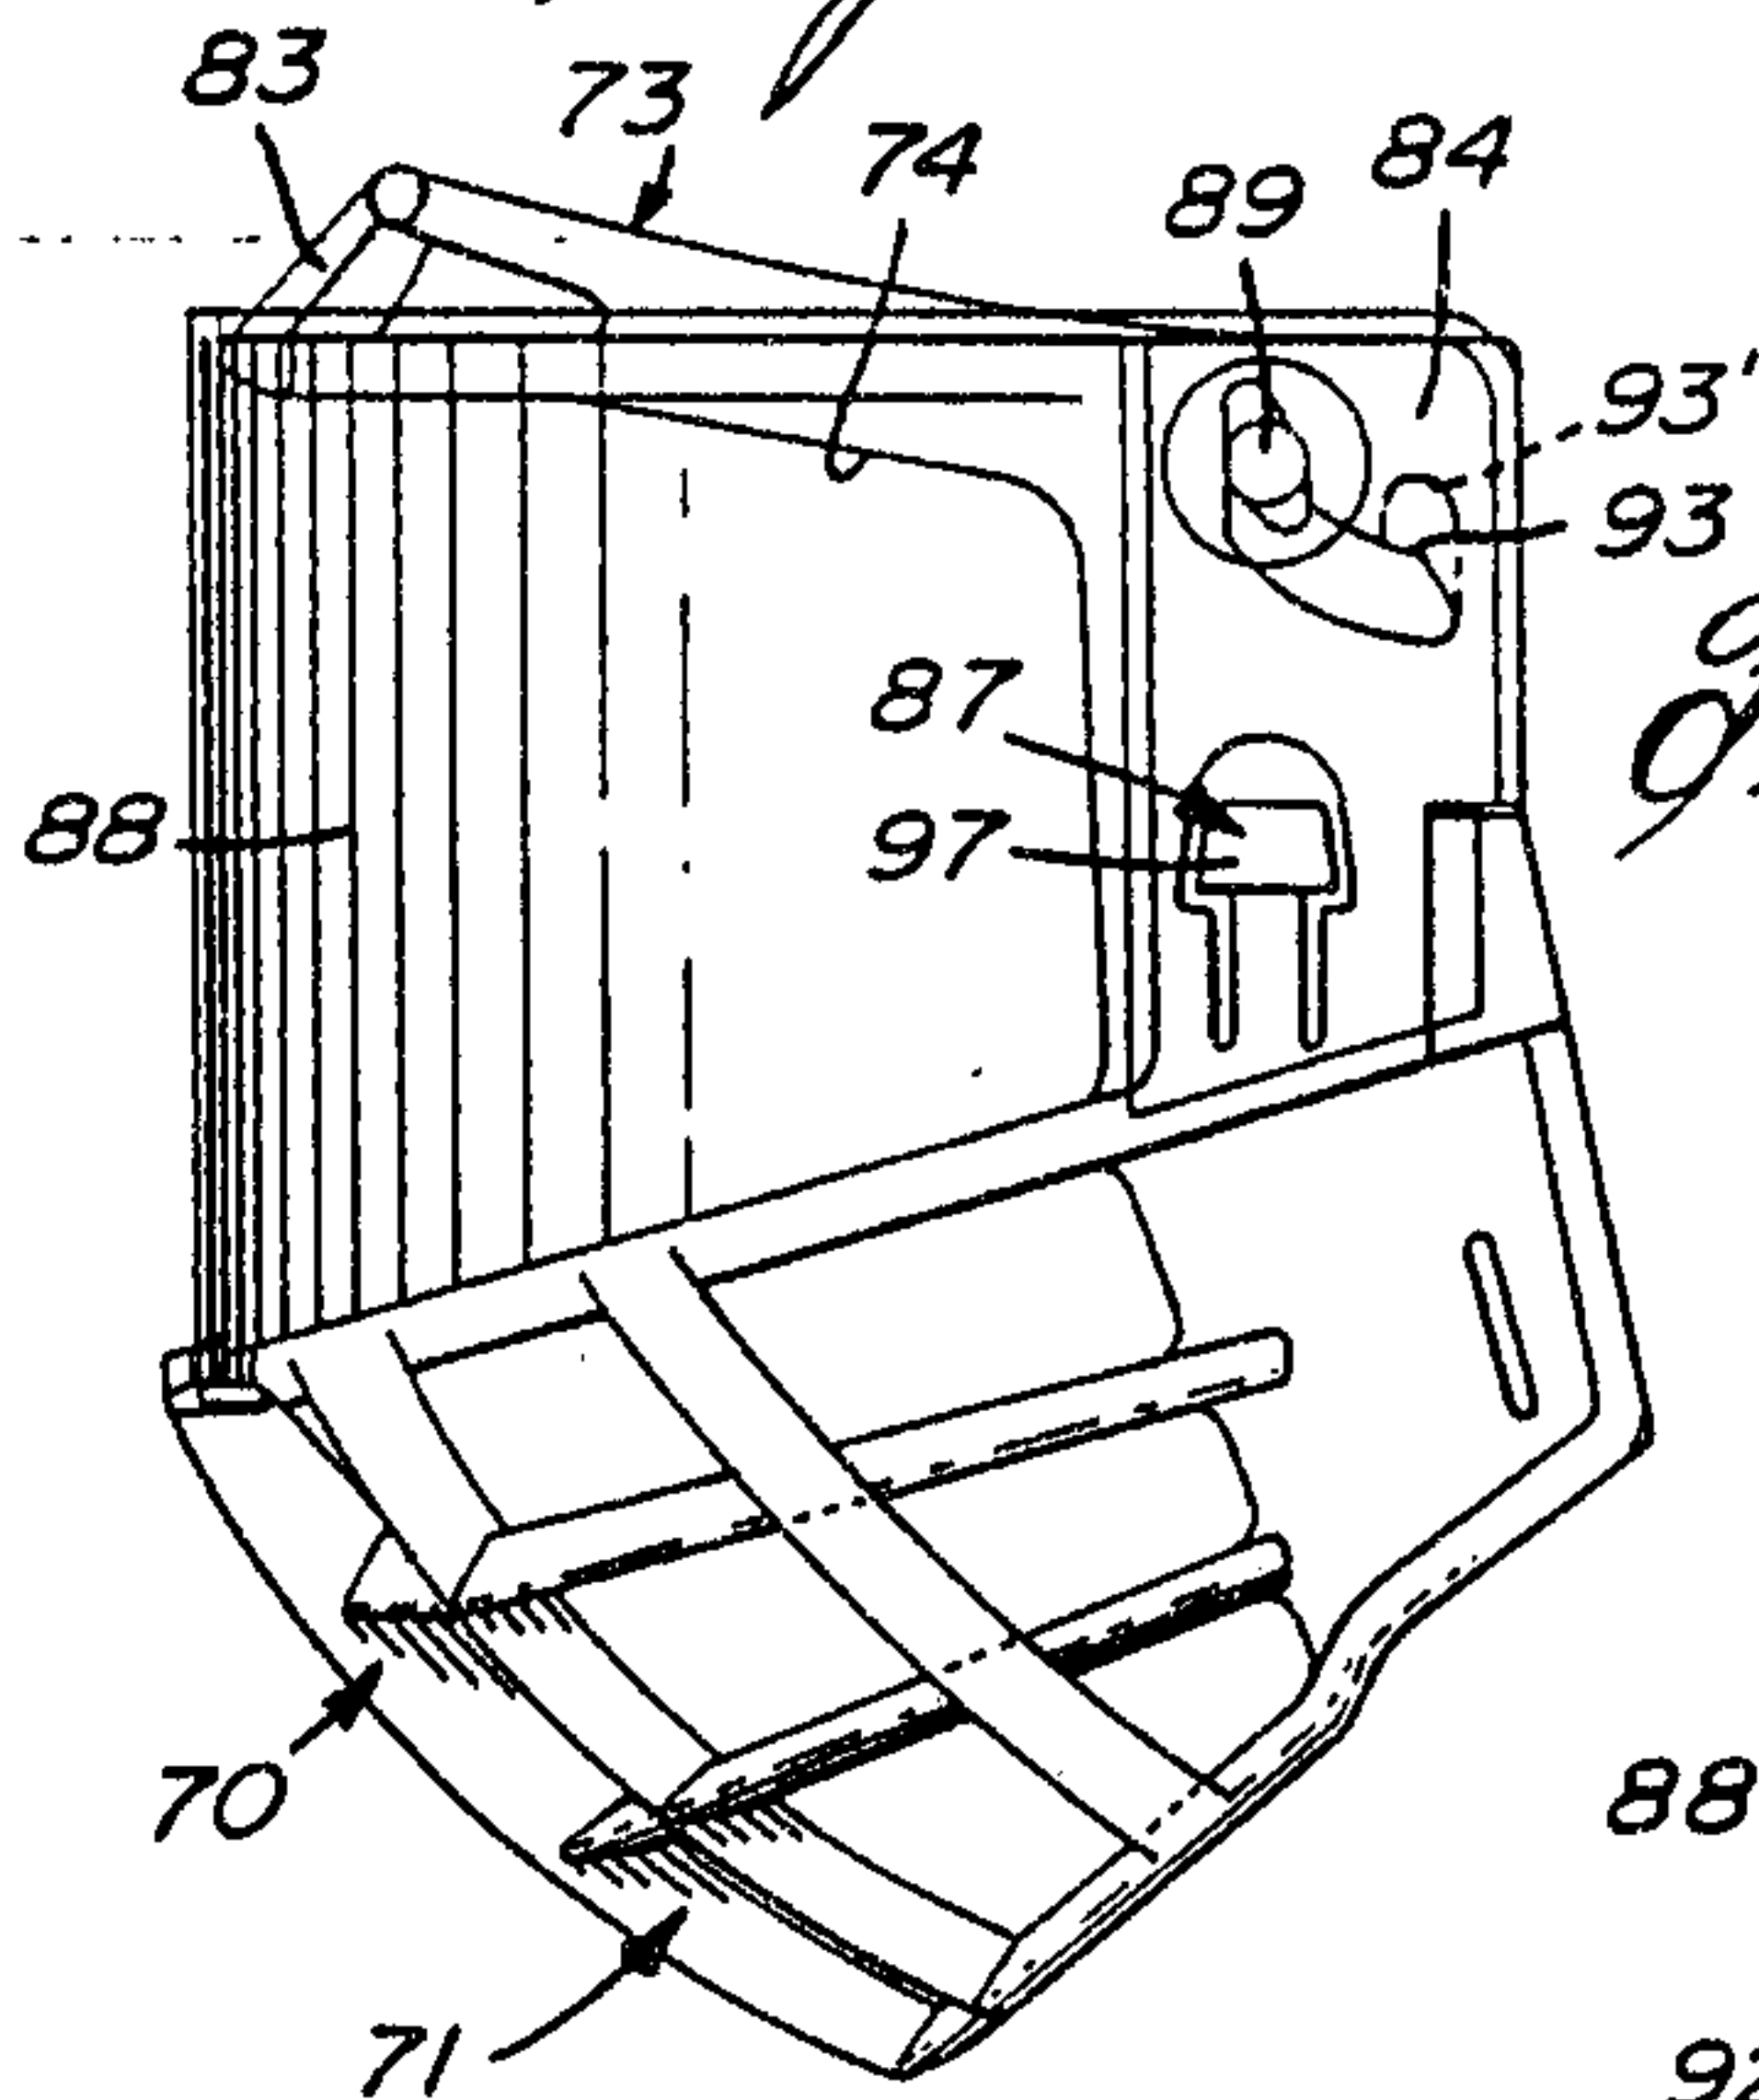


Fig. 24

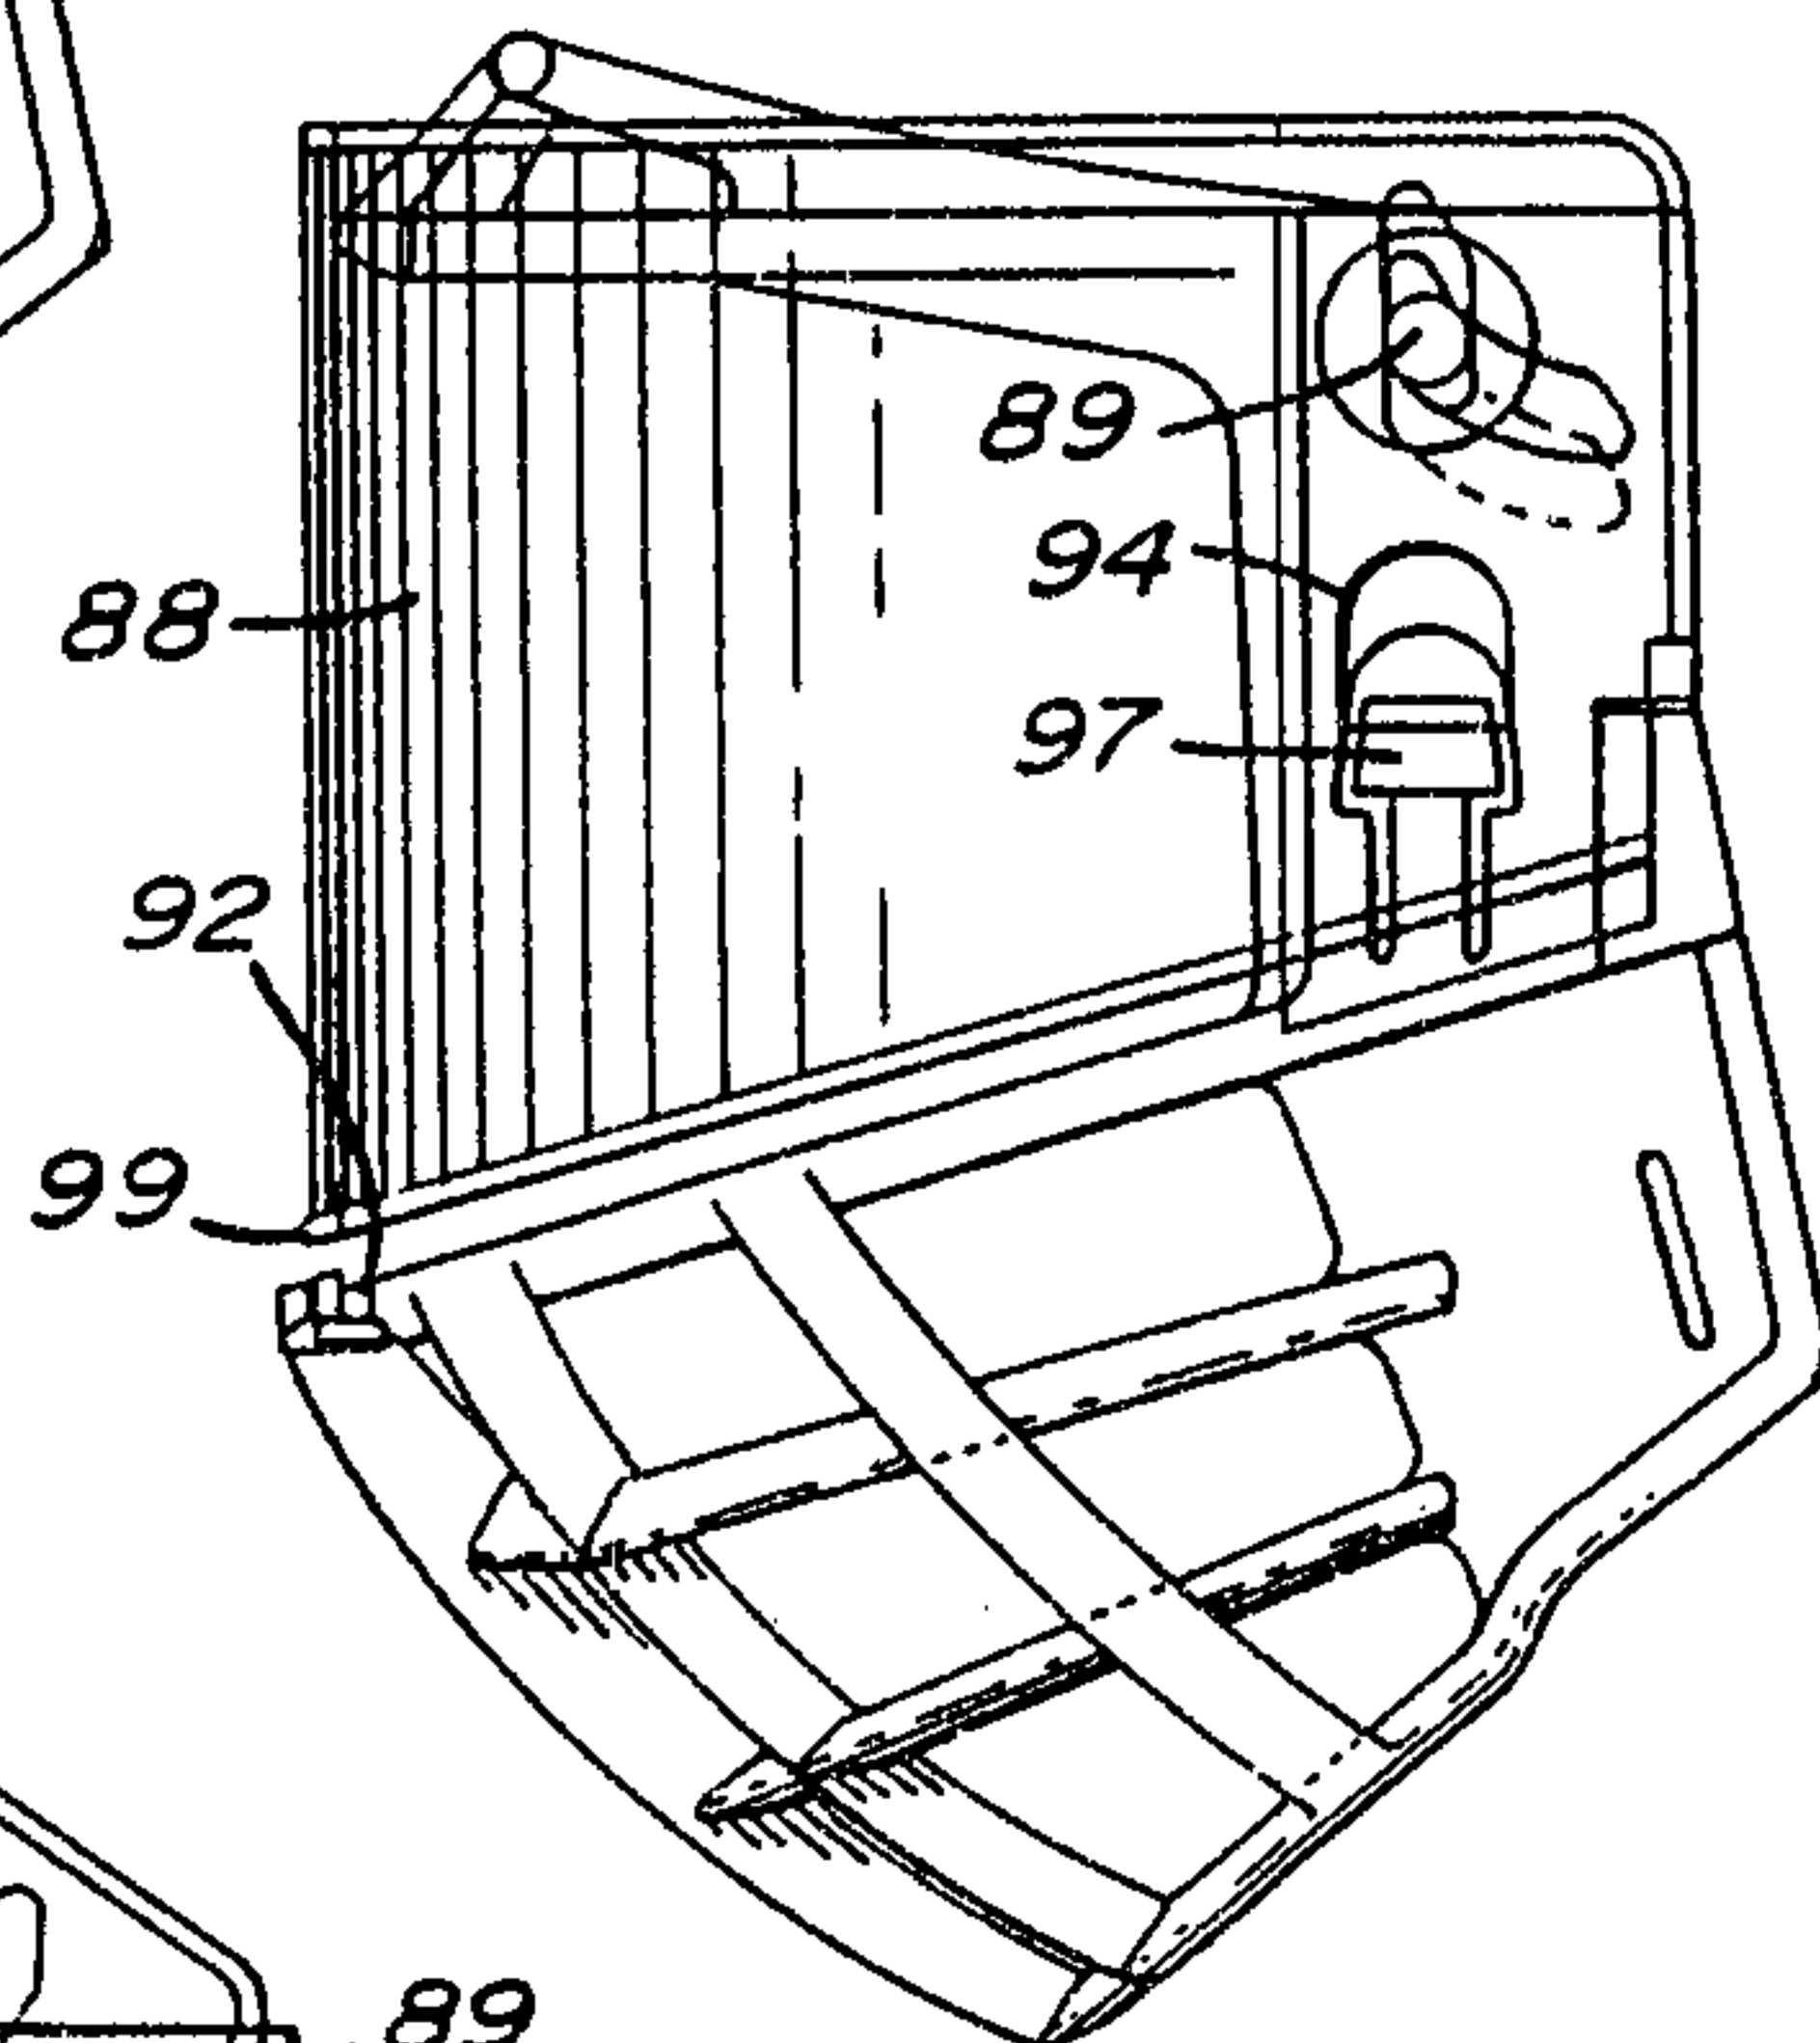


Fig. 25


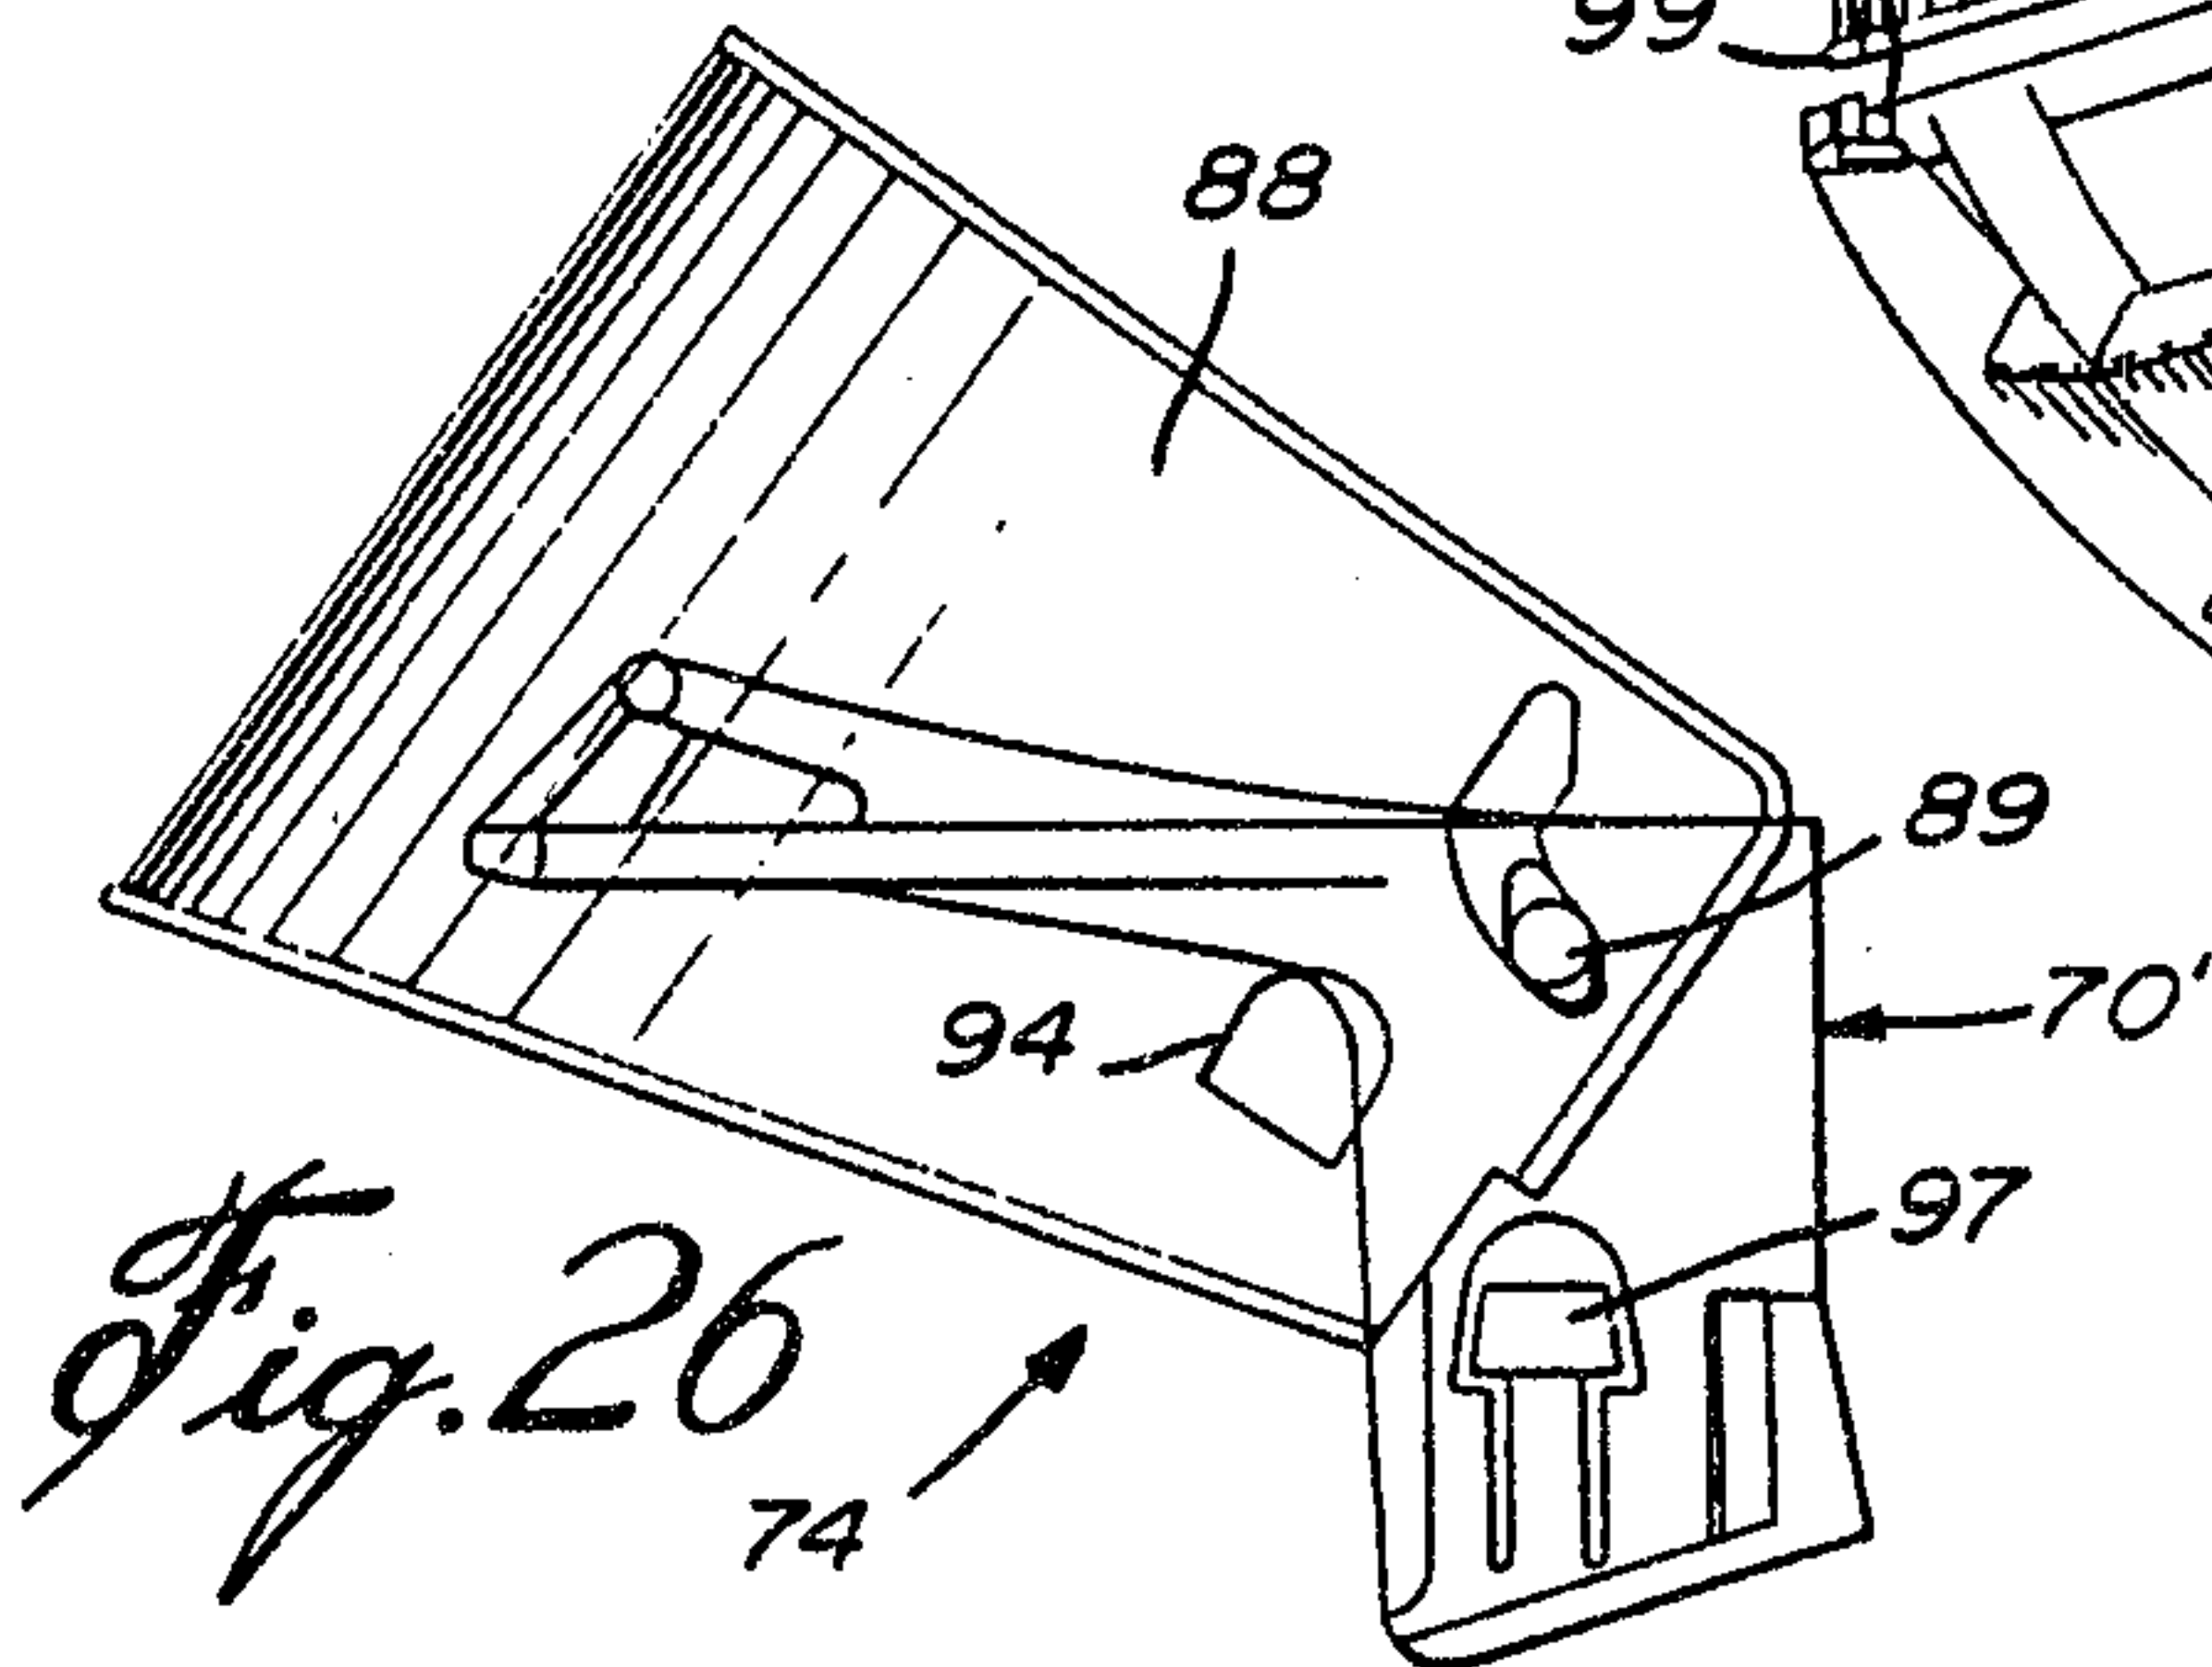


Fig. 26

2096541

8/8

*Fig. 27*

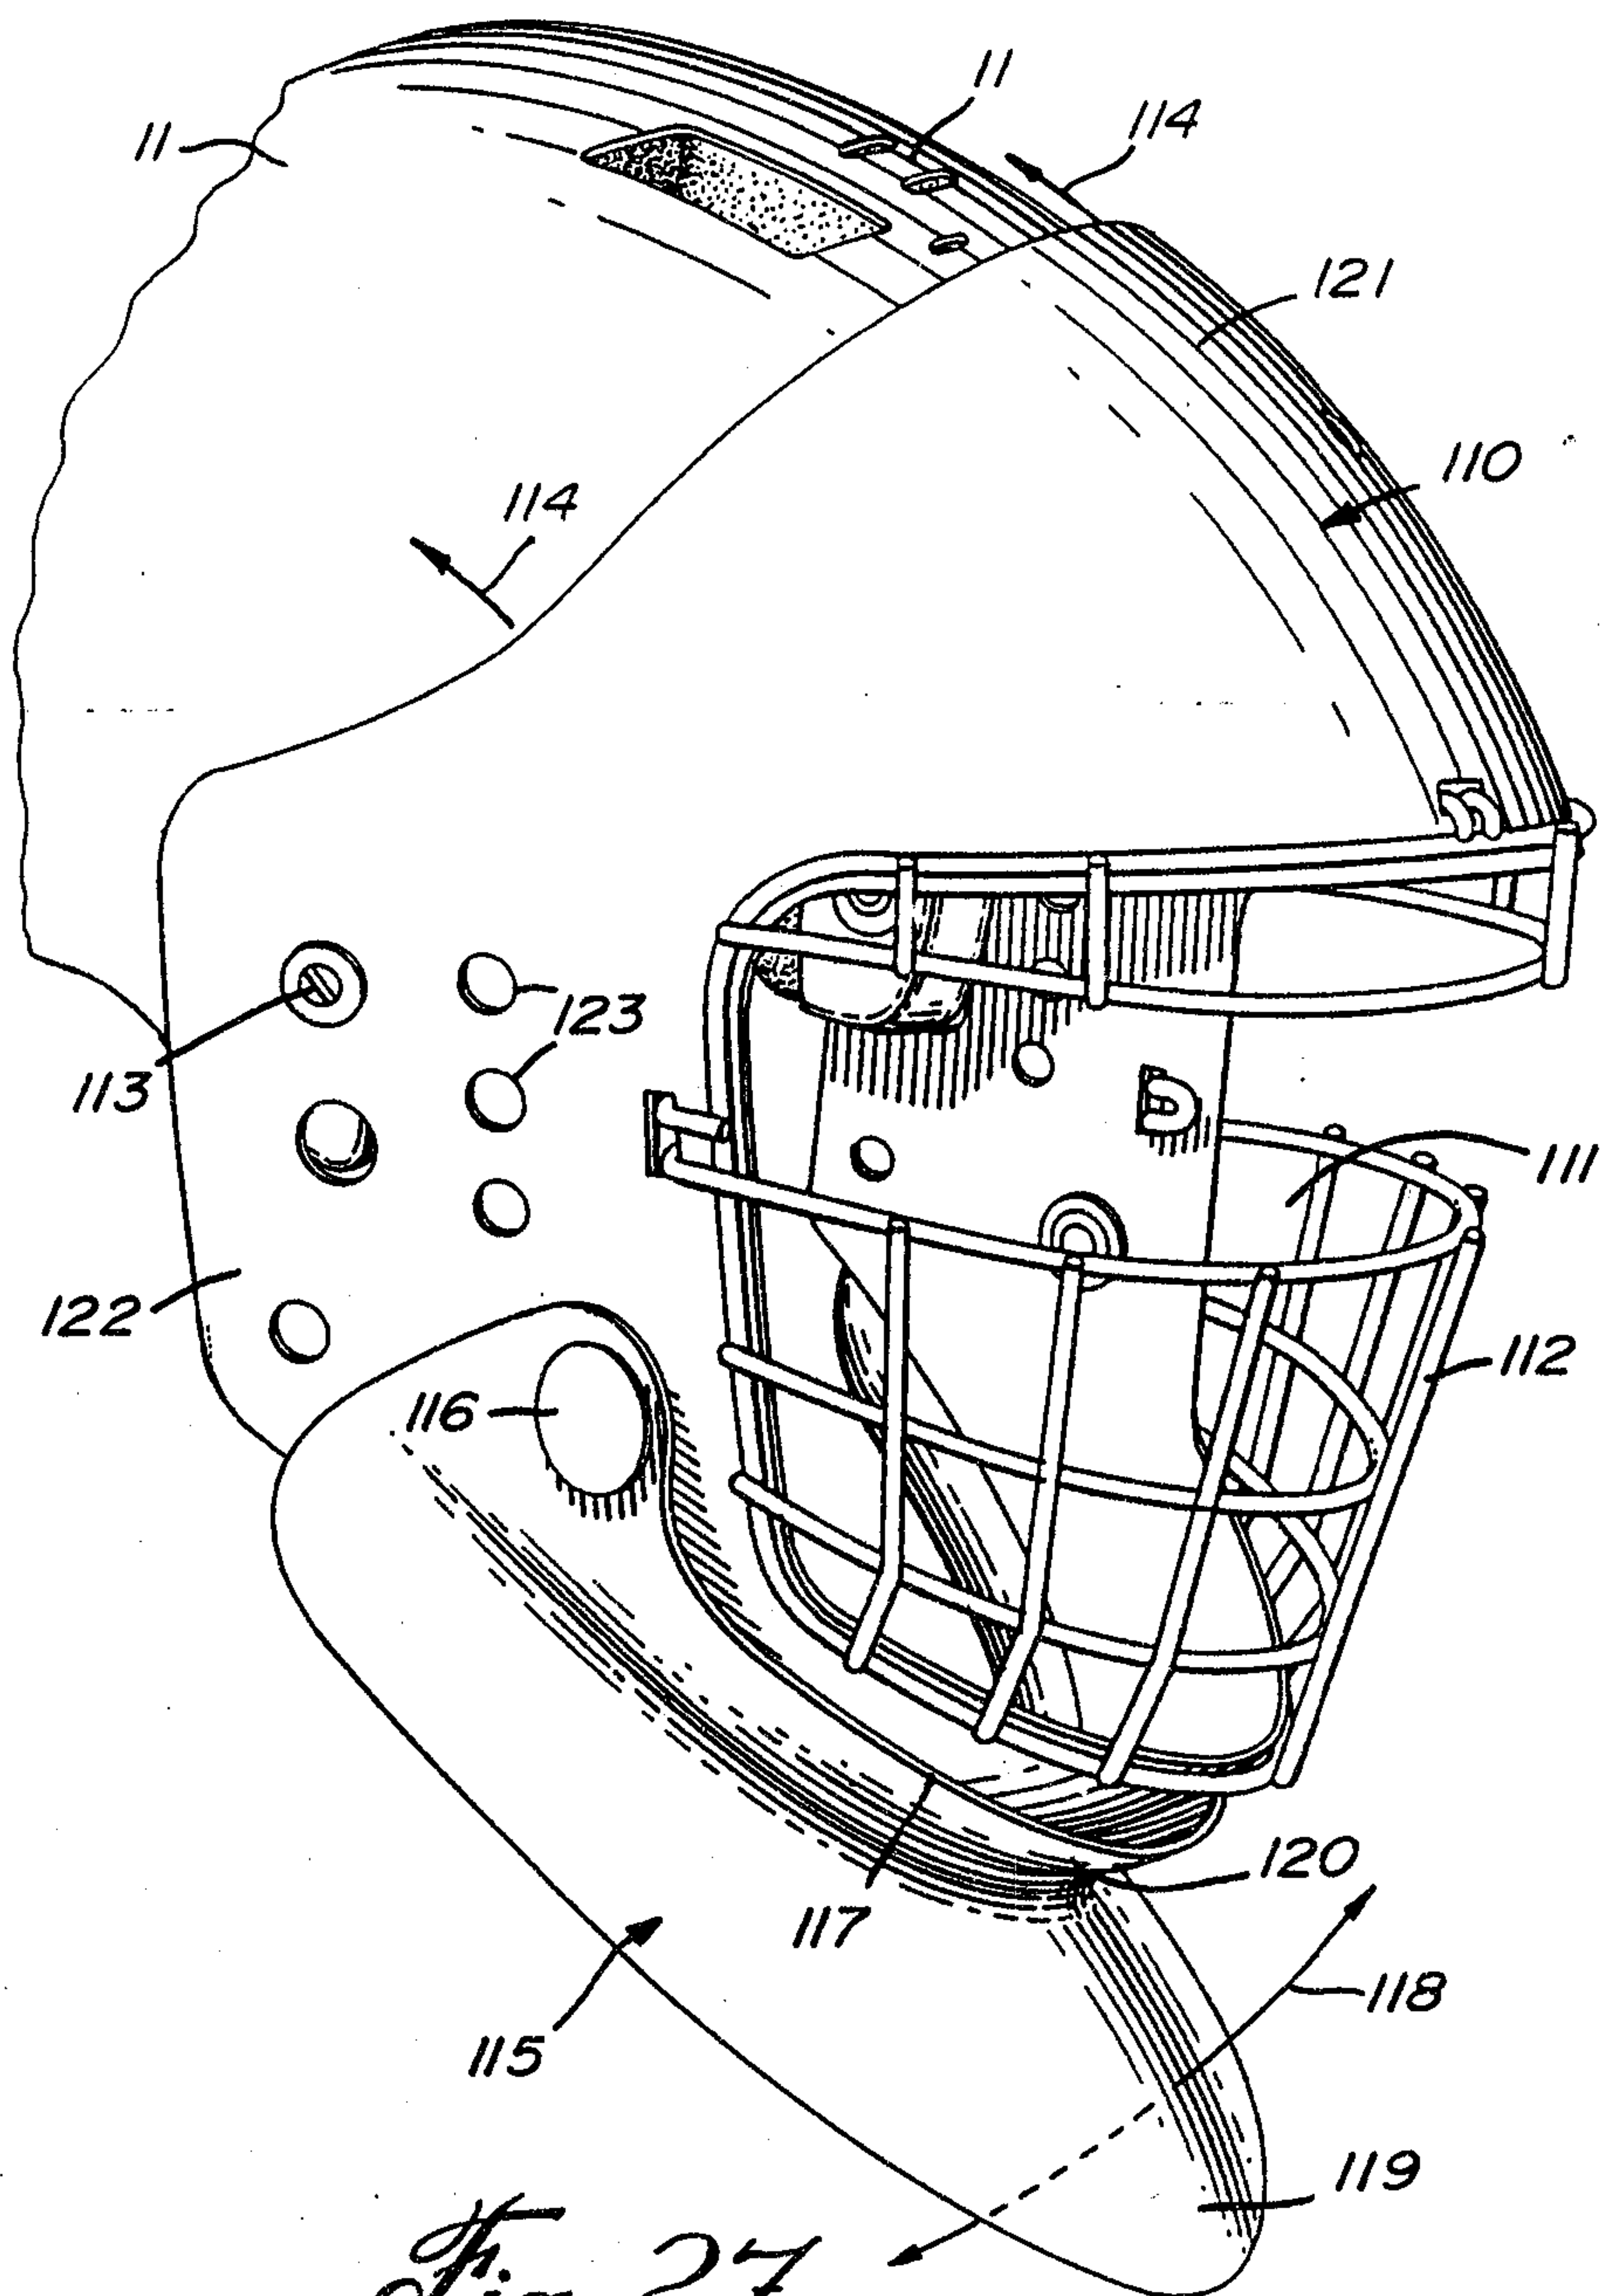