




(86) Date de dépôt PCT/PCT Filing Date: 2015/05/13
(87) Date publication PCT/PCT Publication Date: 2016/02/25
(45) Date de délivrance/Issue Date: 2023/01/10
(85) Entrée phase nationale/National Entry: 2017/01/16
(86) N° demande PCT/PCT Application No.: EP 2015/060691
(87) N° publication PCT/PCT Publication No.: 2016/026589
(30) Priorité/Priority: 2014/08/20 (DE10 2014 111 906.1)

(51) Cl.Int./Int.Cl. *B30B 11/20* (2006.01),
B30B 15/00 (2006.01), *C21D 1/02* (2006.01),
C21B 13/00 (2006.01)
(72) Inventeurs/Inventors:
SCHAFFER, CHRISTOPHER, DE;
DE WELDIGE, EGGERT, DE
(73) Propriétaire/Owner:
MASCHINENFABRIK KOPPERN GMBH & CO. KG, DE
(74) Agent: OSLER, HOSKIN & HARCOURT LLP

(54) Titre : INSTALLATION DE BRIQUETAGE A CHAUD
(54) Title: HOT-BRIQUETTING INSTALLATION

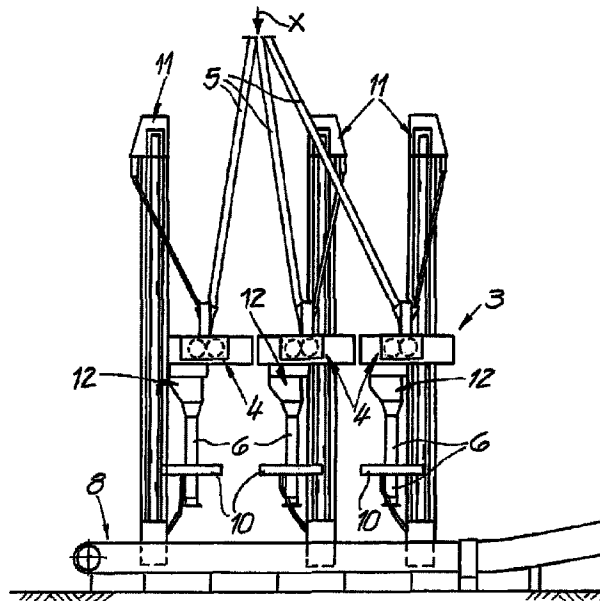

(57) Abrégé/Abstract:

The invention relates to a hot-briquetting or hot-compacting installation, for directly reduced iron, having at least one first row of presses with one or more first roll presses, at least one second row of presses with one or more second roll presses, at least one first cooling conveyor beneath the first row of presses, and a second cooling conveyor beneath the second row of presses, and a plurality of material lines assigned in each case to the individual roll presses and via which the briquetted or compacted material exiting from the roll presses is discharged to the cooling conveyors. The material lines having one or more adjustable diverters, such that the material from the roll presses of the first row of presses and of the second row of presses is discharged optionally in each case to the first cooling conveyor or to the second cooling conveyor.

ABSTRACT

The invention relates to a hot-briquetting or hot-compacting installation, for directly reduced iron, having at least one first row of presses with one or more first roll presses, at least one second row of presses with one or more second roll presses, at least one first cooling conveyor beneath the first row of presses, and a second cooling conveyor beneath the second row of presses, and a plurality of material lines assigned in each case to the individual roll presses and via which the briquetted or compacted material exiting from the roll presses is discharged to the cooling conveyors. The material lines having one or more adjustable diverters, such that the material from the roll presses of the first row of presses and of the second row of presses is discharged optionally in each case to the first cooling conveyor or to the second cooling conveyor.

HOT-BRIQUETTING INSTALLATION

The invention relates to a hot-briquetting or hot-compacting installation, particularly for directly reduced iron, having at least one row of one or more roller presses and at least one cooling conveyor beneath the row of presses.

Directly reduced iron, or DRI, is also referred to as iron sponge or sponge iron. It is produced through the direct reduction of iron ore. The directly reduced iron can then be further processed by hot-briquetting or hot-compacting.

The invention relates to a hot-briquetting installation in which the directly reduced iron is pressed in one or more roller presses embodied as briquette presses into briquettes that are then suitable for transport or storage, for example. The briquettes generally emerge from the press in the form of a strand, for which reason a separator is arranged downstream that then separates the briquettes interconnected in a strand from one another.

Alternatively, the invention also relates to a hot-compacting installation. In that case, pre-reduced or completely directly reduced iron is also pressed in a roller press, but not into briquettes; instead, compaction is (first) performed in which an extrudate emerges from the press as an intermediate product that is referred to as "slug."

This extrudate is then disaggregated, after which the material finally takes the form of a granulate that is generally processed further immediately, for example in another reduction process or in an immediately adjacent smelting furnace.

Since the material emerging from the presses has very high temperatures, the material, particularly if in briquettes, is first discharged to cooling conveyors on or in which the material is flowed around by a cooling medium, for example a liquid coolant (such as water) or a gaseous coolant.

To increase production capacity, several roller presses are generally used for briquetting or compacting.

Such an installation for hot-briquetting directly reduced iron of the type mentioned at the outset is known, for example, from WO 2000/55379 A1. The known installation has four roller presses or four briquetting lines connected in parallel, for example, each of which is supplied from a storage bin with iron sponge in the form of fine particles via a respective "feedleg." Between two respective briquetting lines or roller presses, a bucket conveyor and hence a transport device is provided for returning fine particles separated from the product by screens beneath the briquette presses. A respective cooling conveyor belt for cooling and delivering the briquettes is provided for two briquetting lines or roller presses. Alternatively, a space-saving arrangement of four briquetting lines or roller presses in a rectangular arrangement is described. Four feedlegs go from one storage bin to the individual briquetting lines. One common screen is provided for two respective converging briquetting lines. A line extends, in turn, from the each of the two screens to a single cooling conveyor belt that consequently receives all of the material.

An installation is known from DE 38 06 861 for transporting hot iron sponge from a direct-reduction system to the hot-briquetting system to the side of the shaft furnace. The hot-briquetting presses are located beneath a feed hopper for the material to be briquetted. They deliver the iron sponge as briquettes to screening, cooling and conveyor systems. EP 2 132 344 [US 7,938,882] describes a method in which directly reduced iron can be delivered via supply conduits either to briquette presses or directly to a transport means. A material diverter is provided above the roller presses for this purpose. Finally, EP 2 641 981 A2 describes an installation for manufacturing molten iron from directly reduced iron in which the directly reduced iron is compacted presses and then reduced to small pieces. The material emerging from the compacting presses or from disaggregators can either be conveyed via an upstream conveyor to a smelting furnace or stored on an interim basis in storage containers via a second conveyor. Diverters are beneath the disaggregators, so that the material can be optionally delivered to the smelting furnace on the first conveyor or to the storage container on the second conveyor. In such installations for hot-briquetting or hot-compacting directly reduced iron, the constant need exists to optimize capacity. Moreover, safety considerations are at the forefront when the installation is designed. For instance, during the processing of hot material from directly reduced iron, one must ensure that the briquettes are reliably transported away while simultaneously cooling, particularly including when system parts fail. This is where the invention comes in.

It is the object of the invention to provide a hot-briquetting or hot-compacting installation, particularly for directly reduced iron, that is characterized by a high level of operational reliability. In addition, the installation is to be
5 must have great cost-effectiveness.

To achieve this object, the invention teaches a hot-briquetting or hot-compacting installation, particularly for directly reduced iron, having at least one row of presses with one or more roller presses, at least one first cooling conveyor and one
10 second cooling conveyor beneath the row of presses, and several material conduits associated with the individual roller presses via which the briquetted or compacted material is delivered from the roller presses to the cooling conveyors, with the material conduits being equipped with one or more diverters that can be operated such
15 that the material is optionally delivered from the roller presses to the first or to the second cooling conveyor.

Two cooling conveyors are therefore provided according to the invention, each of which is designed such that it can individually pick up and convey the material away from the roller
20 presses. It is thus possible during normal operation to convey the material from the presses together over both cooling conveyors. In case of a fault, for example, in the event that a cooling conveyor malfunctions, the possibility exists of conveying away, with the aid of diverters, (all of) the material via another, operable
25 cooling conveyor. Alternatively, it is possible to work with only one cooling conveyor even in normal operation, in which case the other cooling conveyor is used only if the first cooling conveyor

malfunctions. In any case, the configuration of the installation with several cooling conveyors and corresponding diverters improves the operational reliability of the installation.

Preferably, the presses are in several rows of presses, for example in a first row of presses and a second row of presses, with the first cooling conveyor being beneath the first row of presses and the second cooling conveyor beneath the second row of presses, and with the diverters being switchable such that the material can be delivered optionally from the roller presses of the first row of presses and of the second row of presses to either the first cooling conveyor or the second cooling conveyor.

Preferably, the first row of presses has several first roller presses in a line, for example successively in a straight line, and the second row of presses has several second roller presses in a line, for example successively in a straight line, with two roller presses from the first row of presses on the one hand and the second row of presses on the other hand arranged in pairs next to one another being associated with one diverter. The invention proceeds in this regard from the inherently known insight that the capacity of such an installation can be increased through the use of a plurality of roller presses, for example at least four roller presses, preferably at least six roller presses. The roller presses are preferably in at least two rows of presses. In comparison to the possible arrangement of the presses in a single row of presses, this arrangement in two rows of presses offers the advantage that the supply conduits (feedlegs) above the roller presses can be at a steeper angle than in an arrangement of the

same number of presses in a single row of presses, since the angle of the feedlegs with respect to the roller presses at the ends of the row of presses becomes flatter and flatter. However, this is not acceptable for reasons of operational reliability; after all, the angle of the feedlegs to the vertical should be no more than about 30° in practice in order to ensure flawless delivery of the directly reduced iron to the roller presses. An arrangement in two rows is therefore preferred, particularly if more than a total of three presses are provided.

According to the invention, a cooling conveyor is associated with each of the two rows of presses, so that, during normal operation, the material of the first row of presses is delivered to one cooling conveyor (for example the first cooling conveyor) and the material of the second row of presses is delivered to the other cooling conveyor (for example the second cooling conveyor). But now the diverters provided according to the invention enable a variable operating mode, particularly in the event of a malfunction. If one of the cooling conveyors breaks down, the possibility exists for the diverters to deliver both the material of the first row of presses and the material of the second row of presses to just one of the cooling conveyors, that is, either to the first cooling conveyor or the second cooling conveyor. To increase operational reliability, the two cooling conveyors are each designed such that they can individually pick up and transport away all of the material of the installation. Consequently, the cooling conveyors are adapted to the overall capacity of the installation. It is advantageous if each cooling

conveyor individually can pick up more than the material of a single row of presses. That way, overall production can be continued with both rows of presses even if one of the cooling conveyors malfunctions, since the cooling conveyor that is still in operation is dimensioned such that all of the material can be conveyed away.

It is advantageous if the row of presses or each row of presses has at least two roller presses, preferably three roller presses. In the case of several rows of presses, it also lies within the scope of the invention if the rows of presses have a different number of roller presses, for example the first row of presses has three roller presses and the second row of presses has four roller presses, it is advantageous if two roller presses, one being from the first row of presses and the other from the second row of presses, are in pairs next to one another. According to another proposal of the invention, a provision is made that screens are beneath the roller presses for separating off fine components ("hot fines"), it being possible to return this fine fraction to the briquette presses using one or more transport means. The diverters, in turn, are below the screens. Transport means are inherently known; they can be so-called "bucket conveyors." In this regard, the invention proposes that these transport means, for example bucket conveyors, be preferably arranged between the rows of presses. To wit, it is expedient if at least one transport means, for example a bucket conveyor, is arranged between two respective roller presses arranged in pairs next to one another.

According to the invention, the arrangement is very safe since the cooling of the material is ensured even if one of the cooling conveyors malfunctions. Wasteful emergency disposal, which would be conceivable in principle, can thus be eliminated.

5 In a preferred development, an installation is created that is characterized by a high production capacity and availability with a compact construction. The installation is characterized, among other things, by a low tower height, because, due to the arrangement of the presses in two rows, relatively short
10 feedlegs can be used which are still at a sufficiently steep angle. Moreover, sufficient space exists between the individual machines for escape routes, and there is sufficient space to open the roller presses to replace the rolls or perform other maintenance work. Another advantageous aspect in this regard is the fact that the
15 individual roller presses can all be constructed identically and also in identical orientation in the rows of presses. No special adaptations or "mutual orientation" of adjoining presses is necessary, thus further simplifying handling and maintenance. The availability of the installation is also improved by virtue of the
20 fact that not only the presses, but also the cooling is redundant.

The invention is described in further detail below with reference to a schematic drawing showing only one embodiment and in which:.

25 FIG. 1 is a simplified top view of an installation according to the invention for hot-briquetting directly reduced iron;

FIG. 2 shows the installation according to FIG. 1 in a simplified view from the direction of arrow A; and

FIG. 3 shows the installation according to FIG. 1 in a simplified view from the direction of arrow B;

5 FIG. 4 is a simplified view of a modified embodiment of the invention.

The drawing show a schematically simplified view of an installation for hot-briquetting directly reduced iron. The directly reduced iron is manufactured from pellets and/or lump ore, with the direct reduction being performed using gas. The drawing
10 does not illustrate details of the manufacture of the directly reduced iron. The directly reduced iron is inputted in the direction of arrow X.

The installation for hot-briquetting illustrated in the
15 Drawing has a first row 1 of presses with several first roller presses 2 and a second row 3 of presses with several roller presses 4. The directly reduced iron is inputted in the direction X through supply conduits 5 also referred to as "feedlegs." A comparison of FIGS. 2 and 3 shows that a feedleg 5 is provided for
20 each roller press. In this embodiment, the first row of presses 1 has three successively aligned roller presses 2, and the second row of presses 3 also has three successively aligned roller presses 4. The directly reduced iron is pressed into briquettes in the roller presses 2 and 4. The possibility exists for individual briquettes
25 to emerge directly from the roller presses 2 and 4. However, it is common for a string of connected briquettes to initially emerge from the roller presses 2 and 4 and for the briquettes to be

separated beneath each of the roller presses by a suitable
respective cutter 12. The material (briquettes in the illustrated
embodiment) then travels through several material conduits 6 to
cooling conveyors 7 and 8 beneath the roller presses 2 and 4. In
5 this embodiment according to FIGS. 1 to 3, the first cooling
conveyor 7 is beneath the first row of presses 1, and the second
cooling conveyor 8 is beneath the second row of presses 3.
According to the invention, the material conduits 6 are equipped
with diverters 9. They are embodied and integrated into the
10 material conduits 6 such that the briquettes can be delivered from
the first press row 1 optionally to the first cooling conveyor 7 or
to the second cooling conveyor 8. Likewise, the briquettes from
the second press row 3 can be optionally delivered to the second
cooling conveyor 8 or to the first cooling conveyor 7.

15 During normal operation, the installation is operated
such that the material from the roller presses 2 of the first row
of presses 1 is delivered to one cooling conveyor, the first
cooling conveyor 7, and the material from the roller presses 4 of
the second press row 3 is delivered to the other cooling conveyor,
20 the second cooling conveyor 8.

If one of the cooling conveyors 7 and 8 malfunctions, the
diverters 9 can be switched, particularly such that all of the
material both from the roller presses 2 of the first press row 1
and from the roller presses 4 of the second press row 3 is then
25 delivered to only one cooling conveyor, for example the first
cooling conveyor 7 or, alternatively, the second cooling conveyor
8, depending on which conveyor is operational. The installation

according to the invention is therefore characterized by a high level of failure safety, since it ensures that, even in case of the failure of one cooling conveyor, the hot material is transported away flawlessly without the need for a system shutdown or emergency disposal.

FIGS. 1 to 3 illustrate an embodiment in which two adjacent roller presses 2 and 4 are associated with a common respective diverter 9. In the illustrated embodiment, the diverter is X-shaped (see FIG. 3). Alternatively, it lies within the scope of the invention for more than two roller presses to be connected to a respective one of the diverters. For instance, two pairs of roller presses and, consequently, a total of four roller presses can be connected to a respective one of the diverters. This embodiment is not shown in the figures.

Moreover, it can be seen in the drawing that respective screens 10 for separating out a fraction of fine components can be beneath the roller presses 2 and 4. This fine fraction can then be conveyed back to the roller presses by transport means 11. The diverters 9 are beneath the screens. As can be seen in FIG. 3, the screens 10 are inserted into the material conduits 6. The material thus travels from a respective roller press 2 or 4 over the separator 12 into an upstream portion of the material conduit 6 and from there onto the screen 10 and then into an intermediate portion of the material conduit 6. This is then followed by the diverter 9 and, in turn, a downstream portion of the material conduit 6. In the illustrated embodiment, the transport means 11 are bucket conveyors. The drawing shows that these bucket conveyors 11 are

between the rows of presses 1, 3. Two respective roller presses are associated with a respective common transport means 11, so that each transport means 11 is positioned between two adjacent roller presses.

5 FIG. 4 shows a modified embodiment of the invention in which the roller presses 2 are aligned in only a single press row 1. Two cooling conveyors 7 and 8 are beneath this single press row 1. As in the embodiment according to FIGS. 1 to 3, the material travels from the roller presses 2 via material conduits 6 to the
10 cooling conveyors 7 and 8. Diverters are, in turn, integrated into the material conduit 6, so that the material can be delivered from the roller presses 2 optionally to the first cooling conveyor 7 or to the second cooling conveyor 8. This embodiment, too, is therefore characterized by an increased level of operational
15 reliability since, if one cooling conveyor fails, the material can be picked up by the other cooling conveyor. In this embodiment, the diverters 9 are Y-diverters. Details are not shown.

 Moreover, the invention optionally also includes
embodiments with more than two rows of presses and/or more than two
20 cooling conveyors. For instance, three (or more) rows of presses having three (or more) cooling conveyors beneath them can be provided. Such an embodiment is not shown in the figures.

The embodiments of the present invention for which an exclusive property or privilege is claimed are defined as follows:

1. A hot-briquetting or hot-compacting installation, having at least one first press row of one or more roller presses and at least one second press row of one or more roller presses, at least one first cooling conveyor and one second cooling conveyor the first cooling conveyor being beneath the first press row and the second cooling conveyor beneath the second press row and several material conduits associated with the respective individual roller presses via which the briquetted or compacted material emerging from the roller presses is delivered to the cooling conveyors with the material conduits being equipped with one or more diverters the diverters being displaceable to deliver the briquetted or compacted material selectively from the roller presses of the first press row or from the second press row to the first cooling conveyor or the second cooling conveyor.

2. The installation defined in claim 1, wherein the first press row has several first roller presses in a line, and the second press row has several second roller presses in a line.

3. The installation defined in claim 2, wherein the first press row has several first roller presses successively in a straight line, and the second press row has several second roller presses successively in a straight line.

4. The installation defined in any one of claims 1 to 3, wherein two roller presses arranged in pairs next to one

another, are connected to a respective one of the diverters.

5. The installation defined in claim 4, wherein one roller press from the first press row on the one hand and one roller press from the second press row on the other hand are connected to a respective one of the diverters.

6. The installation defined in any one of claims 1 to 5, wherein two successively arranged pairs of two roller presses arranged next to one another, are connected to a respective one of the diverters.

7. The installation defined in any one of claims 1 to 6, wherein the cooling conveyors are each designed and adapted to the capacity of the roller presses such that, during operation, the cooling conveyors each receive and transport more than the material of only one of the rows of presses.


8. The installation defined in any one of claims 1 to 7, wherein screens for separating off fine components are beneath the roller presses, which fine components are returned to the roller presses by transport means.

9. The installation defined in claim 8, wherein two of the roller presses arranged in pairs next to one another are associated with at least one respective transport means.

10. The installation defined in claim 9, wherein the transport means is arranged between the roller presses arranged in pairs next to one another or between the cooling conveyors.

1/4

Fig. 1

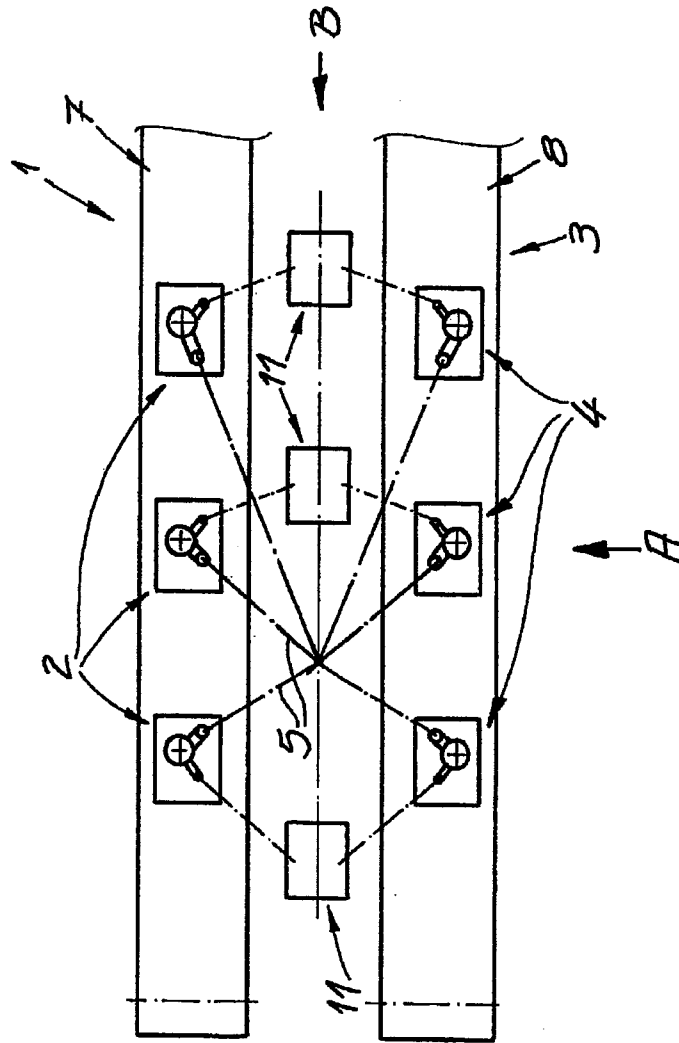

2/4


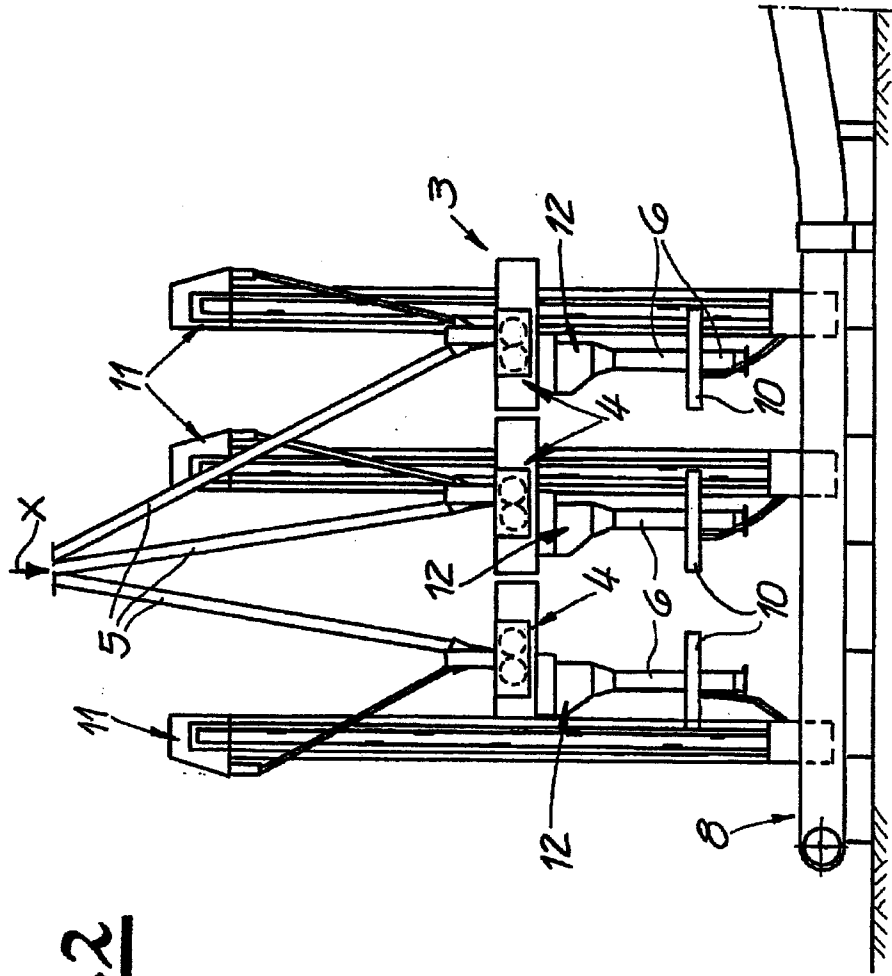


Fig. 2

314

Fig. 3

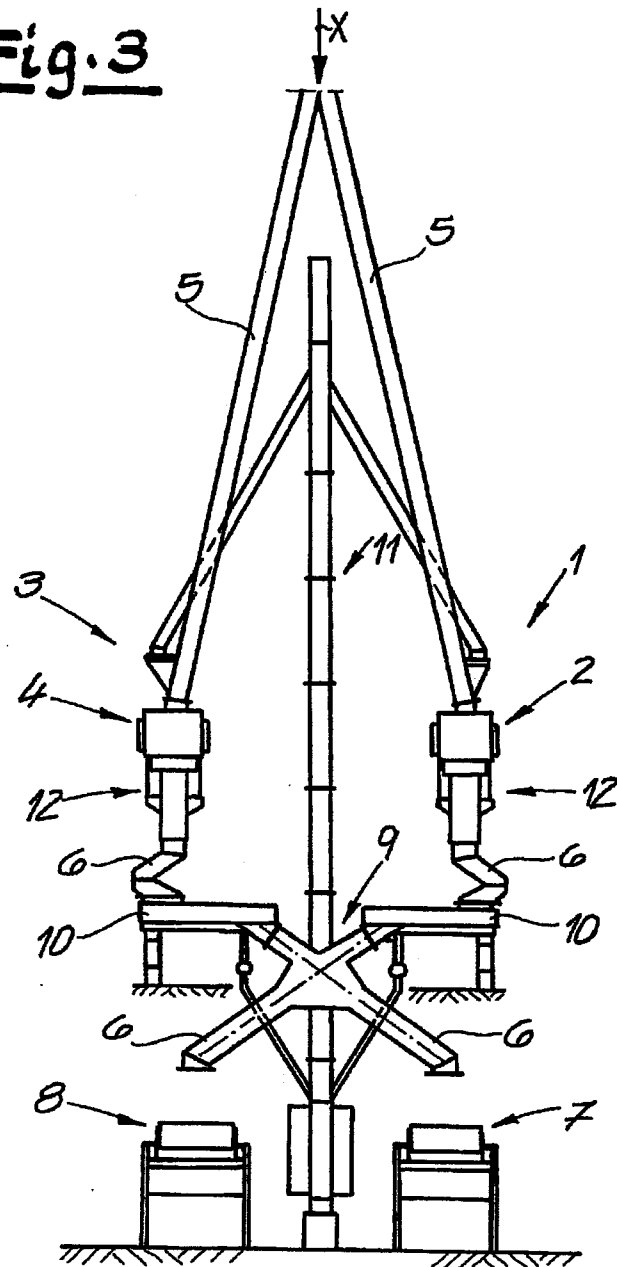

4/4

Fig. 4

