



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61M 5/315, 5/50	A1	(11) International Publication Number: WO 96/10433 (43) International Publication Date: 11 April 1996 (11.04.96)
---	----	---

(21) International Application Number: PCT/AU95/00650

(22) International Filing Date: 4 October 1995 (04.10.95)

(30) Priority Data:
PM 8598 4 October 1994 (04.10.94) AU

(71) Applicant (for all designated States except US): EASTLAND TECHNOLOGY AUSTRALIA PTY LTD [AU/AU]; West Point Centre, Unit 105, 396 Scarborough Beach Road, Osborne Park, W.A. 6109 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): WHISSON, Maxwell, Edmund [AU/AU]; 15 Loftus Street, Nedlands, W.A. 6009 (AU).


(74) Agents: HARWOOD, Errol, John et al.; Wray & Associates, Primary Industry House, 6th floor, 239 Adelaide Terrace, Perth, W.A. 6000 (AU).

(81) Designated States: AL, AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).

Published

With international search report.

(54) Title: SYRINGE

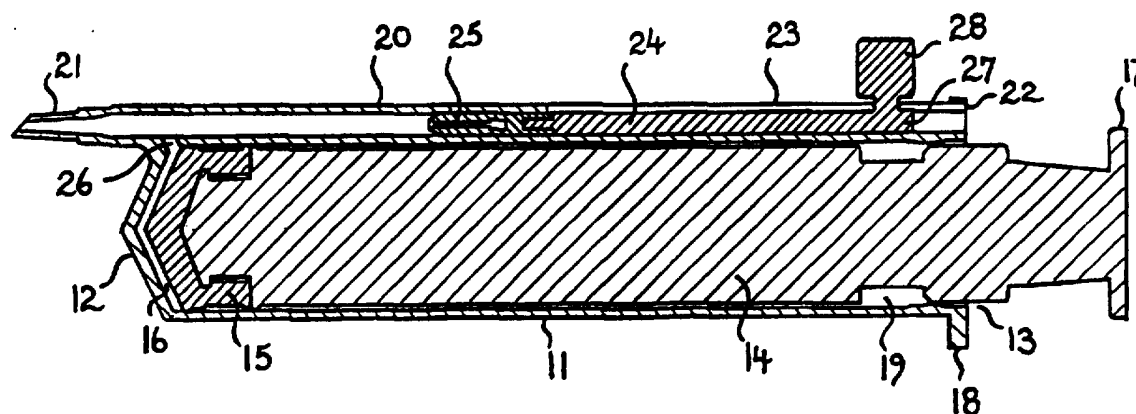

(57) Abstract

A syringe comprising a tubular body (11) closed at one end (12) and open at the other end (13), a plunger (14) receivable in the body (11) to define a chamber (16) of variable volume, a needle support (24) adapted to support and accommodate a hollow needle, said needle support (24) being supported from or in the wall of the body (11) and being movable in a direction substantially parallel to the main axis of the body (11) between a first position at which the needle extends from the one end of the body (11) and the interior of the needle is in communication with the chamber (16), and a second position at which the outer end of the needle is in a retracted position, said needle support (24) having a protrusion (28) which is selectively engageable with the wall of the body (11) at the first and second positions to be able to be retained at said positions and receivable through the wall of the body (11) when at the second position to be engaged with the plunger (14) to prevent axial movement of both the needle support (24) and the plunger (14) with respect to the body (11).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

TITLE: SYRINGE

THIS INVENTION relates to syringes and in particular syringes of the form which incorporate a retractable needle.

As a result of the need to develop practices which minimise the risk of infection the use of disposable syringes has become commonplace. The principal difficulty of such syringes however relates in the need to prevent the spread of infection as a result of inadvertent "stick" injuries. These can result from accidents during the use of the syringes and the inappropriate disposal of the syringe. In many cases these can be avoided if the pointed needle can be stored in a retracted position when not in use and in particular prior to disposal. In addition it is highly desirable to prevent such syringes from being reused. As a result syringes have been proposed in which the needle can be moved between a retracted position and an extended position. Some of these syringes are provided with a locking means which is able to prevent a used syringe from being reused by lockingly retaining the needle of a used syringe in the retracted position to prevent its reuse. Examples of such syringes are disclosed in the following patent specifications: AU-A-17419/92; US4927414; and US4941883.

A difficulty of such syringes however is that the plunger is still capable of being used to draw and force fluid from the chamber of the syringe which means that if the needle can be disengaged from its locking engagement, the syringe can be reused.

It is an object of this invention to provide a syringe whereby when the needle is located in the retracted position in which it is fully accommodated within the syringe body, it can be locked in that position.

Accordingly the invention resides in a syringe comprising a tubular body closed at one end and open at the other end, a plunger receivable in the body to define a chamber of variable volume, a needle support adapted to support and accommodate a hollow needle, said needle support being supported from, or in

- 2 -

- the wall of the body and being movable in a direction substantially parallel to the main axis of the body between a first position at which the needle extends from the one end of the body and the interior of the needle is in communication with the chamber and a second position at which the outer end of the needle is in a retracted position, said needle support having a protrusion which is selectively engagable with the wall of the body at the first and second positions to be able to be retained at said positions and receivable through the wall of the body at the second position to be engaged with the plunger to prevent axial movement of both the needle support and the plunger with respect to the body.
- 5
- 10 According to a preferred feature of the invention the needle support is rotatable about an axis substantially parallel to its direction of movement and said protrusion extends radially from the needle support, whereby rotation of the needle support will cause the protrusion to pass through the wall of the body and engage the plunger.
- 15 According to a further preferred feature of the invention the needle support is receivable in a passage provided on or in the wall of the body and is slidable along the passage to enable movement between the first and second position. The passageway can be formed with a longitudinal slot which slidably receives the protrusion. If desired the slot can be formed with a transverse extension at a position corresponding to the position of the protrusion at both the first and the second position whereby rotation of the needle support will cause the protrusion to engage with respective slot when at the first and second position.
- 20
- 25 According to a further preferred feature an aperture is provided in the wall adjacent the transverse slot at said second position to permit the protrusion to pass through the wall to engage the plunger. The aperture is dimensioned to require resilient deformation of the protrusion and/or the edges of the aperture to permit the passage of the protrusion through the aperture.

- 3 -

According to a further preferred feature the plunger is formed with a radial abutment surface along its length which will engage the protrusion when in the engaged position to prevent said axial movement of the plunger. The abutment surface can be located such that when the plunger is substantially fully received
5 within the body the abutment surface is capable of being engaged by the protrusion. If desired a plurality of abutment surfaces can be provided along the length of the plunger. In one form the abutment surface is provided by a recess in the side of the plunger. In another form the abutment surface is formed by a radial flange provided along the length of the plunger.

- 10 The invention will be more fully understood in the light of the following description of several specific embodiments. The description is made with reference to the accompanying drawings of which:

Figure 1 is a sectional side view of the first embodiment showing the needle support in the extended position;

- 15 Figure 2 is a side elevation of the syringe body of the body of the first embodiment without the needle support located therein;

Figure 3 is an end elevation of the first embodiment as shown at Figure 1;

Figure 4 is a sectional side view of the first embodiment with the needle support in the retracted position;

- 20 Figure 5 is a cross section of the embodiment with the needle supported in the retracted position and the protrusion in the locked position; and

Figure 6 is an isometric view of a plunger according to a second embodiment of the invention.

- 25 The first embodiment as shown in the accompanying drawings comprises a syringe of the general form disclosed in patent specification WO 88/08315. The syringe has a tubular body 11 which is closed at one end 12 and is open at the other end 13. The tubular body supports a plunger 14 which is slidably received within the body and is provided with a seal 15 at its inner end which defines a

- 4 -

chamber 16 between the inner end of the plunger 14 and the one end 12 of the body and which is of variable volume. The outer end of the plunger 14 is provided with suitable handle 17 or manipulation means to facilitate gripping of the plunger by the operator and the other end 13 of the body is provided with a
5 lateral flange 18 to facilitate manipulation by the operator.

The side of the plunger 14 is formed with a recessed portion 19 which provides a pair of spaced abutment surfaces. The recessed portion is located towards the other end of the plunger and is positioned to be located within the body 11 when the plunger is fully received within the body 11.

10 The outer wall of the body is formed with a tubular portion 20 which provides a passage which is substantially parallel therewith. One end 21 of the tubular portion 20 which is adjacent the one end 12 of the body 11 is formed as a pointed tubular boss which may be formed to be capable of accommodating a "LUER" or like fitting or alternatively may be pointed or similarly sharpened to be
15 able to pierce a closure provided on a conventional phial or a like container.

The wall of the tubular member 20 between the other end 22 is formed with a longitudinal slot 23.

The tubular member 20 slidably supports a needle support 24 which is slidably received within the tubular member 20 to be movable towards a first position at
20 which its one end 25 is adjacent the one end 21 of the tubular member 20 as shown at Figure 1 and a second position as shown at Figure 4 at which the one end 25 is remote from the one end 21 of the tubular member 20. The one end 25 of the needle support 24 is adapted to receive a hollow needle (not shown) which when the needle support is in the extended position as shown at Figure 1
25 will extend through the tubular boss 21 to extend from the syringe body.

An opening 26 is provided between the chamber 16 and the interior of the tubular member at one end of the body 11. The end 25 of the needle support 24 is adapted to sealingly engage the side walls of the interior of the tubular member in the region of the opening 26 and provide communication between the

- 5 -

opening 26 and the interior of the hollow needle when in the extended position as shown at Figure 1.

The other end 27 of the needle support is provided with a radial protrusion 28 which is configured to be able to be manipulated to facilitate manual movement
5 of the needle support between the first position as shown at Figure 1 and the second position as shown at Figure 4. The longitudinal slot 23 enables the longitudinal movement of the protrusion 28 between those two positions. The innermost end of the longitudinal slot 23 is formed with a transverse extension 29 whereby when the needle support is in the first position as shown at Figure 1,
10 the needle support can be caused to rotate about its central axis whereby the protrusion 28 is received in the innermost transverse slot 29 and the needle body is retained in the extended first position. A second transverse slot 30 is provided towards the outer end of the longitudinal slot 23 whereby on rotation of the needle support 24 when the protrusion 28 is in the region of the second
15 transverse slot, the protrusion 28 can be moved laterally.

In order to lockingly retain the needle support in the second position and limit the movement of the plunger the wall of the body 11 on the corresponding side of the tubular member 21, and at the location of the second transverse slot 30 is formed with an aperture 31 which is configured to receive the protrusion 28 on
20 rotation of the needle support 24 within the tubular member 20. The location of the transverse slot 30 and aperture 31 corresponds to the position of the recessed portion 19 of the plunger 14 when the plunger is fully accommodated within the tubular body 11.

As shown at Figure 5, the protrusion is configured such that when the plunger is
25 fully received within the body and the needle support is in its retracted second position the needle support can be caused to rotate about its central axis whereby the protrusion 28 is able to move through the transverse slot 30 and through the aperture 31, to be received within the recessed portion 19 of the plunger 17. The aperture 31 is slightly smaller than the protrusion 28 such that
30 when the protrusion 28 is caused to rotate into engagement with the aperture

- 6 -

31, and is fully engaged therewith such that its outer edge moves past the inner face of the wall of the body of the tubular body, the wall in the region of the aperture and /or the protrusion is caused to undergo some resilient deformation to permit the movement of the protrusion through the wall. As result the protrusion becomes positively engaged within the body and cannot be easily extracted from the body without damaging the body, or the protrusion or the needle support. Once so engaged, the needle is fully accommodated within the tubular member 20, the plunger 14 is fully accommodated within the body 11 and the syringe is unusable since the needle support and plunger have been lockingly and substantially irretrievably engaged with the body 11.

According to an alternative form of the first embodiment the plunger may be formed with a number of recessed portions along the length whereby the syringe can be rendered unusable, even if not empty.

According to a second embodiment as shown in Figure 6 the plunger may be formed with a plurality of radial flanges 35 to provide abutment surfaces. The flanges 35 serve the function of the recessed portion 19 of the first embodiment. Once the protrusion 28 is received through the aperture 31 the presence of the flanges will limit the relative movement of the plunger within the body. The number of flanges can be varied as desired.

It should be appreciated that the scope of the present invention need not be limited to the particular scope of the embodiment described above.

- 7 -

The Claims defining the invention are as follows:-

1. A syringe comprising a tubular body closed at one end and open at the other end, a plunger receivable in the body to define a chamber of variable volume, a needle support adapted to support and accommodate a hollow
5 needle, said needle support being supported from, or in the wall of the body and being movable in a direction substantially parallel to the main axis of the body between a first position at which the needle extends from the one end of the body and the interior of the needle is in communication with the chamber and a second position at which the outer end of the needle is in a
10 retracted position, said needle support having a protrusion which is selectively engagable with the wall of the body at the first and second positions to be able to be retained at said positions and receivable through the wall of the body at the second position to be engaged with the plunger to prevent axial movement of both the needle support and the plunger with
15 respect to the body.
2. A syringe as claimed at claim 1, wherein the needle support is rotatable about an axis substantially parallel to its direction of movement and said protrusion extends radially from the needle support, whereby rotation of the
20 needle support will cause the protrusion to pass through the wall of the body and engage the plunger.
3. A syringe as claimed at claim 1 or 2 wherein the needle support is receivable in a passage provided on or in the wall of the body and is slidable along the passage to enable movement between the first and second position.
4. A syringe as claimed at claim 3 wherein the passageway is formed with a
25 longitudinal slot which slidably receives the protrusion.
5. A syringe as claimed at claim 4 wherein the slot is formed with a transverse extension at a position corresponding to the position of the protrusion at both

- 8 -

the first and the second position whereby rotation of the needle support will cause the protrusion to engage with respective slot when at the first and second position.

- 5 6. A syringe as claimed at claim 5 wherein an aperture is provided in the wall at a position adjacent the transverse slot at said second position to permit the protrusion to pass through the wall to engage the plunger.
7. A syringe as claimed at claim 6 wherein the aperture is dimensioned to require resilient deformation of the protrusion and/or the edges of the aperture to permit the passage of the protrusion through the wall.
- 10 8. A syringe as claimed at any one of the preceding claims wherein the plunger is formed with a radial abutment surface along its length which will engage the protrusion when in the engaged position to prevent said axial movement of the plunger.
- 15 9. A syringe as claimed at claim 8 wherein the abutment surface is located such that when the plunger is substantially fully received within the body the abutment surface is capable of being engaged by the protrusion.
10. A syringe as claimed at any one of claim 8 or 9 wherein a plurality of abutment surfaces provided along the length of the plunger.
- 20 11. A syringe as claimed at any one of claims 8, 9, or 10 wherein the abutment surface is provided by a recess in the side of the plunger.
12. A syringe as claimed at any one of claims 8, 9, or 10 wherein the abutment surface is provided by radial flange provided along the length of the plunger.

- 9 -

13. A syringe as claimed at any one of the preceding claims wherein the protrusion comprises an enlargement which is receivable through the wall of the body and is engagable with the plunger.
14. A syringe substantially as herein described.

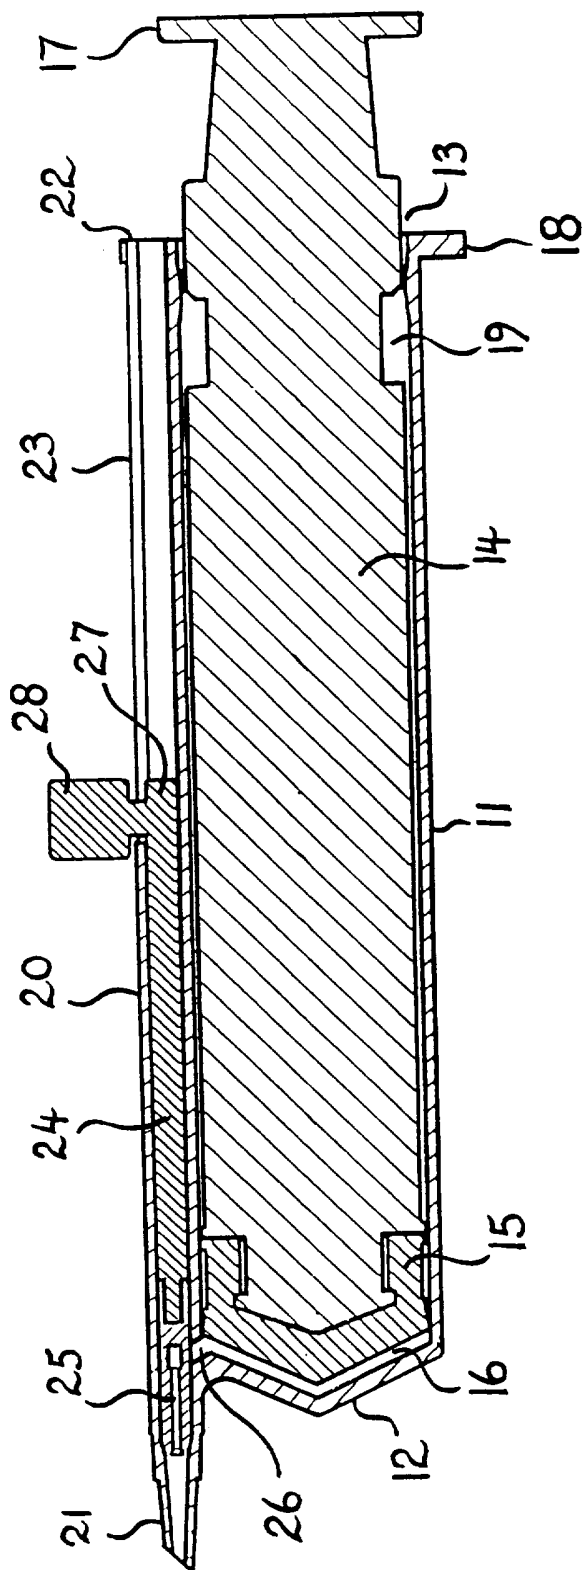
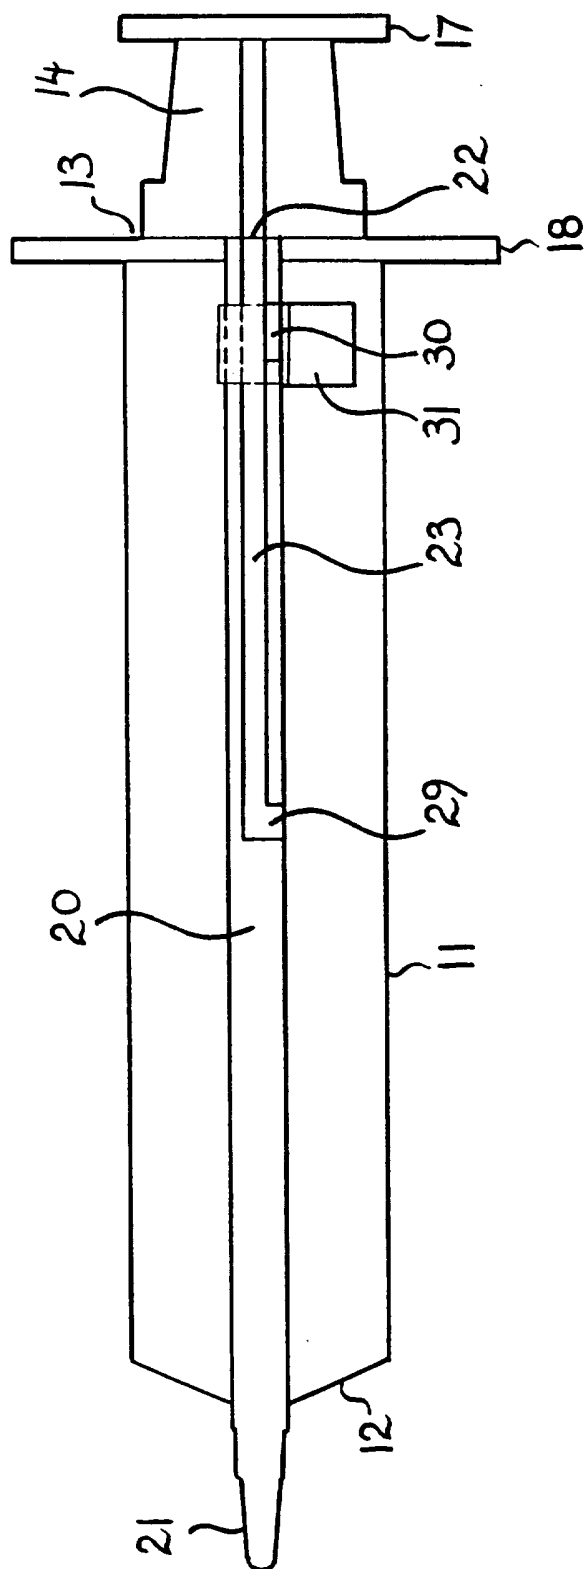


Fig. 1

**Fig. 2**

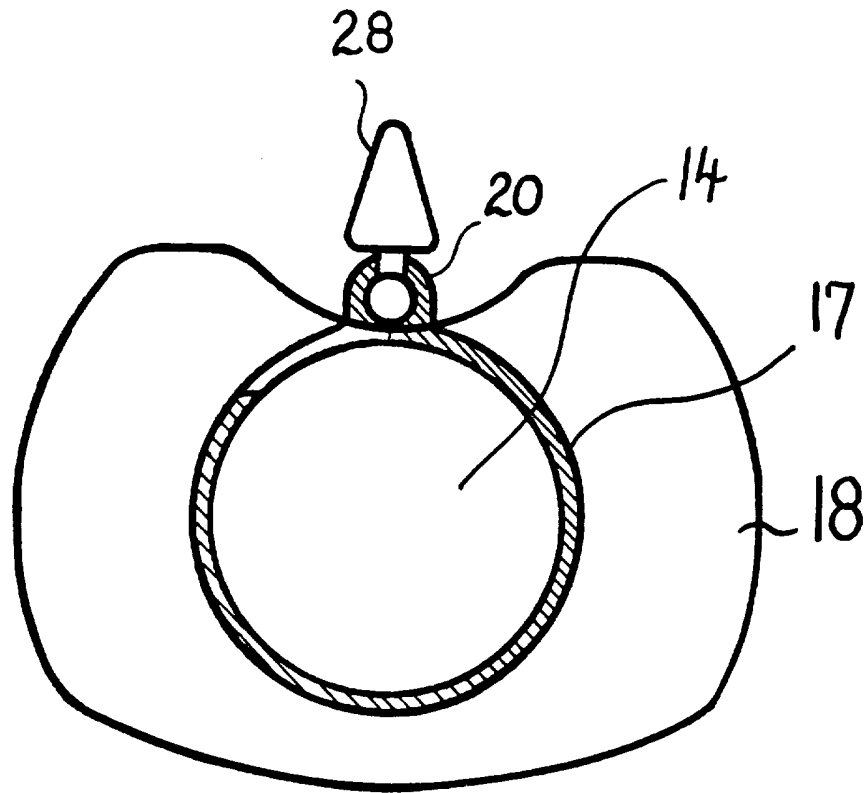
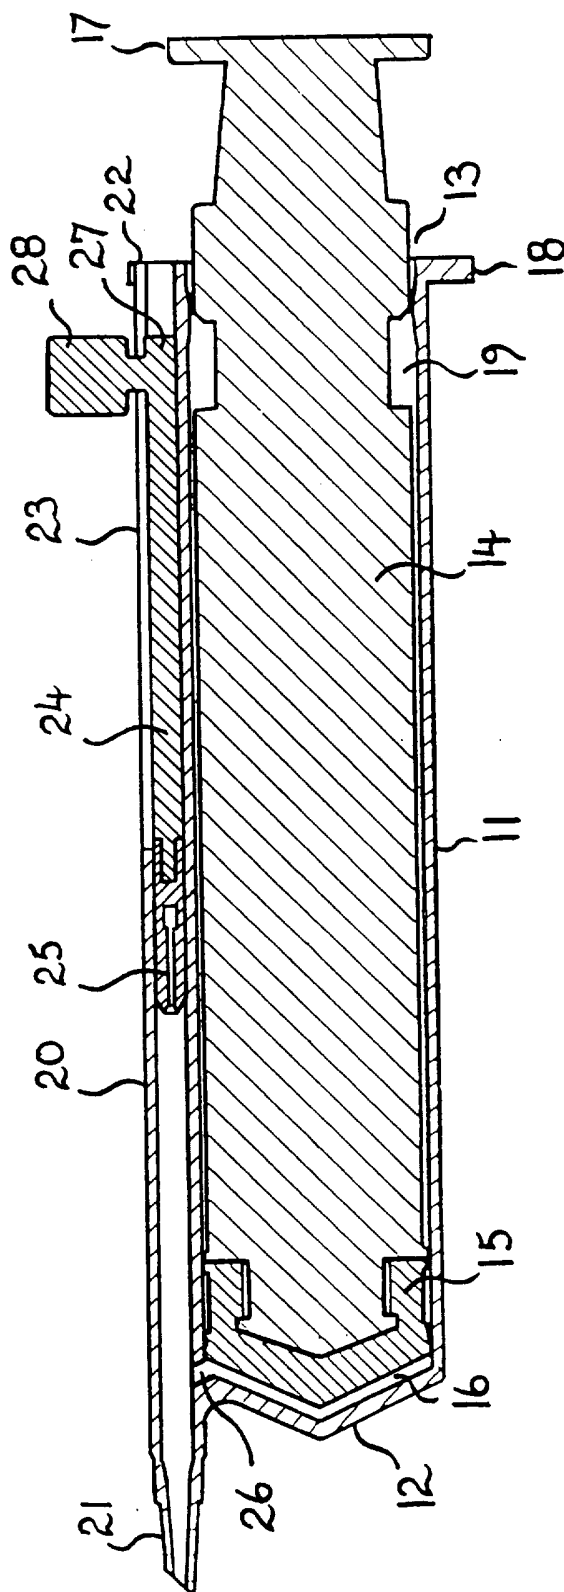


Fig. 3.

**Fig. 4**

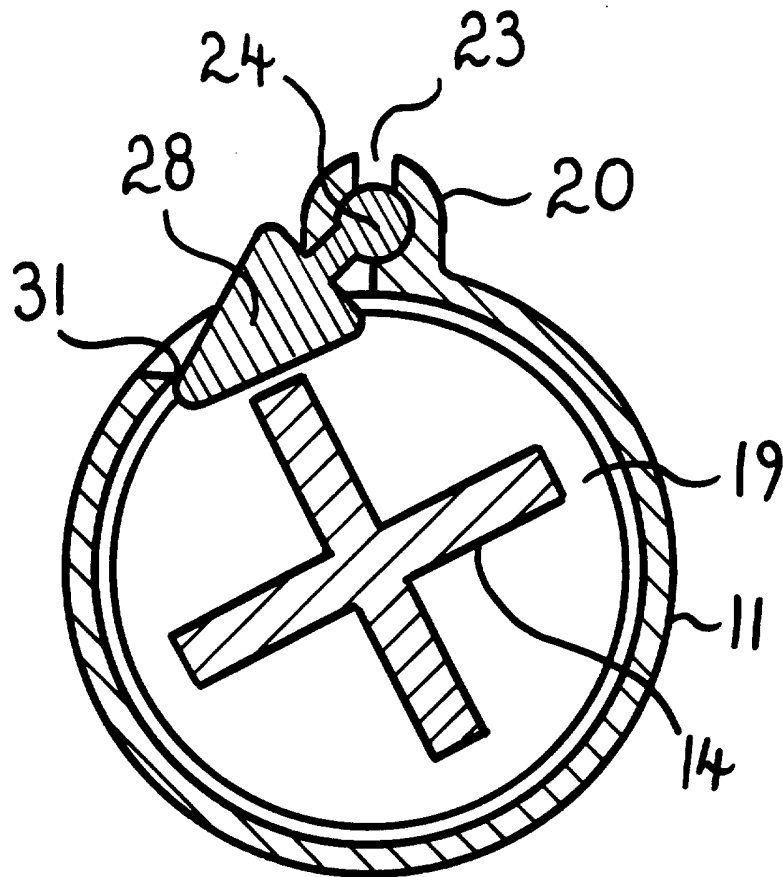


Fig. 5.

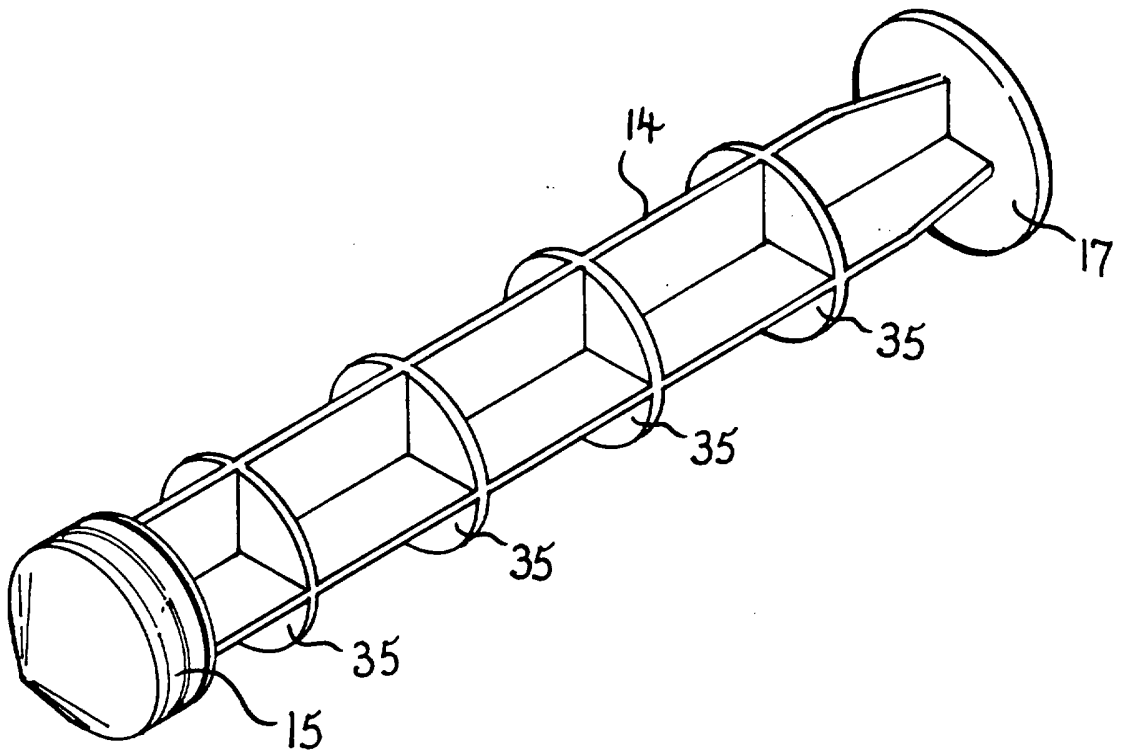


Fig. 6.

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/AU 95/00650**A. CLASSIFICATION OF SUBJECT MATTER**Int Cl⁶: A61M 5/315, 5/50

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC A61M 5/22, 5/315, 5/32, 5/50

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

AU : IPC as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DERWENT**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 92/17230 A (HABLEY MEDICAL TECHNOLOGY CORPORATION) 15 October 1992 page 6 lines 1-21	1
A	EP 479303 A (MORANDINI) 8 April 1992 column 3 line 42 - column 4 line 17	1
A	WO 93/09824 A (WHISSON) 27 May 1993 Figures 4 and 5	1



Further documents are listed in the continuation of Box C



See patent family annex

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier document but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
21 December 1995

Date of mailing of the international search report

8 January 1996Name and mailing address of the ISA/AU
AUSTRALIAN INDUSTRIAL PROPERTY ORGANISATION
PO BOX 200
WODEN ACT 2606
AUSTRALIA Facsimile No.: (06) 285 3929

Authorized officer

D. MELHUISE

Telephone No.: (06) 283 2426

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/AU 95/00650

C (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	AU 26288/88 A (HOPWOOD) 1 June 1989 page 4 lines 8-31	1

INTERNATIONAL SEARCH REPORT
Information on patent family members

International Application No.
PCT/AU 95/00650

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report				Patent Family Member			
WO	9217230	AU	17419/92	CA	2106577	EP	579735
		US	5263942				
EP	479303	IT	1242868				
WO	9309824	AU	29358/92	EP	613382		
AU	26288/88	WO	8904681				
							END OF ANNEX