



(11) **EP 3 199 698 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
01.02.2023 Bulletin 2023/05

(51) International Patent Classification (IPC):
D06F 95/00 ^(2006.01) **D06F 37/22** ^(2006.01)
D06F 37/26 ^(2006.01) **D06F 37/30** ^(2020.01)

(21) Application number: **16205441.5**

(52) Cooperative Patent Classification (CPC):
D06F 37/302; D06F 95/00; D06F 37/22;
D06F 37/267

(22) Date of filing: **20.12.2016**

(54) **FRONT-LOADING WASHING MACHINE**

FRONTLADER-WASCHMASCHINE

MACHINE À LAVER À CHARGEMENT FRONTAL

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(30) Priority: **28.01.2016 CN 201610059102**
28.01.2016 CN 201620086128 U

(43) Date of publication of application:
02.08.2017 Bulletin 2017/31

(73) Proprietor: **WUXI LITTLE SWAN ELECTRIC CO.,**
LTD.
Wuxi, 214028 Jiangsu (CN)

(72) Inventors:
• **YU, Xin**
Wuxi, Jiangsu 214028 (CN)

- **TANG, Yusheng**
Wuxi, Jiangsu 214028 (CN)
- **LUO, Siming**
Wuxi, Jiangsu 214028 (CN)
- **KIM, Kyunghag**
Wuxi, Jiangsu 214028 (CN)

(74) Representative: **Lam, Alvin et al**
Maucher Jenkins
Seventh Floor Offices
Artillery House
11-19 Artillery Row
London SW1P 1RT (GB)

(56) References cited:
EP-A2- 1 069 228 WO-A1-2011/016009
DE-B3- 10 339 604 JP-U- 3 196 947
US-A- 3 199 319

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD

[0001] The present disclosure relates to a technology field household appliances, and more particularly to a front-loading washing machine.

BACKGROUND

[0002] In the related art, the washing machine includes a front-loading washing machine and a pulsator washing machine. When the pulsator washing machine operates, the laundry needs to be completely immersed in water, so that the water saving effect is poor. Moreover, when loading or unloading the laundry with the front-loading washing machine, a user needs to bend and squat down, and thus it is much inconvenient for use and is particularly difficult for operations of special populations, such as the aged.

[0003] JP3196947U relates to a washing machine, including a housing and a washing/drying drum received in the housing. A pivotal mechanism is mounted to each of two flanks of the washing/drying drum. Each pivotal mechanism includes a support having an axle. The axles define a pivotal axis passing through a diameter of the washing/drying drum. Each pivotal mechanism further includes a rotating device rotatable about the pivotal axis defined by the axles. The washing/drying drum is coupled to the rotating devices. The washing/drying drum is pivotable between a horizontal position and a vertical position. One of the pivotal mechanisms includes a positioning mechanism configured to position the washing/drying drum in the horizontal position or the vertical position.

SUMMARY

[0004] The present disclosure seeks to solve at least one of the problems existing in the related art to at least some extent.

[0005] According to an aspect of the present invention, there is provided a front-loading washing machine as claimed in claim 1.

[0006] Thus, embodiments of the present disclosure provide a front-loading washing machine, the front-loading washing machine is easy to be used.

[0007] In the front-loading washing machine according to embodiments of the present disclosure, by providing the driving mechanism to drive the tub to move up and down in the opening, so as to change a position of the access port, it is convenient for a user to load and unload the laundry. Moreover, the front-loading washing machine further has advantages of an easy usage, a low laundry abrasion and a less water cost.

[0008] In addition, the front-loading washing machine according to embodiments of the present disclosure may further include following additional features.

[0009] According to an embodiment of the present dis-

closure, the driving mechanism is configured to drive the access port to move up and down between a washing position and a non-washing position in the opening.

[0010] According to an embodiment of the present disclosure, when the access port is located at the non-washing position, the access port is driven to move close to an upper edge of the front panel, and when the access port located is at the washing position, the access port is driven to move close to a lower edge of the front panel.

[0011] According to an embodiment of the present disclosure, the driving mechanism is configured to drive the access port to move upwards to close to an upper edge of the front panel and move downwards to close to a lower edge of the front panel.

[0012] According to an embodiment of the present disclosure, a motion range of the access port in the opening is configured in such a manner that an angle between a central axis of the access port and a horizontal plane ranges from 0° to 90°.

[0013] According to an embodiment of the present disclosure, the flexible folded cover has an annular shape and includes at least one annular folded portion extending along a circumferential direction of the flexible folded cover, an inner circumferential edge of the flexible folded cover is fixed with the door unit and an outer circumferential edge thereof is fixed with the front panel.

[0014] According to an embodiment of the present disclosure, the inner circumferential edge of the flexible folded cover is matched with an outer circumferential edge of the door unit in shape, and the outer circumferential edge of the flexible folded cover is matched with an inner circumferential edge of the opening in shape.

[0015] According to an embodiment of the present disclosure, the door unit includes a door base and a door body hinged to the door base, and the inner circumferential edge of the flexible folded cover is fixed with the door base.

[0016] According to an embodiment of the present disclosure, the inner circumferential edge of the flexible folded cover is fixed with the door base by a clamp.

[0017] According to an embodiment of the present disclosure, the outer circumferential edge of the flexible folded cover is fixed to the front panel by a fixing ring mounted on an inner surface of the front panel.

[0018] According to an embodiment of the present disclosure, the flexible folded cover is configured as a rubber part.

[0019] The additional aspects and advantages of embodiments of the present disclosure will be given in the following descriptions, parts of which will become apparent from the following descriptions or known through the practice of the present disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] These and other aspects and advantages of embodiments of the present disclosure will become apparent and more readily appreciated from the following

descriptions made with reference to the drawings, in which:

Fig. 1 is a partial schematic view of a front-loading washing machine according to embodiments of the present disclosure;

Fig. 2 is a partial schematic view of a front-loading washing machine according to embodiments of the present disclosure, in which a door unit, a front panel, a flexible folded cover and a tub are assembled together;

Fig. 3 is a partially exploded view of a front-loading washing machine according to embodiments of the present disclosure;

Fig. 4 is a front view of a front-loading washing machine according to embodiments of the present disclosure;

Fig. 5 is a perspective view of a front-loading washing machine according to embodiments of the present disclosure, in which the front-loading washing machine is in a non-washing state; and

Fig. 6 is a perspective view of a front-loading washing machine according to embodiments of the present disclosure, in which the front-loading washing machine is in a washing state.

Reference numerals:

[0021]

front-loading washing machine 1;
cabinet 10; front panel 11; opening 111; upper edge 112; lower edge 113; flexible folded cover 12; inner circumferential edge 121; outer circumferential edge 122; through hole 123; positioning flange 124;
tub 20; access port 21; drum 30;
door unit 40; door hinge 41; door base 42; door body 43; fixing ring 44;
driving mechanism 50; longitudinal pushrod 51;
transverse shaft 52; support frame 53; hole 531.

DETAILED DESCRIPTION

[0022] Reference will be made in detail to embodiments of the present disclosure. The embodiments described herein with reference to drawings are explanatory, illustrative, and used to generally understand the present disclosure. The embodiments shall not be construed to limit the present disclosure. The same or similar elements and the elements having same or similar functions are denoted by like reference numerals throughout the descriptions.

[0023] A front-loading washing machine 100 will be described with reference to accompanying drawings in the following.

[0024] As shown in Figs. 1-6, the front-loading washing machine 100 according to embodiments of the present disclosure includes a cabinet 10, a tub 20, a rotatable

drum 30, a door unit 40 and a driving mechanism 50.

[0025] The cabinet 10 includes a front panel 11, and an opening 111 is formed in the front panel 11. The tub 20 has an access port 21 for loading and unloading laundry, and the tub 20 is disposed in the cabinet 10 and configured in such a manner that the access port 21 is capable of being moved up and down in the opening 111 (an up-and-down direction is shown in Figs. 2-4). The drum 30 is disposed in the tub 20. The door unit 40 is mounted to the tub 20 and configured to cover the access port 21. The driving mechanism 50 is provided in the cabinet 10, coupled to the tub 20, and further used to drive the tub 20 to move.

[0026] In the front-loading washing machine 100 according to embodiments of the present disclosure, the tub 200 is configured in such a manner that the access port 21 is capable of being moved up and down in the opening 111, and thus the front-loading washing machine 100 can move the access port 21 to a position suitable for a user to load and unload laundry when the user needs to load or unload the laundry, compared with a front-loading washing machine having the access port disposed in a front surface thereof in the related art. In this way, when loading or unloading laundry through the access port 21, the user does not need to squat down or bend, and thus the front-loading washing machine 1 according to embodiments of the present disclosure has high practicability, especially for the user inconvenient to bend or squat down.

[0027] Moreover, since the access port 21 can be moved up and down in the opening 111, the access port 21 may be moved to a position suitable for washing laundry after the laundry has been loaded. For example, the access port 21 may be moved downwards. In this way, when washing laundry, the drum may roll to tumble the laundry up and down so as to achieve the washing of laundry, thus reducing abrasion of the laundry during washing thereof. Moreover, because the laundry needs not to be completely immersed in water when being washed, but only a small amount of water is needed to accomplish the washing thereof, a corresponding water cost is reduced, which is more environmentally friendly.

[0028] In addition, by disposing the driving mechanism 50, the tub 20 may be driven by using the driving mechanism 50. In this way, when the user needs to adjust a position of the access port 21, the driving mechanism 50 may be used to drive the tub 20 so as to adjust the position of the access port 21. Thereby, the user can adjust the position of the tub 20 with less effort, so that it is convenient for the user to adjust the position of the access port 21, thus further improving using convenience of the front-loading washing machine 1.

[0029] That is to say, by providing the tub 20 configured in such a manner that the access port 21 is capable of being moved up and down in the opening 111 and providing the driving mechanism 50 configured to drive the tub 20 to move, the front-loading washing machine 1 can achieve a desired effect of an ordinary front-loading

washing machine when washing the laundry, and the access port 21 can be adjusted to the position suitable for loading and unloading laundry when the laundry needs to be loaded or unloaded or additional laundry needs to be loaded during the washing, so that a problem that it is inconvenient to load and unload laundry for the traditional front-loading washing machine in the related art is overcome.

[0030] Therefore, with the front-loading washing machine 100 according to embodiments of the present disclosure, by providing the drive mechanism 50 to drive the tub 20 to move up and down in the opening 111 so as to change the position of the access port 21, it is convenient for the user to load and unload laundry. Furthermore, the front-loading washing machine 100 according to embodiments of the present disclosure has advantages of the convenient use, the low laundry abrasion and the reduced water cost.

[0031] The front-loading washing machine 100 according to embodiments of the present disclosure will be described with reference to accompanying drawings in the following.

[0032] In some specific embodiments of the present disclosure, as shown in Figs. 1-6, the front-loading washing machine 100 according to embodiments of the present disclosure includes a cabinet 10, a tub 20, a rotatable drum 30, a door unit 40 and a driving mechanism 50.

[0033] The driving mechanism 50 drives the access port 21 to move up and down between a washing position and a non-washing position in the opening 111. In this way, when the laundry needs washing, the driving mechanism 50 may be used to drive the tub 20, so that the access port 21 can be moved to the washing position, thus facilitating washing the laundry. When the laundry does not need washing, the driving mechanism 50 may be used to drive the tub 20, so that the access port 21 can be moved to the non-washing position, thus facilitating loading and unloading the laundry by the user.

[0034] Specifically, as shown in Figs. 1-3, when the access port 21 is located at the non-washing position (as shown in Fig. 5), the access port 21 is driven to move close to an upper edge 112 of the front panel 11. When the access port 21 is located at the washing position (as shown in Fig. 6), the access port 21 is driven to move close to a lower edge 113 of the front panel 11. Thereby, when the user needs to load or unload the laundry, the access port 21 may be moved close to the upper edge 112 of the front panel 11, to facilitate loading and unloading laundry from top by the user, when the user needs to wash laundry, the access port 21 may be moved close to the lower edge 113 of the front panel 11, to facilitate washing laundry through the rolling of the drum 30.

[0035] Specifically, as shown in Fig. 2, the front panel 11 may be inclined backwards from bottom to top. Thereby, it may be further convenient for the user to load and unload laundry when the access port 21 is moved to the non-washing position.

[0036] Advantageously, as shown in Figs. 1 and 2, the driving mechanism 50 is configured to drive the access port 21 to move upwards to close to the upper edge 112 of the front panel 11 and to move downwards to close to the lower edge 113 of the front panel 11. In this way, when the laundry needs to be loaded or unloaded, the driving mechanism 50 may be operated, so that the access port 21 can be moved upwards to close to the upper edge 112 of the front panel 11, thereby facilitating loading or unloading the laundry; and when the laundry needs to be washed, the driving mechanism 50 may be operated, so that the access port 21 can be moved downwards to close to the lower edge 113 of the front panel 11, thereby facilitating washing the laundry by the rolling of the drum 30.

[0037] Optionally, a motion range of the access port 21 in the opening 111 is configured in such a manner that an included angle between a central axis of the access port 21 and a horizontal plane ranges from 0° to 90°. In other words, the access port 21 may be moved between a horizontal position and a vertical position of the central axis thereof. Specifically, when the access port 21 is located at the non-washing position suitable for loading and unloading laundry, the central axis of the access port 21 may be oriented in a vertical direction; and when the access port 21 is located at the washing position suitable for washing laundry, the central axis of the access port 21 may be oriented in a horizontal direction. Thereby, it is convenient for the user to load and unload the laundry through the access port 21 from top, and also to wash the laundry by the rolling of the drum.

[0038] It can be understood by those skilled in the art that, the motion range of the access port 21 may be adjusted according to the actual conditions. For example, when the access port 21 is located at the non-washing position (as shown in Fig. 2), the central axis of the access port 21 may be inclined forwards from bottom to top, and thus it is convenient for the user to load and unload the laundry as well. When the access port 21 is located at the washing position (as shown in Fig. 4), the central axis of the access port 21 may be oriented at a predetermined angle with respect to the horizontal direction, in condition of ensuring the laundry in the drum to be washed in a rolling manner.

[0039] The front-loading washing machine 100 according to a specific example of the present disclosure is shown in Figs. 1-4. As shown in Figs. 1-5, the driving mechanism 50 includes a longitudinal pushrod 51 disposed at a front side of the tub 20, a transverse shaft 52 disposed at a rear side of and coupled to the tub 20, and a support frame 53 disposed in the cabinet 10 and having a hole 531, in which the transverse shaft 52 may rotate in the hole 531 of the support frame 53. In this way, the tub 20 may be disposed rotatably to the support frame 53 by the transverse shaft 52, so that the access port 21 can be moved up and down in the opening 111; moreover, the tub 20 may be driven to move by the longitudinal pushrod 51, so as to achieve a position adjustment of

the access port 21.

[0040] It could be understood that, a clearance fit between an outer circumferential surface of the tub 20 and the opening 111 is needed, so that the tub 20 can move up and down in the opening 111, and thus a position adjustment of the access port 21 in the up-and-down direction can be achieved. But, when the tub 20 moves up and down in the opening 111 or during the washing of the laundry, the tub 20 collides with the front panel 11 due to the clearance fit between the tub 20 and the front panel 11, thus bringing about an unpleasant sound. In addition, a fitting clearance between the tub 20 and the front panel 11 may influence an overall appearance of the front-loading washing machine 100, and also dust or some other objects may fall into the machine through the fitting clearance, thus affecting a normal operation of the front-loading washing machine 100. Furthermore, children may extend their hands into the fitting clearance, thus bringing about some potential security hazards.

[0041] Thus, in some embodiments of the present disclosure, the front-loading washing machine 100 may further include a flexible folded cover 12, and the flexible folded cover 12 is connected with the front panel 11 and the door unit 40 and configured to cover a gap between the door unit 40 and an edge of the opening 111. As shown in Fig. 2, the flexible folded cover 12 is disposed between the door unit 40 and the front panel 11, and an outer circumferential edge 122 of the flexible folded cover 12 is jointed with an inner circumferential wall of the opening 111. A through hole 123 is formed in the middle of the flexible folded cover 12, and the outer circumferential surface of the tub 20 is fitted with an inner circumferential wall of the through hole 123. In this way, when the tub 20 moves up and down, the tub 20 touches and is fitted with the flexible folded cover 12 directly. That is, when the tub 20 moves upwards, the tub 20 presses an upper part of the flexible folded cover 12 to make the upper part contract slowly, and a lower part of the flexible folded cover 12 gradually spreads out; when the tub 20 moves downwards, the tub 20 presses the lower part of the flexible folded cover 12 to make the lower part contract slowly, and the upper part of the flexible folded cover 12 gradually spreads out.

[0042] Thus, in the front-loading washing machine 100 according to embodiments of the present disclosure, by providing the flexible folded cover 12 between the front panel 11 and the door unit 40, a seamless connection between the tub 20 and the front panel 11 is obtained, so as to prevent the tub 20 from directly touching the front panel 11 while the tub 20 is moving up and down, thus reducing the unpleasant sound generated during an operation of the front-loading washing machine 100 and improving the security and the appearance quality of the front-loading washing machine 100.

[0043] In some examples of the present disclosure, the flexible folded cover 12 has an annular shape and includes at least one annular folded portion extending along a circumferential direction of the flexible folded cov-

er 12. An inner circumferential edge 121 of the flexible folded cover 12 is fixed with the door unit 40, and an outer circumferential edge 122 thereof is fixed with the front panel 11. As shown in Figs. 2 and 3, a radial dimension of the outer circumferential edge 122 of the flexible folded cover 12 is larger than a radial dimension of the inner circumferential edge 121 thereof. The inner circumferential edge 121 extends out from a front surface of the outer circumferential edge 122 so as to form a stepped structure. It should be noted that, "inner" and "outer" are defined in terms of a center of the flexible folded cover 12, in which "inner" means being close to the center of the flexible folded cover 12 and "outer" means being away from the center of the flexible folded cover 12.

[0044] Furthermore, the inner circumferential edge 121 of the flexible folded cover 12 is matched with an outer circumferential edge of the door unit 40 in shape, and the outer circumferential edge 122 of the flexible folded cover 12 is matched with an inner circumferential edge of the opening 111 in shape. Thus, the flexible folded cover 12 can be closely fitted with the door unit 40 and the opening 111 of the front panel 11 respectively, and it is ensured that the flexible folded cover 12 and the door unit 40 can move up and down along with the tub 20 synchronously.

[0045] In some embodiments of the present disclosure, as shown in Fig. 2, the door unit 40 may include a door base 42 and a door body 43 hinged to the door base 42, and the inner circumferential edge 121 of the flexible folded cover 12 is fixed with the door base 42. As shown in Fig. 3, a door hinge 41 is provided between the door base 42 and the door body 43, and the door body 43 may rotate about a central shaft of the door hinge 41. The inner circumferential edge 121 of the flexible folded cover 12 is fixed with the door base 42 by a clamp.

[0046] Furthermore, the outer circumferential edge 122 of the flexible folded cover 12 is fixed to the front panel 11 by a fixing ring 44 mounted on an inner surface of the front panel 11. The flexible folded cover 12 may be configured a rubber part. The rubber part has a relatively good elastic deformation capability. As shown in Fig. 3, a positioning flange 124 is provided at a rear end surface of the outer circumferential edge 122 of the flexible folded cover 12, and the positioning flange 124 is configured to be fitted with the fixing ring 44, so as to fix the flexible folded cover 12 to the front panel 11.

[0047] Other components and operations of the front-loading washing machine 100 according to embodiments of the present disclosure are known to those skilled in the related art, and thus will not be described in detail herein.

[0048] In the specification, it is to be understood that terms such as "central," "longitudinal," "lateral," "length," "width," "thickness," "upper," "lower," "front," "rear," "left," "right," "vertical," "horizontal," "top," "bottom," "inner," "outer," "clockwise," and "counterclockwise" should be construed to refer to the orientation as then described or as shown in the drawings under discussion. These rela-

tive terms are for convenience of description and do not require that the present disclosure be constructed or operated in a particular orientation.

[0049] In addition, terms such as "first" and "second" are used herein for purposes of description and are not intended to indicate or imply relative importance or significance or to imply the number of indicated technical features. Thus, the feature defined with "first" and "second" may comprise one or more of this feature. In the description of the present disclosure, "a plurality of" means two or more than two, unless specified otherwise.

[0050] In the present disclosure, unless specified or limited otherwise, the terms "mounted," "connected," "coupled," "fixed" and the like are used broadly, and may be, for example, fixed connections, detachable connections, or integral connections; may also be mechanical or electrical connections; may also be direct connections or indirect connections via intervening structures; may also be inner communications of two elements, which can be understood by those skilled in the art according to specific situations.

[0051] In the present disclosure, unless specified or limited otherwise, a structure in which a first feature is "on" or "below" a second feature may include an embodiment in which the first feature is in direct contact with the second feature, and may also include an embodiment in which the first feature and the second feature are not in direct contact with each other, but are contacted via an additional feature formed therebetween. Furthermore, a first feature "on," "above," or "on top of" a second feature may include an embodiment in which the first feature is right or obliquely "on," "above," or "on top of" the second feature, or just means that the first feature is at a height higher than that of the second feature; while a first feature "below," "under," or "on bottom of" a second feature may include an embodiment in which the first feature is right or obliquely "below," "under," or "on bottom of" the second feature, or just means that the first feature is at a height lower than that of the second feature.

[0052] Reference throughout this specification to "an embodiment," "some embodiments," "one embodiment," "another example," "an example," "a specific example," or "some examples," means that a particular feature, structure, material, or characteristic described in connection with the embodiment or example is included in at least one embodiment or example of the present disclosure. Thus, the appearances of the phrases such as "in some embodiments," "in one embodiment," "in an embodiment," "in another example," "in an example," "in a specific example," or "in some examples," in various places throughout this specification are not necessarily referring to the same embodiment or example of the present disclosure. Furthermore, the particular features, structures, materials, or characteristics may be combined in any suitable manner in one or more embodiments or examples.

Claims

1. A front-loading washing machine (100), comprising:

a cabinet (10) having a front panel (11), wherein the front panel (11) is provided with an opening (111);
a tub (20) disposed in the cabinet (10) and having an access port (21) for loading and unloading laundry;
a rotatable drum (30) disposed in the tub (20);
a door unit (40) mounted to the tub (20) and configured to cover the access port (21); and
a driving mechanism (50) provided in the cabinet (10), wherein the driving mechanism (50) comprises:

a longitudinal pushrod (51) disposed at a front side of the tub (20);

a transverse shaft (52) disposed at a rear side of the tub (20) and coupled to the tub (20);

a support frame (53) disposed in the cabinet (10) and having a hole (531), wherein the transverse shaft (52) is configured to rotate in said hole (531) of the support frame (53); and

the driving mechanism (50) is configured to drive the tub (20) to rotate, such that the access port (21) is capable of being moved up and down in the opening (111);

wherein the front-loading washing machine (100) further comprises a flexible folded cover (12), connected with the front panel (11) and the door unit (40) and configured to cover a gap between the door unit (40) and an edge of the opening (111).

2. The front-loading washing machine (100) according to claim 1, wherein the driving mechanism (50) is configured to drive the access port (21) to move up and down between a washing position and a non-washing position in the opening (111).

3. The front-loading washing machine (100) according to claim 2, wherein when the access port (21) is located at the non-washing position, the access port (21) is driven to move close to an upper edge (112) of the front panel (11), and when the access port (21) is located at the washing position, the access port (21) is driven to move close to a lower edge (113) of the front panel (11).

4. The front-loading washing machine (100) according to claim 1, wherein the driving mechanism (50) is configured to drive the access port (21) to move upwards to close to an upper edge (112) of the front panel (11) and move downwards to close to a lower

edge (113) of the front panel (11).

5. The front-loading washing machine (100) according to claim 1, wherein a motion range of the access port (21) in the opening (111) is configured in such a manner that an included angle between a central axis of the access port (21) and a horizontal plane ranges from 0° to 90°. 5
6. The front-loading washing machine (100) according to claim 1, wherein the flexible folded cover (12) has an annular shape and comprises at least one annular folded portion extending along a circumferential direction of the flexible folded cover (12), an inner circumferential edge (121) of the flexible folded cover (12) is fixed with the door unit (40) and an outer circumferential edge (122) thereof is fixed with the front panel (11). 10
7. The front-loading washing machine (100) according to claim 6, wherein the inner circumferential edge (121) of the flexible folded cover (12) is matched with an outer circumferential edge (122) of the door unit (40) in shape, and the outer circumferential edge (122) of the flexible folded cover (12) is matched with an inner circumferential edge (121) of the opening (111) in shape. 15
8. The front-loading washing machine (100) according to claim 6, wherein the door unit (40) comprises a door base (42) and a door body (43) hinged to the door base (42), and the inner circumferential edge (121) of the flexible folded cover (12) is fixed with the door base (42). 20
9. The front-loading washing machine (100) according to claim 8, wherein the inner circumferential edge (121) of the flexible folded cover (12) is fixed with the door base (42) by a clamp. 25
10. The front-loading washing machine (100) according to claim 6, wherein the outer circumferential edge (122) of the flexible folded cover (12) is fixed to the front panel (11) by a fixing ring (44) mounted on an inner surface of the front panel (11). 30
11. The front-loading washing machine (100) according to any one of claims 1-10, wherein the flexible folded cover (12) is configured as a rubber part. 35

Patentansprüche

1. Frontlader-Waschmaschine (100), die Folgendes aufweist: 40

ein Gehäuse (10) mit einer Frontplatte (11), wobei die Frontplatte (11) mit einer Öffnung (111)

versehen ist;
einen Bottich (20), der im Gehäuse (10) angeordnet ist und eine Luke (21) zum Laden und Entnehmen von Wäsche hat;
eine drehbare Trommel (30), die im Bottich (20) angeordnet ist;
eine Türeinheit (40), die am Bottich (20) montiert ist und zum Abdecken der Luke (21) gestaltet ist; und
einen im Gehäuse (10) bereitgestellten Antriebsmechanismus (50), wobei der Antriebsmechanismus (50) Folgendes aufweist:

eine Längs-Schubstange (51), die an einer Vorderseite des Bottichs (20) angeordnet ist;
eine Querachse (52), die an einer Rückseite des Bottichs (20) angeordnet ist und mit dem Bottich (20) gekoppelt ist;
einen Stützrahmen (53), der im Gehäuse (10) angeordnet ist und ein Loch (531) hat, wobei die Querachse (52) zum Drehen in dem genannten Loch (531) des Stützrahmens (53) gestaltet ist; und
der Antriebsmechanismus (50) zum Antreiben des Bottichs (20) zum Drehen, so dass die Luke (21) in der Öffnung (111) nach oben und unten bewegt werden kann, gestaltet ist;
wobei die Frontlader-Waschmaschine (100) ferner eine flexible gefaltete Abdeckung (12) aufweist, die mit der Frontplatte (11) und der Türeinheit (40) verbunden ist und zum Abdecken einer Lücke zwischen der Türeinheit (40) und einem Rand der Öffnung (111) gestaltet ist.

2. Frontlader-Waschmaschine (100) nach Anspruch 1, wobei der Antriebsmechanismus (50) zum Antreiben der Luke (21) zur Bewegung nach oben und unten zwischen einer Waschposition und einer Nicht-Waschposition in der Öffnung (111) gestaltet ist. 45
3. Frontlader-Waschmaschine (100) nach Anspruch 2, wobei, wenn die Luke (21) sich an der Nicht-Waschposition befindet, die Luke (21) angetrieben wird, um sich nahe an einen oberen Rand (112) der Frontplatte (11) zu bewegen, und, wenn die Luke (21) sich an der Waschposition befindet, die Luke (21) angetrieben wird, um sich nahe an einen unteren Rand (113) der Frontplatte (11) zu bewegen. 50
4. Frontlader-Waschmaschine (100) nach Anspruch 1, wobei der Antriebsmechanismus (50) zum Antreiben der Luke (21) zum Aufwärtsbewegen bis nahe an einen oberen Rand (112) der Frontplatte (11) und zum Abwärtsbewegen bis nahe an einen unteren Rand (113) der Frontplatte (11) gestaltet ist. 55

5. Frontlader-Waschmaschine (100) nach Anspruch 1, wobei ein Bewegungsbereich der Luke (21) in der Öffnung (111) so gestaltet ist, dass ein eingeschlossener Winkel zwischen einer Mittelachse der Luke (21) und einer horizontalen Ebene von 0° bis 90° reicht. 5
6. Frontlader-Waschmaschine (100) nach Anspruch 1, wobei die flexible gefaltete Abdeckung (12) eine ringförmige Form hat und wenigstens einen ringförmigen gefalteten Teil aufweist, der sich entlang einer Umfangsrichtung der flexiblen gefalteten Abdeckung (12) erstreckt, ein innerer Umfangsrand (121) der flexiblen gefalteten Abdeckung (12) mit der Türeinheit (40) befestigt ist und ein äußerer Umfangsrand (122) davon mit der Frontplatte (11) befestigt ist. 10
7. Frontlader-Waschmaschine (100) nach Anspruch 6, wobei der innere Umfangsrand (121) der flexiblen gefalteten Abdeckung (12) mit einem äußeren Umfangsrand (122) der Türeinheit (40) in der Form übereinstimmt und der äußere Umfangsrand (122) der flexiblen gefalteten Abdeckung (12) mit einem inneren Umfangsrand (121) der Öffnung (111) in der Form übereinstimmt. 15
8. Frontlader-Waschmaschine (100) nach Anspruch 6, wobei die Türeinheit (40) eine Türbasis (42) und einen Türkörper (43), der an der Türbasis (42) angelenkt ist, aufweist und der innere Umfangsrand (121) der flexiblen gefalteten Abdeckung (12) mit der Türbasis (42) befestigt ist. 20
9. Frontlader-Waschmaschine (100) nach Anspruch 8, wobei der innere Umfangsrand (121) der flexiblen gefalteten Abdeckung (12) durch eine Klemme mit der Türbasis (42) befestigt ist. 25
10. Frontlader-Waschmaschine (100) nach Anspruch 6, wobei der äußere Umfangsrand (122) der flexiblen gefalteten Abdeckung (12) durch einen Befestigungsring (44), der an einer Innenfläche der Frontplatte (11) montiert ist, an der Frontplatte (11) befestigt ist. 30
11. Frontlader-Waschmaschine (100) nach einem der Ansprüche 1 bis 10, wobei die flexible gefaltete Abdeckung (12) als ein Gummiteil gestaltet ist. 35

Revendications

1. Lave-linge à chargement frontal (100), comportant : 40
 - une caisse (10) ayant un panneau avant (11), dans lequel le panneau avant (11) comporte une ouverture (111) ;

une cuve (20) disposée dans la caisse (10) et ayant un port d'accès (21) servant à charger et à décharger le linge ;
 un tambour rotatif (30) disposé dans la cuve (20) ;
 une unité formant porte (40) montée sur la cuve (20) et configurée pour couvrir le port d'accès (21) ; et
 un mécanisme d'entraînement (50) mis en oeuvre dans la caisse (10), dans lequel le mécanisme d'entraînement (50) comporte :

une tige poussoir longitudinale (51) disposée au niveau d'un côté avant de la cuve (20) ;
 un arbre transversal (52) disposé au niveau d'un côté arrière de la cuve (20) et accouplé à la cuve (20) ;
 un cadre de support (53) disposé dans la caisse (10) et ayant un trou (531), dans lequel l'arbre transversal (52) est configuré pour tourner dans ledit trou (531) du cadre de support (53) ; et
 le mécanisme d'entraînement (50) est configuré pour entraîner la cuve (20) à tourner, de telle sorte que le port d'accès (21) est en mesure d'être déplacé vers le haut et vers le bas dans l'ouverture (111) ;
 dans lequel le lave-linge à chargement frontal (100) comporte par ailleurs un couvercle plié flexible (12), raccordé au panneau avant (11) et à l'unité formant porte (40) et configuré pour couvrir un espace entre l'unité formant porte (40) et un bord de l'ouverture (111).

2. Lave-linge à chargement frontal (100) selon la revendication 1, dans lequel le mécanisme d'entraînement (50) est configuré pour entraîner le port d'accès (21) à se déplacer vers le haut et vers le bas entre une position de lavage et une position de non-lavage dans l'ouverture (111). 45
3. Lave-linge à chargement frontal (100) selon la revendication 2, dans lequel, quand le port d'accès (21) est situé au niveau de la position de non-lavage, le port d'accès (21) est entraîné pour se déplacer jusqu'à côté d'un bord supérieur (112) du panneau avant (11), et quand le port d'accès (21) est situé au niveau de la position de lavage, le port d'accès (21) est entraîné pour se déplacer jusqu'à côté d'un bord inférieur (113) du panneau avant (11). 50

4. Lave-linge à chargement frontal (100) selon la revendication 1, dans lequel le mécanisme d'entraînement (50) est configuré pour entraîner le port d'accès (21) à se déplacer vers le haut jusqu'à se rapprocher d'un bord supérieur (112) du panneau avant (11) et 55

à se déplacer vers le bas jusqu'à se rapprocher d'un bord inférieur (113) du panneau avant (11).

5. Lave-linge à chargement frontal (100) selon la revendication 1, dans lequel une plage de mouvement du port d'accès (21) dans l'ouverture (111) est configurée d'une telle manière qu'un angle d'ouverture entre un axe central du port d'accès (21) et un plan horizontal s'étend de 0° à 90°. 5
- 10
6. Lave-linge à chargement frontal (100) selon la revendication 1, dans lequel le couvercle plié flexible (12) a une forme annulaire et comporte au moins une partie pliée annulaire s'étendant le long d'une direction circonférentielle du couvercle plié flexible (12), un bord circonférentiel intérieur (121) du couvercle plié flexible (12) est fixé sur l'unité formant porte (40) et un bord circonférentiel extérieur (122) de celui-ci est fixé sur le panneau avant (11). 15
- 20
7. Lave-linge à chargement frontal (100) selon la revendication 6, dans lequel le bord circonférentiel intérieur (121) du couvercle plié flexible (12) correspond à un bord circonférentiel extérieur (122) de l'unité formant porte (40) en termes de forme, et le bord circonférentiel extérieur (122) du couvercle plié flexible (12) correspond à un bord circonférentiel intérieur (121) de l'ouverture (111) en termes de forme. 25
- 30
8. Lave-linge à chargement frontal (100) selon la revendication 6, dans lequel l'unité formant porte (40) comporte une base de porte (42) et un corps de porte (43) articulé sur la base de porte (42), et le bord circonférentiel intérieur (121) du couvercle plié flexible (12) est fixé sur la base de porte (42). 35
- 40
9. Lave-linge à chargement frontal (100) selon la revendication 8, dans lequel le bord circonférentiel intérieur (121) du couvercle plié flexible (12) est fixé sur la base de porte (42) par un collier de serrage. 40
- 45
10. Lave-linge à chargement frontal (100) selon la revendication 6, dans lequel le bord circonférentiel extérieur (122) du couvercle plié flexible (12) est fixé sur le panneau avant (11) par une bague de fixation (44) montée sur une surface intérieure du panneau avant (11). 45
- 50
11. Lave-linge à chargement frontal (100) selon l'une quelconque des revendications 1 à 10, dans lequel le couvercle plié flexible (12) est configuré sous la forme d'une pièce en caoutchouc. 50

55

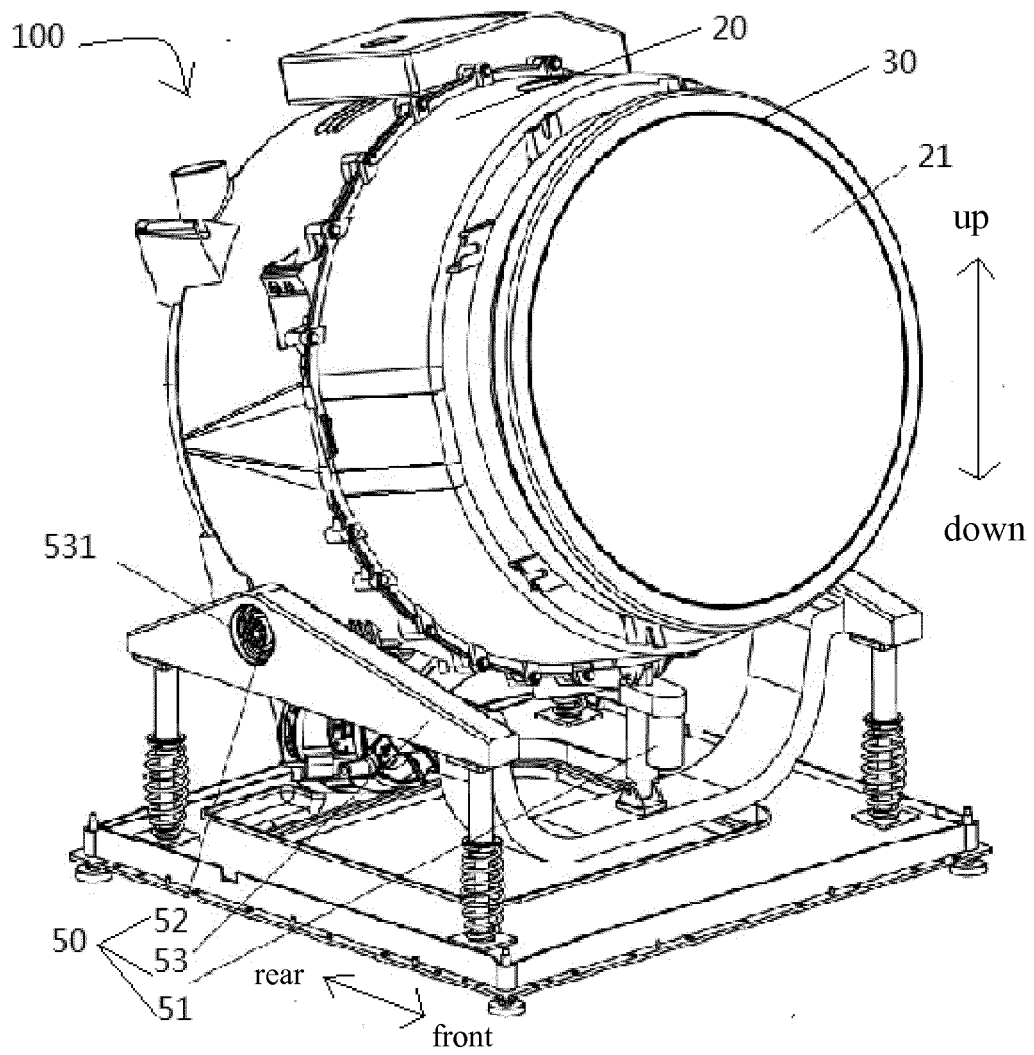


Fig. 1

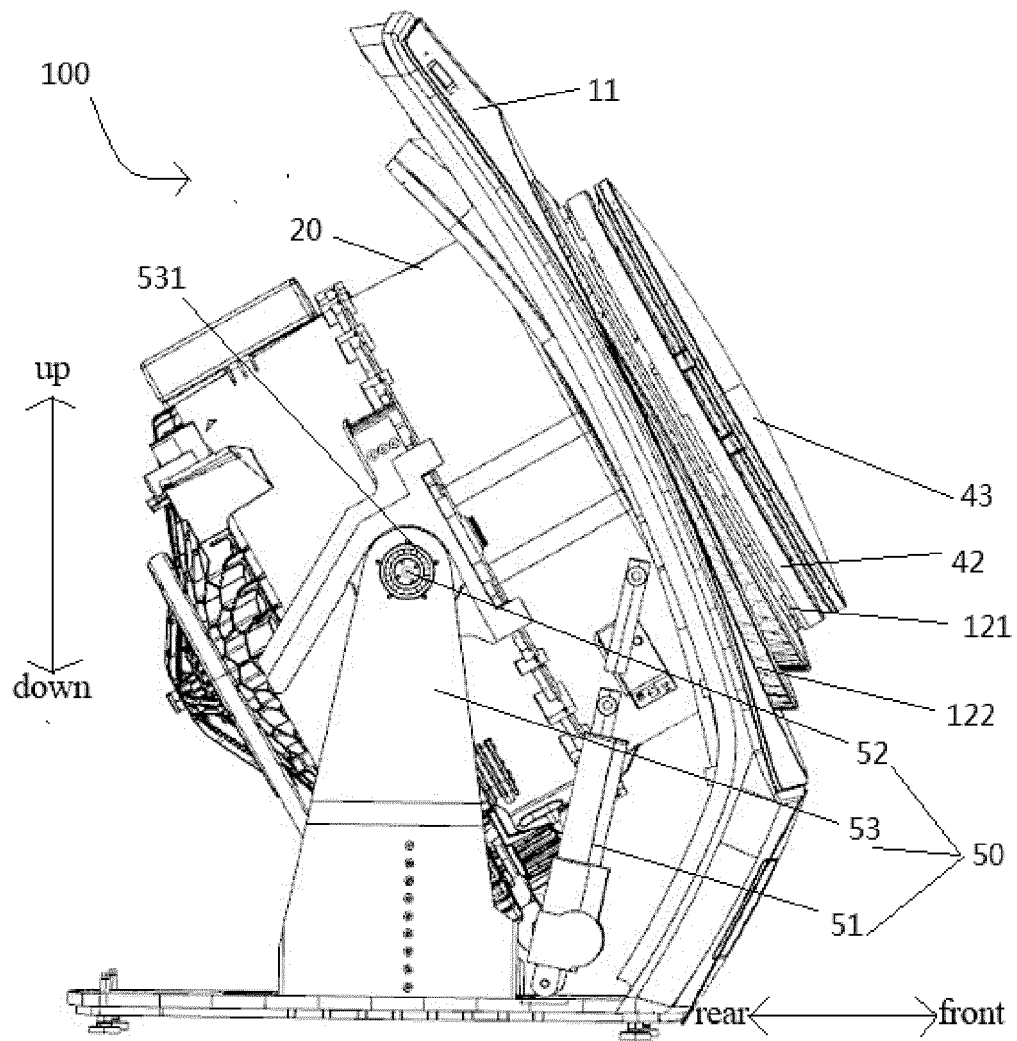


Fig. 2

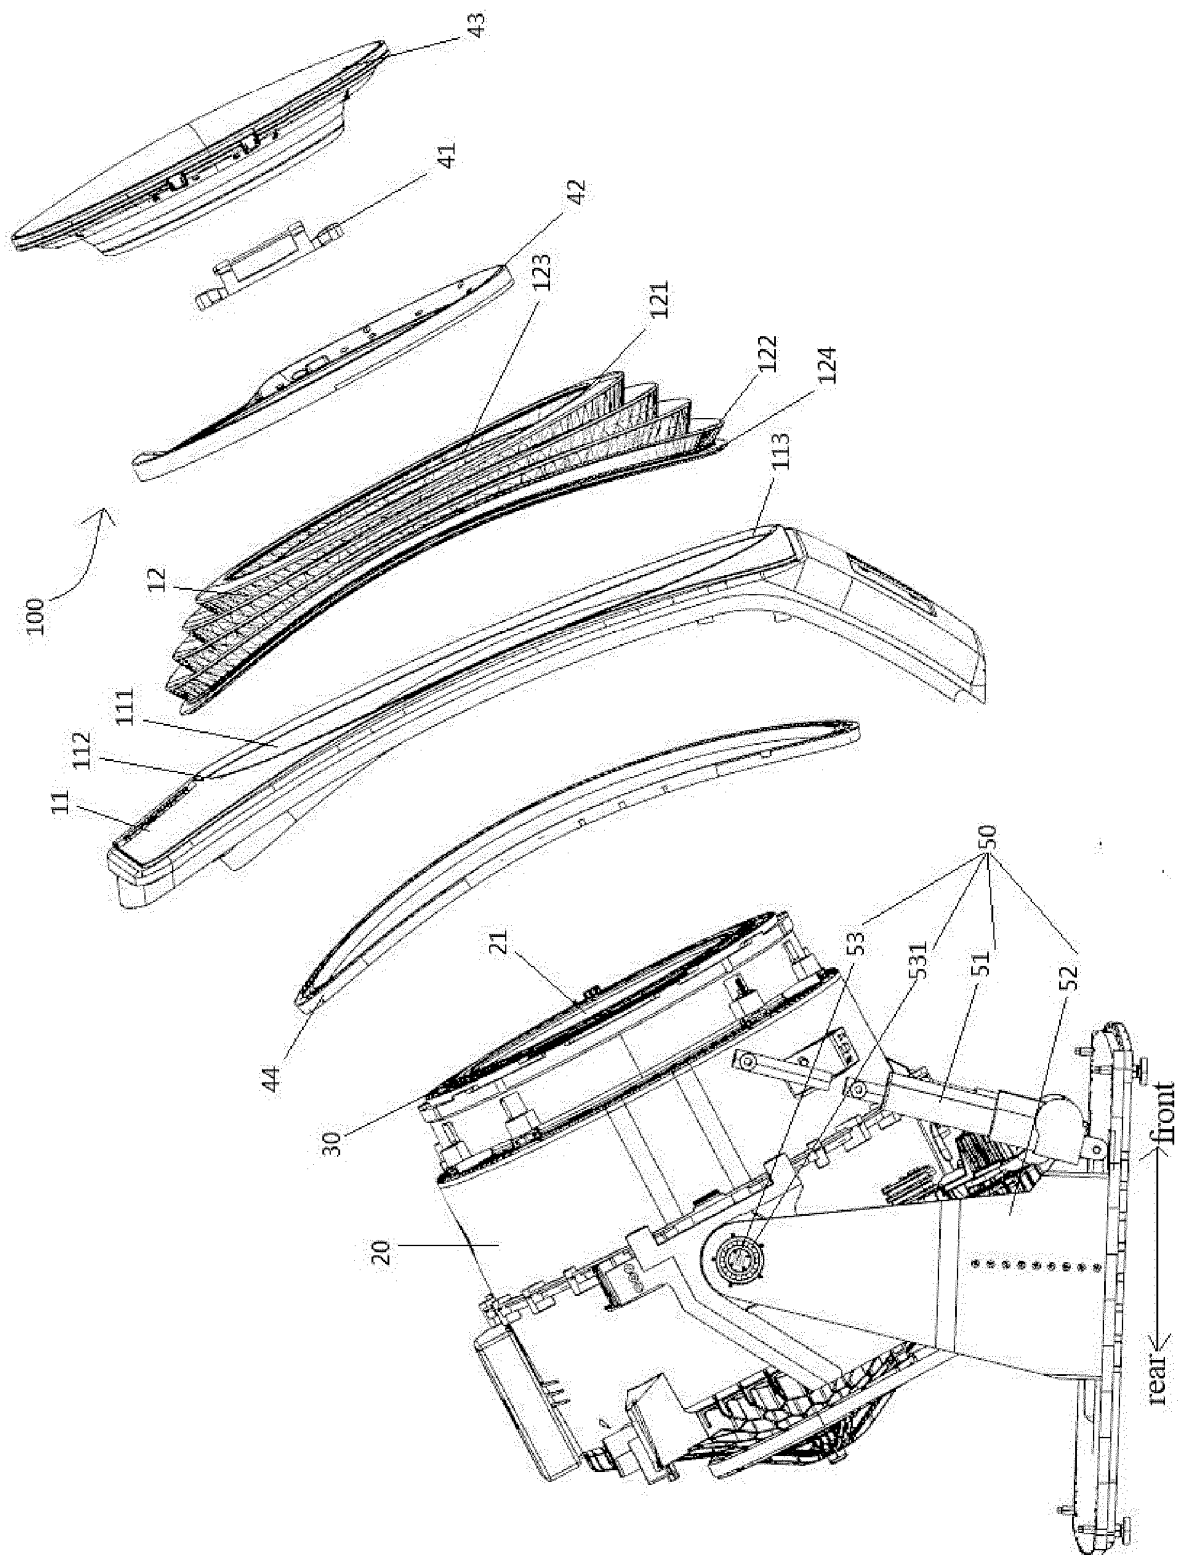


Fig. 3

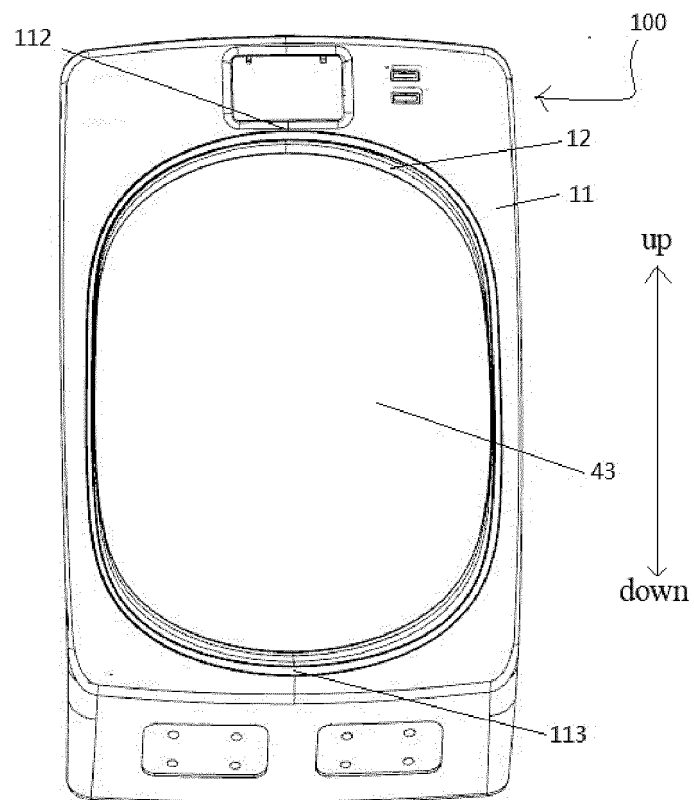


Fig. 4

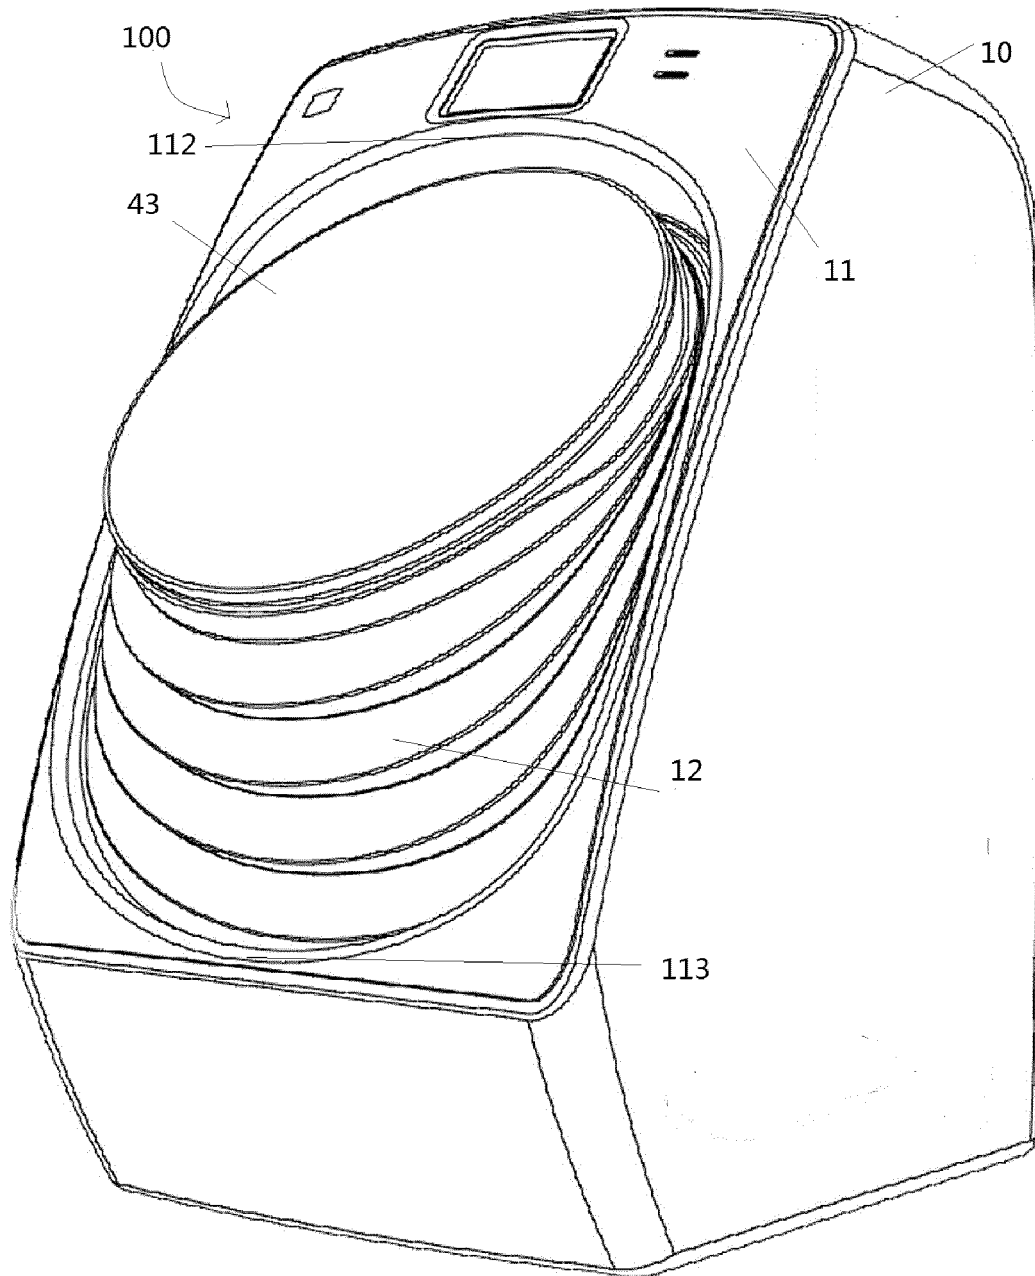


Fig. 5

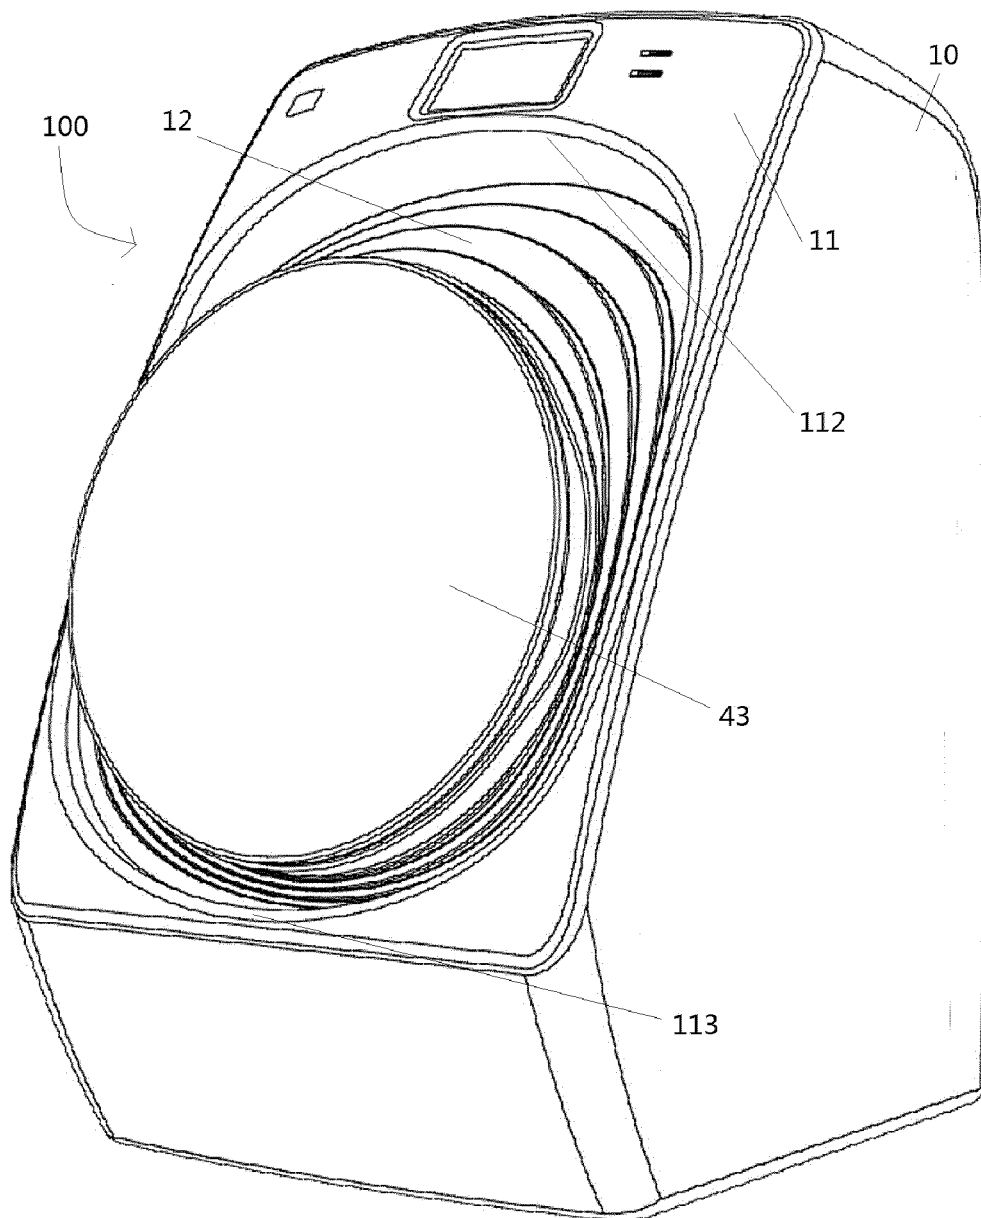


Fig. 6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 3196947 U [0003]