




- (51) International Patent Classification:
C08F 10/10 (2006.01) C08F 2/01 (2006.01)
C08L 23/22 (2006.01)
- (21) International Application Number:
PCT/US2012/059473
- (22) International Filing Date:
10 October 2012 (10.10.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/551,547 26 October 2011 (26.10.2011) US
- (71) Applicant: TPC GROUP LLC [US/US]; 5151 San Felipe, Suite 800, Houston, TX 77056 (US).
- (72) Inventor: SHAIKH, Sohel, K.; 15819 Crooked Arrow Drive, Sugar Land, TX 77498 (US).
- (74) Agent: FERRELL, Michael, W.; Ferrells, PLLC, P.O. Box 312, Clifton, VA 20124-1706 (US).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: MID-RANGE VINYLIDENE CONTENT, HIGH VISCOSITY POLYISOBUTYLENE POLYMERS

FIG. 1
CONVERSION AS A FUNCTION OF DELTA P (CIRCULATION RATE),
MID RANGE VINYLIDENE PIB; NOMINAL Mn of 3000

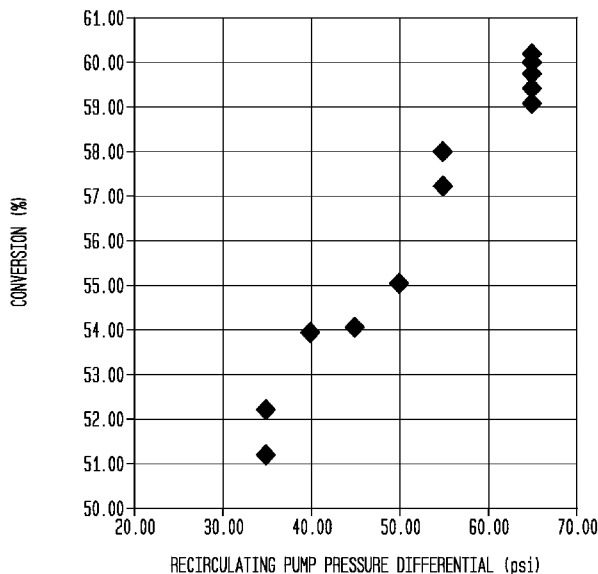

(57) Abstract: A mid-range vinylidene content, high viscosity PIB polymer composition including PIB molecules, wherein a first portion of the PIB molecules have alpha position double bonds and a second portion of the PIB molecules have beta position double bonds, and the first and second portions together include at least 80 mole % of the PIB molecules of the composition. The first portion includes less than 75 mole % of the PIB molecules of the composition. Additionally, no more than 10 mole % of the PIB molecules of the composition have tetra-substituted double bonds, while the composition is further characterized by having a polydispersity of no more than 2.7 and in that the composition has a kinematic viscosity in the range of 3000 cSt to 5000 cSt, a number average molecular weight, Mn, in the range of 2800 Daltons to 4000 Daltons and a ratio of Mn: PDI of greater than 1100.

WO 2013/062759 A1

Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

MID-RANGE VINYLIDENE CONTENT, HIGH VISCOSITY
POLYISOBUTYLENE POLYMERS

5 Cross-Reference to Related Application

This application is based upon United States Provisional Application Serial No. 61/551,547, filed October 26, 2011, of the same title. The priority of Provisional Application Serial No. 61/551,547 is hereby claimed and its disclosure incorporated by reference into this application in its entirety

10

Technical Field

This invention relates to polyisobutylene polymers having a kinematic viscosity in the range of 2800 cSt to 5000 cSt and a polydispersity of no more than 2.7.

15

Background of Invention

The polymerization of olefins using Friedel-Crafts type catalysts, such as boron trifluoride and aluminum trichloride is well known. The degree of polymerization of the products obtained varies according to which of the various
20 known polymerization techniques is used and also varies with the parameters used to control the reaction. The molecular weight of the polymeric product is directly related to the degree of polymerization and that the degree of polymerization may be manipulated by manipulating process parameters so as to produce a variety of products having respective desired average molecular weights. Due to the nature
25 and mechanics of the olefinic polymerization process, a polyolefin product has a single double bond remaining in each molecule at the end of the polymerization process. The position of this remaining double bond is often an important feature of the product. For example, polyisobutylene (PIB) molecules wherein the remaining double bond is in a terminal (vinylidene) position are known to be more
30 reactive than PIB molecules wherein the remaining double bond is internal, that is, not in a terminal position. A PIB product wherein most of the double bonds are in a terminal position may often be referred to as high vinylidene or reactive PIB.

The extent to which a polyolefin product has terminal double bonds may also be manipulated by manipulation of process parameters.

It is also known that alpha olefins, particularly PIB, may be manufactured in at least two different classes of material--regular and high vinylidene. Conventionally, these two product grades have been made by different processes, but both often and commonly use a diluted feedstock in which the isobutylene concentration may range from 40 to as high as 90% by weight. Non-reactive hydrocarbons, such as isobutane, n-butane and/or other lower alkanes commonly present in petroleum fractions, may also be included in the feedstock as diluents. The feedstock often may also contain small quantities of other unsaturated hydrocarbons such as 1-butene and 2-butene.

High vinylidene, or highly reactive PIB, a relatively new product in the marketplace, is characterized by a large percentage of terminal double bonds, typically greater than 75% and preferentially greater than 80%. This provides a more reactive product, compared to regular PIB, and hence this product is also referred to as highly reactive PIB. The terms highly reactive (HR-PIB) and high vinylidene (HV-PIB) are synonymous. The basic processes for producing HR-PIB all include a reactor system, employing BF_3 and/or modified BF_3 catalysts, such that the reaction time can be closely controlled and the catalyst can be immediately neutralized once the desired product has been formed. Since formation of the terminal double bond is kinetically favored, short reactions times favor high vinylidene levels. The reaction is quenched, usually with an aqueous base solution, such as, for example, NH_4OH , before significant isomerization to internal double bonds can take place. Molecular weights are relatively low. HR-PIB having an average molecular weight of about 950-1050 is the most common product. Conversions, based on isobutylene, are kept at 75-85%, since attempting to drive the reaction to higher conversions reduces the vinylidene content through isomerization. Prior United States Patent No. 4,152,499 dated May 1, 1979, prior United States Patent No. 4,605,808 dated August 12, 1986, prior United States

Patent No. 5,068,490 dated November 26, 1991, prior United States Patent No. 5,191,044 dated March 2, 1993, prior United States Patent No. 5,286,823 dated June 22, 1992, prior United States Patent No. 5,408,018 dated April 18, 1995 and prior United States Patent No. 5,962,604 dated October 5, 1999 are all directed to
5 related subject matter.

Other than the HR grades and the regular grades of PIB, a certain grade of PIB known as the enhanced grade has been more recently developed (EP 1381637 and related patents discussed below). An advantage of these products is that the
10 overall reactivity is high without the need for high vinylidene content. Mid-range vinylidene PIB is manufactured using less catalyst and complexing agent than highly reactive PIB as is seen in the comparative examples. Moreover, mid-range vinylidene PIB may be made with a lower polydispersity than a corresponding
15 grade of highly reactive PIB; the product may also be made at higher temperature differentials between the coolant and reaction medium in a shell and tube reactor which is easier to control and leads to higher conversion of monomer.

The following patents describe mid-range vinylidene content polyisobutylene (PIB) polymers and processes for producing them: United States
20 Patent Nos. 7,037,099; 7,091,285; 7,056,990; and 7,498,396. The products are characterized in that at least about 90% of the PIB molecules present in the product comprise alpha or beta position isomers. The vinylidene (alpha) isomer content of the product may range from about 20% to about 70% thereof and the content of tetra-substituted internal double bonds is very low, preferably less than
25 about 10% or 5% and ideally less than about 1-2%. The midrange vinylidene content PIB polymer products are prepared by a liquid phase polymerization process conducted in a loop reactor at a temperature of at least 60°F using a BF_3 /methanol catalyst complex and a contact time of no more than 4 minutes.

Summary of Invention

Despite numerous advances in the art, there is a need to provide more energy efficient and higher yield processes as well as PIB material having lower polydispersity, especially at higher molecular weights and kinematic viscosity.

5 There is thus provided in accordance with this invention a mid-range vinylidene content, high viscosity PIB polymer composition including PIB molecules, wherein a first portion of the PIB molecules have alpha position double bonds and a second portion of the PIB molecules have beta position double bonds, and the first and second portions together include at least 80 mole % of the PIB molecules
10 of the composition. The first portion includes less than 75 mole % of the PIB molecules of the composition. Additionally, no more than 10 mole % of the PIB molecules of the composition have tetra-substituted double bonds, while the composition is further characterized by having a polydispersity of no more than 2.7 and in that the composition has a kinematic viscosity in the range of 3000 cSt
15 to 5000 cSt, a number average molecular weight, Mn, in the range of 2800 Daltons to 4000 Daltons and a ratio of Mn: PDI of greater than 1100.

In connection with the invention, products produced have unexpectedly lower polydispersities at higher molecular weight, contrary to the teachings of the
20 prior art. This feature is particularly desirable when the products are used for making derivatives such as alkyl phenols and/or fuel or lubricating oil additives. Higher polydispersities are related to higher engine deposits. Mid-range vinylidene PIB has the further advantage that fewer by-products may be produced when derivatizing the materials as compared with highly reactive PIB.

25

The inventive compositions are produced at relatively high linear velocity in the reaction tubes which leads to higher conversion and lower polydispersity than conventional processing methods. Note **Figure 1**, wherein it is seen that conversion increases by about 10% as the pressure differential (DP) across a
30 recirculating pump increases from 35 psi to 65 psi.

Conventional boron trifluoride catalyst systems reported in the patent literature typically produce somewhat less than 900 lbs PIB/lb of BF_3 and typically less than 450 lbs PIB/lb of BF_3 , as is seen in the following United States Patents: 7,485,764; 7,217,773; and 7,038,008, discussed below in connection
5 with catalyst consumption. Catalyst productivity of 2 to 4 times higher than reported in the literature and 2 to 3 times higher than seen in connection with highly reactive PIB manufactured under like conditions is readily achieved when making products of the present invention.

10 Still further features and advantages of the invention will become apparent from the discussion which follows.

Brief Description of Drawings

The invention is described in detail below with reference to the various
15 **Figures**, wherein:

Figure 1 is a plot of isobutylene conversion to polymer as a function of pressure differential across a recirculating pump in a loop reactor for Mid Range Vinylidene PIB; Nominal Mn of 3000;

20

Figure 2 is a schematic diagram of a loop reactor of the class useful in practicing the present invention;

Figure 3 lists equations useful for determining heat transfer and the
25 overall heat transfer coefficient;

Figure 4 is a plot of catalyst turnover as a function of the linear velocity of the reaction mixture in the tubes of a loop reactor for Mid Range Vinylidene PIB;
30 Nominal Mn of 3300; and

Figure 5 is a plot of isobutylene conversion to polymer as a function of pressure differential across a recirculating pump in a loop reactor for Mid Range Vinylidene PIB; Nominal Mn of 3300;

5 Detailed Description of Invention

The invention is described in detail below with reference to several embodiments and numerous examples. Such discussion is for purposes of illustration only. Modifications to examples within the spirit and scope of the present invention, set forth in the appended claims, will be readily apparent to one
10 of skill in the art. Terminology used throughout the specification and claims herein is given its ordinary meaning, for example, psi refers to pressure in lbs/inch² and so forth. Terminology is further defined below.

The improved products of the present invention are made with a Friedel-
15 Crafts catalyst which is complexed with a complexing agent. Many useful Friedel-Crafts catalysts are known to those of ordinary skill in the related art field. In particular, many useful catalysts are described in the patents referenced above. Useful Friedel-Crafts catalysts include, for example, BF₃, AlCl₃, TiCl₄, BCl₃, SnCl₄ and FeCl₃ and the like. The complexing agent for the catalyst, and in
20 particular for the BF₃ catalyst, may be any compound containing a lone pair of electrons, such as, for example, an alcohol, an ester or an amine. For purposes of the present invention, however, the complexing agent may be an alcohol, desirably a primary alcohol, preferably a C₁–C₈ primary alcohol (such as, for example, methanol, ethanol, propanol, isopropanol, hexyl alcohol and the like)
25 and ideally methanol. The molar ratio of BF₃ to complexing agent in the catalyst composition is generally in the range of from approximately 0.5:1 to approximately 5:1 respectively, desirably within the range of from approximately 0.5:1 to approximately 2:1, and preferably within the range of from approximately 0.5:1 to approximately 1:1. Ideally, the catalyst composition may simply be a 1:1
30 complex of BF₃ and methanol as is seen in the examples. For purposes of convenience, “catalyst” refers to a Friedel-Crafts catalyst of the class described

above, while “catalyst complex” refers to the Friedel-Crafts catalyst and complexing agent up to a 1:1 molar ratio. When complexing agent is used in a molar excess with respect to the Friedel-Crafts catalyst it is referred to herein as modifier.

5

“Catalyst complex turnover number” and like terminology refers to the weight of polymer produced per unit weight of catalyst complex employed in the process.

10

“Consisting essentially of” and like terminology refers to the recited components and excludes other ingredients which would substantially change the basic and novel characteristics of the mixture or composition. Unless otherwise indicated or readily apparent, a composition or mixture consists essentially of the recited components when the composition or mixture includes 95% or more by weight of the recited components. That is, the terminology excludes more than 5% unrecited components.


15

Conversion of the reaction mixture to polymer is expressed in weight percent and calculated as the weight of polymer produced less the weight of isobutylene fed to the reaction system divided by the weight of isobutylene fed to the reaction system times 100%.

20

Polyisobutylene, “PIB” and like terminology refers to polymers made up of repeat units derived from isobutene, also referred to as isobutylene.

25




isobutene

Such polymers are derived from feedstocks made up of purified isobutenes and hydrocarbon diluents, from isobutene concentrate, dehydro effluent, or from


raffinate streams. The PIB polymer consists essentially of repeat units derived from isobutylene, but may contain minor amounts of material derived from 1-butenes, butadiene or other C₄ olefins, 2-butenes (cis and/or trans) depending on the feedstock composition. Typically, the polymer is more than 99 % by weight derived from isobutylene monomer. Particular compositions of interest in connection with the present invention have a number average molecular weight of from 500 to 4000 Daltons and in preferred embodiments significant amounts of alpha vinylidene terminated molecules:

10

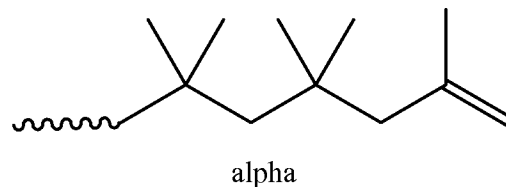


Highly reactive (HR) PIB polymer compositions typically include more than 80 mole % alpha molecules, while mid-range vinylidene content PIB products contain less alpha and more beta olefin isomers (1,1,2-trisubstituted or 1,2,2-trisubstituted cis or trans isomer):

15

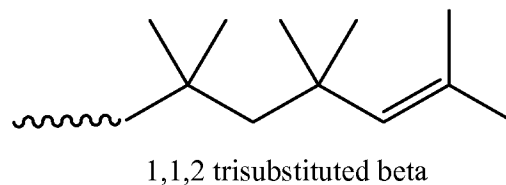


20

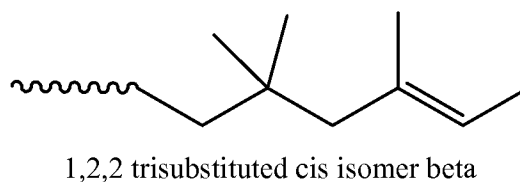

Other structures which may be present include tetrasubstituted structures, other trisubstituted structures with a double bond in the internal gamma position, structures with other internal double bonds and aliphatic structures, for example:


25

9

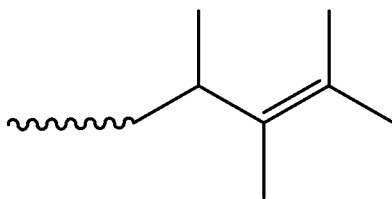


tetra

5

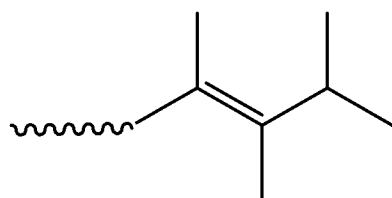

tetra

10



gamma

15



aliphatic

When calculating endgroup percentages, all PIB molecules found in the PIB compositions having a significant presence (more than half a percent or so) are included in endgroup calculations. The endgroup content is determined by nuclear magnetic resonance ^{13}C NMR as is well known in the art.

Suitable feedstocks include purified isobutenes with or without hydrocarbon diluents such as isobutane, hexane and so forth. Purified isobutene is readily available in bulk with purity levels of more than 95% by weight, for example 98.5% + by weight or 99.5% by weight in some cases. The purified isobutene may be fed with diluents as seen in the examples herein. Other suitable feedstocks include isobutene concentrate, dehydro effluent, or raffinate having typical compositions noted in Tables 1-3 below.

Table 1 – Isobutylene Concentrate

Ingredient	Weight %
C ₃ component	0.00
I-butane	6.41
n-butane	1.68
1-butene	1.30
I-butene	89.19
trans-2-butene	0.83
cis-2-butene	0.38
1,3-butadiene	0.21

10

Table 2 – Dehydro Effluent

Ingredient	Weight %
C ₃ components	0.38
I-butane	43.07
n-butane	1.29
1-butene	0.81
I-butene	52.58
trans-2-butene	0.98
cis-2-butene	0.69
1,3-butadiene	0.20

Table 3 – Raff-1

Ingredient	Weight %
C ₃ components	0.357
I-butane	4.42
n-butane	16.15
1-butene	37.22
I-butene	30.01
trans-2-butene	8.38
cis-2-butene	2.27
1,3-butadiene	0.37
Other	0.61

One of skill in the art will appreciate that the feedstock may need to be purified to remove water and oxygenates such as alcohols, ethers and so forth to avoid adverse effects on the catalyst. Typical media for removal of impurities from hydrocarbon feed streams use molecular sieves, activated alumina and other hybrid adsorbents. A suitable adsorbent to reduce water and oxygenate levels to desired limits is UOP AZ 300 (Des Plaines, IL, USA). Post treatment, prior to feeding to the reactor, the feed stream preferably has less than 3 ppm of oxygenates and less than 1 ppm of water.

A mid-range vinylidene polymer composition refers to a PIB wherein a first portion of the PIB molecules have alpha position double bonds and a second portion of the molecules have beta position double bonds, wherein said first and second portions together include at least 80 mole % of the PIB molecules of the composition, wherein said first portion includes less than 75 mole % of the PIB molecules of the composition, and wherein no more than 10 mole % of the PIB molecules of the composition have tetra-substituted double bonds, the first and second portions together includes at least 85 mole % of the PIB molecules of the composition and preferably the said first and second portions together include at least 90 mole % of the PIB molecules of the compositions. Typically, the first

portion includes less than 72.5 mole % of the PIB molecules of the composition and sometimes less than 70 mole % of the PIB molecules of the composition. In preferred cases, no more than 5 mole % of the PIB molecules of the composition have tetra-substituted double bonds.

5

“Highly reactive PIB” and like terminology means polyisobutylene polymers with more than 80 mole percent alpha vinylidene terminated molecules.

Kinematic viscosity of the PIB products of the invention is expressed in centistokes, cSt, @100°C and is preferably measured in accordance with Test Method ASTM D 445.

Molecular weight herein is typically reported as number average molecular weight, in Daltons, and is measured by gel permeation chromatography (GPC). GPC measurements reported herein were carried out using a Viscotek GPCmax® instrument (Malvern instruments, Worcestershire, UK) employing a 3-column set-up (5µm (particle size) 100 Angstrom (pore size), 5µm 500Angstrom, 5µm 10⁴Angstrom) and a Refractive Index (RI) detector. Polyisobutylene standards were used to construct the calibration curve.

20

Polydispersity or PDI is defined as the ratio of the weight average molecular weight divided by the number average molecular weight of the polymer.

“Linear velocity” refers to the velocity of the recirculating reaction mixture in the tubes of the loop reactor and is calculated by dividing the volumetric flow rate of the reaction fluid by the cross-sectional area of the reaction tubes.

Recirculation ratio is calculated as the weight ratio of the reaction mixture recirculated to the feed added to the residual reactor stream.

30

Residence time is calculated as the volume of the reactor divided by the volumetric feed rate.

Any standard test method referred to herein is the version in effect as of
5 January 1, 2011.

In connection with the manufacture of the product of this invention, there are seen dramatic increases in conversion and improved product quality as pressure differential across a recirculation pump is increased. Without being
10 bound by any particular theory, it is believed that improved heat transfer and mixing, in part, provide the benefits observed. The heat transfer coefficient of the process fluid was increased by increasing the pressure differential across a recirculating pump thereby increasing the velocity of the process fluid in the reactor tubes, likely decreasing the amount of relatively immobile material
15 adjacent the reactor walls. In other words, by increasing the degree of turbulence of the tube side process fluid, the effect of undesirable boundary layer heat and mass transfer phenomena are reduced. The heat transfer is related to the Nusselt number of a fluid. Further, equations such as the Sieder Tate equations (for turbulent flow) provide a way to calculate the Nusselt number. These correlations
20 relate the Nusselt number to the Reynolds number (ratio of inertial to viscous forces) and the Prandtl number (ratio of viscous diffusion to thermal diffusion). A potential problem faced in loop reactors is that there may be an increase in the viscosity of the tube side fluid at the heat transfer surface. This leads to a substantially lower internal heat transfer coefficient and a loss in conversion and
25 productivity. It is seen in the examples which follow that the heat transfer coefficient increases dramatically and unexpectedly as the velocity in the tubes is increased above conventional levels.

EXAMPLES

30 Operation of the inventive process with a two-pass loop reactor is illustrated and described in connection in **Figure 2**. In **Figure 2** there is shown

schematically a reactor system **10** which includes a two-pass loop reactor **12**, a recirculating pump **14** driven by a motor **16** with a variable speed drive **18**, a feed and recirculation loop indicated at **20** and a product outlet at **22**.

5 Reactor **12** includes a feed chamber **24**, a plurality of tubes indicated at **26** for upward flow, a plurality of tubes indicated at **28** for downward flow, as well as an upper plenum **30** and a receiving chamber **32** for circulated material. Reactor **12** is conventional in design and known in the art as a 1-2 shell and tube heat exchanger (1 shell, 2 pass). The reactor is suitably provided with 1164 tubes with
10 tube outer diameter of 0.375" and a wall thickness of 0.035". The tubes are surrounded by a shell indicated at **34**, **36** for circulating chilled coolant since the polymerization reaction is highly exothermic.

 In operation, isobutylene feedstock is fed to a residual reactor stream **38**
15 via a feed line **40** to form a reaction mixture which is optionally provided with catalyst modifier, typically methanol, at an injection point at **42** just upstream of pump **14**. Pump **14** operates at a pressure differential, delta P, indicated in **Figure 3** to recirculate the reaction mixture in reactor **12** via loop **20**. A catalyst injection port at **44** provides a catalyst complex, for example one comprising a 1:1 molar
20 mixture of methanol and BF_3 to the reaction mixture upstream of feed chamber **24**.

 Variable speed drive **18** contacts motor **16** which drives pump **14** at a pressure differential, delta P, across the pump which, in turn, corresponds to a
25 recirculating flow rate in the reactor for a reaction mixture. The flow characteristics of the reaction mixture are also influenced by temperature in the reactor, molecular weight, monomer and diluent content and so forth as is readily appreciated by one of skill in the art. The flow characteristics of the reaction mixture are thus controlled by feed and catalyst rates, conversion of monomer,
30 mixture composition and the temperatures in the reactor as is seen in the examples which follow. For a given mixture, feed rates and temperature, recirculation rates

and hence velocity of the reaction mixture in the tubes of the reactor is most conveniently controlled by controlling the speed of pump **14** to provide a pressure differential, delta P (DP in the diagram), across the pump.

- 5 The pump circulates the reaction mixture to feed chamber **24** where the mixture is fed to a plurality of upwardly directed tubes indicated at **26** where it flows to plenum **30** before being transferred to a plurality of downwardly directed tubes indicated at **28** where it flows to receiving chamber **32**. A polymerized product is withdrawn at **22** through a pressure relief valve indicated at **46**.
- 10 Residual reactor stream **38** remains in the system and feed line **40** provides fresh monomer to the residual stream as discussed above. Reactor **12** is operated under pressure sufficient to maintain the reaction mixture and its components in liquid form at reaction temperatures, suitably in the range of from about 40°F to about 90°F. Further details relating to the operation of reactor **12** are provided in
- 15 European Patent 1 242 464, the disclosure of which is incorporated by reference.

Typically, the inventive process is operated wherein the recirculation rate is much higher than the feed rate as seen in the examples which follow. Coolant in the shell side of the reactor indicated at **34, 36, 48, 50** removes the heat of

20 reaction. Any suitable coolant may be used, for example a 50:50 w/w mixture of water and methanol may be chilled and circulated in the shell section(s) to control reactor temperature.

Utilizing the procedure and materials described above, a 1-2 tube and

25 shell reactor was operated to produce PIB using purified isobutylene diluted with isobutane and a BF₃/methanol catalyst and modifier system. Details and results appear in Tables 4 and 5. In Tables 4 and 5, “catalyst complex” refers to a 1:1 w/w mixture of BF₃/methanol. In these tables, the heat transfer coefficient, Q, is calculated from the log mean temperature difference as described immediately

30 below and in connection with Equations (1)-(6) of **Figure 3**.

The heat transferred (Q) may be calculated either using shell-side (chilling fluid) or tube side (process fluid) data by Equation (1).

Q (BTU/hr) was calculated using tube reaction side data.

The terms in Equation (1) are as follows:

5 \dot{m}_s = mass flow rate of shell side fluid (methanol-water);

$c_{p,s}$ = specific heat of the shell side (cooling) fluid;

t_{s1} = chiller temperature inlet;

t_{s2} = chiller temperature outlet;

\dot{M} = mass flow rate of tube side fluid (process fluid)

10 $c_{p,t}$ = specific heat of the tube side fluid (process fluid)

T_1 = inlet temp of (reactor) process fluid;

T_2 = outlet temperature of (reactor) process fluid;

The Fourier Equation for heat transfer relates the overall heat transfer co-efficient;

'U' to the amount of heat transfer (Q). For a 1-2 heat exchanger (1 shell and 2

15 tube passes), the equation can be written in the form of Equation (2) and Equation (3). (Process heat transfer, D. Q. Kern, McGraw Hill, 1950, pg 144).

Δt_m of Equation (3) is also known as the log mean temperature difference (LMTD);

20 A = Area available for heat exchange

In Equation (4), F_T = fractional ratio of the true temperature difference to the LMTD.

25 For satisfactory operation of 1-2 heat exchangers, the value of F_T is generally desired to be greater than 0.75 (Process heat transfer, D. Q. Kern, McGraw Hill, 1950, pg 145). F_T can be calculated by Equations (4) and (5) or through figures relating the values of the dimensionless parameters R and S to F_T (Fig 18, pg 828, Kern, D.Q.).

30

R and S values for Equation 4 have been calculated in the Tables. \bar{F}_g has been calculated from the R and S values.

The overall 'U' can be recalculated by rearranging equation (2) into the form
5 shown in Equation (6).

The overall U as shown in equation (6) also appears in Tables 4-7.

Table 4 – Manufacture of Mid-Range Vinylidene PIB, Nominal Mn of 3000

Example	Delta Pressure, psi	Conversion, w/w %	Mn	PDI	KVIS-100°C, cSt	Alpha-V	Isobutylene, wt %	Isobutane, wt %
1	35.00	51.20	2997	2.71	3623	69	89.81	10.90
2	34.95	52.24					90.28	10.96
3	40.03	53.94					90.33	11.00
4	44.99	54.04					90.21	11.02
5	49.98	55.04	3004	2.47	3361	69	90.22	11.01
6	54.97	57.20					90.25	10.95
7	54.94	57.99					90.90	10.25
8	64.97	59.39					90.67	10.41
9	65.03	59.09					90.56	10.31
10	65.01	59.97					90.46	10.26
11	64.96	60.18					90.50	10.31
12	65.02	59.73	3118	2.36	3310	67	90.41	10.52

Table 4— Manufacture of Mid-Range Vinylidene PIB, Nominal Mn of 3000 (continued)

Example	Delta Pressure, psi	Feed rate, Gal / min	Catalyst Complex, ml/min	% change in catalyst	Methanol, ml/min	% change in methanol	Reactor temp In, ° F	React temp Out, ° F
1	35.00	44.89	29.03	0.00	0.00	0.00	42.69	37.94
2	34.95	44.99	29.71	2.34	0.00	0.00	42.78	37.91
3	40.03	44.83	27.17	-6.38	0.00	0.00	43.15	38.32
4	44.99	44.79	24.53	-15.50	0.00	0.00	43.09	38.55
5	49.98	44.86	24.90	-14.23	0.00	0.00	43.07	38.62
6	54.97	44.90	24.67	-15.01	0.00	0.00	43.27	38.85
7	54.94	45.04	23.88	-17.75	0.00	0.00	43.22	38.86
8	64.97	44.93	24.41	-15.91	0.00	0.00	42.96	39.00
9	65.03	44.87	24.43	-15.83	0.00	0.00	43.43	38.97
10	65.01	45.05	23.78	-18.07	0.00	0.00	43.15	38.95
11	64.96	45.02	25.05	-13.70	0.00	0.00	43.26	38.95
12	65.02	44.92	23.52	-18.97	0.00	0.00	43.11	38.97

Table 4— Manufacture of Mid-Range Vinylidene PIB, Nominal Mn of 3000 (continued)

Example	Delta Pressure, psi	Chiller Temp In, °F	Chiller Temp Out, °F	Chiller Flow, GPM	Recirc Flow, GPM	Recirc / Feed Ratio	Residence time, mins	PIB production rate, lbs / min
1	35.00	-12.37	-8.80	1993	1139	25.37	4.37	122
2	34.95	-12.95	-9.23	2001	1147	25.50	4.36	125
3	40.03	-12.82	-8.92	2000	1312	29.27	4.37	129
4	44.99	-13.08	-9.26	1993	1490	33.26	4.38	129
5	49.98	-12.93	-9.02	2006	1652	36.84	4.37	131
6	54.97	-12.61	-8.53	2000	1749	38.95	4.37	137
7	54.94	-12.93	-8.80	1999	1743	38.70	4.35	140
8	64.97	-13.08	-8.80	1998	1917	42.66	4.36	143
9	65.03	-12.90	-8.72	2000	1920	42.78	4.37	141
10	65.01	-12.27	-8.01	1999	1934	42.94	4.35	144
11	64.96	-12.18	-7.93	2000	1934	42.95	4.35	144
12	65.02	-12.67	-8.40	2001	1931	42.98	4.36	143

Table 4— Manufacture of Mid-Range Vinylidene PIB, Nominal Mn of 3000 (continued)

Example	Delta Pressure, psi	Catalyst Complex rate, lbs / min	Turnover number, lbs PIB / lbs catalyst complex	Catalyst Efficiency, % improvement	Tube velocity, Ft/sec	Q, BTU/hr	LMTD	R
1	35.00	0.0896	1358	0.00	8.6	-1622200	50.895	1.33
2	34.95	0.0917	1364	0.45	8.7	-1705400	51.431	1.31
3	40.03	0.0839	1535	13.04	9.9	-2049500	51.602	1.24
4	44.99	0.0757	1699	25.18	11.2	-2276400	51.988	1.19
5	49.98	0.0768	1708	25.81	12.5	-2580600	51.818	1.14
6	54.97	0.0761	1794	32.13	13.2	-2852500	51.629	1.08
7	54.94	0.0737	1898	39.81	13.2	-2878300	51.906	1.06
8	64.97	0.0753	1892	39.39	14.5	-3279200	51.925	0.93
9	65.03	0.0754	1876	38.21	14.5	-3204600	52.004	1.07
10	65.01	0.0734	1962	44.51	14.6	-3295200	51.185	0.99
11	64.96	0.0773	1868	37.62	14.6	-3281800	51.165	1.02
12	65.02	0.0726	1969	45.03	14.6	-3299300	51.580	0.97

Table 4— Manufacture of Mid-Range Vinylidene PIB, Nominal Mn of 3000 (continued)

Example	Delta Pressure, psi	S	F _t	U = Q/(A*delT_LMTD)*F _t , Btu/(hr ft ² °F)	increase in ht coeff, %
1	35.00	0.064719	0.99890	29.09	0.00
2	34.95	0.066706	0.99885	30.26	4.03
3	40.03	0.069802	0.99881	36.25	24.62
4	44.99	0.068036	0.99892	39.96	37.37
5	49.98	0.069758	0.99891	45.45	56.24
6	54.97	0.073000	0.99887	50.42	73.34
7	54.94	0.073558	0.99888	50.61	73.98
8	64.97	0.076348	0.99895	57.63	98.12
9	65.03	0.074131	0.99885	56.24	93.34
10	65.01	0.076881	0.99885	58.75	101.98
11	64.96	0.076561	0.99883	58.54	101.24
12	65.02	0.076612	0.99889	58.37	100.68

A=1097 sq. ft.

Table 5 – Manufacture of Mid-Range Vinylidene PIB, Nominal Mn of 3300

Example	Delta Pressure, psi	Conversion, w/w %	Mn	PDI	KVIS- 100°C, cSt	Alpha-V	Isobutylene, %	Isobutane, %
13	34.99	51.74					90.48	9.81
14	34.97	52.06					90.22	10.10
15	35.00	51.18	3208	2.67	4197	67	90.33	10.14
16	35.07	51.70					90.55	10.12
17	34.97	51.91	3284	2.62	4106	68	90.54	10.19
18	49.94	55.10					90.65	10.11
19	52.04	54.33					90.62	10.17
20	55.02	55.24					90.57	10.18
21	60.02	58.09	3367	2.51	4178	70	90.54	10.18
22	64.99	61.86					90.31	10.02
23	65.06	62.04	3560	2.47	4485	67	90.33	10.04

Table 5 – Manufacture of Mid-Range Vinylidene PIB, Nominal Mn of 3300 (continued)

Example	Delta Pressure, psi	Feed rate, Gal / min	Catalyst Complex, ml/min	% change in catalyst	Methanol, ml/min	% change in methanol	Reactor temp in, ° F	React temp Out, ° F
13	34.99	40.41	24.13	0.00	0.00	0.00	35.10	30.35
14	34.97	40.31	23.69	-1.80	0.00	0.00	35.89	30.19
15	35.00	39.92	23.52	-2.53	0.00	0.00	35.38	30.23
16	35.07	39.80	22.98	-4.77	0.00	0.00	34.95	29.77
17	34.97	40.10	23.34	-3.26	0.00	0.00	34.74	29.85
18	49.94	39.91	22.33	-7.44	0.00	0.00	34.01	29.64
19	52.04	40.07	21.51	-10.86	0.00	0.00	33.02	28.74
20	55.02	40.15	22.51	-6.70	0.00	0.00	33.24	28.81
21	60.02	40.00	21.38	-11.40	0.00	0.00	32.92	28.94
22	64.99	39.96	20.74	-14.05	0.00	0.00	34.92	31.00
23	65.06	39.97	20.76	-13.95	0.00	0.00	36.12	32.43

Table 5 – Manufacture of Mid-Range Vinylidene PIB, Nominal Mn of 3300 (continued)

Example	Delta Pressure, psi	Chiller temp in, °F	Chiller Temp Out, °F	Chiller Flow, GPM	Recirc Flow, GPM	Recirc / Feed Ratio	Residence time, mins	PIB production rate, lbs / min
13	34.99	-12.87	-9.41	1999	1182	29.26	4.85	111
14	34.97	-12.70	-9.21	2002	1174	29.12	4.86	112
15	35.00	-12.76	-9.29	1999	1160	29.07	4.91	109
16	35.07	-12.61	-9.12	2000	1182	29.70	4.92	110
17	34.97	-12.82	-9.33	1998	1203	30.00	4.89	111
18	49.94	-12.88	-9.15	2003	1593	39.93	4.91	117
19	52.04	-12.84	-9.15	2000	1645	41.06	4.89	116
20	55.02	-12.95	-9.23	1999	1696	42.23	4.88	118
21	60.02	-12.62	-8.75	2000	1790	44.75	4.90	124
22	64.99	-12.95	-8.84	2001	1935	48.41	4.90	132
23	65.06	-12.82	-8.68	2000	1930	48.28	4.90	132

Table 5— Manufacture of Mid-Range Vinylidene PIB, Nominal Mn of 3300 (continued)

Example	Delta Pressure, psi	Catalyst Complex rate, lbs / min	Turnover number, lbs PIB / lbs catalyst complex	Catalyst Efficiency, % improvement	Tube velocity, Ft/sec	Q, BTU/hr	LMTD	R
13	34.99	0.0745	1497	0.00	8.9	-1634600	43.860	1.38
14	34.97	0.0731	1525	1.91	8.9	-1640400	43.988	1.63
15	35.00	0.0726	1498	0.09	8.8	-1611100	43.822	1.48
16	35.07	0.0709	1548	3.42	8.9	-1648400	43.222	1.49
17	34.97	0.0720	1541	2.97	9.1	-1676600	43.364	1.40
18	49.94	0.0689	1704	13.83	12	-2375900	42.840	1.17
19	52.04	0.0664	1751	16.99	12.4	-2429100	41.875	1.16
20	55.02	0.0695	1704	13.82	12.8	-2522100	42.114	1.19
21	60.02	0.0660	1878	25.49	13.5	-2765400	41.614	1.03
22	64.99	0.0640	2055	37.29	14.6	-3185200	43.853	0.95
23	65.06	0.0641	2060	37.62	14.6	-3198400	45.020	0.89

Table 5 – Manufacture of Mid-Range Vinylidene PIB, Nominal Mn of 3300 (continued)

Example	Delta Pressure, psi	S	F _t	U = Q/(A*delT_LMTD*F _t), Btu/ (hr ft ² °F)	increase in ht coeff, %
13	34.99	0.072081	0.99857	34.02	0.00
14	34.97	0.071930	0.99828	34.05	0.09
15	35.00	0.072149	0.99844	33.57	-1.34
16	35.07	0.073324	0.99838	34.82	2.35
17	34.97	0.073315	0.99849	35.30	3.75
18	49.94	0.079522	0.99851	50.63	48.82
19	52.04	0.080513	0.99849	52.96	55.66
20	55.02	0.080549	0.99845	54.68	60.71
21	60.02	0.084865	0.99851	60.67	78.32
22	64.99	0.086017	0.99859	66.30	94.88
23	65.06	0.084712	0.99874	64.84	90.59

A=1097 sq. ft.

The various features and advantages of the invention are readily apparent from Tables 4 and 5 and the appended **Figures**. Table 4 provides results for mid-range vinylidene PIB with a weight average molecular weight of 3000 Daltons or so, while table 5 provides results for mid-range vinylidene PIB with a weight average molecular weight of 3300 Daltons or so. **Figure 1** is a plot of isobutylene conversion to polymer as a function of pressure differential across a recirculating pump in a loop reactor for Mid Range Vinylidene PIB of Table 4. **Figure 4** is a plot of catalyst turnover as a function of the linear velocity of the reaction mixture in the tubes of a loop reactor for Mid Range Vinylidene PIB; Nominal Mn of 3300 (Table 5) and **Figure 5** is a plot of isobutylene conversion to polymer as a function of pressure differential across a recirculating pump in a loop reactor for Mid Range Vinylidene PIB of Table 5.

It is seen in **Figures 1** and **5** that conversion increases dramatically as the pressure differential, delta P, across the recirculating pump increases along with the linear velocity of the reaction mixture within the tubes of the reactor. Catalyst productivity also increases dramatically throughout the foregoing examples as pressure differential and linear velocity is increased. *Note Figure 4* where this aspect is illustrated.

The novel compositions of Tables 4 and 5 are compared with conventional mid-range vinylidene polymers in Tables 6 through 9, below.

Table 6 – Conventional Mid-Range Vinylidene Grade, 3K Nominal Viscosity

DP	K Visc	Mn	PDI	Mn/PDI
25	3243.5	2653	3.008	882.0
25	3089	2635	2.958	890.8
25	3141.36	2643	2.978	887.5
25	3221.6	2635	3.038	867.3
Average	3173.87	2641.5	2.9955	881.8

Table 7 – Mid-Range Vinylidene Grade, High Circulation, 3K Nominal Viscosity

DP	K Visc	Mn	PDI	Mn/PDI
35	3622.51	2997	2.707	1107.1
45	3298.05	2995	2.487	1204.3
50	3360.85	3004	2.473	1214.7
55	3332.77	3019	2.446	1234.3
60	3303.57	3028	2.431	1245.5
65	3310.09	3118	2.359	1321.7
Average	3371.30	3026.8	2.484	1218.52

5

Table 8 – Conventional Mid-Range Vinylidene Grade, 4K Nominal Viscosity

DP	K Visc	Mn	PDI	Mn/PDI
25	4125.7	3074	2.79	1101.8
25	4222.01	3099	2.73	1135.16
25	4352.57	3131	2.77	1130.3
Average	4233.43	3101.33	2.76333	1122.32

10

Table 9 – Mid-Range Vinylidene Grade, High Circulation, 4K Nominal Viscosity

DP	K Visc	Mn	PDI	Mn/PDI
35	4106.4	3208	2.672	1200.6
35	4265.8	3284	2.622	1252.5
60	4145.19	3367	2.513	1339.8
65	4383.38	3560	2.468	1442.46
Average	4225.19	3354.75	2.569	1385.06

15

It is seen in Tables 6 through 9 that the new mid-range vinylidene polymers produced at high velocity and recirculation rates have higher molecular weight and lower polydispersity at a given kinematic viscosity. The novel PIB polymers thus provide a more uniform product which may be derivatized. Lower polydispersity is particularly valuable in fuel additives where compositions with lower polydispersity cause less engine deposits than compositions with higher polydispersity.

20

Catalyst productivity (efficiency) is unexpectedly improved as compared to prior art systems and HR PIB compositions. In Table 10, the process of the invention is compared with prior art reaction systems and highly reactive (HR) PIB compositions. Compositions HR-C1 and HR-C2 were made in the same apparatus as Examples 12 and 23, but were produced at lower temperatures with more methanol in order to increase vinylidene content.

Details as to calculation are summarized in Table 11. Catalyst productivity is about 2000 lbs polymer/lb catalyst complex with the process of the invention versus from about 150 lbs polymer/lb catalyst complex to about 300 lbs polymer/lb catalyst complex as reported in the prior art. Catalyst productivity when making HR vinylidene PIB is about 1000 lbs polymer/lb catalyst complex or less. When calculated based on BF_3 only, similar increases in catalyst productivity are provided when making the compositions of the invention.

Table 10 - Comparison of Catalyst Productivity

Source	Ex.	TON lbs polymer/ lbs catalyst complex	TON - BF_3 lbs polymer/ lbs BF_3	Mn Daltons
Table 4	12	1969.70	2896.61	3118
Table 5	23	2059.28	3028.36	3560
HR-C1		1003.8	1476.1	1087
HR-C2		784.7	1153.9	2419
U.S. Patent No.				
7038008	1	323.04	888.07	2387
7038008	2	115.84	318.45	956
7217773	comp	171.72	321.21	980
7217773	1	204.6	405.06	930
7485764	1	238.48	407.52	1150
7485764	2	189.11	407.52	1070
7485764	3	157.15	407.52	1030

Table 11 - Calculation of Catalyst Productivity

Source	Ex.	Alcohol	BF ₃	BF ₃	Alcohol	Alcohol	Total Complex	Isobutylene	Conversion	PIB	TON
			wt (lbs)	wt (lbs)	wt (lbs)	wt		flow	w/w %	lbs/min	lbs polymer/ lbs complex
Table 4	12	Methanol		0.049368		0.023232	0.0726			143	1969.70
Table 5	23	Methanol		0.043588		0.020512	0.0641			132	2059.28
HR-C1		Methanol		0.129608		0.060992	0.1906			191	1003.8
HR-C2		Methanol		0.145044		0.068256	0.2133			167	784.7
U.S. Patent No.											
			mmoles	(gms)	mmoles	(gms)					
7038008	1	2-butanol	7.1	0.48138	11.36	0.8420032	1.3233832	450	0.95	427.5	323.04
7038008	2	2-butanol	19.8	1.34244	31.68	2.3481216	3.6905616	450	0.95	427.5	115.84
7217773	comp	Methanol	8.55	0.57969	15.75	0.50463	1.0843	196	0.95	186.2	171.72
7217773	1	Methanol	6.78	0.459684	14.06	0.4504824	0.9102	196	0.95	186.2	204.6
7485764	1	Methanol	10	0.678	15	0.4806	1.1586	307	0.9	276.3	238.48
7485764	2	Ethanol	10	0.678	17	0.78302	1.46102	307	0.9	276.3	189.11
7485764	3	Isopropanol	10	0.678	18	1.08018	1.75818	307	0.9	276.3	157.15

Catalyst consumption is much lower than in the prior art and much lower than seen in connection with highly reactive PIB manufacture. Moreover, it is seen in tables 4 and 5 that catalyst consumption becomes even lower as circulation rates increase.

From the foregoing, it will be appreciated that conversion unexpectedly increases with increased recirculation rates at the same residence time, contrary to the teachings of the prior art. Higher yield is realized without significant additional capital or processing costs. It was also found that polydispersity decreases with substantially the same residence time as circulation rates increase all other things being equal. The products produced have unexpectedly lower polydispersities especially at higher molecular weight, also contrary to the teachings of the prior art. This feature is particularly desirable when the products are used for making derivatives such as alkyl phenols and/or fuel or lubricating oil additives.

While the invention has been described in detail, modifications within the spirit and scope of the invention will be readily apparent to those of skill in the art. In view of the foregoing discussion, relevant knowledge in the art and references discussed above in connection with the Background and Detailed Description, the disclosures of which are all incorporated herein by reference, further description is deemed unnecessary. In addition, it should be understood that aspects of the invention and portions of various embodiments may be combined or interchanged either in whole or in part. Furthermore, those of ordinary skill in the art will appreciate that the foregoing description is by way of example only, and is not intended to limit the invention.

WHAT IS CLAIMED IS:

1. A mid-range vinylidene content, high viscosity PIB polymer composition comprising PIB molecules, wherein a first portion of said PIB molecules have alpha position double bonds and a second portion of said PIB molecules have beta position double bonds, wherein said first and second portions together include at least 80 mole % of the PIB molecules of the composition, wherein said first portion includes less than 75 mole % of the PIB molecules of the composition, and wherein no more than 10 mole % of the PIB molecules of the composition have tetra-substituted double bonds, said composition having a polydispersity of no more than 2.7; and being further characterized in that the composition has a kinematic viscosity in the range of 3000 cSt to 5000 cSt, a number average molecular weight, Mn, in the range of 2800 Daltons to 4000 Daltons and a ratio of Mn: PDI of greater than 1100.
2. The composition according to Claim 1, wherein the composition has a kinematic viscosity of greater than 3100 cSt.
3. The composition according to Claim 1, wherein the composition has a kinematic viscosity of greater than 3300 cSt.
4. The composition according to Claim 1, wherein the composition has a kinematic viscosity of greater than 3500 cSt.
5. The composition according to Claim 1, wherein the composition has a kinematic viscosity of greater than 3700 cSt.
6. The composition according to Claim 1, wherein the composition has a kinematic viscosity of greater than 4000 cSt.
7. The composition according to Claim 1, having a PDI of no more than 2.6.

8. The composition according to Claim 1, having a PDI of no more than 2.5.
9. The composition according to Claim 1, having a PDI in the range of from 2 to 2.7.
- 5 10. The composition according to Claim 1, having a ratio of Mn:PDI of greater than 1200.
- 10 11. The composition according to Claim 1, having a ratio of Mn:PDI of greater than 1300.
12. The composition according to Claim 1, having a ratio of Mn:PDI of up to 1750.
- 15 13. The composition according to Claim 1, wherein said first portion includes less than 72.5 mole % of the PIB molecules of the composition.
14. The composition according to Claim 1, wherein said first portion includes less than 70 mole % of the PIB molecules of the composition.
- 20 15. The composition according to Claim 1, wherein said first and second portions together include at least 85 mole % of the PIB molecules of the composition.
16. The composition according to Claim 1, wherein said first and second portions together include at least 90 mole % of the PIB molecules of the composition.
- 25 17. The composition according to Claim 1, wherein no more than 5 mole % of the PIB molecules of the composition have tetra-substituted double bonds.
- 30 18. A mid-range vinylidene content, high viscosity PIB polymer composition comprising PIB molecules, wherein a first portion of said PIB molecules have

alpha position double bonds and a second portion of said PIB molecules have beta position double bonds, wherein said first and second portions together include at least 80 mole % of the PIB molecules of the composition, wherein said first portion includes less than 75 mole % of the PIB molecules of the composition, and wherein no more than 10 mole % of the PIB molecules of the composition have tetra-substituted double bonds, said composition having a polydispersity of no more than 2.8; and being further characterized in that the composition has a kinematic viscosity in the range of 3000 cSt to 3700 cSt, a number average molecular weight, M_n , in the range of 2800 Daltons to 4000 Daltons and a ratio M_n : PDI of greater than 1100.

19. The composition according to Claim 16, wherein the composition has a kinematic viscosity of less than 3500 cSt.
20. The composition according to Claim 18, having a PDI of no more than 2.6.
21. The composition according to Claim 18, having a PDI of no more than 2.5.
22. The composition according to Claim 18, having a PDI in the range of from 2.3 to 2.8.
23. The composition according to Claim 18, having a ratio of M_n :PDI of greater than 1200.
24. The composition according to Claim 18, having a ratio of M_n :PDI of greater than 1250.
25. The composition according to Claim 18, having a ratio of M_n :PDI of up to 1500.

26. The composition according to Claim 18, wherein said first portion includes less than 72.5 mole % of the PIB molecules of the composition.
27. The composition according to Claim 18, wherein said first portion includes
5 less than 70 mole % of the PIB molecules of the composition.
28. The composition according to Claim 18, wherein said first and second portions together include at least 85 mole % of the PIB molecules of the composition.
- 10 29. The composition according to Claim 18, wherein said first and second portions together include at least 90 mole % of the PIB molecules of the composition.
30. The composition according to Claim 18, wherein no more than 5 mole % of
15 the PIB molecules of the composition have tetra-substituted double bonds.
31. A mid-range vinylidene content, high viscosity PIB polymer composition comprising PIB molecules, wherein a first portion of said PIB molecules have alpha position double bonds and a second portion of said PIB molecules have beta position double bonds, wherein said first and second portions together
20 include at least 80 mole % of the PIB molecules of the composition, wherein said first portion includes less than 75 mole % of the PIB molecules of the composition, and wherein no more than 10 mole % of the PIB molecules of the composition have tetra-substituted double bonds, said composition having a polydispersity of no more than 2.7; and being further characterized in that the
25 composition has a kinematic viscosity in the range of 3750 cSt to 5000 cSt, a number average molecular weight, Mn, in the range of 3000 Daltons to 3800 Daltons and a ratio of Mn: PDI of greater than 1200.
32. The composition according to Claim 31, wherein the composition has a
30 kinematic viscosity of greater than 3500 cSt.


33. The composition according to Claim 31, wherein the composition has a kinematic viscosity of greater than 3750 cSt.
34. The composition according to Claim 31, wherein the composition has a
5 kinematic viscosity in the range of from 3800 cSt to 4500 cSt.
35. The composition according to Claim 31, having a PDI of no more than 2.6.
36. The composition according to Claim 31, having a PDI of no more than 2.5.
10
37. The composition according to Claim 31, having a PDI in the range of from 2.2 to 2.7.
38. The composition according to Claim 31, having a ratio of Mn:PDI of greater
15 than 1250.
39. The composition according to Claim 31, having a ratio of Mn:PDI of greater than 1300.
- 20 40. The composition according to Claim 31, having a ratio of Mn:PDI of greater than 1400.
41. The composition according to Claim 2431 having a ratio of Mn:PDI of up to
25 1700.
42. The composition according to Claim 31, wherein said first portion includes less than 72.5 mole % of the PIB molecules of the composition.
43. The composition according to Claim 31, wherein said first portion includes
30 less than 70 mole % of the PIB molecules of the composition.

44. The composition according to Claim 31, wherein said first and second portions together include at least 85 mole % of the PIB molecules of the composition.
45. The composition according to Claim 31, wherein said first and second portions
5 together include at least 90 mole % of the PIB molecules of the composition.
46. The composition according to Claim 31, wherein no more than 5 mole % of the PIB molecules of the composition have tetra-substituted double bonds.


1/5

FIG. 1

CONVERSION AS A FUNCTION OF DELTA P (CIRCULATION RATE);
MID RANGE VINYLIDENE PIB; NOMINAL Mn of 3000

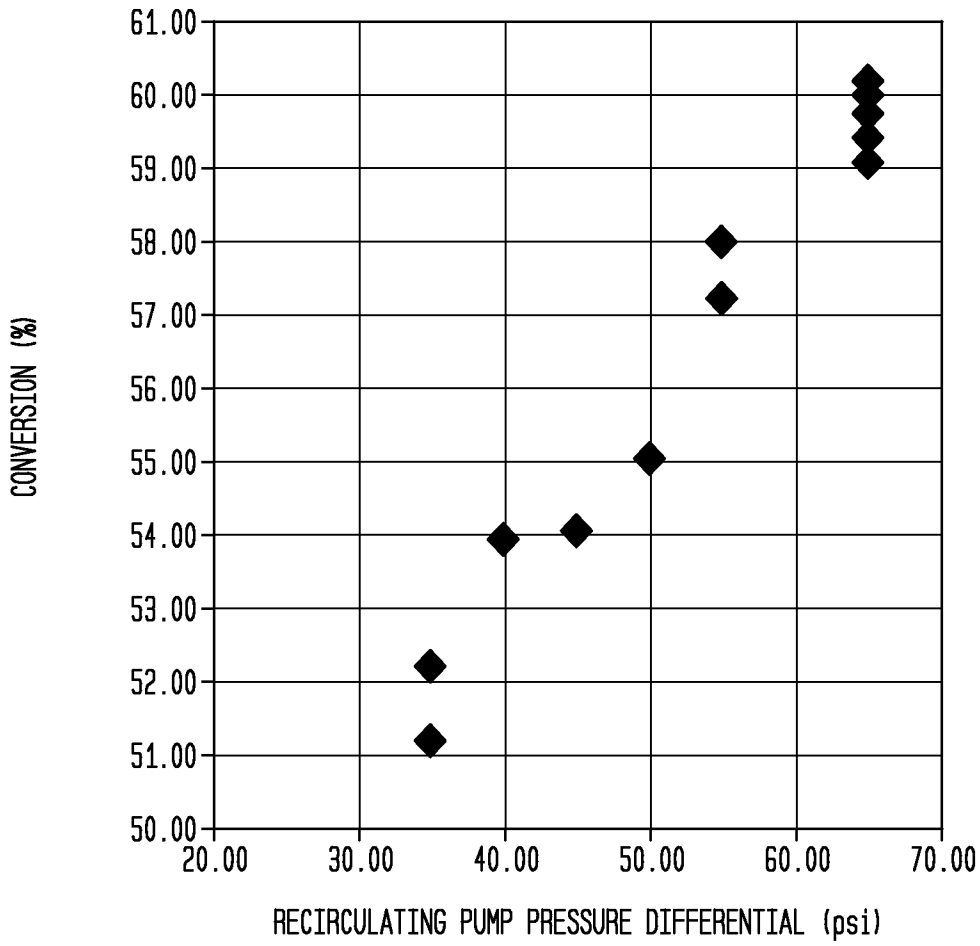

2/5
FIG. 2

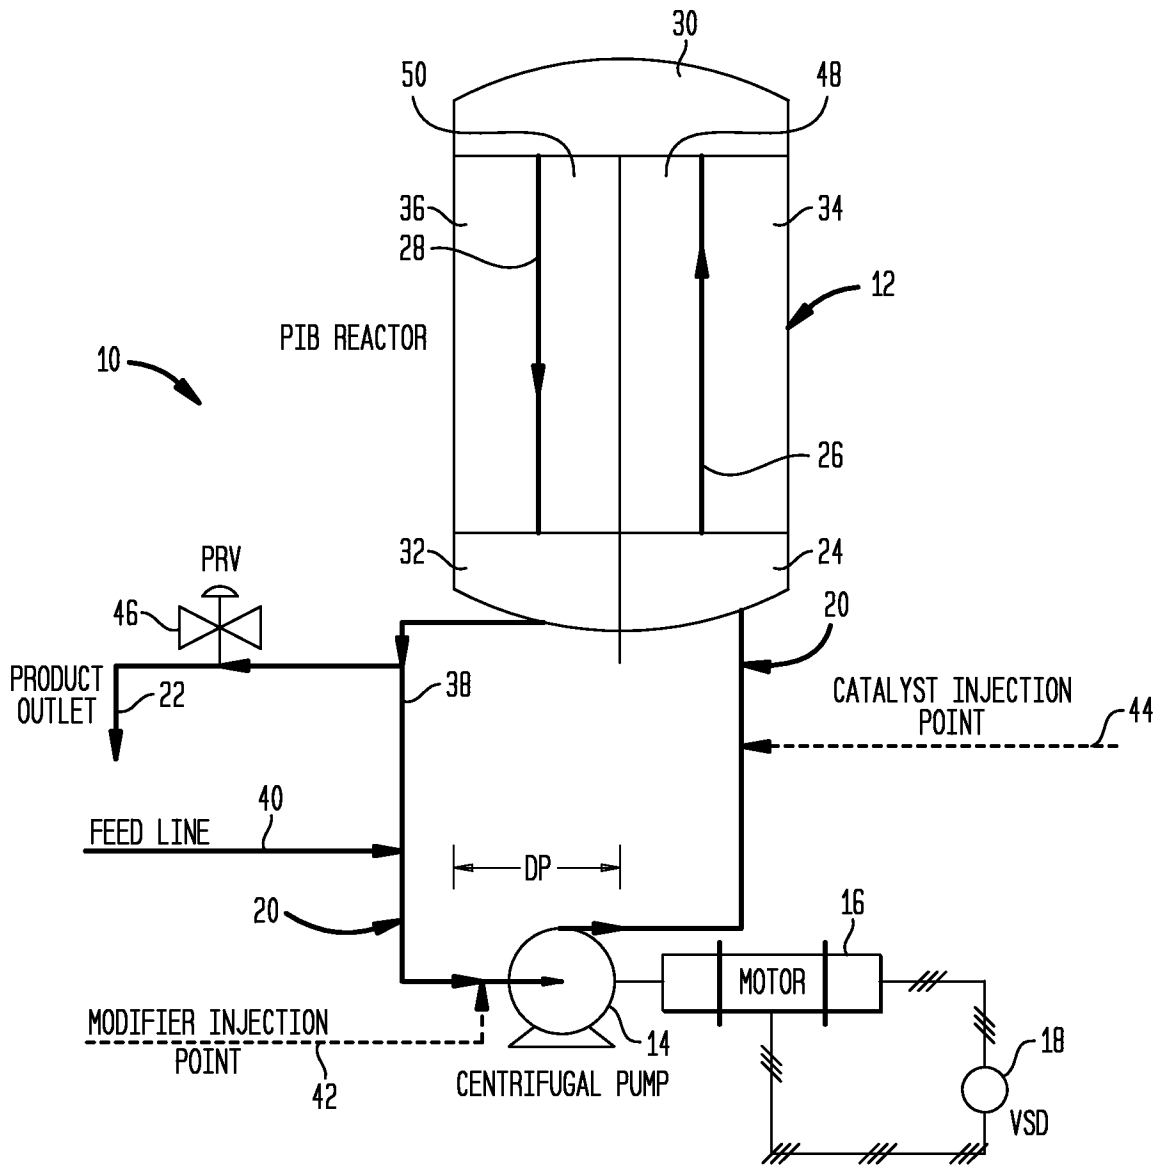

3/5

FIG. 3

$$Q = \dot{m} c_p (t_1 - t_2) = \dot{M} C_p (T_1 - T_2) \quad (1)$$

$$Q = U A F_t \Delta t \quad (2)$$

$$\Delta t = \frac{(T_1 - t_2) - (T_2 - t_1)}{\ln \left\{ \frac{(T_1 - t_2)}{(T_2 - t_1)} \right\}} \quad (3)$$

$$F_t = \frac{\sqrt{R^2 + 1}}{R - 1} \frac{\ln \frac{(1 - S)}{(1 - RS)}}{\ln \frac{2 - S(R + 1 - \sqrt{R^2 + 1})}{2 - S(R + 1 + \sqrt{R^2 + 1})}} \quad (4)$$

$$R = \frac{(T_1 - T_2)}{(t_2 - t_1)} ; S = \frac{(t_2 - t_1)}{(T_1 - t_1)} \quad (5)$$


$$U = Q / (A F_t \Delta t) \quad (6)$$

4/5

FIG. 4

CATALYST TURNOVER VS. VELOCITY, MID RANGE VINYLIDENE PIB, NOMINAL Mn 3300

CATALYST TURNOVER, Lbs POLYMER/ lb CATALYST COMPLEX

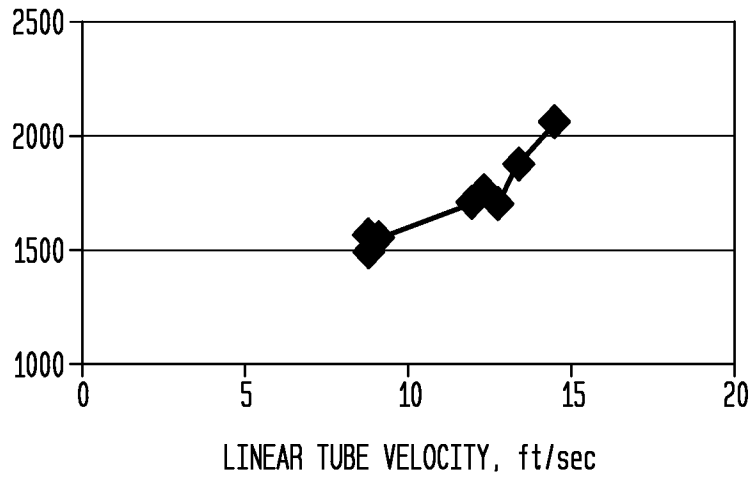


—◆— CATALYST TURNOVER VS. VELOCITY

5/5

FIG. 5

CONVERSION AS A FUNCTION OF DELTA P (CIRCULATION RATE);
MID RANGE VINYLIDENE PIB; NOMINAL Mn of 3300

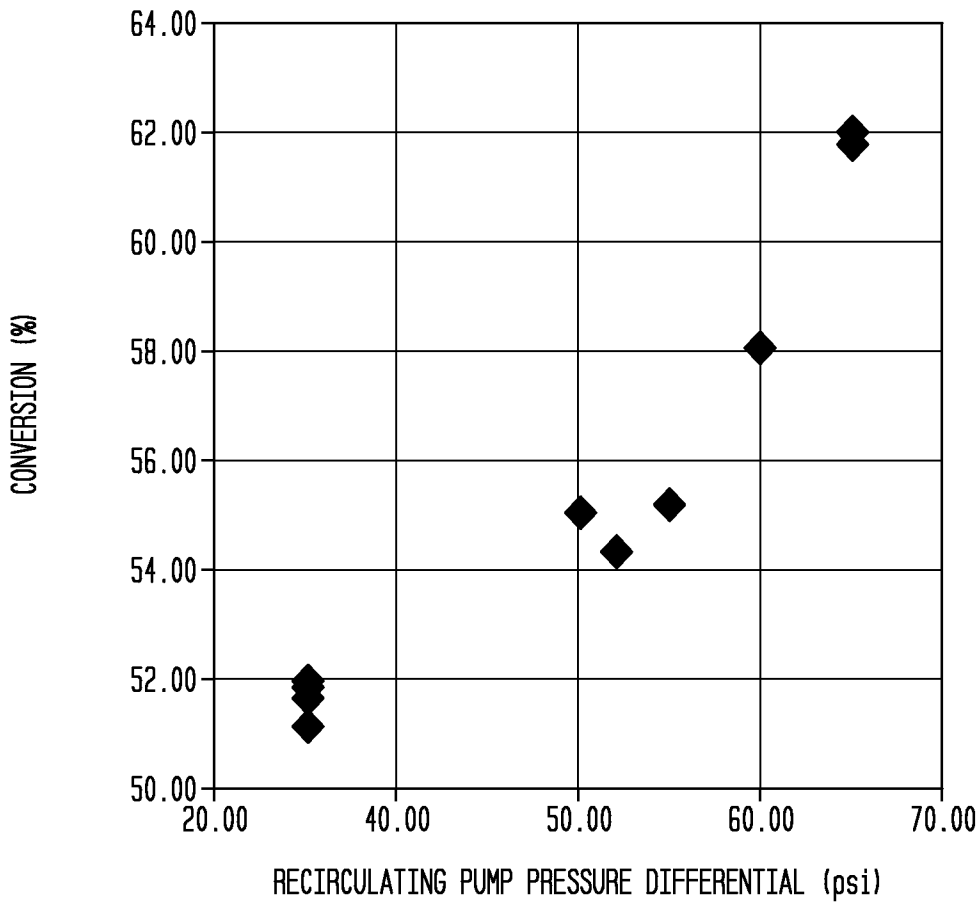

A. CLASSIFICATION OF SUBJECT MATTER*C08F 10/10(2006.01)i, C08L 23/22(2006.01)i, C08F 2/01(2006.01)i*

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C08F 8/00, C08F 8/46, C08F 10/10, C08F 110/10, C08K 5/01, C08L 23/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: mid-range vinylidene content, polyisobutylene, PIB, alpha, beta, double bond, polydispersity, kinematic viscosity, molecular weight.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 7037999 B2 (BAXTER, JR., C. E. et al.) 02 May 2006 See column 12, lines 5-62; claims 1-9.	1-46
A	US 2010-0298507 A1 (MENSCHIG, K. et al.) 25 November 2010 See claims 1-22; tables 1, 3-4 & 6.	1-46
A	US 2004-0152841 A1 (GIPSON, B. L.) 05 August 2004 See claims 1-54.	1-46
A	US 6730739 B2 (GIPSON, B. L.) 04 May 2004 See column 4, lines 9-23; claims 1-33; Table 1.	1-46
A	US 5777025 A (SPENCER, J. R. et al.) 07 July 1998 See column 4, line 57-column 5, line 57; claims 1-20.	1-46

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 FEBRUARY 2013 (28.02.2013)

Date of mailing of the international search report

04 MARCH 2013 (04.03.2013)

Name and mailing address of the ISA/KR



Facsimile No. 82-42-472-7140

Authorized officer

KIM, Dong Seok

Telephone No. 82-42-481-8647



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2012/059473

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 7037999 B2	02.05.2006	AU 2000-71237 A1	17.04.2001
		CA 2385576 A1	22.03.2001
		CA 2500674 A1	25.11.2004
		CA 2500674 C	26.06.2012
		CA 2660742 A1	22.03.2001
		CA 2660742 C	15.05.2012
		CN 100516092 C	22.07.2009
		CN 100523004 C	05.08.2009
		CN 101412772 A	22.04.2009
		CN 101412772 B	10.11.2010
		CN 101412773 A	22.04.2009
		CN 101412773 B	28.09.2011
		CN 101412774 A	22.04.2009
		CN 101412774 B	01.06.2011
		CN 101445571 A	03.06.2009
		CN 1188430 C0	09.02.2005
		CN 1377372 A0	30.10.2002
		CN 1705563 A	07.12.2005
		CN 1705563 C0	07.12.2005
		CN 1769306 A	10.05.2006
		CN 1769306 C0	10.05.2006
		EP 1242464 A1	25.09.2002
		EP 1242464 B1	27.04.2011
		EP 1622710 A2	08.02.2006
		EP 2277926 A2	26.01.2011
		EP 2277926 A3	25.05.2011
		EP 2277927 A2	26.01.2011
		EP 2277927 A3	25.05.2011
		EP 2284198 A2	16.02.2011
		EP 2284198 A3	25.05.2011
		JP 2003-509544 A	11.03.2003
		JP 2006-515385 A	25.05.2006
		JP 2007-197734 A	09.08.2007
		JP 2009-052048 A	12.03.2009
		JP 2009-057564 A	19.03.2009
		JP 2009-062535 A	26.03.2009
		JP 2009-062536 A	26.03.2009
		JP 2012-082439 A	26.04.2012
		JP 4156837 B2	24.09.2008
		JP 4287468 B2	03.04.2009
		JP 5064878 B2	17.08.2012
		KR 10-0600256 B1	13.07.2006
		KR 10-0645122 B1	10.11.2006
		US 2003-0032740 A1	13.02.2003
US 2003-0040587 A1	27.02.2003		
US 2003-0096924 A1	22.05.2003		
US 2004-0176552 A1	09.09.2004		
US 2004-0225083 A1	11.11.2004		
US 2004-0225084 A1	11.11.2004		

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2012/059473

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 2004-0225087 A1	11.11.2004
		US 2005-0004328 A1	06.01.2005
		US 2005-0019227 A1	27.01.2005
		US 2005-0101750 A1	12.05.2005
		US 2005-0137363 A1	23.06.2005
		US 2006-0002828 A1	05.01.2006
		US 2006-0030684 A1	09.02.2006
		US 2006-0079652 A1	13.04.2006
		US 6525149 B1	25.02.2003
		US 6562913 B1	13.05.2003
		US 6683138 B2	27.01.2004
		US 6777506 B1	17.08.2004
		US 6844400 B2	18.01.2005
		US 6844401 B2	18.01.2005
		US 6858188 B2	22.02.2005
		US 6884858 B2	26.04.2005
		US 6992152 B2	31.01.2006
		US 7056990 B2	06.06.2006
		US 7091285 B2	15.08.2006
		US 7498396 B2	03.03.2009
		US 7645847 B2	12.01.2010
		WO 01-19873 A1	22.03.2001
		WO 2004-101128 A2	25.11.2004
US 2010-0298507 A1	25.11.2010	EP 2432806 A1	28.03.2012
		KR 10-2012-0026552 A	19.03.2012
		TW 201041903 A	01.12.2010
		US 2011-251359 A1	13.10.2011
		WO 2010-135034 A1	25.11.2010
US 2004-0152841 A1	05.08.2004	AU 2003-300478 A1	06.09.2004
		US 2004-0266936 A1	30.12.2004
		US 6815504 B2	09.11.2004
		US 6982300 B2	03.01.2006
		WO 2004-072128 A1	26.08.2004
US 6730739 B2	04.05.2004	US 2002-197497 A1	26.12.2002
US 5777025 A	07.07.1998	CA 2209708 A1	17.07.1998
		CA 2209708 C	03.10.2006
		EP 0958308 A1	06.09.2000
		EP 0958308 B1	25.09.2002
		JP 2001-507723 A	12.06.2001
		JP 4064461 B2	19.03.2008
		US 5891953 A	06.04.1999
		WO 98-31718 A1	23.07.1998