



(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2020/04/03
(87) Date publication PCT/PCT Publication Date: 2020/10/08
(85) Entrée phase nationale/National Entry: 2021/09/30
(86) N° demande PCT/PCT Application No.: US 2020/026629
(87) N° publication PCT/PCT Publication No.: 2020/206293
(30) Priorités/Priorities: 2019/04/03 (US62/828,963);
2020/04/03 (US16/839,336)

(51) Cl.Int./Int.Cl. *B60K 1/04* (2019.01),
B60L 53/80 (2019.01), *B60L 58/18* (2019.01)
(71) Demandeur/Applicant:
ARTISAN VEHICLE SYSTEMS, INC., US
(72) Inventeurs/Inventors:
HUFF, BRIAN R., US;
HICKEY, KYLE, US
(74) Agent: GOWLING WLG (CANADA) LLP

(54) Titre : DISPOSITIF D'ENERGIE INTERCHANGEABLE POUR VEHICULE ELECTRIQUE
(54) Title: INTERCHANGEABLE ENERGY DEVICE FOR ELECTRIC VEHICLE

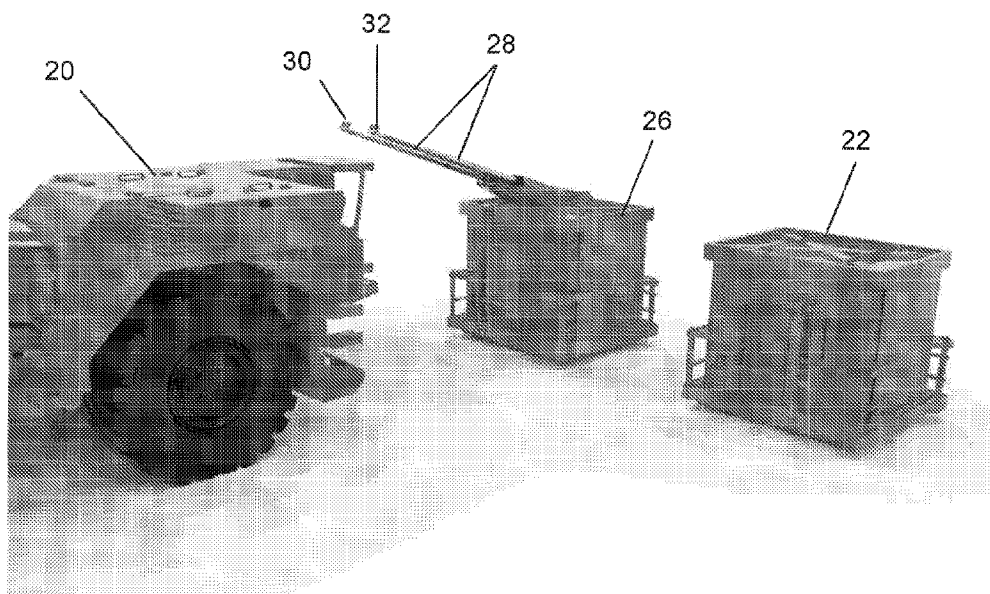


FIG. 2

(57) **Abrégé/Abstract:**

An interchangeable energy device for an electric vehicle enables an electric vehicle to be compatible with existing power lines such as overhead catenary system with little to no modification necessary to a modern electric vehicle. The interchangeable energy device has the same form factor as a battery pack, and is fully compatible with the drive system of the vehicle. The interchangeable device enables a battery pack to be swapped for an adapter to take advantage of existing power systems such as an overhead catenary system.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property

Organization

International Bureau

(43) International Publication Date

08 October 2020 (08.10.2020)



(10) International Publication Number

WO 2020/206293 A1

(51) International Patent Classification:

B60K 1/04 (2006.01)*B60L 58/18* (2019.01)*B60L 53/80* (2019.01)(US). **HICKEY, Kyle**; c/o Artisan Vehicle Systems Inc., 2385 Pleasant Valley Road, Camarillo, CA 93012 (US).

(21) International Application Number:

PCT/US2020/026629

(74) **Agent: HONG, Patricia E.** et al.; Plumsea Law Group, LLC, 6710 A Rockledge Dr., Suite 400, Bethesda, MD 20817 (US).

(22) International Filing Date:

03 April 2020 (03.04.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/828,963

03 April 2019 (03.04.2019)

US

16/839,336

03 April 2020 (03.04.2020)

US

(71) Applicant: **ARTISAN VEHICLE SYSTEMS, INC.**


[US/US]; 2385 Pleasant Valley Road, Camarillo, CA 93012 (US).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(72) Inventors: **HUFF, Brian, R.**; c/o Artisan Vehicle Systems Inc., 2385 Pleasant Valley Road, Camarillo, CA 93012

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

(54) Title: INTERCHANGEABLE ENERGY DEVICE FOR ELECTRIC VEHICLE

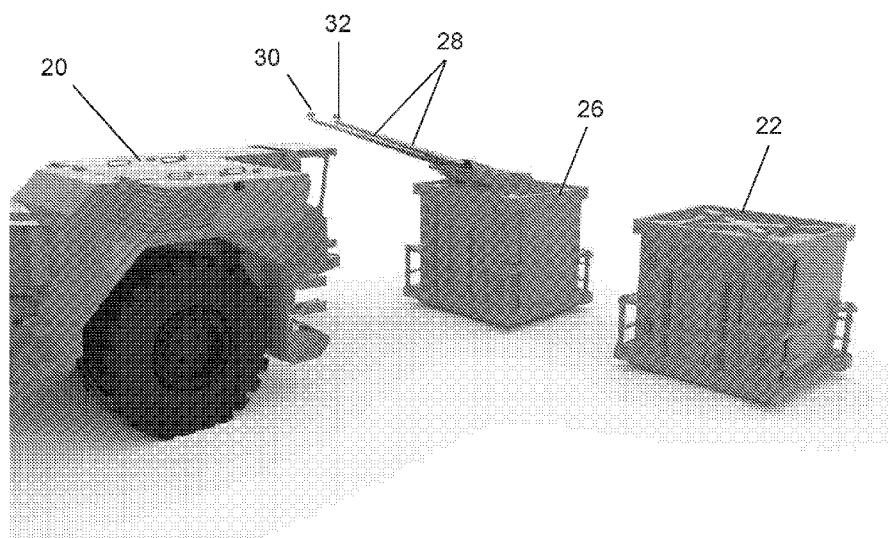**FIG. 2**

(57) **Abstract:** An interchange energy device for an electric vehicle enables an electric vehicle to be compatible with existing power lines such as overhead catenary system with little to no modification necessary to a modern electric vehicle. The interchangeable energy device has the same form factor as a battery pack, and is fully compatible with the drive system of the vehicle. The interchangeable device enables a battery pack to be swapped for an adapter to take advantage of existing power systems such as an overhead catenary system.

[Continued on next page]

**WO 2020/206293 A1**

WO 2020/206293 A1

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

INTERCHANGEABLE ENERGY DEVICE FOR ELECTRIC VEHICLE

REFERENCE TO RELATED APPLICATION

[0001] This application claims priority to U.S. utility application number 16/839,336 filed April 3, 2020, which claims priority to U.S. provisional application number 62/828,963 filed on April 3, 2019.

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0002] The present disclosure relates broadly to electric vehicles, and more specifically to electric vehicles used in subsurface mines.

2. Description of Related Art

[0003] Co-pending and commonly owned U.S. application number 15/908,802 filed on February 28, 2018, describes a method and system for mounting and dismounting batteries from an electric vehicle, and swapping one battery for another. The contents of U.S. application number 15/908,802, was made a part of the provisional application, and is also hereby incorporated by reference in its entirety

[0004] In vehicles powered solely and at least partially with electricity, the sources of electricity may be from a fuel engine, a hybrid system, or a fully electric drive system powered by a battery. In the subsurface mining environment, advances in electric and clean energy alternatives to traditional diesel machines require adaptability as mine operators transition from traditional diesel machines or trolley powered electric machines. While fully electric machines become more available with on-board energy sources in the form of heavy duty battery packs, in some applications, it would be even more advantageous to be able to provide interchangeable energy sources for the electric machines.

SUMMARY OF THE INVENTION

[0005] Various embodiments of an electric vehicle are disclosed. The embodiments describe electric mining vehicles which can be battery powered or powered by a conventional trolley system with electrified catenary cables or rails supplied in a subsurface mine. The interchangeable device may be another battery, or an adapter of sorts that enables the vehicle to be powered by the trolley system. The concept being to provide an interchangeable energy device that may be another battery, another type of battery, a generator, a fuel engine, a trolley system adapter, or another type of energy source or adapter for another type of energy. The interchangeable device would be sized and configured to be compatible with the battery packs supplied for the particular type of electric vehicle and the vehicle drive system so that the energy source for the vehicle can be easily changed and swappable.

[0006] The vehicle and battery mounting and dismounting method are described in application number 15/908,802. The current disclosure contemplates the use of a different type of energy source or adaptor for an energy source that has a compatible form factor with the battery pack and the drive system of the machine. In the language of application number 15/908,802, a primary battery assembly may be supplied as an on-board energy source for the vehicle, or more broadly, machine.

[0007] Any of the various types of energy sources are contemplated, with the compatible form factor and functionality providing a range of options for operators to provide a suitable set of energy devices for any given electric machine operation.

[0008] Other systems, methods, features and advantages of the invention will be, or will become, apparent to one of ordinary skill in the art upon examination of the following figures and detailed description. It is intended that all such additional systems, methods, features and advantages be included within this description and this summary, be within the scope of the invention, and be protected by the following claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] The invention can be better understood with reference to the following drawings and description. The components in the figures are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the invention. Moreover, in the figures, like reference numerals designate corresponding parts throughout the different views.

[0010] FIG. 1 is a perspective view of a subsurface mining machine powered by overhead electrified catenary cables or rails.

[0011] FIG. 2 is a schematic view of a portion of a machine shown with two interchangeable energy devices, illustrated with both devices off-board of the machine.

[0012] FIG. 3 is a schematic view of a portion of a machine shown with one interchangeable energy device mounted on the platform and another interchangeable energy device shown off-board.

DETAILED DESCRIPTION

[0013] The electric vehicles are may be supplied with on-board energy devices such as battery packs which enable free movement of the vehicles. In some conventional subsurface mines, electric vehicles are powered by a wired connection such as a catenary line or a conductive rail of a track or the like.

[0014] The vehicle 10 shown in FIG. 1 is a conventional electric vehicle that is powered by a catenary lines or rails 12 via contact between contact shoes 14 at the ends of trolley poles 16 connected to the top surface of the vehicle with a trolley pole base 18.

[0015] In some subsurface mines, catenary lines are installed and powered. To enable modern electric vehicles to be employed in existing mines, an interchangeable energy device is provided that enables newer vehicles to be backwards compatible with existing mines having trolley system infrastructure. FIGS. 2 and 3 illustrate conceptually electric vehicles and battery packs as may be used in a subsurface mine. Referring to FIG. 2, only a portion of vehicle 20 is illustrated, the portion having the battery mounting platform, in this exemplary embodiment, next to the operator cab. Vehicle 20 may have an auxiliary battery on-board to power it during energy source swapping operations, or to move between battery charging areas, or the like. In FIG. 2, a battery 22 is illustrated and may be the type of battery pack described in application number 15/908,802. Also shown in FIG. 2 is an interchangeable energy device 24 which has the same form factor as battery 22. As used herein, both battery 22 and energy device 24 are interchangeable energy devices. Energy device 24 functions as an adapter for powering vehicle 20 using an existing trolley system (FIG. 1). Therefore energy device 24, while having the same form factor as battery 22, includes a trolley pole base 26, trolley poles 28 and contact shoes 30 and 32. The form factor for device 24 is identical to that of the battery and device 22 is fully compatible with the battery mounting hardware on vehicle 20 as well as the drive system of vehicle 20.

[0016] FIG. 3 illustrates vehicle 20 shown with the interchangeable device 24 mounted on the vehicle and battery 22 off-loaded from the vehicle. A full description of swapping method can be found in application number 15/908,802. Overhead cables or catenary

rails 40 are illustrated schematically in contact with contact shoes 30 and 32 of the energy device. In this fashion, it can be seen that an interchangeable energy device can be employed to make vehicle 20 compatible with an existing overhead catenary system (OCS). In some environments, it is possible that the OCS is discontinuous in which case the auxiliary battery of the vehicle may be employed to power the vehicle from one section of the OCS to another section of the OCS. The auxiliary battery also powers the energy source mounting and dismounting operation described in application number 15/908,802.

[0017] The interchangeable device enables a vehicle with little to no modifications to operate in either an existing OCS system or a new environment in which on-board power will be employed. The system enables the machine to pick up a trolley device as needed to swap energy sources as necessitated by the operating conditions. This provides needed flexibility for the vehicle fleet or mine operator to ensure the system is forward and backward compatible.

[0018] It will be understood that variations on the energy sources are possible within the scope of this concept. That is the interchangeable energy device may be a battery, a different type of battery, a generator, a fuel engine, or an adaptor for any existing energy infrastructure. It will also be understood that the system may be employed with any combination of devices, such as batteries, adapters and the like.

[0019] It will also be understood that the energy source is compatible with and in communication with the drive system and drive controller. The energy source, whether battery or trolley adapter, or another type of source would be compatible with the drive system and controller.

[0020] As described herein, the OCS, overhead catenary system or rail may involve options for off-wire operation such as ground level power supply or on-board energy storage systems. While on-board power generation is a third option that has received less research, this may change with hydrogen fuel cell technology. Any combination of energy systems are also contemplated to within the scope of this disclosure.

[0021] Ground level power supply can be contact or contactless. Contact ground level power supply essentially employs an embedded third rail as is typically used in subway systems and was used on some early streetcar systems. Much improved versions of this

technology may offer advantages in challenging environments that have heavy loads from heating or cooling needs or the need to traverse steep inclines, all of which can quickly drain a stored power system.

[0022] Another type of infrastructure which may pre-exist is contactless ground level power supply using induction coils to power the vehicle. Typically this power transfer takes place only when the vehicle is directly above the coils, and the range of such a system may be extended by combining it with an on-board power storage, so that the coils do not need to be present along the entire length of the system.

[0023] On-board energy storage offers an alternative or complement to ground level power supply. Storage mechanisms include batteries, capacitors, flywheels and in some cases, reclaiming kinetic energy from braking to increase system efficiency. A system that runs off wire for a limited segment can often recharge onboard power as runs on a wired segment. Longer spans of off wire operation may require a recharging station approach, which be attained by sufficient dwell time at a stop. For example, in some streetcar systems, a programmed dwell time of contact at a station is sufficient to recharge the roof-mounted supercapacitors, charging in a short amount of time that is customary for its duty cycle.

[0024] In general, as used herein, "electric vehicle" refers to a vehicle that uses electrical power for propulsion purposes, at least in one mode of operation. Thus, electric vehicles include all-electric vehicles (e.g., a vehicle with a traction motor and only an onboard electrical energy storage device or mechanism for receiving electric energy from an off-board source, such as an overhead *catenary* or powered rail), hybrid-electric vehicles (e.g., a vehicle with a traction motor, an energy storage device, hydraulic propulsion, and a fuel engine, fuel cell, or the like for charging the energy storage device and/or directly generating power for running the traction motor), dual-mode vehicles (e.g., a vehicle with an engine-only mode of operation and an electricity-only mode of operation, or a vehicle with a first mode of operation where traction electricity is provided by an engine and a second mode of operation where traction electricity is provided by another source), diesel-electric and other engine-electric vehicles (e.g., a vehicle with an engine that generates electrical power for running a traction motor), and combinations and variants thereof. Electric vehicles may have one traction motor, or plural

traction motors; "traction motor" refers to a motor of sufficient size and capacity to move a vehicle of sufficient size for the designated operation.

[0025] Also, the vehicle interface equipment of the wayside stations may comprise: "plug in" modules, e.g., the vehicle plugs into a receptacle of the wayside station, for receiving electrical power from the station; a continuous power interface by which a vehicle can receive off-board power while moving, such as the aforementioned catenary line or third rail; or the like.

[0026] While various embodiments of the invention have been described, the description is intended to be exemplary, rather than limiting and it will be apparent to those of ordinary skill in the art that many more embodiments and implementations are possible that are within the scope of the invention. Accordingly, the invention is not to be restricted except in light of the attached claims and their equivalents. Also, various modifications and changes may be made within the scope of the attached claims.

CLAIMS:

We claim:

1. A system for supplying energy to an electric vehicle comprising:
an electric vehicle with an energy device mounting and dismounting platform;
a first interchangeable energy device configured to be removably mounted on said platform of said vehicle and adapted to power a drive system of said vehicle;
a second interchangeable energy device configured to be removably mounted on said platform of said vehicle and adapted to power a drive system of said vehicle; and
an auxiliary battery disposed on said vehicle to provide power for mounting or dismounting one of said first or second interchangeable energy devices.
2. The system of claim 1, wherein said auxiliary battery powers said vehicle when first and second interchangeable energy devices are disconnected.
3. The system of claim 1, wherein said first interchangeable energy device is a battery pack to provide on-board stored energy.
4. The system of claim 1, wherein said second interchangeable energy device is a trolley system adapter to provide off-board energy.
5. The system of claim 1, wherein at least one of said first and said second interchangeable energy device is a battery pack to provide on-board stored energy.
6. The system of claim 1, wherein at least one of said first and said second interchangeable energy device is a trolley system adapter to provide off-board energy.
7. The system of claim 1, wherein said first interchangeable energy device is a generator.

8. The system of claim 1, wherein said first interchangeable energy device is a supercapacitor.

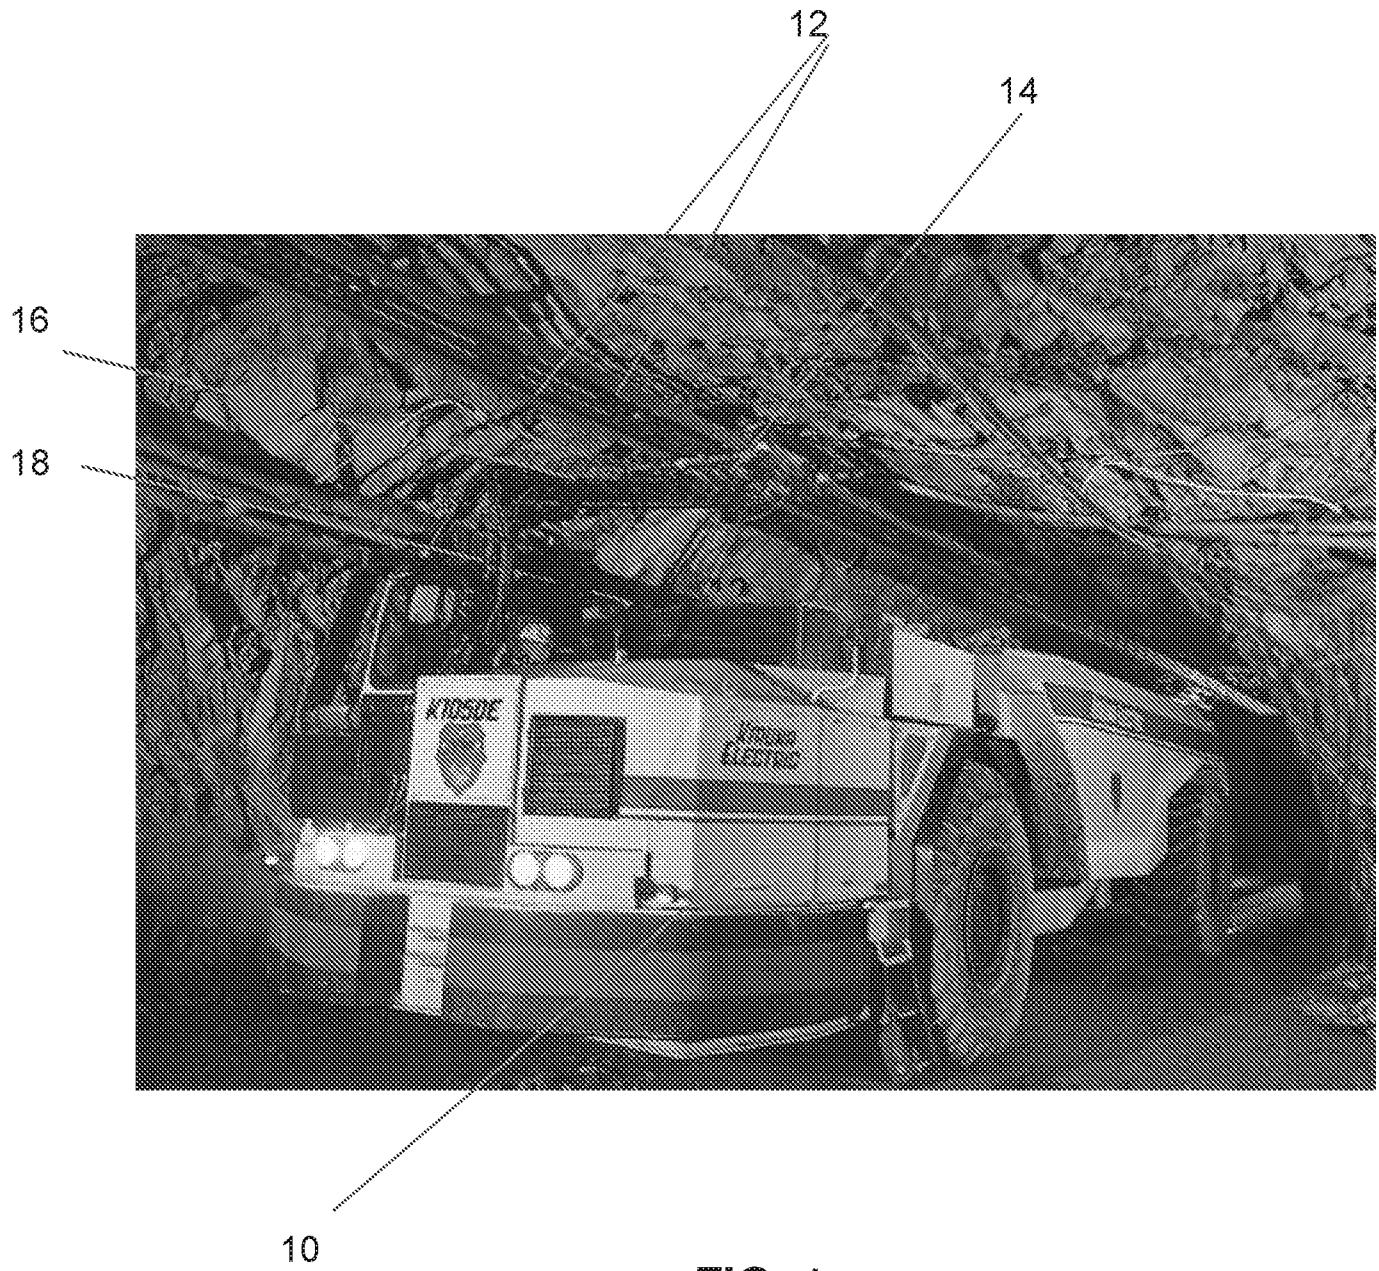


FIG. 1

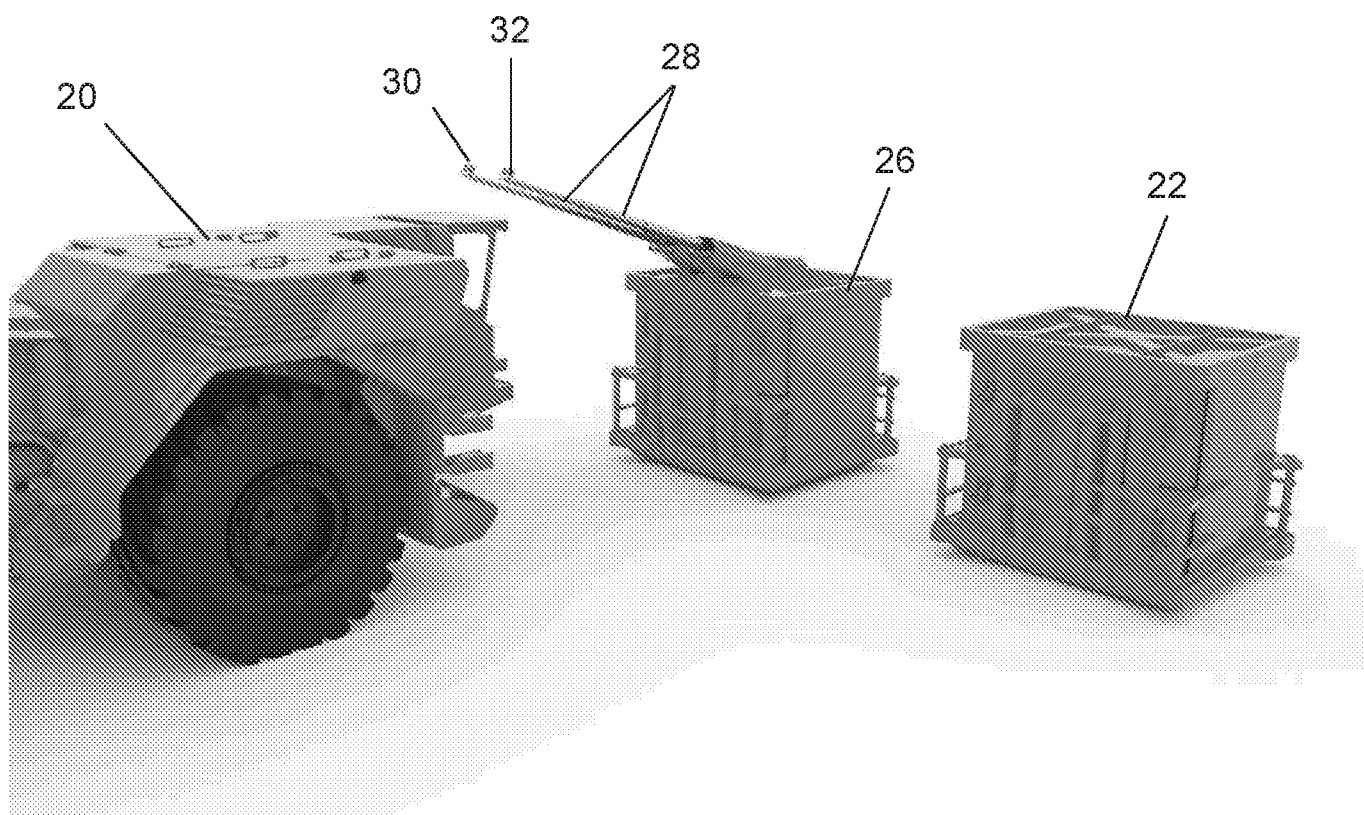
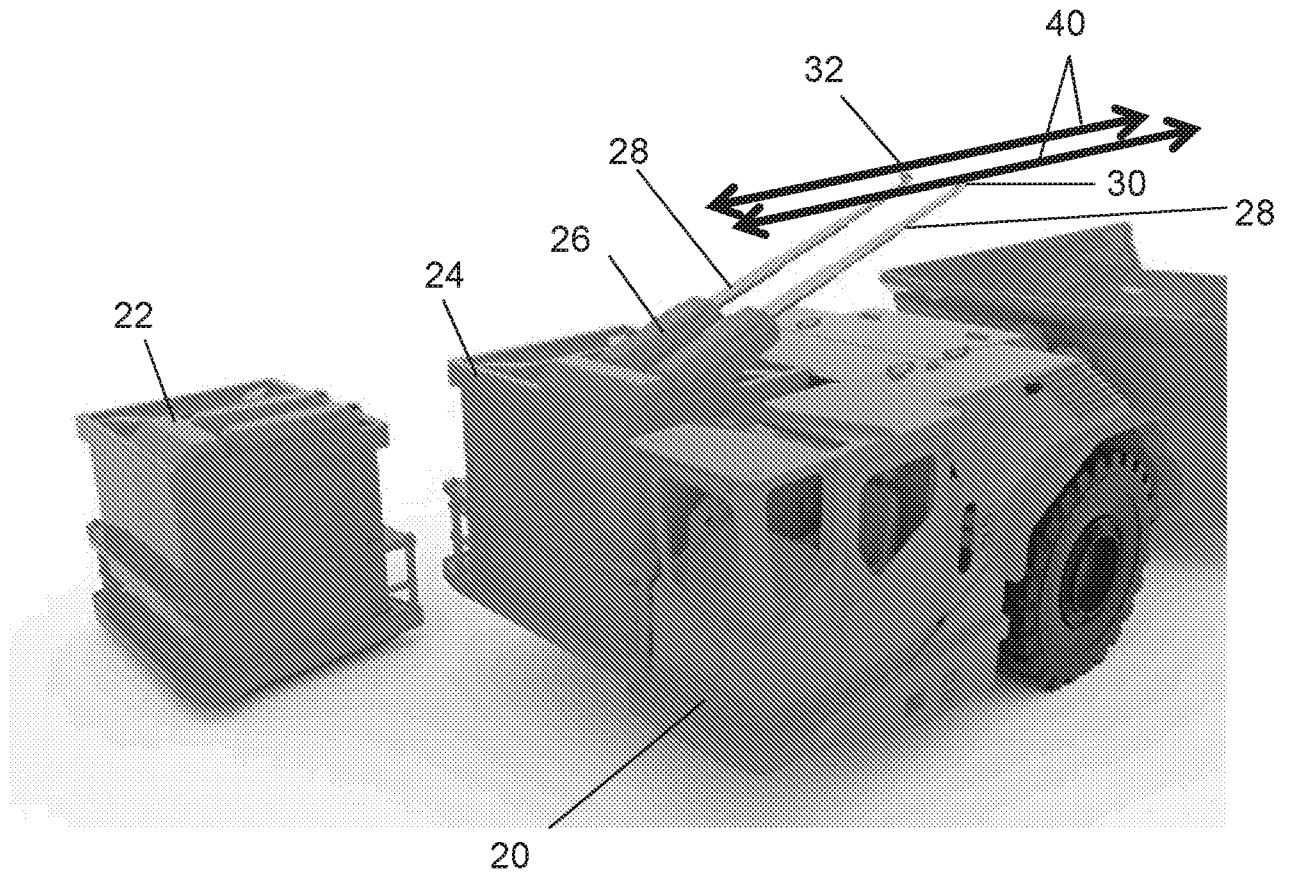


FIG. 2

**FIG. 3**

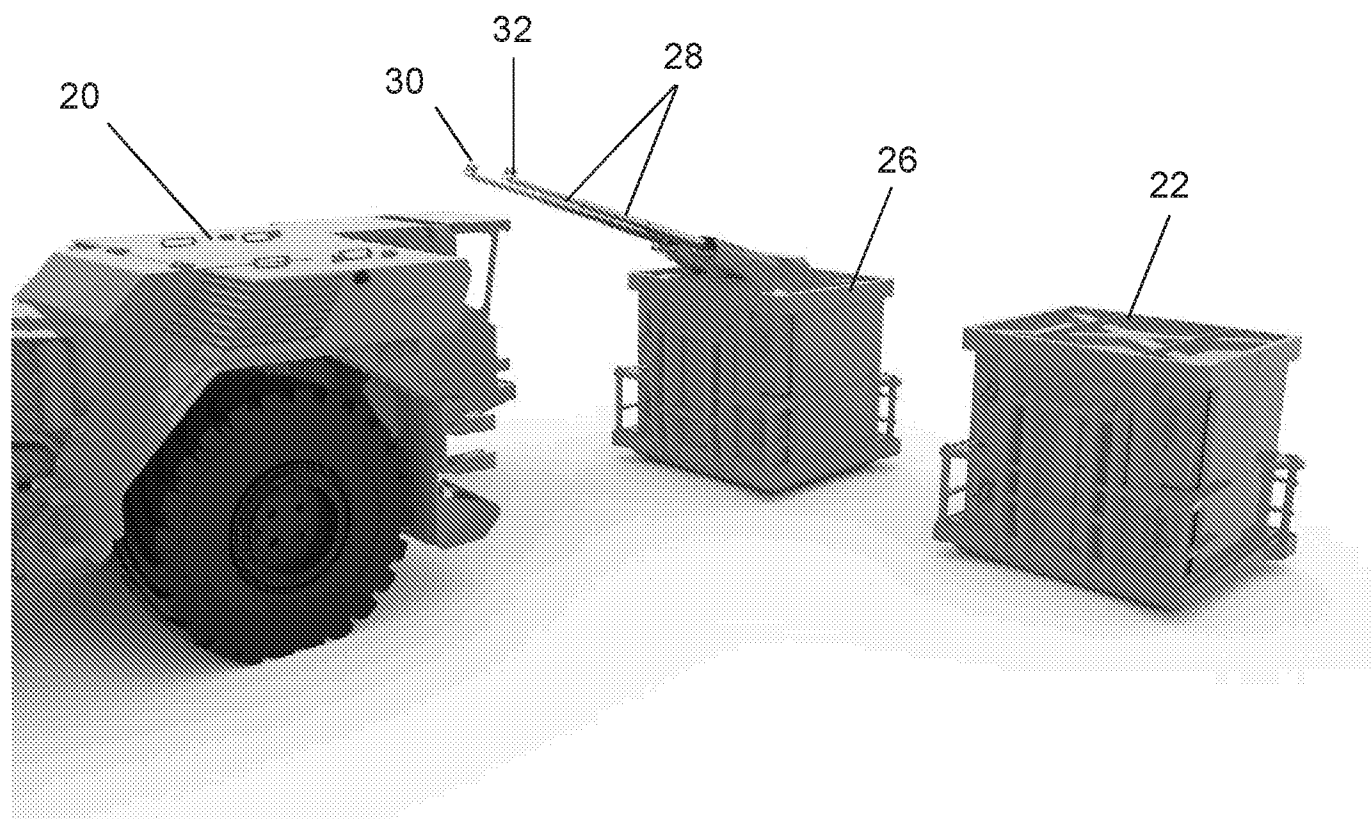


FIG. 2