

(19)



(11)

EP 2 425 637 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
12.06.2013 Bulletin 2013/24

(51) Int Cl.:
H04R 5/033 ^(2006.01) **H04R 5/04** ^(2006.01)
H04R 29/00 ^(2006.01) **H04M 1/60** ^(2006.01)

(21) Application number: **10716973.2**

(86) International application number:
PCT/US2010/032721

(22) Date of filing: **28.04.2010**

(87) International publication number:
WO 2010/126976 (04.11.2010 Gazette 2010/44)

(54) **INTERCOM HEADSET CONNECTION AND DISCONNECTION**

INTERCOM-HEADSET-VERBINDUNG UND TRENNUNG

CONNEXION ET DÉCONNEXION DE CASQUE D'ÉCOUTE D'INTERPHONE

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**

(30) Priority: **29.04.2009 US 431959**
29.04.2009 US 431962

(43) Date of publication of application:
07.03.2012 Bulletin 2012/10

(60) Divisional application:
13162133.6

(73) Proprietor: **BOSE CORPORATION**
Framingham, MA 01701 (US)

(72) Inventors:
• **YAMKOVY, Paul, G.**
Framingham
Massachusetts 01701 (US)
• **PAPE, David, D.**
Framingham
Massachusetts 01701 (US)

(74) Representative: **Attali, Pascal et al**
Bose
12, rue de Témara
78100 Saint-Germain-en-Laye (FR)

(56) References cited:
WO-A2-2008/028175 US-A1- 2007 225 035
US-A1- 2008 175 402

EP 2 425 637 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD

5 **[0001]** This disclosure relates to monitoring a connection between a headset and an intercom system, and to possible responses of the headset to being coupled or uncoupled with the intercom system.

BACKGROUND

10 **[0002]** Two-way communications headsets are in common use in many types of vehicles and with various large pieces of machinery, especially vehicles and machinery that create a high noise environment during operation such that necessary two-way communications with the driver, operator or pilot would be impaired without such headsets. Examples of such noisy environments include airplane cockpits, driver's compartments in commercial trucks and tractors, operator cabins in cranes and tunnel boring machines, and crew compartments in tanks and other military vehicles. It is commonplace for such vehicles and machinery to incorporate an intercom system providing one or more connection points to which such headsets are coupled. Such intercoms typically cooperate with multiple ones of such headsets to enable personnel within or in the immediate vicinity of such vehicles to communicate with each other, and such intercoms typically incorporate long-range wireless transceivers enabling personnel to use such headsets in communicating with other personnel at a distance.

20 **[0003]** It has recently become increasingly desired to further enable such headsets to be coupled to portable audio devices that personnel may carry with them, in addition to being able to be coupled to an intercom system of a vehicle or large piece of machinery. Therefore, it has become desirable to enable the simultaneous coupling of a headset to both an intercom system and a personal audio device in a manner that provides a high degree of ease of use of such a combination, and avoids electrical incompatibility problems due to changes in a headset's operating state between being coupled to and uncoupled from an intercom system.

25 **[0004]** US 2007/0225035 discloses an audio accessory for a headset, capable of receiving audio signals from two external sources and of controlling their relative amplitude to a playback device. It does not disclose essential features of the present invention which provide high degree of use and avoid electrical incompatibility problems.

30 SUMMARY

[0005] A headset is able to be coupled via a cable to an intercom system, is able to be wirelessly coupled to a wireless device via a wireless transceiver of the headset, and is able to be connected to a wired device via another cable. A controller of the headset separately monitors the microphone conductors and audio conductors by which the headset may be coupled to the intercom system to detect whether or not one or both of a communications microphone and an acoustic driver of the headset are coupled to the intercom system, and monitors the operating state of the wireless transceiver to detect whether or not the wireless transceiver is inactive, on standby or in use; and selectively couples a system ground conductor to one of the microphone conductors, selectively provides a local sidetone, and/or selectively provides a local microphone bias voltage in response to what is observed through such monitoring.

35 **[0006]** In one aspect, a method of responding to coupling of a headset to an intercom system includes monitoring results of a first test of at least one audio conductor used to convey a signal representing audio to an acoustic driver of the headset to determine whether the at least one audio conductor is coupled to the intercom system; monitoring results of a second test of at least one microphone conductor of a pair of microphone conductors used to convey signals representing audio detected by a communications microphone of the headset to determine whether the at least one microphone is coupled to the intercom system; monitoring a wireless transceiver of the headset to determine whether the wireless transceiver is inactive, on standby in preparation to be used in two-way communications, or in use in two-way communications; and coupling a ground conductor associated with the at least one audio conductor to a microphone conductor of the pair of microphone conductors, and providing a sidetone from the communications microphone to the acoustic driver in response to either of the at least one audio conductor or the at least one microphone conductor not being coupled to the intercom system, and in response to the wireless transceiver being in use.

40 **[0007]** Implementations may include, and are not limited to, one or more of the following features. The method may further include monitoring results of the first test to determine whether the intercom system is active such that the intercom system is driving the at least one audio conductor, in addition to monitoring results of the first test to determine whether the at least one audio conductor is coupled to the intercom system; coupling the ground conductor associated with the at least one audio conductor to a microphone conductor of the pair of microphone conductors in response to either of the at least one audio conductor or the at least one microphone conductor not being coupled to the intercom system, and in response to the wireless transceiver being on standby; and/or providing a microphone bias voltage across the pair of microphone conductors in response to the at least one microphone conductor not being coupled to the intercom

system, and in response to the wireless transceiver being in use.

5 **[0008]** The method may further include performing the first test, wherein the first test includes: injecting a current into the at least one audio conductor; monitoring the voltage of the at least one audio conductor relative to the ground conductor associated with the at least one audio conductor; determining that the at least one audio conductor is coupled to the intercom system in response to the monitored voltage being within a first range of voltages; and determining that the at least one audio conductor is not coupled to the intercom system in response to the monitored voltage being within a second range of voltages, wherein the second range of voltages is higher than the first range of voltages. The method may still further include determining that the at least one audio conductor is coupled to the intercom system and determining that the intercom system is not driving the at least one audio conductor in response to the monitored voltage being within a third range of voltages, wherein the third range of voltages is higher than the first range of voltages and is lower than the second range of voltages, and perhaps include refraining from providing a microphone bias voltage across the pair of microphone conductors in response to determining that the at least one audio conductor is coupled to the intercom system and in response to determining that the intercom system is not driving the at least one audio conductor.

10 **[0009]** The method may further include performing the second test, wherein the second test may include monitoring the pair of microphone conductors for a bias voltage being provided across the pair of microphone conductors; determining that the at least one microphone conductor is coupled to the intercom system in response to detecting a bias voltage across the pair of microphone conductors; and determining that the at least one microphone conductor is not coupled to the intercom system in response to not detecting a bias voltage across the pair of microphone conductors. Alternatively and/or additionally, the method may include performing the second test, wherein the second test includes injecting a current into the at least one microphone conductor; monitoring the voltage across the pair of microphone conductors; determining that the at least one microphone conductor is coupled to the intercom system in response to the monitored voltage being within a first range of voltages; and determining that the at least one microphone conductor is not coupled to the intercom system in response to the monitored voltage being within a second range of voltages, wherein the second range of voltages is higher than the first range of voltages.

15 **[0010]** In one aspect, a headset includes an acoustic driver to acoustically output audio to an ear of a user; a communications microphone to detect speech sounds of the user; a wireless transceiver to wirelessly couple the headset to a wireless device; and a cable assembly to couple the headset to an intercom system. The cable assembly includes an audio conductor used to convey a signal representing audio to the acoustic driver; a ground conductor associated with the audio conductor; and a pair of microphone conductors used to convey signals representing audio detected by the communications microphone. The headset further includes a ground coupler to couple the ground conductor to one of the microphone conductors of the pair of microphone conductors in response to either the audio conductor or at least one microphone conductor of the pair of microphone conductors not being coupled to the intercom system, and in response to the wireless transceiver being in use; and a local sidetone generator to generate a sidetone from the communications microphone to the acoustic driver in response to either the audio conductor or the at least one microphone conductor not being coupled to the intercom system, and in response to the wireless transceiver being in use.

20 **[0011]** Implementations may include, and are not limited to, one or more of the following features. The ground coupler may couple the ground conductor to one of the microphone conductors of the pair of microphone conductors in response to either of the at least one audio conductor or the at least one microphone conductor not being coupled to the intercom system, and in response to the wireless transceiver being on standby. The headset may further include a bias voltage supply to provide a microphone bias voltage across the pair of microphone conductors in response to the at least one microphone conductor not being coupled to the intercom system, and in response to the wireless transceiver being in use. The headset may further include a bias voltage detector; and a controller coupled to the bias voltage detector to determine that the at least one microphone conductor is coupled to the intercom system in response to the bias voltage detector detecting a bias voltage across the pair of microphone conductors, and to determine that the at least one microphone conductor is not coupled to the intercom system in response to the bias voltage detector not detecting a bias voltage across the pair of microphone conductors. The headset may further include an excitation current injector to inject a current into the at least one microphone conductor; a voltage sensor to monitor the voltage across the pair of microphone conductors; and a controller coupled to the excitation current injector and the voltage sensor to determine that the at least one microphone conductor is coupled to the intercom system in response to the voltage sensor detecting a voltage within a first range of voltages, and to determine that the at least one microphone conductor is not coupled to the intercom system in response to the voltage sensor detecting a voltage within a second range of voltages, wherein the second range of voltages is higher than the first range.

25 **[0012]** The headset may further include an excitation current injector to inject a current into the audio conductor; a voltage sensor to monitor the voltage of the audio conductor relative to the ground conductor; and a controller coupled to the excitation current injector and the voltage sensor to determine that the audio conductor is coupled to the intercom system in response to the voltage sensor detecting a voltage within a first range of voltages, and to determine that the audio conductor is not coupled to the intercom system in response to the voltage sensor detecting a voltage within a

second range of voltages, wherein the second range of voltages is higher than the first range. The controller may determine that the audio conductor is coupled to the intercom system and determines that the intercom system is not driving the audio conductor in response to the voltage sensor detecting a voltage within a third range of voltages, wherein the third range of voltages is higher than the first range of voltages and is lower than the second range of voltages. The headset may further include a bias voltage supply to be operated by the controller to provide a microphone bias voltage across the pair of microphone conductors in response to the controller determining that the at least one microphone conductor is not coupled to the intercom system and in response to the wireless transceiver being in use, wherein the controller refrains from operating the bias voltage supply to provide a microphone bias voltage across the pair of microphone conductors in response to determining that the audio conductor is coupled to the intercom system and that the intercom system is not driving the audio conductor.

[0013] In one aspect, a method of detecting coupling of a headset to an intercom system includes: injecting a current into at least one audio conductor used to convey a signal representing audio to an acoustic driver of the headset; monitoring the voltage of the at least one audio conductor relative to a ground conductor associated with the at least one audio conductor; determining that the at least one audio conductor is coupled to the intercom system in response to the monitored voltage being within a first range of voltages; and determining that the at least one audio conductor is not coupled to the intercom system in response to the monitored voltage being within a second range of voltages, wherein the second range of voltages is higher than the first range of voltages.

[0014] Implementations may include, and are not limited to, one or more of the following features. The method may further include determining that the at least one audio conductor is coupled to the intercom system and determining that the intercom system is not driving the at least one audio conductor in response to the monitored voltage being within a third range of voltages, wherein the third range of voltages is higher than the first range of voltages and is lower than the second range of voltages. The method may further include refraining from providing a microphone bias voltage across a pair of microphone conductors used to convey signals representing audio detected by a communications microphone of the headset in response to determining that the at least one audio conductor is coupled to the intercom system and in response to determining that the intercom system is not driving the at least one audio conductor. The method may further include performing a test of at least one microphone conductor of a pair of microphone conductors used to convey signals representing audio detected by a communications microphone of the headset to determine whether the at least one microphone is coupled to the intercom system; and monitoring the operating state of a wireless transceiver of the headset to determine if the wireless transceiver is inactive, on standby in preparation to be used in two-way communications, or in use.

[0015] Performing the test of the at least one microphone conductor may include monitoring the pair of microphone conductors for a bias voltage being provided across the pair of microphone conductors; determining that the at least one microphone conductor is coupled to the intercom system in response to detecting a bias voltage across the pair of microphone conductors; and determining that the at least one microphone conductor is not coupled to the intercom system in response to not detecting a bias voltage across the pair of microphone conductors. Alternatively and/or additionally, performing the test of the at least one microphone conductor may include injecting a current into the at least one microphone conductor; monitoring the voltage across the pair of microphone conductors; determining that the at least one microphone conductor is coupled to the intercom system in response to the monitored voltage being within a first range of voltages; and determining that the at least one microphone conductor is not coupled to the intercom system in response to the monitored voltage being within a second range of voltages, wherein the second range of voltages is higher than the first range of voltages. The method still further include coupling the ground conductor associated with the at least one audio conductor to a microphone conductor of the pair of microphone conductors, and providing a sidetone from the communications microphone to the acoustic driver in response to either of the at least one audio conductor or the at least one microphone conductor not being coupled to the intercom system, and in response to the wireless transceiver being in use. Alternatively and/or additionally, the method may still further include coupling the ground conductor associated with the at least one audio conductor to a microphone conductor of the pair of microphone conductors in response to either of the at least one audio conductor or the at least one microphone conductor not being coupled to the intercom system, and in response to the wireless transceiver being on standby. The method may still further include providing a microphone bias voltage across the pair of microphone conductors in response to the at least one microphone conductor not being coupled to the intercom system, and in response to the wireless transceiver being in use.

[0016] In one aspect, a headset includes an acoustic driver to acoustically output audio to an ear of a user; a communications microphone to detect speech sounds of the user; and a wireless transceiver to wirelessly couple the headset to a wireless device; a cable assembly to couple the headset to an intercom system. The cable assembly includes an audio conductor used to convey a signal representing audio to the acoustic driver; a ground conductor associated with the audio conductor; and a pair of microphone conductors used to convey signals representing audio detected by the communications microphone. The headset further includes an excitation current injector to inject a current into the audio conductor; a voltage sensor to monitor a voltage of the of the audio conductor relative to the ground conductor; and a

controller coupled to the excitation current injector and the voltage sensor to determine that the audio conductor is coupled to the intercom system in response to the voltage sensor detecting a voltage within a first range of voltages, and to determine that the audio conductor is not coupled to the intercom system in response to the voltage sensor detecting a voltage within a second range of voltages, wherein the second range of voltages is higher than the first range.

5 **[0017]** Implementations may include, and are not limited to, one or more of the following features. The headset may further include an audio signal presence detector coupled to the controller to detect activity on the audio conductor; and an audio signal interrupter to divide the audio conductor to isolate a portion of the audio conductor into which the excitation current injector injects a current from another portion of the audio conductor; wherein the controller awaits an indication from the audio signal presence detector of there being no activity on the audio conductor prior to operating the audio signal interrupter to divide the audio conductor, operating the excitation current injector to inject a current into the audio conductor, and awaiting an indication from the voltage sensor of the voltage of the audio conductor. The headset may further include a bias voltage detector coupled to the controller to monitor the pair of microphone conductors for a microphone bias voltage conductors, wherein the controller determines that at least one microphone conductor of the pair of microphone conductors is coupled to the intercom system in response to detecting a bias voltage across the pair of microphone conductors; and wherein the controller determines that the at least one microphone conductor is not coupled to the intercom system in response to not detecting a bias voltage across the pair of microphone conductors. The headset may further include a ground coupler coupled to the controller to couple the ground conductor to one of the microphone conductors of the pair of microphone conductors in response to either the audio conductor or at least one microphone conductor of the pair of microphone conductors not being coupled to the intercom system, and in response to the wireless transceiver being in use; and a local sidetone generator coupled to the controller to generate a sidetone from the communications microphone to the acoustic driver in response to either the audio conductor or the at least one microphone conductor not being coupled to the intercom system, and in response to the wireless transceiver being in use. The controller may operate the ground coupler to couple the ground to a microphone conductor of the pair of microphone conductors in response to either of the at least one audio conductor or the at least one microphone conductor not being coupled to the intercom system, and in response to the wireless transceiver being on standby.

10 **[0018]** The controller may further determine that the audio conductor is coupled to the intercom system and determines that the intercom system is not driving the at least one audio conductor in response to the voltage sensor detecting a voltage within a third range of voltages, wherein the third range of voltages is higher than the first range of voltages and is lower than the second range of voltages. The headset may still further include a bias voltage supply coupled to the controller to provide a microphone bias voltage across the pair of microphone conductors, and wherein the controller refrains from operating the bias voltage supply to provide a microphone bias voltage across the pair of microphone conductors in response to determining that the at least one audio conductor is coupled to the intercom system and in response to determining that the intercom system is not driving the at least one audio conductor.

15 **[0019]** Other features and advantages of the invention will be apparent from the description and claims that follow.

DESCRIPTION OF THE DRAWINGS

20 **[0020]** Figures 1 is a perspective diagram of a headset.

[0021] Figure 2 is a block diagram of an electrical architecture employable in the headset of Figure 1.

25 **[0022]** Figure 3 is a block diagram of a control circuit of the electrical architecture of Figure 2.

DETAILED DESCRIPTION

30 **[0023]** What is disclosed and what is claimed herein is intended to be applicable to a wide variety of headsets, i.e., devices structured to be worn on or about a user's head in a manner in which at least one acoustic driver is positioned in the vicinity of an ear, and in which a microphone is positioned in the vicinity of the user's mouth to enable two-way audio communications. It should be noted that although specific embodiments of headsets incorporating a pair of acoustic drivers (one for each of a user's ears) are presented with some degree of detail, such presentations of specific embodiments are intended to facilitate understanding through examples

35 **[0024]** It is intended that what is disclosed and what is claimed herein is applicable to headsets that also provide active noise reduction (ANR), passive noise reduction (PNR), or a combination of both. It is intended that what is disclosed and what is claimed herein is applicable to headsets structured to be connected with at least an intercom system through a wired connection, but which may be further structured to be connected to any number of additional devices through wired and/or wireless connections. It is intended that what is disclosed and what is claimed herein is applicable to headsets having physical configurations structured to be worn in the vicinity of either one or both ears of a user, including and not limited to, over-the-head headsets with either one or two earpieces, behind-the-neck headsets, two-piece headsets incorporating at least one earpiece and a physically separate microphone worn on or about the neck, as well as hats or helmets incorporating earpieces and a microphone to enable audio communication. Still other embodiments of

headsets to which what is disclosed and what is claimed herein is applicable will be apparent to those skilled in the art.

[0025] Figure 1 depicts an embodiment of a headset 1000 having an "over-the-head" physical configuration. The headset 1000 incorporates a head assembly 100, an upper cable assembly 200, and one or the other of a lower cable assembly 300a and a lower cable assembly 300b. The head assembly 100 incorporates a pair of earpieces 110a and 110b that each incorporate an acoustic driver 115, a headband 120 that couples together the earpieces 110a and 110b, and a microphone boom 130 extending from the earpiece 110a to support a communications microphone 135. The upper cable assembly 200 incorporates a control box 250 having a control circuit 500, and an electrically conductive cable 240 that couples the control box 250 to the earpiece 110a. The lower cable assembly 300a incorporates an upper coupling 370 that detachably couples the cable assembly 300a to the control box 250, a lower coupling 390 that detachably couples the cable assembly 300a to an intercom system (not shown), and an electrically conductive cable 380 that couples together the upper coupling 370 and the lower coupling 390. Similarly, the lower cable assembly 300b incorporates an upper coupling 370 that detachably couples the cable assembly 300b to the control box 250, a pair of lower couplings 390 that detachably couples the cable assembly 300b to an intercom system (not shown), and an electrically conductive split form of cable 380 that couples together the upper coupling 370 and the pair of lower couplings 390.

[0026] The head assembly 100 is given its over-the-head physical configuration by the headband 120. Depending on the size of each of the earpieces 110a and 110b relative to the typical size of the pinna of a human ear, each of the earpieces 110a and 110b may be either an "on-ear" (also commonly called "supra-aural") or an "around-ear" (also commonly called "circum-aural") form of earcup. As will be explained in greater detail, the provision of an acoustic driver 115 in each of the earpieces 110a and 110b enables the headset 1000 to acoustically output two-channel audio (e.g., stereo audio) to a user. The microphone boom 130 positions the communications microphone 135 in the vicinity of the mouth of a user of the headset 1000 when the head assembly 100 is correctly worn such that the earpieces 110a and 110b overly corresponding ones of the user's ears. However, despite the depiction in Figure 1 of this particular physical configuration of the head assembly 100, those skilled in the art will readily recognize that the head assembly may take any of a variety of other physical configurations. By way of example, alternate embodiments may incorporate only one of the earpieces 110a and 110b to acoustically output only one-channel audio, may incorporate a "behind-the-head" or "behind-the-neck" variant of band in place of the headband 120, may position the communications microphone 135 on a portion of one or the other of the earpieces 110a and 110b (rather than at the end of the microphone boom 130), and/or may be structured to permit one or both of the cable 240 and the microphone boom 130 to be detachable from the earpiece 110a in order to be attached to the earpiece 110b.

[0027] The upper cable assembly 200 provides a cable-based coupling of the control box 250 to the earpiece 110a (or possibly the earpiece 110b, as just discussed) through the cable 240. As will be explained in greater detail, the control circuit 500 within the control box 250 enables a user of the headset 1000 to interact with more than just an intercom system through the headset 1000. The control circuit 500 may incorporate a wireless transceiver that enables wireless communications via wireless signals 870 (e.g., infrared signals, radio frequency signals, etc.) between the control circuit 500 and a wireless device 800 (e.g., a cell-phone, an audio recording and/or playback device, a two-way radio, etc.) to thereby enable a user to interact with the wireless device 800 through the headset 1000. The control box 250 may incorporate an auxiliary input enabling the control circuit 500 to be coupled through a cable 970 to a wired device 900 (e.g., an audio playback device, an entertainment radio, etc.) to enable a user to listen through the headset 1000 to audio provided by the wired device 900. Although not specifically depicted in Figure 1, in various possible embodiments, the control box 250 may provide one or more manually-operable controls to enable the user to control one or more aspects of the operation of the headset 1000, possibly including coordinating the transfer of audio among the headset 1000, an intercom system to which the headset may be coupled via one or the other of the lower cable assemblies 300a and 300b, the wireless device 800 and the wired device 900. Further, and although also not depicted in Figure 1, the control circuit 500 may be incorporated into one or both of the earpieces 110a and 110b (or some other portion of the head assembly 100) in addition to or as an alternative to being incorporated within the control box 250, thereby possibly obviating the need for the upper cable assembly 200 to incorporate the control box 250.

[0028] Each of the lower cable assemblies 300a and 300b enable the coupling of the headset 1000 to an intercom system of a vehicle or large piece of machinery, including and not limited to, a truck, multi-car train, military vehicle, airplane, seafaring vessel, crane, tunnel boring machine, harvester, combine or tractor. As previously discussed, the lower cable assembly 300a incorporates a single lower connector 390 for coupling to an intercom system, while the lower cable assembly 300b incorporates a pair of lower connectors 390. As will be readily recognized by those having familiarity with such vehicles or large pieces of machinery, despite standards that may exist in some industries, it is not uncommon for manufacturers of different ones of such vehicles or large pieces of machinery to provide intercom systems having characteristics that vary among those manufacturers. Among those varying characteristics is the separation of outgoing and incoming audio signals to be conveyed through two separate connectors by some manufacturers, while other manufacturers choose to combine both outgoing and incoming audio signals to be conveyed through a single connector. Thus, the lower cable assembly 300a is structured to enable the headset 1000 to be coupled to intercom systems employing a single connector through the single lower coupling 390, while the lower cable assembly 300b is

structure to enable the headset 1000 to be coupled to intercom systems employing separate connectors through the separate ones of the pair of lower couplings 390. Although a split form of the cable 380 of the cable assembly 300b is depicted as splitting at or in the vicinity of the upper coupling 370, it will be apparent to those skilled in the art that other physical configurations of the cable 380 that accommodate the separation of incoming and outgoing signals among the pair of lower couplings 390 are possible.

[0029] Figure 2 depicts a possible embodiment of an electrical architecture that may be employed by the headset 1000. With one or the other of the lower cable assemblies 300a and 300b coupling the control box 250 of upper cable assembly 200 to an intercom system, and with the control box 250 being coupled to the head assembly 100 via the rest of the upper cable assembly 200, left and right audio signals (along with system ground) are able to be conveyed from the intercom system to the acoustic drivers 115, and high and low microphone signals are able to be conveyed from the communications microphone 135 to the intercom system. As will be explained in greater detail, the control circuit 500 incorporated within the control box 250 monitors the coupling of the headset 1000 to an intercom system, and controls the conveying of these signals, controls the local provision of sidetone and local microphone biasing voltage. As will also be explained in greater detail, the control circuit controls the local coupling of the system ground of the acoustic drivers 115 to the microphone low signal of the communications microphone 135, at least partly in response to whether or not the headset 1000 is coupled to an intercom system such that such a coupling is already made within the intercom system. In this way, the headset 1000 is able to be employed in interactions by a user with numerous possible combinations of an intercom system, a wireless device 800 and a wired device 900.

[0030] Figure 3 depicts a possible embodiment of an electrical architecture that may be employed by the control circuit 500. In employing this electrical architecture, the control circuit 500 incorporates a summing node 510, an auxiliary connector 512, a sidetone generator 520, wireless transceiver 530, a controller 550, a local power supply 552, an audio signal presence detector 580, an audio signal interrupter 582, an excitation current injector 584, a voltage sensor 586, a bias voltage detector 590 and a ground coupler 592. The controller 550 is coupled to many others of these components to monitor and/or control their functions as will be explained in greater detail. Also, and although the connections are not specifically depicted for sake of clarity of presentation, the local power supply 552 provides power to others of these components. Further, the power provided by the power supply 552 is preferably referenced to the system-gnd conductor, which is also the reference ground provided by an intercom system (when the headset 1000 is coupled to an intercom system such that the system-gnd conductor is coupled to that intercom system).

[0031] The summing node 510 combines the left and right audio signals provided by an intercom system (if the headset 1000 is coupled to an intercom system) with audio provided by a wired device (if the headset 1000 is coupled to a wired device), audio provided by the local sidetone generator 520 (if active), and audio provided by the wireless transceiver 530 (if active). Where a source of audio provides only single-channel audio (otherwise known as "mono"), the summing node 510 may combine that audio with only one of the audio-left and audio-right signals, or both. Though not specifically depicted, in some embodiments, the control box and/or at least one of the earpieces 110a and 110b may carry one or more manually-operable controls to enable a user of the headset 1000 to select or in some other way control what sources of audio are conveyed through the summing node 510 and ultimately to the acoustic drivers 115. In a preferred embodiment of the headset 1000 for use in at least aircraft, there would be no manually-operable control by which audio provided by an intercom system would be prevented from being conveyed to the acoustic drivers 115. The summing node 510 may be implemented as a resistor network, a summing amplifier, or other mechanism for combining audio as will be familiar to those skilled in the art.

[0032] The auxiliary connector 512 enables a wired device (such as the wired device 900 depicted in Figure 1) to be coupled by a cable (such as the cable 970) to control circuit 500 to thereby allow audio provided by the wired device to be summed with other audio by the summing node 510, and ultimately provided to the acoustic drivers 115. In various possible embodiments, the auxiliary connector 512, in cooperation with the summing node 510, may enable the provision of either single-channel or two-channel audio for being combined with other audio by the summing node 510. As depicted, the auxiliary connector 512 makes no provision for a two-way exchange of audio. However, as those skilled in the art will readily recognize, other variations of the auxiliary connector 512 are possible through which signals from the communications microphone 135 are made available to a wired device coupled to the auxiliary connector 512.

[0033] The local sidetone generator 520 can be employed to convey sounds detected by the communications microphone 135 to the acoustic driver 115 (through the summing node 510) as a way of providing a user of the headset 1000 a more natural acoustic experience when talking. Studies have revealed that people are accustomed to hearing the sound of their own voice when talking, that the human mind uses this self-hearing of speech as part of regulating speech volume (i.e., how loud to talk), and that an inability to maintain an appropriate speech volume begins to occur when a person is substantially prevented from hearing themselves talk. Especially in embodiments of the headset 1000 in which the earpieces provide some degree of either passive or active noise reduction, and especially when the headset 1000 is used in a noisy environment, the ability of a person to hear their voice well enough to enable normal self-regulation of speech volume can become greatly impaired. The sidetone generator 520 passes through a variation of the sounds detected by the communications microphone 135 that may be attenuated and/or filtered in some way to approximate

the normal experience of a person hearing themselves talk in order to enable normal self-regulation of speech volume. In some embodiments, sounds detected by the communications microphone may be subjected to a bandpass filter within the local sidetone generator 520 to limit sounds conveyed to the summing node 510 to those within a range of frequencies typically associated with human speech.

5 **[0034]** The wireless transceiver 530 enables a wireless device (such as the wireless device 800 depicted in Figure 1) to be wirelessly coupled to the control circuit 500 to thereby allow audio received from the wireless device to be summed with other audio by the summing node 510, and to thereby allow sounds detected by the communications microphone 135 to be transmitted to the wireless device. In this way, two-way audio communications is enabled between the headset 1000 and such a wireless device. In various embodiments, the wireless coupling may be through radio frequency (RF) signals, possibly RF signals meant to comply with one or more widely known and used industry standards for RF communication including, and not limited to, the Bluetooth specification promulgated by the Bluetooth SIG based in Bellevue, Washington, or the ZigBee specification promulgated by the ZigBee Alliance based in San Ramon, California.

10 **[0035]** The audio signal presence detector 580 monitors the audio-left and audio-right conductors of the lower cable assembly 300a or 300b for activity associated with signals conveying sounds from an intercom system (if the headset 1000 is coupled to an intercom system) and ultimately to the acoustic drivers 115. The audio signal interrupter 582 is able to be operated to selectively disconnect the audio-left and audio-right conductors of the lower cable assembly 300a or 300b from the audio-left and audio-right conductors coupled through the upper cable assembly 200 to head assembly 100. The excitation current injector 584 is able to be operated to selectively function as a current source injecting a current onto one or both of the audio-left and audio-right conductors of the lower cable assembly 300a or 300b. The voltage sensor 586 is able to measure a voltage that might be present on one or both of the audio-left and audio-right conductors of the lower cable assembly 300a or 300b (as a result of the injection of current by the excitation current injector 584) as referenced to the system-gnd conductor.

15 **[0036]** The bias voltage detector 590 is able to detect the presence or absence of a microphone bias voltage across the mic-high and mic-low conductors. As previously explained, in typical intercom systems, the mic-low and system-gnd conductors are coupled together. However, as also previously explained, the possible use of the lower cable assembly 300b makes possible a situation where only one or the other of the system-gnd and mic-low conductors is coupled to an intercom system, thereby preventing the coupling of the mic-low conductor to the system-gnd conductor such that the mic-low conductor may be floating relative to the system ground conductor. Therefore, in order to detect a bias voltage across the mic-low and mic-high conductors at a time when the mic-low conductor is floating relative to the system-gnd conductor, the bias voltage detector 590 may be implemented with an opto-isolator. The ground coupler 592 is able to be operated to selectively couple the system-gnd conductor to the mic-low conductor. In an effort to minimize power consumption by the ground coupler 592, it may be implemented using a MOSFET. The bias voltage supply 594 is able to be operated to selectively provide a microphone bias voltage on the mic-high and mic-low conductors.

20 **[0037]** The controller 550 is coupled to and receives signals indicating status from one or more of the wireless transceiver 530, the audio signal presence detector 580, the voltage sensor 586, and the bias voltage detector 590. The controller is coupled to and sends signals to operate one or more of the local sidetone generator 520, the audio signal interrupter 582, the excitation current generator 584 and the ground coupler 592. The controller 550 may be implemented in any of a number of ways. In some embodiments, the controller 550 is a combination of a processing device and a storage device in which is stored a sequence of instructions that is executed by the processing device of the controller 550 to cause that processing device to perform a number of tasks as are described herein. Possible implementations of such a processing device include, and are not limited to, a general purpose central processing unit (CPU), a digital signal processor (DSP), a microcontroller, a sequencer, and a state machine implemented with discrete logic. Possible implementations of such a storage device include, and are not limited to, dynamic random access memory (DRAM), static random access memory (SRAM), read-only memory (ROM), electrically erasable programmable read-only memory (EEPROM), any of a variety of other types of volatile and/or non-volatile solid state memory storage technologies, magnetic and/or optical storage media, and any of a variety of other types of storage media.

25 **[0038]** The controller 550 cooperates with the audio signal presence detector 580, the audio signal interrupter 582, the excitation current injector 584 and the voltage sensor 586 to perform a test to determine whether or not at least the audio-left, the audio-right and the system-gnd conductors of the lower cable assembly 300a or 300b are connected to an intercom system on a recurring basis. The audio signal presence detector 580 signals the controller 550 upon detecting an instance of their being a lack of activity on one or both of the audio-left and audio-right conductors of the lower cable assembly 300a or 300b consistent with no audio being provided by an intercom system. In response, the controller 550 may operate the audio signal interrupter 582 to disconnect the audio-left and audio-right conductors of the lower cable assembly 300a or 300b from the same two conductors that are coupled to the head assembly 100. Then, while the audio signal interrupter is still operated to disconnect conductors, the controller 550 may operate the excitation current injector 584 to function as a current source and output a current onto one or both of the audio-left and audio-right conductors coupled to the lower cable assembly 300a or 300b, while the voltage sensor 586 signals the controller 550 with an indication of what voltages are observed on one or both of these conductors. As will be familiar to those skilled in the

art, if the audio-left, audio-right and system-gnd conductors of the lower cable assembly 300a or 300b are not coupled to an intercom system, there will be a very high resistance (theoretically, a near-infinite resistance) between the system-gnd conductor and each of the audio-left and audio-right conductors such that a relatively high voltage will be found to be present by the voltage sensor 586 on one or both of the audio-left and audio-right conductors relative to the system-gnd conductor. However, if these conductors are coupled to an intercom system, then there will be a far lower resistance between the system-gnd conductor and each of the audio-left and audio-right conductors such that a relatively low voltage will be found to be present by the voltage sensor 586.

[0039] If the voltage sensor 586 indicates to the controller 550 that voltages consistent with these conductors being coupled to an intercom system are present, then the controller 550 operates the audio signal interrupter 582 to reconnect conductors and operates the excitation current injector 584 to cease sourcing a current onto either of the audio-left and audio-right conductors of the lower cable assembly 300a or 300b. However, if the voltage sensor 586 indicates to the controller that voltages consistent with no such connection to an intercom system are present, then the controller 550 may continue to operate the audio signal interrupter 582 to continue disconnecting conductors, and may continue to operate the excitation current injector 584 to source a current onto one or both of the audio-left and audio-right conductors, either continuously or on a repeating interval. Such use of the audio signal interrupter 582 to disconnect conductors serves to ensure that the voltages seen are not influenced by resistances and/or currents from other components of the headset 1000, and serves to ensure that the user is not caused to hear various audio artifacts (e.g., popping, static, crackling or buzzing noises).

[0040] The controller 500 additionally cooperates with the transceiver 530, the bias voltage detector 590, the ground coupler 592 and the bias voltage supply 594 to determine whether or not the mic-high and mic-low conductors are connected to an intercom system, and to determine whether to couple the system-gnd and mic-low conductors, provide a bias voltage across the mic-low and mic-high conductors, and/or provide sidetone. These actions that the controller 500 may take are in recognition of the fact that in the electrical architecture for the control circuit 500 depicted in Figure 3, the communications microphone provides signals representing sounds that it has detected only to one or both of an intercom system (if the headset 1000 is coupled to an intercom system) and the transceiver 530. These actions are also taken in recognition of the fact that the mic-low and system-gnd conductors are typically coupled within an intercom system to which the headset 1000 may be coupled, and that it is usually desirable to avoid also coupling those same conductors within a headset used with such an intercom system due to the possible introduction of electromagnetic interference and audible noise that may arise from the ground loop that may be created by such a redundant connection within a headset. It should be noted that these possible actions may differ somewhat from what is about to be described for the depicted electrical architecture in a case where the control circuit 500 employs an alternate electrical architecture that additionally accommodates two-way communication through the auxiliary connector 512.

[0041] At times when the wireless transceiver 530 has been turned off or otherwise put into an inactive operating state by the user in which the transceiver 530 is neither prepared for use nor in use, the controller 550 ignores all indications from the bias voltage detector 590 of whether or not there is a bias voltage present across the mic-high and mic-low conductors, and ignores all results of tests performed to determine whether or not at least the audio-left, audio-right and system-gnd conductors are coupled to an intercom system. At these times, the controller 550 operates the ground coupler 592 to not couple the system-gnd and mic-low conductors, operates the bias voltage supply 594 to not provide a bias voltage across the mic-low and mic-high conductors, and operates the local sidetone generator 520 to not provide sidetone. In this way, electric power is not wasted by the bias voltage supply 594 providing a bias voltage or the local sidetone generator 520 providing a sidetone when neither is needed as a result of the communications microphone 135 not being used with the wireless transceiver 530. At these times, it is still possible for the communications microphone 135 to be used with an intercom system, since it is typical for intercom systems of vehicles and large machinery to provide sidetone and any needed bias voltage.

[0042] At times when the wireless transceiver 530 enters into or remains in the standby operating state such that it is prepared for being used, the controller 550 makes use of indications provided by the bias voltage detector 590 and results of the tests of whether the audio-left, audio-right and system-gnd conductors are coupled to an intercom system. The controller 550 uses such indications and test results in determining whether or not to operate the ground coupler 592 to couple the system-gnd and mic-low conductors in preparation for the communications microphone 135 being used with the wireless transceiver 530. However, as long as the transceiver 530 indicates to the controller 550 that the transceiver 530 is on standby, the controller 550 operates the bias voltage supply 594 to refrain from providing a bias voltage, and operates the local sidetone generator 520 to refrain from providing sidetone. While the transceiver 530 is on standby, if the bias voltage detector 590 does not detect a bias voltage, then it's presumed that the mic-low and mic-high conductors are not coupled to an intercom system, and the controller 550 operates the ground coupler 592 to couple the mic-low conductor to the system-gnd to prepare the communications microphone 135 for use with the transceiver 530.

[0043] Alternatively, while the transceiver 530 is on standby, if the bias voltage detector 590 does detect a bias voltage, then it's presumed that the mic-low and mic-high conductors are coupled to an intercom system. If results of tests to determine whether or not the audio-left, audio-right and system-gnd conductors are also coupled to the intercom system

indicate that those conductors are so coupled, then the controller 550 operates the ground coupler 592 to not couple the mic-low and system-gnd conductors to avoid creating a ground loop. However, if results of tests to determine whether or not the audio-left, audio-right and system-gnd conductors are also coupled to the intercom system indicate that those conductors are not so coupled, then the controller 550 operates the ground coupler 592 to couple the mic-low and system-gnd conductors, since they are not able to be coupled through the intercom system.

[0044] At times when the wireless transceiver 530 transitions into the operating state of being in use or remains in use, the controller 550 makes use of indications provided by the bias voltage detector 590 and results of the tests of whether the audio-left, audio-right and system-gnd conductors are coupled to an intercom. The controller 550 uses such indications and test results in determining whether or not to operate the ground coupler 592 to couple the system-gnd and mic-low conductors to enable the communications microphone 135 to be used with the wireless transceiver 530. Starting at the time the wireless transceiver 530 transitions into being in use and while it remains in use, if the bias voltage detector 590 detects a bias voltage, it's presumed that the mic-low and mic-high conductors are coupled to an intercom system, and the controller 550 operates the bias voltage supply 594 to refrain from providing a bias. If results of tests to determine whether or not the audio-left, audio-right and system-gnd conductors are also coupled to the intercom system indicate that those conductors are so coupled, then the controller 550 operates the ground coupler 592 to not couple the mic-low and system-gnd conductors, and operates the local sidetone generator 520 to not provide sidetone. However, if results of tests to determine whether or not the audio-left, audio-right and system-gnd conductors are also coupled to the intercom system indicate that those conductors are not so coupled, then the controller 550 operates the ground coupler 592 to couple the mic-low and system-gnd conductors, and operates the local sidetone generator 520 to provide sidetone.

[0045] Alternatively, starting at the time the wireless transceiver 530 transitions into being in use and while it remains in use, if the bias voltage detector 590 ever detects an absence of a bias voltage, it's presumed that the mic-low and mic-high conductors either were not coupled to an intercom system at the start of the wireless transceiver 530 being in use or were subsequently uncoupled from an intercom system while the wireless transceiver 530 was in use. In response, the controller operates the ground coupler 592 to couple the mic-low and system-gnd conductors, operates the bias voltage supply 594 to provide a bias voltage, and operates the local sidetone generator 520 to provide sidetone. Further, since the provision of a bias voltage by the bias voltage supply 594 results in the bias voltage detector 590 not being able to detect if a bias voltage is subsequently again provided by an intercom system, the controller 550 simply continues to operate the ground coupler 592 to couple the mic-low and system-gnd conductors, continues to operate the bias voltage supply 594 to provide a bias voltage, and continues to operate the local sidetone generator to provide sidetone for as long as the wireless transceiver 530 continues to indicate that it is in use.

[0046] Only when the wireless transceiver 530 ceases to indicate to the controller 550 that the wireless transceiver is in use (e.g., by entering into either an inactive operating state, or a standby operating state) does the controller 550 then operate the bias voltage supply 594 to cease providing a bias voltage and operate the local sidetone generator to cease providing sidetone. The operating of the of the bias voltage supply to cease providing a bias voltage enables the bias voltage detector 590 to once again monitor the mic-low and mic-high conductors for an indication of a bias voltage being provided by an intercom system. If the wireless transceiver 530 is transitioning to an inactive operating state (such as being turned off), then the controller also operates the ground coupler 592 to cease coupling the system-gnd and mic-low conductors, and the controller 550 once again ignores any indication by the bias voltage detector 590 of whether or not an intercom system is providing a bias voltage. Alternatively, if the wireless transceiver 530 is transitioning to a standby operating state, then whether or not the ground coupler 592 is operated to cease coupling the mic-low and system-gnd conductors will once again depend on the results of tests of whether the audio-left, audio-right and system-gnd signals are coupled to an intercom and on whether the bias voltage detector 590 detects a bias voltage being supplied by an intercom system.

[0047] Since, as just explained, it is possible for the bias voltage supply 594 to continue providing a bias voltage even after the mic-low and mic-high conductors are once again coupled to an intercom system that also provides a bias voltage, the bias voltage supply 594 is structured to avoid ever damaging an intercom system by providing a bias voltage that could be higher than a bias voltage provided by any intercom system to which the headset 1000 might be coupled. Further, the bias voltage supply 594 is also structured to incorporate one or more diodes, a rectifier and/or other protective circuitry to avoid being damaged by the provision of a higher bias voltage by an intercom system at the same time that the bias voltage supply 594 is also providing a bias voltage. It is presumed that the wireless transceiver 530 will not remain in the operating state of being in use indefinitely, since it is presumed that a user of the headset 1000 will, at some point, cease engaging in two-way communications with a wireless device through the wireless transceiver 530.

[0048] These separate tests of whether the mic-low and mic-high conductors are coupled to an intercom system and of whether the audio-left, audio-right and system-gnd conductors are coupled to an intercom system are carried out to accommodate the use of the lower cable assembly 300b in which the provision of two of the lower couplings 390 (one for at least the mic-low and mic-high conductors, and the other for at least the audio-left, audio-right and system-gnd conductors) enable the independent coupling and uncoupling of each of these two sets of conductors. The ability to

EP 2 425 637 B1

couple only the audio-left, audio-right and system-gnd conductors to an intercom system may be deemed desirable by a user who wishes to hear communications occurring through that intercom system, but does not wish others coupled to that intercom system to hear their own two-way communications involving the headset 1000 and a wireless device (such as the wireless device 800 of Figure 1). The ability to couple only the mic-low and mic-high conductors to an intercom system may be deemed desirable by a user who wishes to be able to say something through that intercom system, but who needs to momentarily remove the distraction of hearing others through that intercom system so that they can momentarily concentrate on listening to audio provided by either a wireless device or a wired device coupled by a cable to the headset 1000 (such as the wired device 900 of Figure 1). Thus, the employment of these separate tests to separately determine whether or not the mic-low and mic-high conductors or the audio-left, audio-right and system-gnd conductors are coupled to an intercom system to accommodate the lower cable assembly 300b can result in desired flexibility in the use of the headset 1000 being provided to a user.

[0049] These separate tests, their possible interactions, and the possible resulting actions that the controller 550 may take, and which have just been described at length, are summarized in the following table:

Audio Line Connection Status	Microphone Line Connection Status	Wireless Transceiver Status	Coupling of system-gnd & mic-low	Microphone Bias	Sidetone
not connected	not connected	inactive	not coupled	none	none
		standby	coupled locally	none	none
		in use	coupled locally	supplied locally	supplied locally
	connected	inactive	not coupled	supplied by intercom	none
		standby	coupled locally		none
		in use	coupled locally		supplied locally
connected	not connected	inactive	not coupled	none	none
		standby	coupled locally	none	none
		in use	coupled locally	supplied locally	supplied locally
	connected	inactive	coupled by intercom	supplied by intercom	supplied by intercom
		standby			
		in use			

[0050] However, where the lower cable assembly 300a is employed in place of the lower cable assembly 300b, the possible interactions of the results of these separate tests, and the possible resulting actions taken by the controller 550 become greatly simplified, and are summarized in the following table:

Audio & Microphone Line Connection Status	Wireless Transceiver Status	Coupling of system-gnd & mic-low	Microphone Bias & Sidetone
not connected	inactive	not coupled	none
	standby	coupled locally	none
	in use	coupled locally	supplied locally
connected	inactive	coupled by intercom	supplied by intercom
	standby		
	in use		

[0051] As can be appreciated through the comparison of the above two tables, where the lower cable assembly 300a is employed in place of the lower cable assembly 300b, it may be possible to cease performing either the tests to determine whether the audio-left, audio-right and system-gnd conductors are coupled to an intercom system or the tests to determine whether the mic-low and mic-high conductors are coupled to an intercom system. Indeed, in one possible

embodiment of the headset 1000, a switch, sensor, connector contact with a pull-down or pull-up resistor, or other mechanism may be employed to provide an indication to the controller 550 of which of the lower cable assemblies 300a and 300b are being employed at any given time, and the controller 550 may use such an indication to alter the tests that are performed to determine what conductors are coupled to an intercom system and/or to alter the actions taken by the controller 550 in response to the results of one or more of those tests.

[0052] It should be noted that the above description of these tests and possible resulting actions that the controller 550 may take are partly based on the assumption that the intercom system is active such that the intercom system will provide a bias voltage when the mic-low and mic-high conductors are coupled to the intercom system, and such that the intercom system will provide sidetone when the mic-low, mic-high, audio-left, audio-right and system-gnd conductors are all coupled to the intercom system. However, there may be situations in which the intercom system of a vehicle or large piece of machinery may not be turned on or may in other ways be at least partly inactive such that a bias voltage and/or sidetone are not provided.

[0053] In some embodiments, where the mic-low and mic-high conductors are coupled to an intercom system, but the intercom system fails to provide a bias voltage, the controller 550 responds in a manner substantially similar to how it has been described above as responding to the mic-low and mic-high signals not being coupled to an intercom system. In other words, the controller 550 responds to the lack of a bias voltage being provided by the intercom system at times when a user employs the communications microphone 135 in two-way communications through the wireless transceiver 530 by operating the bias voltage supply 594 to provide a bias voltage. Unfortunately, and as will be familiar to those skilled in the art, the connection of the mic-low and mic-high signals to an intercom system that does not provide a bias voltage will likely result in a greater draw of current from the bias voltage supply 594 through the intercom system. This may be significant where the local power supply 552 is of limited capacity (e.g., is a battery or similarly limited power source) such that the local power supply 552 will be drained at an increased rate.

[0054] On occasions where all of the mic-low, mic-high, audio-left, audio-right and system-gnd conductors are coupled to an intercom system that is turned off or otherwise inactive, whether the controller 550 operates the ground coupler 592 to couple the system-gnd and mic-low conductors and whether the controller 550 operates the local sidetone generator 520 to provide sidetone may depend on how the controller 550 interprets the results of the recurring test to detect the coupling of the audio-left and/or audio-right conductors to an intercom system. As previously discussed at length, the test of whether or not the audio-left and/or audio-right conductors are coupled to an intercom system entails injecting a current into one or both of the audio-left and audio-right conductors and observing the voltage that results, where a relatively high voltage indicates that there is no such coupling and a relatively low voltage indicates that there is such a coupling. As also previously discussed, the relatively high voltage results from the lack of current flowing from the audio-left and audio-right conductors to the system-gnd conductor as a result of their being no coupling of these conductors through an intercom system, while the relatively low voltage results from their being a relatively low resistance coupling between these conductors through an intercom system that allows a current flow to take place. However, as those skilled in the art will readily recognize, the resistance through the portion of an intercom system to which the audio-left, audio-right and system-gnd conductors may be coupled does change depending on whether or not that intercom system is active such that the audio-left and audio-right conductors are being driven by that intercom system. More particularly, resistance between the system-gnd conductor and each of the audio-left and audio-right conductors is higher when an intercom system is inactive such that the audio-left and audio-right conductors are not driven than when an intercom system is active such that the audio-left and audio-right conductors are driven.

[0055] Therefore, in other embodiments, during tests to determine whether the audio-left, audio-right and system-gnd conductors are coupled to an intercom, the controller 550 evaluates the voltage(s) detected by the voltage sensor 586 to determine whether the voltage(s) fall within a range of voltages indicative of these conductors being coupled to an active intercom system, being coupled to an inactive intercom system, or not being coupled to an intercom system. In response to a voltage in a range of voltages indicative of being coupled to an active intercom system or a voltage in a range of voltages indicative of not being coupled to an intercom system, the controller 550 may take action in ways consistent with what has been previously discussed at length, above. However, in response to a voltage in a range of voltages indicative of being coupled to an inactive intercom system, the controller 550 may operate the bias voltage supply 594 and the local sidetone generator 520 to provide a bias voltage and sidetone at least at times when a user employs the communications microphone 135 to engage in two-way communications through the wireless transceiver 530. Given that the bias voltage detector 590 would be incapable of distinguishing between whether the mic-low and mic-high signals are not coupled to an intercom system or are coupled to an inactive intercom system that does not provide a bias voltage, the controller may further respond to a voltage in a range of voltages indicative of the audio-left, audio-right and system-gnd signals being coupled to an inactive intercom system by also operating the bias voltage supply 594 to provide a bias voltage at least at times when a user employs the communications microphone 135 to engage in two-way communications through the wireless transceiver 530. Alternatively, in an effort to prevent the local power supply 552 being drained at an increased rate, the controller may respond to a voltage in a range indicative of the audio-left, audio-right and system-gnd signals being coupled to an inactive intercom system by either operating the

local power supply 552 to turn off many of the components of the control circuit 500 such that a user cannot use the headset 1000, or enabling only the components of the control circuit 500 that are needed to enable the user to listen to audio provided through the auxiliary connector 512.

[0056] In still other embodiments, the ability to interpret the voltage(s) observed during tests to determine whether or not the audio-left, audio-right and system-gnd conductors are coupled to an active intercom system, are coupled to an inactive intercom system or are not coupled to an intercom system may be combined with an enhanced ability to determine whether or not the mic-low and mic-high conductors are coupled to an active intercom system, are coupled to an inactive intercom system or are not coupled to an intercom system. Such an enhanced ability may be provided through the addition of an ability to detect and use periods of inactivity on the mic-low and mic-high conductors to inject a current in the mic-high conductor and measure a voltage in a manner not unlike what has been described as being done with the audio-left and audio-right conductors. Further, a microphone signal interrupter (not shown) may be incorporated into the control circuit 500 to divide the mic-low and/or mic-high conductors in a manner not unlike the dividing of the audio-left and audio-right conductors by the audio signal interrupter 582. Dividing the mic-low and/or mic-high conductors may be done at least in response to determining that these conductors are coupled to an inactive intercom system in order to avoid the previously described increased drain of power from the local power supply 552.

[0057] Still further, the approach of injecting a current into the mic-high conductor may be employed to determine whether or not the mic-low and mic-high conductors are coupled to an intercom system where the communications microphone 135 is a dynamic microphone, and not an electret microphone. As those skilled in the art will readily recognize, dynamic microphones do not require the provision of a bias voltage, and therefore, the presence or absence of a bias voltage could not be relied upon to determine whether or not the mic-low and mic-high conductors are coupled to an intercom system. Further, concerns over draining the local power supply 552 through the provision of a bias voltage by the bias voltage supply 594 would be obviated since the bias voltage supply 594 would not be present in the control circuit 500. Still further, the question of whether the mic-low and mic-high conductors are coupled to an intercom system that is either active or inactive may not be of importance in the use of the communications microphone 135 by a user to engage in two-way communications through the wireless transceiver 530. As a result, determining whether or not an intercom system is active or inactive may be of significance only in whether the controller 550 operates the local sidetone generator 520 to provide sidetone, or not.

Claims

1. A method of responding to coupling of a headset to an intercom system, the method comprising:

monitoring results of a first test of at least one audio conductor used to convey a signal representing audio to an acoustic driver of the headset to determine whether the at least one audio conductor is coupled to the intercom system;

monitoring results of a second test of at least one microphone conductor of a pair of microphone conductors used to convey signals representing audio detected by a communications microphone of the headset to determine whether the at least one microphone is coupled to the intercom system;

monitoring a wireless transceiver of the headset to determine whether the wireless transceiver is inactive, on standby in preparation to be used in two-way communications, or in use in two-way communications; and coupling a ground conductor associated with the at least one audio conductor to a microphone conductor of the pair of microphone conductors, and providing a sidetone from the communications microphone to the acoustic driver in response to either of the at least one audio conductor or the at least one microphone conductor not being coupled to the intercom system, and in response to the wireless transceiver being in use.

2. The method of claim 1, further comprising monitoring results of the first test to determine whether the intercom system is active such that the intercom system is driving the at least one audio conductor, in addition to monitoring results of the first test to determine whether the at least one audio conductor is coupled to the intercom system.

3. The method of claim 1, further comprising coupling the ground conductor associated with the at least one audio conductor to a microphone conductor of the pair of microphone conductors in response to either of the at least one audio conductor or the at least one microphone conductor not being coupled to the intercom system, and in response to the wireless transceiver being on standby.

4. The method of claim 1, further comprising providing a microphone bias voltage across the pair of microphone conductors in response to the at least one microphone conductor not being coupled to the intercom system, and in response to the wireless transceiver being in use.

5. The method of claim 1, further comprising performing the first test, wherein the first test comprises:

5 injecting a current into the at least one audio conductor;
monitoring the voltage of the at least one audio conductor relative to the ground conductor associated with the
at least one audio conductor;
determining that the at least one audio conductor is coupled to the intercom system in response to the monitored
voltage being within a first range of voltages; and
determining that the at least one audio conductor is not coupled to the intercom system in response to the
monitored voltage being within a second range of voltages, wherein the second range of voltages is higher than
10 the first range of voltages.

6. The method of claim 5, further comprising determining that the at least one audio conductor is coupled to the intercom
system and determining that the intercom system is not driving the at least one audio conductor in response to the
monitored voltage being within a third range of voltages, wherein the third range of voltages is higher than the first
15 range of voltages and is lower than the second range of voltages.

7. The method of claim 1, further comprising performing the second test, wherein the second test comprises:

20 monitoring the pair of microphone conductors for a bias voltage being provided across the pair of microphone
conductors;
determining that the at least one microphone conductor is coupled to the intercom system in response to
detecting a bias voltage across the pair of microphone conductors; and
determining that the at least one microphone conductor is not coupled to the intercom system in response to
not detecting a bias voltage across the pair of microphone conductors
25

8. The method of claim 1, further comprising performing the second test, wherein the second test comprises:

30 injecting a current into the at least one microphone conductor;
monitoring the voltage across the pair of microphone conductors;
determining that the at least one microphone conductor is coupled to the intercom system in response to the
monitored voltage being within a first range of voltages; and
determining that the at least one microphone conductor is not coupled to the intercom system in response to
the monitored voltage being within a second range of voltages, wherein the second range of voltages is higher
35 than the first range of voltages.

9. A headset comprising:

40 an acoustic drive (110a, 110b) adapted to acoustically output audio to an ear of a user;
a communications microphone (135) adapted to detect speech sounds of the user;
a wireless transceiver (530) adapted to wirelessly couple the headset to a wireless device;
a cable assembly (200) adapted to couple the headset to an intercom system, the cable assembly comprising:

45 an audio conductor used to convey a signal representing audio to the acoustic driver;
a ground conductor associated with the audio conductor; and
a pair of microphone conductors used to convey signals representing audio detected by the communications
microphone;

50 means adapted to perform a first test (550, 580, 582, 584, 586) of at least one audio conductor used to convey
a signal representing audio to an acoustic driver of the headset to determine whether the at least one audio
conductor is coupled to the intercom system;

55 means adapted to perform a second test (550, 590, 592, 594, 530) of at least one microphone conductor of a
pair of microphone conductors used to convey signals representing audio detected by a communications mi-
crophone of the headset to determine whether the at least one microphone is coupled to the intercom system;
means adapted to monitor a wireless transceiver (550, 530) of the headset to determine whether the wireless
transceiver is inactive, on standby in preparation to be used in two-way communications, or in use in two-way
communications; and

a ground coupler (592) adapted to couple the ground conductor to one of the microphone conductors of the
pair of microphone conductors in response to either the audio conductor or at least one microphone conductor

of the pair of microphone conductors not being coupled to the intercom system, and in response to the wireless transceiver being in use; and

a local sidetone generator (520) adapted to generate a sidetone from the communications microphone to the acoustic driver in response to either the audio conductor or the at least one microphone conductor not being coupled to the intercom system, and in response to the wireless transceiver being in use.

10. The headset of claim 9, wherein the ground coupler couples the ground conductor to one of the microphone conductors of the pair of microphone conductors in response to either of the at least one audio conductor or the at least one microphone conductor not being coupled to the intercom system, and in response to the wireless transceiver being on standby.

11. The headset of claim 9, further comprising a bias voltage supply adapted to provide a microphone bias voltage across the pair of microphone conductors in response to the at least one microphone conductor not being coupled to the intercom system, and in response to the wireless transceiver being in use.

12. The headset of claim 9, further comprising:

an excitation current injector adapted to inject a current into the audio conductor;
a voltage sensor adapted to monitor the voltage of the audio conductor relative to the ground conductor; and
a controller coupled to the excitation current injector and the voltage sensor to determine that the audio conductor is coupled to the intercom system in response to the voltage sensor detecting a voltage within a first range of voltages, and to determine that the audio conductor is not coupled to the intercom system in response to the voltage sensor detecting a voltage within a second range of voltages, wherein the second range of voltages is higher than the first range.

13. The headset of claim 12, wherein the controller determines that the audio conductor is coupled to the intercom system and determines that the intercom system is not driving the audio conductor in response to the voltage sensor detecting a voltage within a third range of voltages, wherein the third range of voltages is higher than the first range of voltages and is lower than the second range of voltages.

14. The headset of claim 9, further comprising:

a bias voltage detector; and
a controller coupled to the bias voltage detector to determine that the at least one microphone conductor is coupled to the intercom system in response to the bias voltage detector detecting a bias voltage across the pair of microphone conductors, and to determine that the at least one microphone conductor is not coupled to the intercom system in response to the bias voltage detector not detecting a bias voltage across the pair of microphone conductors.

15. The headset of claim 9, further comprising:

an excitation current injector adapted to inject a current into the at least one microphone conductor;
a voltage sensor adapted to monitor the voltage across the pair of microphone conductors; and
a controller coupled to the excitation current injector and the voltage sensor to determine that the at least one microphone conductor is coupled to the intercom system in response to the voltage sensor detecting a voltage within a first range of voltages, and to determine that the at least one microphone conductor is not coupled to the intercom system in response to the voltage sensor detecting a voltage within a second range of voltages, wherein the second range of voltages is higher than the first range.

Patentansprüche

1. Verfahren zum Ansprechen auf das Koppeln eines Kopfhörers mit einer Gegensprechanlage, wobei das Verfahren folgende Schritte umfasst:

überwachen der Ergebnisse eines ersten Tests mindestens eines Audioleiters, der verwendet wird, um ein Signal, das Audiomaterial darstellt, an einen akustischen Treiber des Kopfhörers zu übertragen, um zu bestimmen, ob der mindestens eine Audioleiter mit der Gegensprechanlage gekoppelt ist;

überwachen der Ergebnisse eines zweiten Tests mindestens eines Mikrofonleiters eines Paares von Mikrofonleitern, die verwendet werden, um Signale zu übertragen, die Audiomaterial darstellen, das von einem Kommunikationsmikrofon erkannt wird, um zu bestimmen, ob das mindestens eine Mikrofon mit der Gegensprechanlage gekoppelt ist;

überwachen eines drahtlosen Sendeempfängers des Kopfhörers, um zu bestimmen, ob der drahtlose Sendeempfänger inaktiv, betriebsbereit in Vorbereitung auf seine Verwendung bei bidirektionalen Kommunikationen oder in Gebrauch bei bidirektionalen Kommunikationen ist; und

koppeln eines Erdleiters, der mit dem mindestens einen Audioteiler verknüpft ist, mit einem Mikrofonleiter des Paares von Mikrofonleitern, und Bereitstellen eines Nebentons aus dem Kommunikationsmikrofon für den akustischen Treiber als Reaktion darauf, dass einer von dem mindestens einen Audioteiler oder dem mindestens einen Mikrofonleiter nicht mit der Gegensprechanlage gekoppelt ist, und als Reaktion darauf, dass der drahtlose Sendeempfänger in Gebrauch ist.

2. Verfahren nach Anspruch 1, ferner umfassend das Überwachen der Ergebnisse des ersten Tests, um zu bestimmen, ob die Gegensprechanlage aktiv ist, so dass die Gegensprechanlage den mindestens einen Audioteiler ansteuert, zusätzlich zu dem Überwachen der Ergebnisse des ersten Tests, um zu bestimmen, ob der mindestens eine Audioteiler mit der Gegensprechanlage gekoppelt ist.

3. Verfahren nach Anspruch 1, ferner umfassend das Koppeln des Erdleiters, der mit dem mindestens einen Audioteiler verknüpft ist, mit einem Mikrofonleiter des Paares von Mikrofonleitern als Reaktion darauf, dass einer von dem mindestens einen Audioteiler oder dem mindestens einen Mikrofonleiter nicht mit der Gegensprechanlage gekoppelt ist, und als Reaktion darauf, dass der drahtlose Sendeempfänger betriebsbereit ist.

4. Verfahren nach Anspruch 1, ferner umfassend das Bereitstellen einer Mikrofonvorspannung an dem Paar von Mikrofonleitern als Reaktion darauf, dass der mindestens eine Mikrofonleiter nicht mit der Gegensprechanlage gekoppelt ist, und als Reaktion darauf, dass der drahtlose Sendeempfänger in Gebrauch ist.

5. Verfahren nach Anspruch 1, ferner umfassend das Ausführen des ersten Tests, wobei der erste Test folgende Schritte umfasst:

einspeisen eines Stroms in den mindestens einen Audioteiler;

überwachen der Spannung des mindestens einen Audioteilers mit Bezug auf den Erdleiter, der mit dem mindestens einen Audioteiler verknüpft ist;

bestimmen, dass der mindestens eine Audioteiler mit der Gegensprechanlage gekoppelt ist, als Reaktion darauf, dass die überwachte Spannung in einem ersten Spannungsbereich liegt; und

bestimmen, dass der mindestens eine Audioteiler nicht mit der Gegensprechanlage gekoppelt ist, als Reaktion darauf, dass die überwachte Spannung in einem zweiten Spannungsbereich liegt, wobei der zweite Spannungsbereich höher als der erste Spannungsbereich ist.

6. Verfahren nach Anspruch 5, ferner umfassend das Bestimmen, dass der mindestens eine Audioteiler mit der Gegensprechanlage gekoppelt ist, und Bestimmen, dass die Gegensprechanlage den mindestens einen Audioteiler nicht ansteuert, als Reaktion darauf, dass die überwachte Spannung in einem dritten Spannungsbereich liegt, wobei der dritte Spannungsbereich höher als der erste Spannungsbereich ist und niedriger als der zweite Spannungsbereich ist.

7. Verfahren nach Anspruch 1, ferner umfassend das Ausführen des zweiten Tests, wobei der zweite Test folgende Schritte umfasst:

überwachen des Paares von Mikrofonleitern für eine Vorspannung, die an dem Paar von Mikrofonleitern bereitgestellt wird;

bestimmen, dass der mindestens eine Mikrofonleiter mit der Gegensprechanlage gekoppelt ist, als Reaktion darauf, dass eine Vorspannung an dem Paar von Mikrofonleitern erkannt wird; und

bestimmen, dass der mindestens eine Mikrofonleiter nicht mit der Gegensprechanlage gekoppelt ist, als Reaktion darauf, dass keine Vorspannung an dem Paar von Mikrofonleitern erkannt wird.

8. Verfahren nach Anspruch 1, ferner umfassend das Ausführen des zweiten Tests, wobei der zweite Test folgende Schritte umfasst:

einspeisen eines Stroms in den mindestens einen Mikrofonleiter;
überwachen der Spannung an dem Paar von Mikrofonleitern;
bestimmen, dass der mindestens eine Mikrofonleiter mit der Gegensprechanlage gekoppelt ist, als Reaktion
darauf, dass die überwachte Spannung in einem ersten Spannungsbereich liegt; und
bestimmen, dass der mindestens eine Mikrofonleiter nicht mit der Gegensprechanlage gekoppelt ist, als Re-
aktion darauf, dass die überwachte Spannung in einem zweiten Spannungsbereich liegt, wobei der zweite
Spannungsbereich höher als der erste Spannungsbereich ist.

9. Kopfhörer, umfassend:

einen akustischen Treiber (110a, 110b), der dazu geeignet ist, um Audiomaterial an ein Ohr eines Benutzers
akustisch auszugeben;
ein Kommunikationsmikrofon (135), das dazu geeignet ist, um Sprachlaute des Benutzers zu erkennen;
einen drahtlosen Sendeempfänger (530), der dazu geeignet ist, um den Kopfhörer drahtlos mit einer drahtlosen
Vorrichtung zu koppeln;
eine Kabelanordnung (200), die dazu geeignet ist, um den Kopfhörer mit einer Gegensprechanlage zu koppeln,
wobei die Kabelanordnung Folgendes umfasst:

- einen Audioteiler, der verwendet wird, um ein Signal, das Audiomaterial darstellt, an den akustischen
Treiber zu übertragen;
- einen Erdleiter, der mit dem Audioteiler verknüpft ist; und
- ein Paar von Mikrofonleitern, die verwendet werden, um Signale zu übertragen, die Audiomaterial dar-
stellen, das von dem Kommunikationsmikrofon erkannt wird;

Mittel, die dazu geeignet sind, um einen ersten Test (550, 580, 582, 584, 586) mindestens eines Audioteilers
auszuführen, der verwendet wird, um ein Signal, das Audiomaterial darstellt, an einen akustischen Treiber des
Kopfhörers zu übertragen,

um zu bestimmen, ob der mindestens eine Audioteiler mit der Gegensprechanlage gekoppelt ist;

Mittel, die dazu geeignet sind, um einen zweiten Test (550, 590, 592, 594, 530) mindestens eines Mikrofonleiters
eines Paares von Mikrofonleitern auszuführen, die verwendet werden, um Signale zu übertragen, die Audiomateri-
al darstellen, das von einem Kommunikationsmikrofon erkannt wird, um zu bestimmen, ob das mindestens
eine Mikrofon mit der Gegensprechanlage gekoppelt ist;

Mittel, die dazu geeignet sind, um einen drahtlosen Sendeempfänger (550, 530) des Kopfhörers zu überwachen,
um zu bestimmen, ob der drahtlose Sendeempfänger inaktiv, betriebsbereit in Vorbereitung auf seine Verwen-
dung bei bidirektionalen Kommunikationen oder im Gebrauch bei bidirektionalen Kommunikationen ist; und
einen Erdungskoppler (592), der dazu geeignet ist, um den Erdleiter mit einem der Mikrofonleiter des Paares
von Mikrofonleitern zu koppeln, als Reaktion darauf, dass entweder der Audioteiler oder mindestens ein Mikro-
fonleiter des Paares von Mikrofonleitern nicht mit der Gegensprechanlage gekoppelt ist, und als Reaktion darauf,
dass der drahtlose Sendeempfänger in Gebrauch ist; und

einen lokalen Nebentongenerator (520), der dazu geeignet ist, um einen Nebenton aus dem Kommunika-
tionsmikrofon zu dem akustischen Treiber zu generieren, als Reaktion darauf, dass entweder der Audioteiler oder
der mindestens eine Mikrofonleiter nicht mit der Gegensprechanlage gekoppelt ist, und als Reaktion darauf,
dass der drahtlose Sendeempfänger in Gebrauch ist.

10. Kopfhörer nach Anspruch 9, wobei der Erdungskoppler den Erdleiter mit einem der Mikrofonleiter des Paares von
Mikrofonleitern koppelt, als Reaktion darauf, dass einer von dem mindestens einen Audioteiler oder dem mindestens
einen Mikrofonleiter nicht mit der Gegensprechanlage gekoppelt ist, und als Reaktion darauf, dass der drahtlose
Sendeempfänger betriebsbereit ist.

11. Kopfhörer nach Anspruch 9, ferner umfassend eine Vorspannungsversorgung, die dazu geeignet ist, um eine Mi-
krofonvorspannung an dem Paar von Mikrofonleitern bereitzustellen, als Reaktion darauf, dass der mindestens eine
Mikrofonleiter nicht mit der Gegensprechanlage gekoppelt ist, und als Reaktion darauf, dass der drahtlose Sende-
empfänger in Gebrauch ist.

12. Kopfhörer nach Anspruch 9, ferner umfassend:

eine Erregerstromspeisung, die dazu geeignet ist, um einen Strom in den Audioteiler einzuspeisen;
einen Spannungssensor, der dazu geeignet ist, um die Spannung des Audioteilers mit Bezug auf den Erdleiter

zu überwachen; und
 einen Controller, der mit der Erregerstromspeisung und dem Spannungssensor gekoppelt ist, um zu bestimmen, dass der Audioleiter mit der Gegensprechanlage gekoppelt ist, als Reaktion darauf, dass der Spannungssensor eine Spannung in einem ersten Spannungsbereich erkennt, und um zu bestimmen, dass der Audioleiter nicht mit der Gegensprechanlage gekoppelt ist, als Reaktion darauf, dass der Spannungssensor eine Spannung in einem zweiten Spannungsbereich erkennt, wobei der zweite Spannungsbereich höher als der erste Bereich ist.

13. Kopfhörer nach Anspruch 12, wobei der Controller bestimmt, dass der Audioleiter mit der Gegensprechanlage gekoppelt ist, und bestimmt, dass die Gegensprechanlage den Audioleiter nicht ansteuert, als Reaktion darauf, dass der Spannungssensor eine Spannung in einem dritten Spannungsbereich erkennt, wobei der dritte Spannungsbereich höher als der erste Spannungsbereich ist und niedriger als der zweite Spannungsbereich ist.

14. Kopfhörer nach Anspruch 9, ferner umfassend:

einen Vorspannungsdetektor; und
 einen Controller, der mit dem Vorspannungsdetektor gekoppelt ist, um zu bestimmen, dass der mindestens eine Mikrofonleiter mit der Gegensprechanlage gekoppelt ist, als Reaktion darauf, dass der Vorspannungsdetektor eine Vorspannung an dem Paar von Mikrofonleitern erkennt, und um zu bestimmen, dass der mindestens eine Mikrofonleiter nicht mit der Gegensprechanlage gekoppelt ist, als Reaktion darauf, dass der Vorspannungsdetektor keine Vorspannung an dem Paar von Mikrofonleitern erkennt.

15. Kopfhörer nach Anspruch 9, ferner umfassend:

eine Erregerstromspeisung, die dazu geeignet ist, um einen Strom in den mindestens einen Mikrofonleiter einzuspeisen;
 einen Spannungssensor, der dazu geeignet ist, um die Spannung an dem Paar von Mikrofonleitern zu überwachen; und
 einen Controller, der mit der Erregerstromspeisung und dem Spannungssensor gekoppelt ist, um zu bestimmen, dass der mindestens eine Mikrofonleiter mit der Gegensprechanlage gekoppelt ist, als Reaktion darauf, dass der Spannungssensor eine Spannung in einem ersten Spannungsbereich erkennt, und um zu bestimmen, dass der mindestens eine Mikrofonleiter nicht mit der Gegensprechanlage gekoppelt ist, als Reaktion darauf, dass der Spannungssensor eine Spannung in einem zweiten Spannungsbereich erkennt, wobei der zweite Spannungsbereich höher als der erste Bereich ist.

Revendications

1. Procédé de réponse au couplage d'un casque d'écoute à un système d'interphone, le procédé comprenant :

la surveillance des résultats d'un premier test d'au moins un conducteur audio utilisé pour transmettre un signal représentant du son à un pilote acoustique du casque d'écoute pour déterminer si l'au moins un conducteur audio est couplé ou non au système d'interphone ;
 la surveillance des résultats d'un second test d'au moins un conducteur de microphone d'une paire de conducteurs de microphone utilisés pour transmettre des signaux représentant du son détectés par un microphone de communications du casque d'écoute pour déterminer si l'au moins un microphone est couplé ou non au système d'interphone ;
 la surveillance d'un émetteur-récepteur sans fil du casque d'écoute pour déterminer si l'émetteur-récepteur sans fil est inactif, en veille ou en préparation pour être utilisé dans des communications bidirectionnelles, ou en cours d'utilisation dans des communications bidirectionnelles ; et
 le couplage d'un connecteur de terre associé à l'au moins un conducteur audio à un conducteur de microphone de la paire de conducteurs de microphone, et la fourniture d'un effet local du microphone de communications au pilote acoustique en réponse au fait que l'au moins un conducteur audio ou l'au moins un conducteur de microphone ne soit pas couplé au système d'interphone, et en réponse au fait que l'émetteur-récepteur sans fil soit en cours d'utilisation.

2. Procédé selon la revendication 1, comprenant en outre la surveillance des résultats du premier test pour déterminer si le système d'interphone est, ou non, actif de sorte que le système d'interphone commande l'au moins un conducteur audio, en complément de la surveillance des résultats du premier test pour déterminer si l'au moins un conducteur

audio est couplé ou non au système d'interphone.

- 5
3. Procédé selon la revendication 1, comprenant en outre le couplage du connecteur de terre associé à l'au moins un conducteur audio à un conducteur de microphone de la paire de conducteurs de microphone en réponse au fait que l'au moins un conducteur audio ou l'au moins un conducteur de microphone ne soit pas couplé au système d'interphone, et en réponse au fait que l'émetteur-récepteur sans fil soit en veille.
- 10
4. Procédé selon la revendication 1, comprenant en outre la fourniture d'une tension de polarisation de microphone aux bornes des deux conducteurs de microphone en réponse au fait que l'au moins un conducteur de microphone ne soit pas couplé au système d'interphone, et en réponse au fait que l'émetteur-récepteur sans fil soit en cours d'utilisation.
- 15
5. Procédé selon la revendication 1, comprenant en outre l'exécution du premier test, dans lequel le premier test comprend :
- 20
- l'injection d'un courant dans l'au moins un conducteur audio ;
 - la surveillance de la tension de l'au moins un conducteur audio par rapport au connecteur de terre associé à l'au moins un conducteur audio ;
 - la détermination du fait que l'au moins un conducteur audio soit couplé au système d'interphone en réponse au fait que la tension surveillée se trouve dans une première plage de tensions ; et
 - la détermination du fait que l'au moins un conducteur audio ne soit pas couplé au système d'interphone en réponse au fait que la tension surveillée se trouve dans une deuxième plage de tensions, dans lequel la deuxième plage de tensions est supérieure à la première plage de tensions.
- 25
6. Procédé selon la revendication 5, comprenant en outre la détermination du fait que l'au moins un conducteur audio soit couplé au système d'interphone et la détermination du fait que le système d'interphone ne commande pas l'au moins un conducteur audio en réponse au fait que la tension surveillée se trouve dans une troisième plage de tensions, dans lequel la troisième plage de tensions est supérieure à la première plage de tensions et est inférieure à la deuxième plage de tensions.
- 30
7. Procédé selon la revendication 1, comprenant en outre l'exécution du second test, dans lequel le second test comprend :
- 35
- la surveillance de la paire de conducteurs de microphone pour voir si une tension de polarisation est fournie aux bornes des deux conducteurs de microphone ;
 - la détermination du fait que l'au moins un conducteur de microphone soit couplé au système d'interphone en réponse à la détection d'une tension de polarisation aux bornes des deux conducteurs de microphone ; et
 - la détermination du fait que l'au moins un conducteur de microphone ne soit pas couplé au système d'interphone en réponse au fait qu'aucune tension de polarisation ne soit détectée aux bornes des deux conducteurs de microphone.
- 40
8. Procédé selon la revendication 1, comprenant en outre l'exécution du second test, dans lequel le second test comprend :
- 45
- l'injection d'un courant dans l'au moins un conducteur de microphone ;
 - la surveillance de la tension aux bornes des deux conducteurs de microphone ;
 - la détermination du fait que l'au moins un conducteur de microphone soit couplé au système d'interphone en réponse au fait que la tension surveillée se trouve dans une première plage de tensions ; et
 - la détermination du fait que l'au moins un conducteur de microphone ne soit pas couplé au système d'interphone en réponse au fait que la tension surveillée se trouve dans une deuxième plage de tensions, dans lequel la deuxième plage de tensions est supérieure à la première plage de tensions.
- 50
9. Casque d'écoute comprenant :
- 55
- un pilote acoustique (110a, 110b) adapté pour délivrer acoustiquement du son à l'oreille d'un utilisateur ;
 - un microphone de communications (135) adapté pour détecter des sons de type vocal de l'utilisateur ;
 - un émetteur-récepteur sans fil (530) adapté pour coupler sans fil le casque d'écoute à un dispositif sans fil ;
 - un ensemble câble (200) adapté pour coupler le casque d'écoute à un système d'interphone, l'ensemble câble

comprenant :

- un conducteur audio utilisé pour transmettre un signal représentant du son au pilote acoustique ;
- un connecteur de terre associé au conducteur audio ; et
- une paire de conducteurs de microphone utilisés pour transmettre des signaux représentant du son détectés par le microphone de communications ;

des moyens adaptés pour exécuter un premier test (550, 580, 582, 584, 586) d'au moins un conducteur audio utilisé pour transmettre un signal représentant du son à un pilote acoustique du casque d'écoute pour déterminer si l'au moins un conducteur audio est couplé ou non au système d'interphone ;

des moyens adaptés pour exécuter un second test (550, 590, 592, 594, 530) d'au moins un conducteur de microphone d'une paire de conducteurs de microphone utilisés pour transmettre des signaux représentant du son détectés par un microphone de communications du casque d'écoute pour déterminer si l'au moins un microphone est couplé ou non au système d'interphone ;

des moyens adaptés pour surveiller un émetteur-récepteur sans fil (550, 530) du casque d'écoute pour déterminer si l'émetteur-récepteur sans fil est inactif, en veille ou en préparation pour être utilisé dans des communications bidirectionnelles, ou en cours d'utilisation dans des communications bidirectionnelles ; et

un coupleur de terre (592) adapté pour coupler le conducteur de terre à l'un des conducteurs de microphone de la paire de conducteurs de microphone en réponse au fait que le conducteur audio ou au moins un conducteur de microphone de la paire de conducteurs de microphone ne soit pas couplé au système d'interphone, et en réponse au fait que l'émetteur-récepteur sans fil soit en cours d'utilisation ; et

un générateur d'effet local (520) adapté pour générer un effet local du microphone de communications au pilote acoustique en réponse au fait que le conducteur audio ou

l'au moins un conducteur de microphone ne soit pas couplé au système d'interphone,

et en réponse au fait que l'émetteur-récepteur sans fil soit en cours d'utilisation.

10. Casque d'écoute selon la revendication 9, dans lequel le coupleur de terre couple le conducteur de terre à l'un des conducteurs de microphone de la paire de conducteurs de microphone en réponse au fait que l'au moins un conducteur audio ou l'au moins un conducteur de microphone ne soit pas couplé au système d'interphone, et en réponse au fait que l'émetteur-récepteur sans fil soit en veille.

11. Casque d'écoute selon la revendication 9, comprenant en outre une source d'alimentation en tension de polarisation adaptée pour fournir une tension de polarisation de microphone aux bornes des deux conducteurs de microphone en réponse au fait que l'au moins un conducteur de microphone ne soit pas couplé au système d'interphone, et en réponse au fait que l'émetteur-récepteur sans fil soit en cours d'utilisation.

12. Casque d'écoute selon la revendication 9, comprenant en outre :

un injecteur de courant d'excitation adapté pour injecter un courant dans le conducteur audio ;

un capteur de tension adapté pour surveiller la tension du conducteur audio par rapport au conducteur de terre ; et

un contrôleur couplé à l'injecteur de courant d'excitation et au capteur de tension pour déterminer que le conducteur audio est couplé au système d'interphone en réponse au fait que le capteur de tension détecte une tension se trouvant dans une première plage de tensions, et pour déterminer que le conducteur audio n'est pas couplé au système d'interphone en réponse au fait que le capteur de tension détecte une tension se trouvant dans une deuxième plage de tensions, dans lequel la deuxième plage de tensions est supérieure à la première plage.

13. Casque d'écoute selon la revendication 12, dans lequel le contrôleur détermine que le conducteur audio est couplé au système d'interphone et détermine que le système d'interphone ne commande pas le conducteur audio en réponse au fait que le capteur de tension détecte une tension se trouvant dans une troisième plage de tensions, dans lequel la troisième plage de tensions est supérieure à la première plage de tensions et est inférieure à la deuxième plage de tensions.

14. Casque d'écoute selon la revendication 9, comprenant en outre :

un détecteur de tension de polarisation ; et

un contrôleur couplé au détecteur de tension de polarisation pour déterminer que l'au moins un conducteur de microphone est couplé au système d'interphone en réponse au fait que le détecteur de tension de polarisation

EP 2 425 637 B1

détecte une tension de polarisation aux bornes des deux conducteurs de microphone, et pour déterminer que l'au moins un conducteur de microphone n'est pas couplé au système d'interphone en réponse au fait que le détecteur de tension de polarisation ne détecte aucune tension de polarisation aux bornes des deux conducteurs de microphone.

5

15. Casque d'écoute selon la revendication 9, comprenant en outre :

un injecteur de courant d'excitation adapté pour injecter un courant dans l'au moins un conducteur de microphone ;

10 un capteur de tension adapté pour surveiller la tension aux bornes des deux conducteurs de microphone ; et

un contrôleur couplé à l'injecteur de courant d'excitation et au capteur de tension pour déterminer que l'au moins un conducteur de microphone est couplé au système d'interphone en réponse au fait que le capteur de tension détecte une tension se trouvant dans une première plage de tensions, et pour déterminer que l'au moins un conducteur de microphone n'est pas couplé au système d'interphone en réponse au fait que le capteur de

15 tension détecte une tension comprise dans une deuxième plage de tensions, dans lequel la deuxième plage de tensions est supérieure à la première plage.

20

25

30

35

40

45

50

55

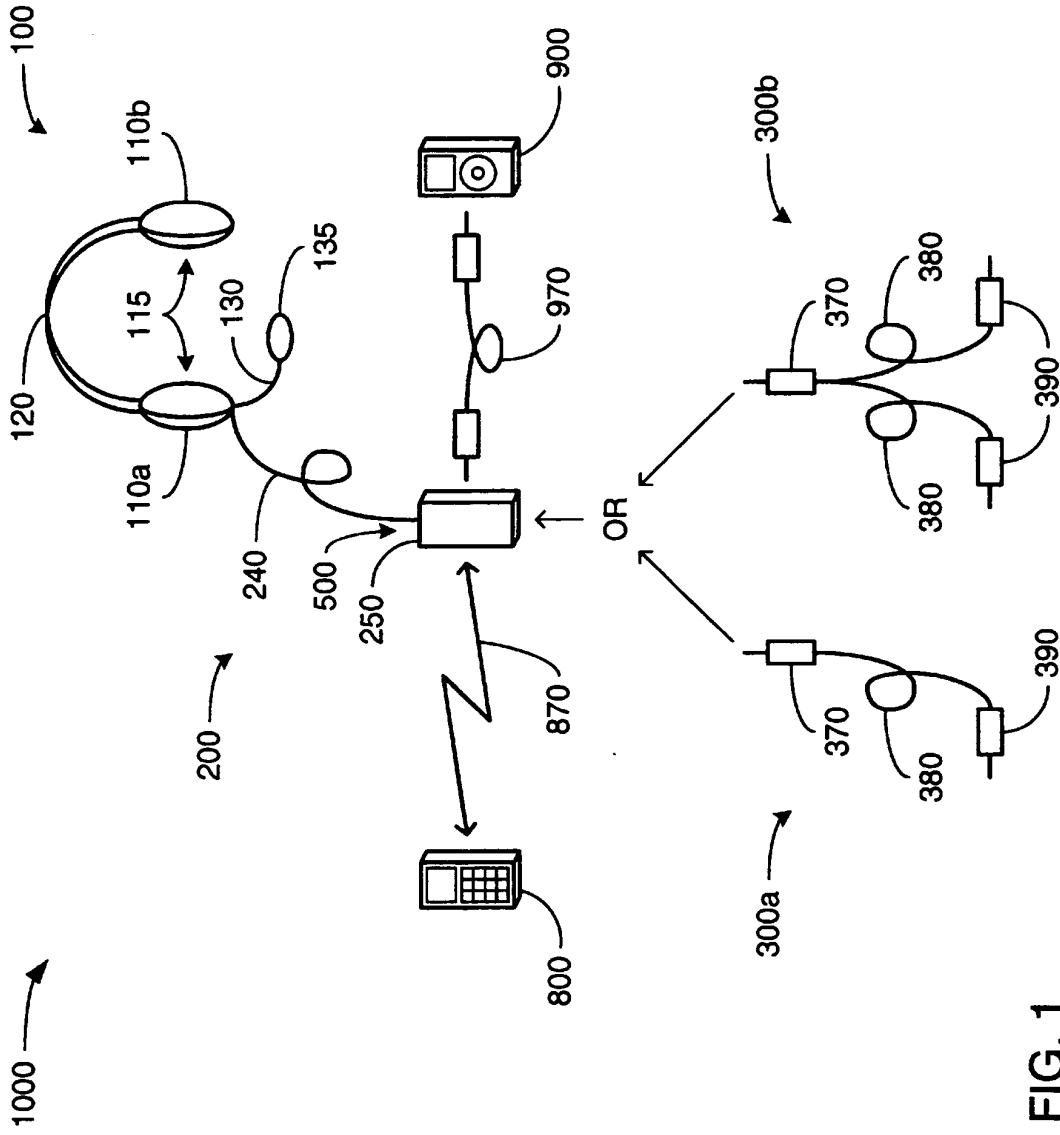


FIG. 1

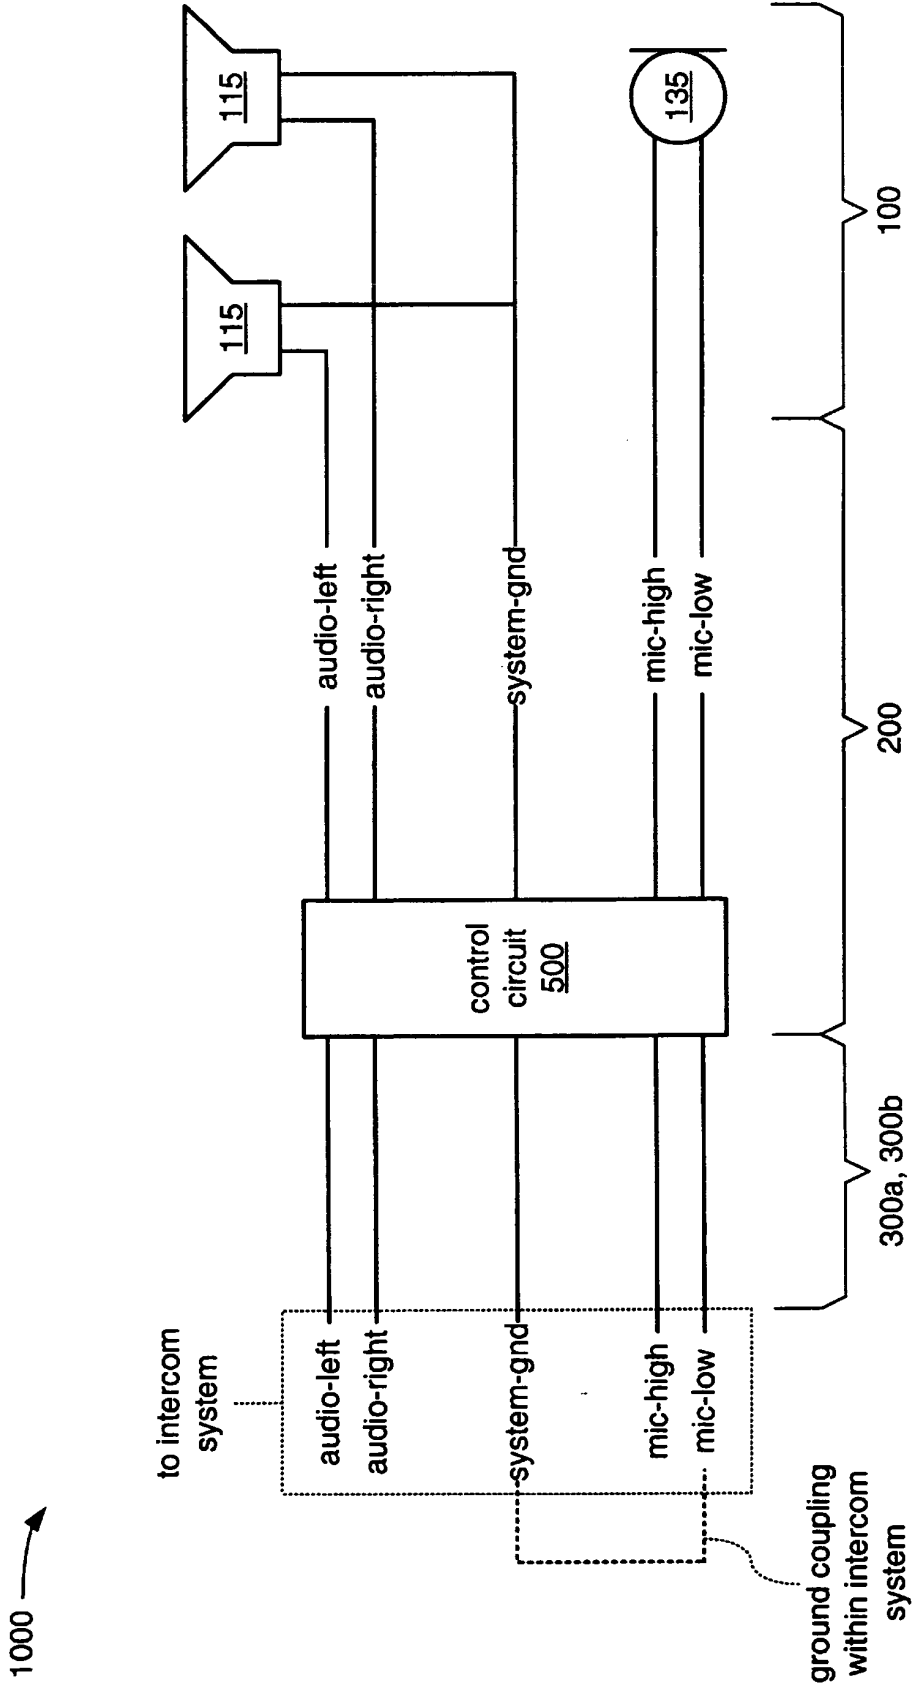


FIG. 2

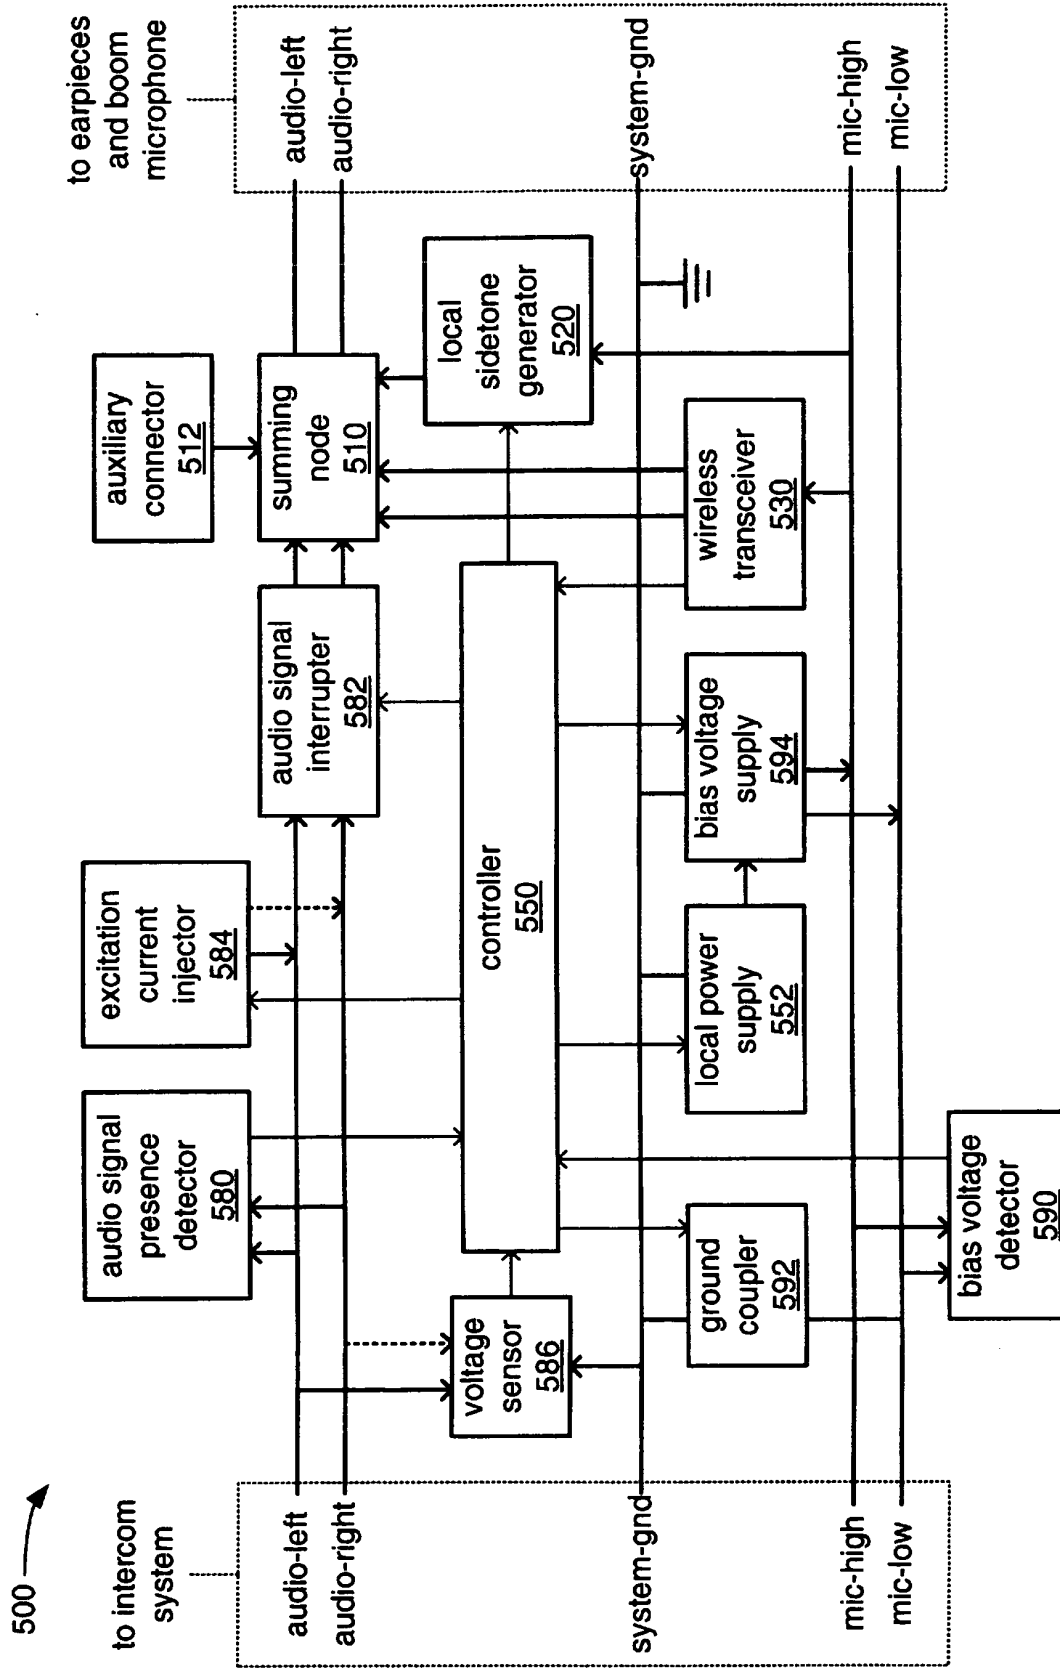


FIG. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20070225035 A [0004]