

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199917431 B2
(10) Patent No. 723672

(54) Title
Bifurcated axially flexible stent

(51)⁶ International Patent Classification(s)
A61M 029/02 A61F 002/04

(21) Application No: **199917431** (22) Application Date: **1999 .02 .19**

(30) Priority Data

(31) Number	(32) Date	(33) Country
09/028383	1998 .02 .24	US

(43) Publication Date : **1999 .11 .25**
(43) Publication Journal Date : **1999 .11 .25**
(44) Accepted Journal Date : **2000 .08 .31**

(71) Applicant(s)
Cordis Corporation

(72) Inventor(s)
Hikmat Hojeibane

(74) Agent/Attorney
FREEHILLS CARTER SMITH and BEADLE,Level 47,101 Collins Street,MELBOURNE VIC 3000

(56) Related Art
WO 97/41803
WO 98/19628
WO 98/36709

ABSTRACT

A stent (10) with axial flexibility, in a preferred embodiment, has a longitudinal axis and comprises a plurality of longitudinally disposed bands (3), wherein each band
5 defines a generally continuous wave along a line segment parallel to the longitudinal axis. A plurality of links (7) maintains the bands in a tubular structure. In a further embodiment of the invention, each longitudinally disposed band of the stent is connected, at a plurality of periodic
10 locations, by a short circumferential link (8) to an adjacent band. Further, a pair of bifurcated stents is disclosed.

11
12
13
14
15

16

17

18
19

AUSTRALIA

Patents Act 1990

**COMPLETE SPECIFICATION
FOR A STANDARD PATENT**

ORIGINAL



Name of Applicant:	CORDIS CORPORATION
Actual Inventor:	Hikmat HOJEIBANE
Address for service in Australia:	CARTER SMITH & BEADLE 2 Railway Parade Camberwell Victoria 3124 Australia
Invention Title:	BIFURCATED AXIALLY FLEXIBLE STENT

The following statement is a full description of this invention, including the best method of performing it known to us

5 BIFURCATED AXIALLY FLEXIBLE STENT



25

The present invention relates to a stent having axial flexibility and resilience in its expanded form.

Background Art

30

A stent is commonly used as a tubular structure left inside the lumen of a duct to relieve an obstruction. Commonly, stents are inserted into the lumen in a non expanded form and are then expanded autonomously (or with the aid of a second device *in situ*). A typical method of expansion occurs through the use of a catheter mounted

5 angioplasty balloon which is inflated within the stenosed vessel or body passageway in order to shear and disrupt the obstructions associated with the wall components of the vessel and to obtain an enlarged lumen.

10 In the absence of a stent, restenosis may occur as a result of elastic recoil of the stenotic lesion. Although a number of stent designs have been reported, these designs have suffered from a number of limitations. These include restrictions on the dimension of the stent such as
15 describes a stent which has rigid ends (8mm) and a flexible median part of 7-21mm. This device is formed of multiple parts and is not continuously flexible along the longitudinal axis. Other stent designs with rigid segments and flexible segments have also been described.

20 Other stents are described as longitudinally flexible but consist of a plurality of cylindrical elements connected by flexible members. This design has at least one important disadvantage, for example, according to this
25 design, protruding edges occur when the stent is flexed around a curve raising the possibility of inadvertent retention of the stent on plaque deposited on arterial walls. This may cause the stent to embolize or more out of position and further cause damage to the interior
30 lining of healthy vessels. (See Figure 1(a) below).

Thus, stents known in the art, which may be expanded by balloon angioplasty, generally compromise axial

5 flexibility to permit expansion and provide overall structural integrity.

Summary of the Invention

10 The present invention overcomes some perceived shortcomings of prior art stents by providing a stent with axial flexibility. In a preferred embodiment, the stent has a first end and a second end with an intermediate section between the two ends. The stent further has a longitudinal axis and comprises a plurality of longitudinally disposed bands, wherein each band defines a generally continuous wave along a line segment parallel to the longitudinal axis. A plurality of links maintains the bands in a tubular structure. In a further embodiment of the invention, each longitudinally disposed band of the stent is connected, at a plurality of periodic locations, by a short circumferential link to an adjacent band. The wave associated with each of the bands has approximately the same fundamental spatial frequency in the intermediate section, and the bands are so disposed that the waves associated with them are spatially aligned so as to be generally in phase with one another. The spatially aligned bands are connected, at a plurality of periodic locations, by a short circumferential link to an adjacent band.

15

20

25

30

In particular, at each one of a first group of common axial positions, there is a circumferential link between each of a first set of adjacent pairs of bands.

5

At each one of a second group of common axial positions, there is a circumferential link between each of a second set of adjacent rows of bands, wherein, along the longitudinal axis, a common axial position occurs alternately in the first group and in the second group, and the first and second sets are selected so that a given band is linked to a neighboring band at only one of the first and second groups of common axial positions.

10

15

In a preferred embodiment of the invention, the spatial frequency of the wave associated with each of the bands is decreased in a first end region lying proximate to the first end and in a second end region lying proximate to the second end, in comparison to the spatial frequency of the wave in the intermediate section. In a further embodiment of the invention, the spatial frequency of the bands in the first and second end regions is decreased by 20% compared with the spatial frequency of the bands in the intermediate section. The first end region may be located between the first end and a set of circumferential links lying closest to the first end and the second end region lies between the second end and a set of circumferential links lying closest to the second end. The widths of corresponding sections of the bands in these end regions, measured in a circumferential direction, are greater in the first and second end regions than in the intermediate section. Each band includes a terminus at each of the first and second ends and the

20

25

30



5 adjacent pairs of bands are joined at their termini to form a closed loop.

10 In a further embodiment of the invention, a stent is provided that has first and second ends with an intermediate section therebetween, the stent further having a longitudinal axis and providing axial flexibility. This stent includes a plurality of longitudinally disposed bands, wherein each band defines a generally continuous wave having a spatial frequency along a line segment parallel to the longitudinal axis, the spatial frequency of the wave associated with each of the bands being decreased in a first end region lying proximate to the first end and in a second end region lying proximate to the second end, in comparison to the spatial frequency of the wave in the intermediate section; and a plurality of links for maintaining the bands in a tubular structure. The first and second regions have been further defined as the region that lies between the first and second ends and a set of circumferential links lying closest to the first end and second end.



25 In a further embodiment the widths of the sectionals of the bands, measured in a circumferential direction, are greater in the first and second end regions than in the intermediate section.

30 In yet an additional embodiment, the stent is divided into a group of segments, and each of the segments are connected by a flexible connector. In addition, the stent

5 segments are provided with enhanced flexibility at the flexible connectors, due to the geometrical configuration of the flexible connectors.

10 Furthermore, the current stent can be modified to provide for bifurcated access, whereas the stent itself is uniform throughout. If the manufacturer designs such a stent to have an essential opening, then it is possible to place the stent such that a pair of stents can be placed one through the other. In this fashion, the stents are capable of being placed at a bifurcation, without any welding or any special attachments. The interlocking mechanism can be incorporated into the stent design to cause the stent to interlock at the desired position during assembly of the device.



20 **Brief Description of the Drawings**



25 The foregoing aspects of the invention will be more readily understood by reference to the following detailed description, taken with the accompanying drawings, in which:



30 Figures 1(a) and 1(b) are side views of a stent having circumferentially disposed bands wherein the stent is in axially unbent and bent positions respectively, the latter showing protruding edges;

Figures 1(c) and 1(d) are side views of an axially flexible stent in accordance with the present invention wherein the stent is in unbent and bent positions

5 respectively, the latter displaying an absence of
 protruding edges;

 Figure 2 is a side view of a portion of the stent of
10 Figures 1(c) and 1(d) showing the longitudinal bands,
 spaces, and inner radial measurements of bends in the
 bands being measured in inches;

 Figures 3(a) and 3(b) show a portion of the stent of
15 Figure 2 with two bands between two circumferential links
 (a) before expansion in the undeformed state; and (b)
 after expansion, in the deformed state;

 Figure 4 is a view along the length of a piece of
20 cylindrical stent (ends not shown) prior to expansion
 showing the exterior surface of the cylinder of the stent
 and the characteristic banding pattern;

 Figure 5 is an isometric view of a deflection plot
25 where the stent of Figure 2 is expanded to a larger
 diameter of 5mm;

 Figure 6 shows a two-dimensional layout of the stent
30 of Figure 4 to form a cylinder such that edge "A" meets
 edge "B", and illustrating the spring-like action provided
 in circumferential and longitudinal directions;

 Figure 7 shows a two dimensional layout of the stent.
 The ends are modified such that the length (L_A) is about

5 20% shorter than length (L_b) and the width of the band A is
greater than the width of band B;

10 Figure 8 shows a perspective view of a stent
containing flexible connectors as described in the present
invention;

15 Figure 9 shows a stent in which the flexible
connectors are attached to stent segments, in layout form.
These flexible connectors are attached in an every-other-
segment pattern;



20 Figure 10 shows a layout view where the stent
segments are connected with a flexible connector in every
stent segment pattern;



25 Figure 11 shows a schematic of the unexpanded stents
when loaded on the stent delivery system;



30 Figure 12 shows the stents placed alone;



Figure 13 shows the stents as expanded without the
delivery system; and

30 Figure 14 shows a modification of the stent in a
layout view.

5 Detailed Description of Specific Embodiments

10 Improvements afforded by embodiments of the present invention include (a) increased flexibility in two planes of the non-expanded stent while maintaining radial strength and a high percentage open area after expansion; (b) even pressure on the expanding stent that ensures the consistent and continuous contact of expanded stent against artery wall; (c) avoidance of protruding parts during bending; (d) removal of existing restrictions on maximum of stent; and reduction of any shortening effect during expansion of the stent.



20 In a preferred embodiment of the invention, an expandable cylindrical stent 10 is provided having a fenestrated structure for placement in a blood vessel, duct or lumen to hold the vessel, duct or lumen open, more particularly for protecting a segment of artery from restenosis after angioplasty. The stent 10 may be expanded circumferentially and maintained in an expanded configuration, that is circumferentially rigid. The stent 25 10 is axially flexible and when flexed at a band, the stent 10 avoids any externally protruding component parts.

30 Figure 1 shows what happens to a stent 10, of a similar design to a preferred embodiment herein but utilizing instead a series of circumferentially disposed bands, when caused to bend in a manner that is likely encountered within a lumen of the body. A stent 10 with a circumferential arrangement of bands (1) experiences an

5 effect analogous to a series of railroad cars on a track. As the row of railroad cars proceeds around the bend, the corner of each car proceeding around the bend after the coupling is caused to protrude from the contour of the track. Similarly, the serpentine circumferential bands
10 have protrusions (2) above the surface of the stent 10 as the stent 10 bends.



15 In contrast, the novel design of the embodiment shown in Figures 1(c) and 1(d) and Figure 7 in which the bands (3) are axially flexible and are arranged along the longitudinal axis, avoids such an effect when the stent 10 is bent, so the bent bands (4) do not protrude from the profile of the curve of the stent 10. Furthermore, any flaring at the ends of the stent 10 that might occur with
20 a stent 10 having a uniform structure is substantially eliminated by introducing a modification at the ends of the stent 10. This modification comprises decreasing the spatial frequency and increasing the width of the corresponding bands in a circumferential direction (L_A and
25 A) compared to that of the intermediate section. (L_B and B).

30 In an embodiment of the invention, the spatial frequency L_A may be decreased 0-50% with respect to L_B , and the width A may be increased in the range of 0-150% with respect to B. Other modifications at the ends of the stent 10 may include increasing the thickness of the wall of the stent 10 and selective electropolishing. These modifications protect the artery and any plaque from

5 abrasion that may be caused by the stent 10 ends during
insertion of the stent 10. The modification also may
provide increased radio-opacity at the ends of the stent
10. Hence it may be possible to more accurately locate
the stent 10 once it is in place in the body.

10

The embodiment as shown in Figures 2 and 6 has the
unique advantage of possessing effective "springs" in both
circumferential and longitudinal directions shown as items
(5) and (6) respectively. These springs provide the stent
10 with the flexibility necessary both to navigate vessels
in the body with reduced friction and to expand at the
selected site in a manner that provides the final
necessary expanded dimensions without undue force while
retaining structural resilience of the expanded structure.


20

As shown in both Figures 2, 4 and 6, each
longitudinal band undulates through approximately two
cycles before there is formed a circumferential link to an
adjacent band. Prior to expansion, the wave W associated
with each of the bands may have approximately the same
fundamental spatial frequency, and the bands are so
disposed that the wave W associated with them are
spatially aligned, so as to be generally in phase with one
another as shown in Figure 6.

30

The aligned bands on the longitudinal axis are
connected at a plurality of periodic locations, by a short
circumferential link to an adjacent band. Consider a
first common axial position such as shown by the line X-X

5 in Figures 4 and 6. Here an adjacent pair of bands is
joined by circumferential link 7. Similarly other pairs
of bands are also linked at this common axial position.
At a second common axial position, shown in Figure 6 by
the line Y-Y, an adjacent pair of bands is joined by
10 circumferential link 8. However, any given pair of bands
that is linked at X-X is not linked at Y-Y and vice-versa.
The X-X pattern of linkages repeats at the common axial
position Z-Z. In general, there are thus two groups of
common axial positions. In each of the axial positions of
15 any one group are links between the same pairs of adjacent
bands, and the groups alternate along the longitudinal
axis of the embodiment. In this way, circumferential
spring 6 and the longitudinal spring 6 are provided.



20 A feature of the expansion event is that the pattern
of open space in the stent 10 of the embodiment of Figure
2 before expansion is different from the pattern of the
stent 10 after expansion. In particular, in a preferred
embodiment, the pattern of open space on the stent 10
25 before expansion is serpentine, whereas after expansion,
the pattern approaches a diamond shape (3a, 3b). In
embodiments of the invention, expansion may be achieved
using pressure from an expanding balloon or by other
mechanical means.



30 In the course of expansion, as shown in Figure 3, the
wave W shaped bands tend to become straighter. When the
bands become straighter, they become stiffer and thereby
withstand relatively high radial forces. Figure 3 shows

5 how radial expansion of the stent 10 causes the fenestra
to open up into a diamond shape with maximum stress being
expended on the apices of the diamond along the
longitudinal axis. When finite element analyses including
strain studies were performed on the stent 10, it was
10 found that maximum strain was experienced on the bands and
links and was below the maximum identified as necessary to
maintain structural integrity.



15 The optimization of strain of the stent 10 is
achieved by creating as large a turn radius as possible in
the wave W associated with each band in the non-expanded
stent 10. This is accomplished while preserving a
sufficient number of bands and links to preserve the
structural integrity of the stent 10 after expansion. In
20 an embodiment of the invention, the strain may be less
than 0.57 inches/inch for 316L stainless steel. The
expansion pressure may be 1.0-7.0 atmospheres. The number
of bands and the spatial frequency of the wave W on the
longitudinal axis also affects the number of
25 circumferential links. The circumferential links
contribute structural integrity during application of
radial force used in expansion of the stent 10 and in the
maintenance of the expanded form. While not being limited
to a single set of parameters, an example of a stent 10 of
30 the invention having a longitudinal axis and providing
axial flexibility of the type shown in Figure 6, may
include a stent 10 having an expanded diameter of 4mm and
a length of 30mm that for example may have about 8-12
rows, more particularly 10 rows and about 6-10 slots, more



5 particularly 8 slots (a slot is shown in Figure 6 as extending between X and Z), with a wave W amplitude of about 1/4-1/10 of a slot length, more particularly 1/8 of a slot length.

10 The stent 10 may be fabricated from many methods. For example, the stent 10 may be fabricated from a hollow or formed stainless steel tube that may be cut out using lasers, electric discharge milling (EDM), chemical etching or other means. The stent 10 is inserted into the body and placed at the desired site in an unexpanded form. In a preferred embodiment, expansion of the stent 10 is effected in a blood vessel by means of a balloon catheter, where the final diameter of the stent 10 is a function of the diameter of the balloon catheter used.

20 In contrast to stents of the prior art, the stent 10 of the invention can be made at any desired length, most preferably at a nominal 30mm length that can be extended or diminished by increments, for example 1.9mm increments.

25 It will be appreciated that a stent 10 in accordance with the present invention may be embodied in a shape memory material, including, for example, an appropriate alloy of nickel and titanium; or stainless steel. In this embodiment after the stent 10 has been formed, it may be compressed so as to occupy a space sufficiently small as to permit its insertion in a blood vessel or other tissue by insertion means, wherein the insertion means include a suitable catheter, or flexible rod. On emerging from the

5 catheter, the stent 10 may be configured to expand into the desired configuration where the expansion is automatic or triggered by a change in pressure, temperature or electrical stimulation.

10 An embodiment of the improved stent 10 has utility not only within blood vessels as described above but also in any tubular system of the body such as the bile ducts, the urinary system, the digestive tube, and the tubes of the reproductive system in both men and women.



15 In yet a further embodiment, there is described a stent 10 as presently disclosed containing a multiplicity of curvilinear segments 20. These curvilinear segments 20 are connected to each other via a generally perpendicular connector 25. The generally perpendicular connector 25 lies substantially in the plane perpendicular to the longitudinal axis of the stent 10. Each of the stent 10 segments as described herein is connected to an adjacent stent 10 segment. This is done using a series of flexible connectors. Importantly, the connectors themselves can be made narrower at their midpoints. This enhances the possibility of flexure at that point. Of course, it is to be realized that alternate designs of the connector to insure flexibility are possible, and contemplated by this invention.

20

25

30

In essence therefore, the stent 10 as described in Figure 8 is a stent 10 of considerable flexibility when compared to more rigid rectilinear stents. Nonetheless,

5 the stent 10 of the present invention does not depart from
the basic concepts set forth herein, in that it discloses
a continuously curvilinear strut. This curvilinear strut
is connected to other curvilinear struts via a series of
"second" more flexible connectors, described above.

10

In any regard, it can be seen that the stent 10 of
the present invention incorporates various new and useful
members. One of them is the flexible connector in
conjunction with a generally curvilinear stent. Another
15 is the use of the generally larger struts at the ends of
the stent 10 in order to provide for continued support at
the stent 10 ends. A final aspect is the use of flexible
connectors amongst stent 10 segments to provide for
greater flexibility.

20


In all regards, however, it is to be seen that the
present invention is to be determined from the attached
claims and their equivalents.

25

As can be seen from Figures 11 through 14, an
improved device 100 of the present invention can also be
made to perform in a bifurcated fashion. In this way, the
stent 101 contains a central opening 102. This central
opening 102 allows for the passage of an unexpanded stent
30 103 of the same size. Typically of course, the two stents
101,103 will have the same general configuration, and one
can pass through the other on the same type of diameter
balloon. In fact, the balloon 150 as seen in the current
figures 11-16 is a bifurcated balloon, but need not be.

5 Two separate balloons are certainly capable of performing the same function. The balloons are preferably less than 6 Fr in their unexpanded shape in a preferred embodiment, but of course, need not be so constrained.

10 As seen in figures 11-14, the first stent 101 (the lower one in the figure) is loaded on one of the balloons 151. It has an opening 102 central to it. This opening faces the upper stent 103 and balloon 152, the upper stent 102 loaded on the second balloon 152. The upper stent 15 103, when loaded on the second balloon 152 also has an opening 104 which faces the lower stent 101. In this fashion, as the second stent 103 is strung through the first stent 101, it is placed in such a fashion so as to have a mutually facing contact with the first stent 101. 20 Then, as the balloon and stent combination is guided through the human anatomy, the devices will go toward a bifurcation. When this happens, the device is caused to split using various guide wire techniques. Then, each of the respective balloons are inflated.



25 On this inflation, the entire device is expanded such as seen in Figure 13. Thus, the entire bifurcation is covered, and yet in a much easier than typical bifurcated expansions. What is unique is that there is no welding of the stents 101, 103 together, they can be common "off-the-shelf" stents modified only slightly so as to be useful 30 for this particular need.

5 It should be noted that the stent of Figures 11-14
can be designed with any slot or wire configurations or of
any high density materials or composites and can be
balloon expandable or self-expanding or even the
10 combination of both. The devices can be sold separately
from separate catheters to be assembled during the desired
procedure by the clinicians; can be used with a bifurcated
balloon or two separate balloons; or incorporated with one
or more radio-opaque markers to allow for better
15 positioning in radioopacity. The bifurcated stent
delivery system is placed by crimping over two balloons
and then expanded at the sight of the lesion.



5 THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

10 1. A bifurcated stent comprising a first stent portion having first and second ends with an intermediate section therebetween, the stent further having a longitudinal axis and a plurality of longitudinally disposed cells, wherein each cell has an opening therein; and



15 a second stent portion having first and second ends with an intermediate section therebetween, the stent further having a longitudinal axis and a plurality of longitudinally disposed cells, wherein each cell has an opening therein; and

20 each of said stent portions capable of expanding from a first respective diameter to a larger second respective diameter; and



wherein said second stent portion is configured in its said first respective diameter passing through a cell of the first stent portion in its first diameter.



25 2. A stent according to claim 1, each said stent formed by a series of longitudinally extending struts connected by links, wherein each link is axially displaced from any circumferentially adjacent link.



30 3. A stent according to claim 2, wherein, at each one of a first group of common axial positions, there is a circumferential link between each of a first set of adjacent pairs of struts.

4. A stent according to claim 3, wherein, at each one of a second group of common axial positions, there is a circumferential link between each of a second set of adjacent rows of struts, wherein, along the longitudinal axis, a common axial position occurs alternately in the first group and in the second group, and the first and second sets are selected so that a given strut is linked to a neighboring strut at only one of the first and second groups of common axial positions.

5. A stent according to claim 2, wherein the spatial frequency of the wave associated with each of the struts is decrease in a first end region lying proximate to the first end and in a second end region lying proximate to the second end, in comparison to the spatial frequency of the wave in the intermediate section.

6. A bifurcated stent system comprising in combination:

a pair of balloons aligned parallel with one another, said balloons each loaded with a stent and said stents maintained generally parallel with each other as they are guided along said balloon into the lumen of a body, wherein said pair of parallel stents is a bifurcated stent comprising:

a first stent portion having first and second ends with an intermediate section therebetween, the stent further having a longitudinal axis and a plurality of longitudinally disposed cells, wherein each cell has an opening therein; and

a second stent portion having first and second ends with an intermediate section therebetween, the stent further having a longitudinal axis and a plurality of longitudinally disposed cells, wherein each cell has an opening therein; and

each of said stent portions is capable of expanding from a first respective diameter to a larger second respective diameter; and

wherein said second stent portion is configured in its said first respective diameter passing through a cell of the first stent portion in its first diameter;

and such that said respective stent portions are aligned on said balloon to be



parallel to one another.

7. A combination according to claim 6, each said stent formed by a series of longitudinally extending struts connected by links, wherein each link is axially displaced from any circumferentially adjacent link.

5 8. The combination according to claim 7, wherein, at each one of a first group of common axial positions, there is a circumferential link between each of a first set of adjacent pairs of struts.

9. The combination according to claim 8, wherein, at each one of a second group of common axial positions, there is a circumferential link between
10 each of a second set of adjacent rows of struts, wherein, along the longitudinal axis, a common axial position occurs alternately in the first group and in the second group, and the first and second sets are selected so that a given strut is linked to a neighboring strut at only one of the first and second groups of common axial positions.

15 10. The combination according to claim 7, wherein the spatial frequency of the wave associated with each of the struts is decreased in a first end region lying proximate to the first end and in a second end region lying proximate to the second end, in comparison to the spatial frequency of the wave in the intermediate section.

11. A bifurcated balloon system, said bifurcated balloon capable of being
20 passed through a lumen of the body, said bifurcated balloon containing at least two balloons, a first of said balloons capable of being placed within a lumen and said second balloon capable of being placed in a second lumen when said first balloon is placed within said first lumen, a bifurcated stent placed on said balloon combination, said bifurcated stent comprising:

25 a first stent portion having first and second ends with an intermediate section therebetween, the stent further having a longitudinal axis and a plurality of longitudinally disposed cells, wherein each cell has an opening therein; and



a second stent portion having first and second ends with an intermediate section therebetween, the stent further having a longitudinal axis and a plurality of longitudinally disposed cells, wherein each cell has an opening therein; and

each of said stent portions capable of expanding from a first respective diameter to a larger second respective diameter; and

wherein said second stent portion is configured in its said first respective diameter passing through a cell of the first stent portion in its first diameter.

12. The system of claim 11 wherein said balloons are passed into the body in a parallel configuration.

10 13. The system of claim 12 wherein the combined diameter of said two balloons each in its unexpanded condition, is less than 6 Fr.

14. The system of claim 11 wherein each balloon carries a stent.

15 15. A system according to claim 11, wherein each said stent formed by a series of longitudinally extending struts connected by links, wherein each link is axially displaced from any circumferentially adjacent link.

16. A system according to claim 15, wherein, at each one of a first group of common axial positions, there is a circumferential link between each of a first set of adjacent pairs of struts.

17. A system according to claim 16, wherein, at each one of a second group of common axial positions, there is a circumferential link between each of a second set of adjacent rows of struts, wherein, along the longitudinal axis, a common axial position occurs alternately in the first group and in the second group, and the first and second sets are selected so that a given strut is linked to a neighboring strut at only one of the first and second groups of common axial positions.

18. A system according to claim 15, wherein the spatial frequency of the



wave associated with each of the struts is decreased in a first end region lying proximate to the first end and in a second end region lying proximate to the second end, in comparison to the spatial frequency of the wave in the intermediate section.

19. A stent system containing:

- 5 at least two stents, each of said stents having an opening in its lateral wall, and one of said stents capable of being emplaced through said lateral wall opening so that a portion of said second stent is maintained separate from said first stent; and

wherein said stents are capable of being rotated one with respect to the other in order to maintain said stents in close-fitting relationship to each other in a
10 bifurcated lumen of the body.

20. The system of claim 19 wherein said pair of stents comprises a bifurcated stent comprising:

a first stent portion having first and second ends with an intermediate section therebetween, the stent further having a longitudinal axis and a plurality of
15 longitudinally disposed cells, wherein each cell has an opening therein; and

a second stent portion having first and second ends with an intermediate section therebetween, the stent further having a longitudinal axis and a plurality of longitudinally disposed cells, wherein each cell has an opening therein; and

each of said stent portions capable of expanding from a first respective
20 diameter to a larger second respective diameter; and

wherein said second stent portion is configured in its said first respective diameter passing through a cell of the first stent portion in its first diameter.

21. A method of stenting a bifurcated vessel comprising:

- a) placing a bifurcated stent on a balloon, said bifurcated stent having a pair of stent sections, and said balloon having a pair of inflatable sections aligned



side-by-side;

each of said stents sections having an opening in its lateral wall, and one of said stent sections capable of being emplaced through said lateral wall opening so that a portion of said second stent section is maintained separate from said first stent section; and

wherein said stent sections are capable of being rotated one with respect to the other in order to maintain said stents in close-fitting relationship to each other in said bifurcated lumen of the body;

b) guiding said stent sections on said balloon to a target bifurcated lesion of the body;

c) causing said first stent section to pass through the hole in said second stent section, so that at least a portion of said two stent sections are separated;

d) rotating said sections one relative to the other, so as to align their respective lateral wall opening; and

e) inflating said balloons, to thereby inflate said segments.

22. The method of claim 21 wherein said stent further comprises:

a first stent portion having first and second ends with an intermediate section therebetween, the stent further having a longitudinal axis and a plurality of longitudinally disposed cells, wherein each cell has an opening therein; and

a second stent portion having first and second ends with an intermediate section therebetween, the stent further having a longitudinal axis and a plurality of longitudinally disposed cells, wherein each cell has an opening therein; and

each of said stent portions capable of expanding from a first respective diameter to a larger second respective diameter; and

wherein said second stent portion is configured in its said first respective



diameter passing through a cell of the first stent portion in its first diameter.

25. A bifurcated stent substantially as hereinbefore described with reference to the accompanying drawings.

26. A stent system substantially as hereinbefore described with reference
5 to the accompanying drawings.

27. A method of stenting a bifurcated vessel substantially as hereinbefore described with reference to the accompanying drawings.

DATED: 27 June 2000

FREEHILLS CARTER SMITH & BEADLE
Patent Attorneys for the Applicant

CORDIS CORPORATION

27
6
8
4



PBS:AM:#40349790 (#30545) claims

27 June 2000

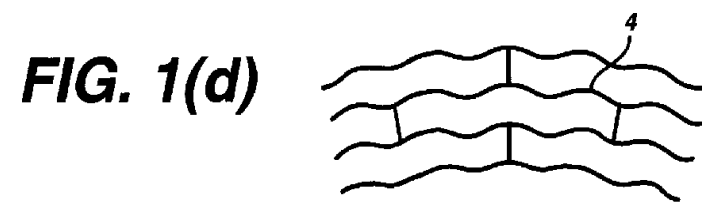
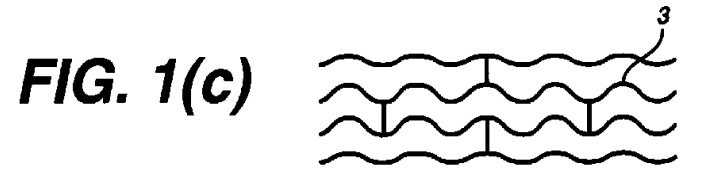
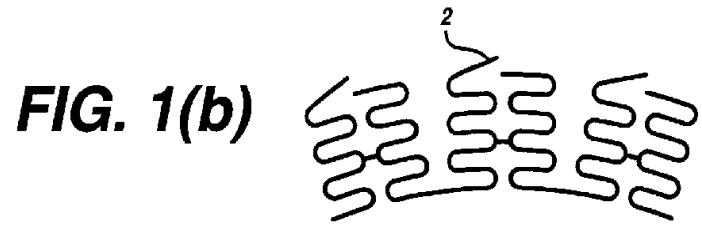
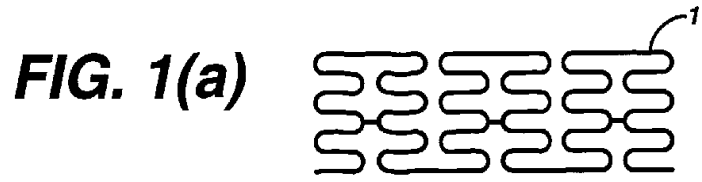


FIG. 2

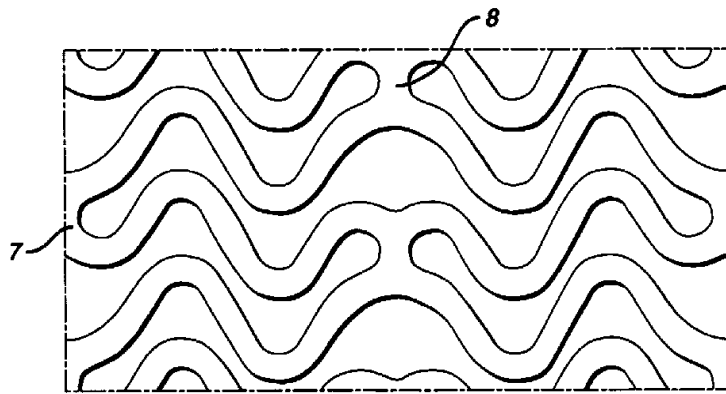


FIG. 2

FIG. 3(a)



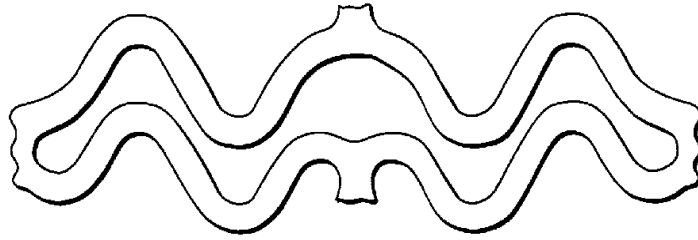


FIG. 3(b)

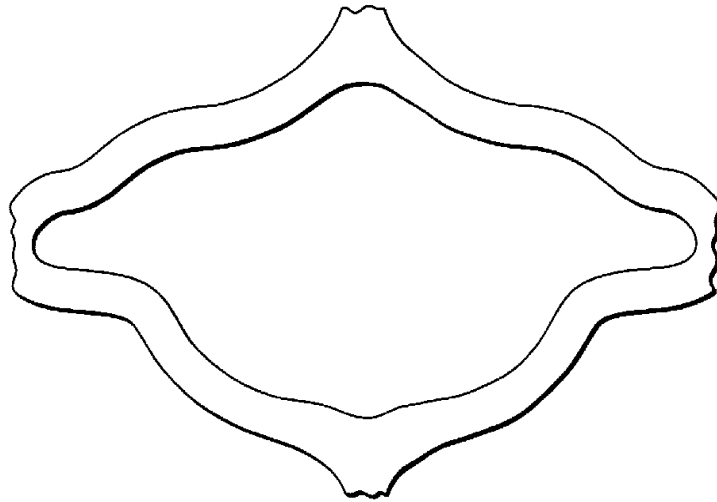


2
2
2
2

FIG. 4

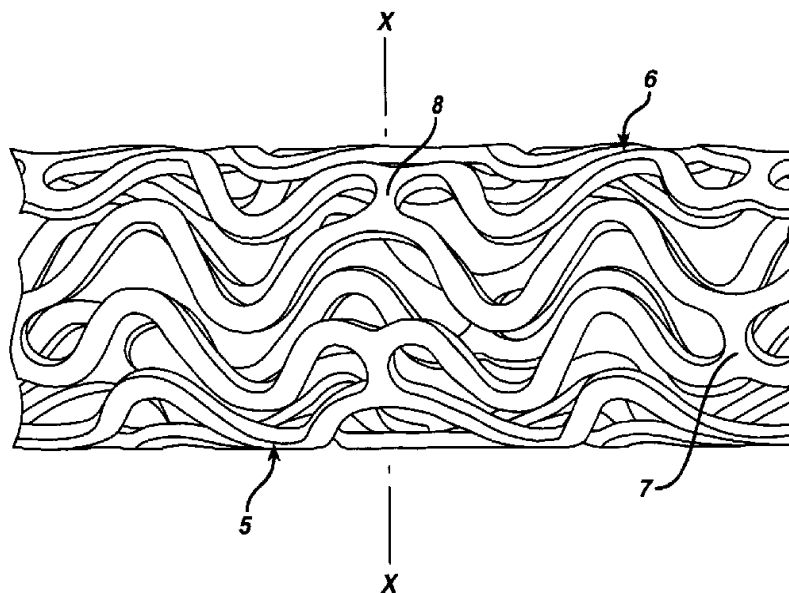

5
6
7
8

FIG. 5

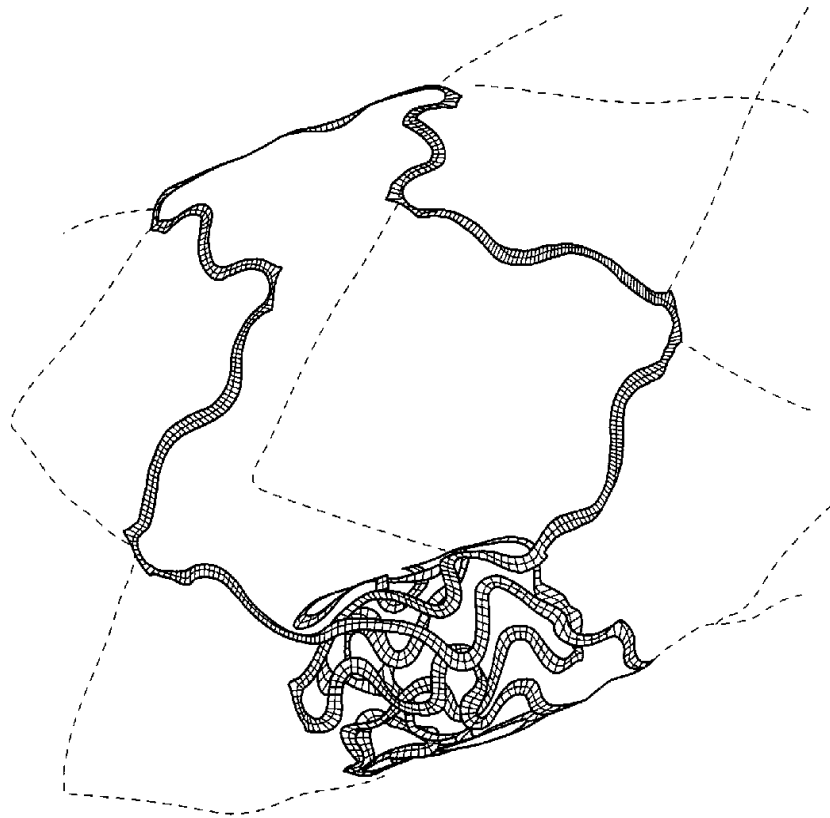

200
100
50

00 400 1701

FIG. 6


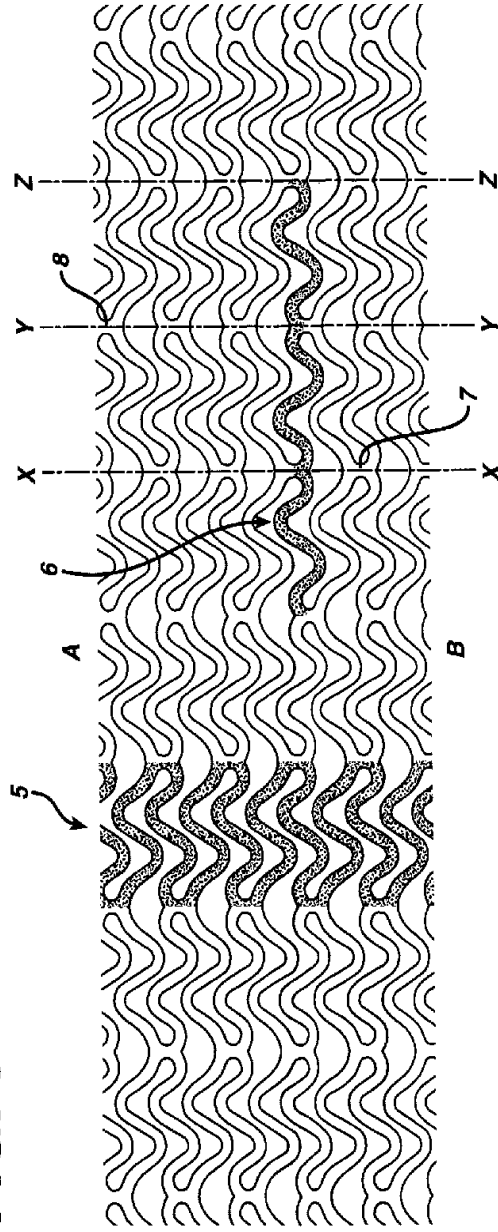



FIG. 7

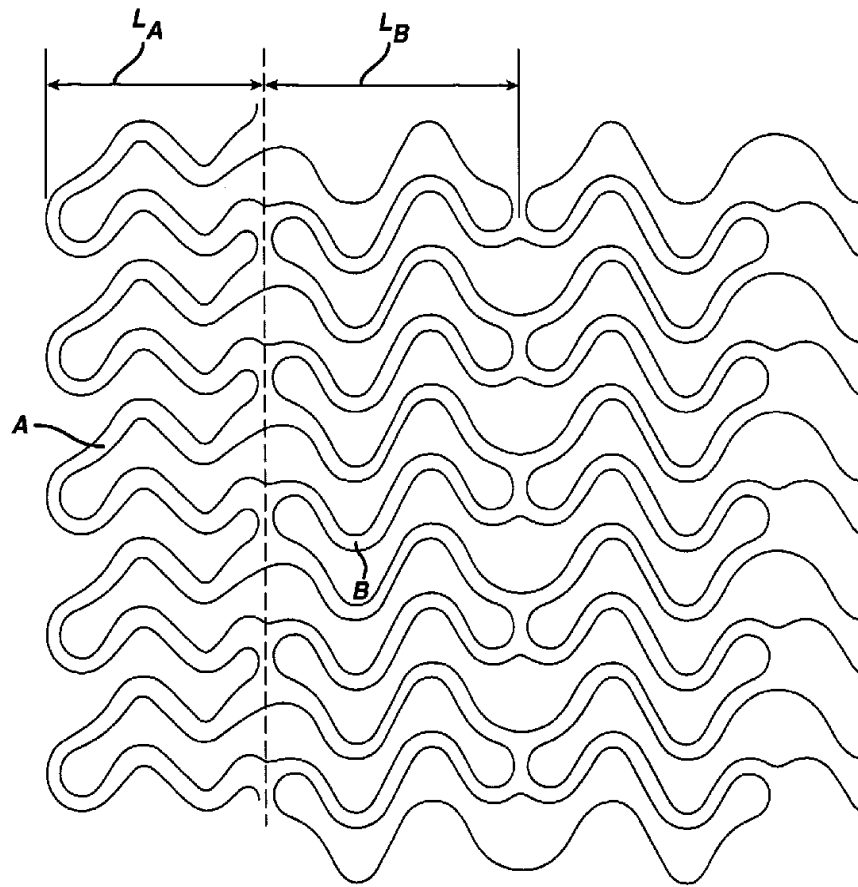

5
4
3
2


20 499 17431

FIG. 8

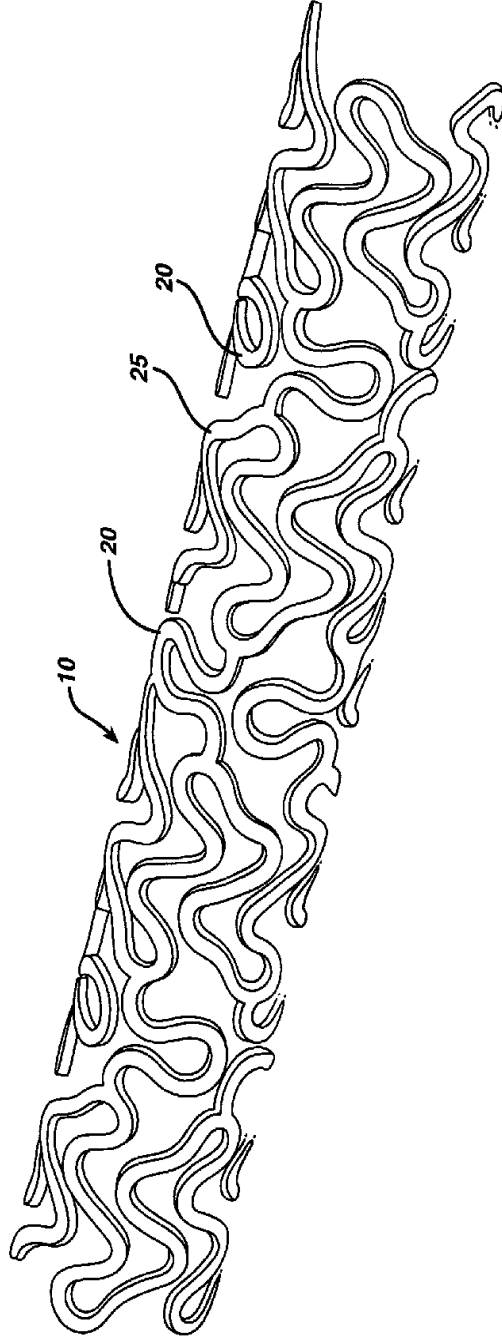

20 400 1701

FIG. 9

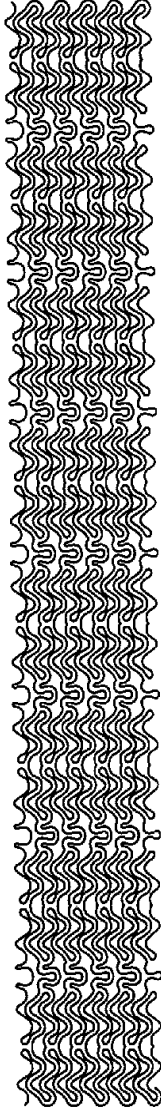

20 400 17031

FIG. 10

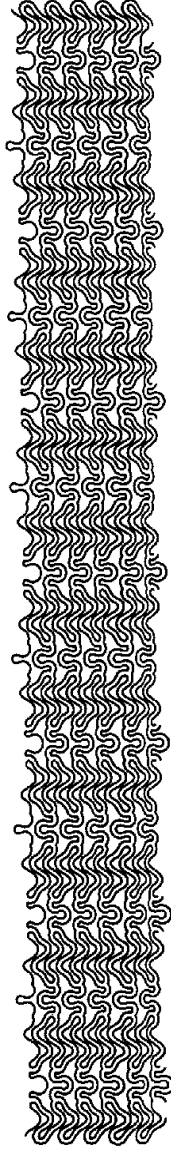


FIG. 11

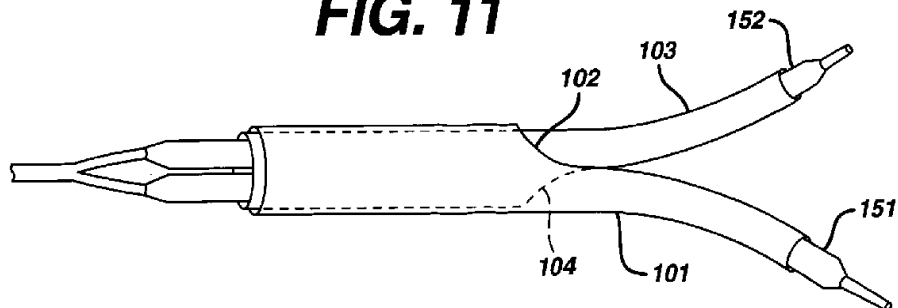


FIG. 12



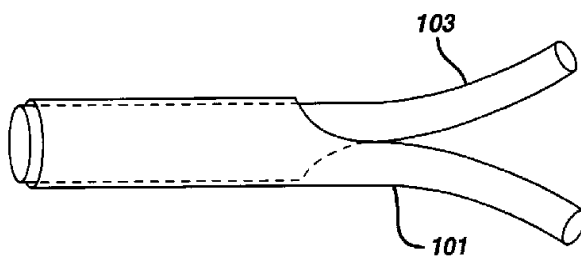


FIG. 13

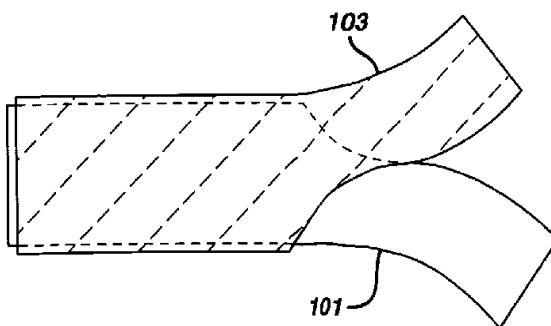

11/12

FIG. 14

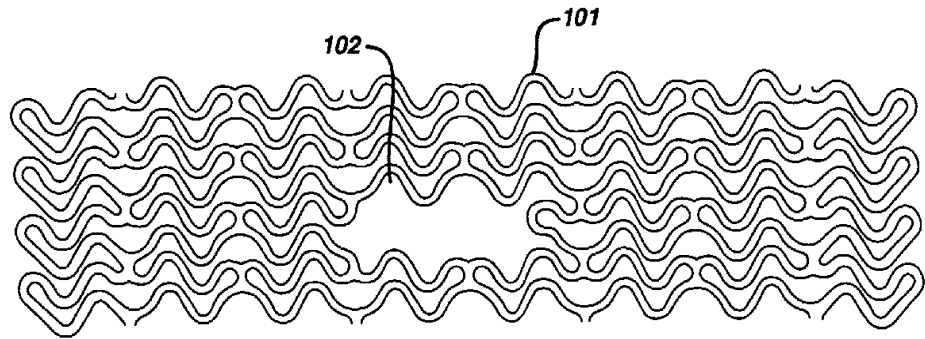

2
3
4