



- (51) International Patent Classification:
B04B 7/14 (2006.01)
- (21) International Application Number:
PCT/EP2017/057706
- (22) International Filing Date:
31 March 2017 (31.03.2017)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
16165095.7 13 April 2016 (13.04.2016) EP
- (71) Applicant: **ALFA LAVAL CORPORATE AB** [SE/SE];
P. O. Box 73, S-221 00 LUND (SE).
- (72) Inventor: **HAGQVIST, Peter**; Docentbacken 11, S-114
18 STOCKHOLM (SE).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG,
NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS,
RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY,
TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) Title: SEPARATING DISC FOR CENTRIFUGAL SEPARATOR AND DISC PACKAGE COMPRISING SUCH SEPARATING DISCS

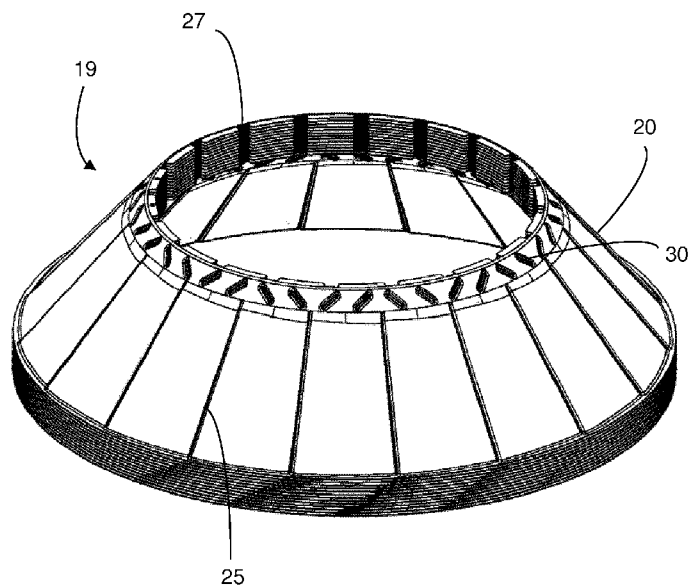


FIG 3

(57) Abstract: A separating disc (20) adapted to be included in a disc package (19) of a centrifuge rotor (5) of a centrifugal separator adapted for separation of components in a supplied medium. The separating disc (20) extends around an axis of rotation (x) and has a tapering shape along the axis of rotation (x). The separating disc (20) further comprises a plurality of distance members (25), wherein each distance member (25) is formed by a pressed marks extending radially. The separating disc (20) is provided with a guiding arrangement (27) comprising a number of index positions for providing indexing of the separating disc (20) in the disc package (19) in a rotational position. The number of index positions is different than the number of the plurality of distance members (25).



SEPARATING DISC FOR CENTRIFUGAL SEPARATOR AND DISC PACKAGE COMPRISING SUCH SEPARATING DISCS

AREA OF INVENTION

5 The present invention involves a separating disc adapted to be included in a disc package of a centrifuge rotor of a centrifugal separator adapted for separation of components in a supplied medium, and such a disc package, wherein the separating disc extends around an axis of rotation and has a tapering shape along the axis of rotation.

10 BACKGROUND OF INVENTION

Conventionally, separating discs for disc packages in centrifuge rotors are manufactured through pressure turning of plane discs to a desired tapering shape, often a conical shape. The distance elements, which define the distance between the separating discs in the disc package, are normally formed by loose flat elements which
15 are attached to the outer surface of the separating discs through spot welding. This method of manufacturing is expensive and time-consuming. It has also been proposed to use different press methods such as deep-drawing, pressing between fixed tools, hydroforming, flow forming etc., to form a plane blank to the desired tapering shape.

20 Example of discs manufactured through this manufacturing method can be found in WO,A,2010/39094. On these discs the distance elements are formed in the pressing process as protrusions extending away from the inner surface and/or the outer surface of the conical disc by the pressing tool. In the above-mentioned document is also disclosed a disc stack comprising a plurality of such discs which will
25 be more or less identical. The discs are stapled on each other in such a manner that the caulks are stacked on each other axially. It is always a risk that a flaw in the material or the pressing processor variations of the thickness of discs will lead to imbalances of the discs stack because those imperfections will be situated in the same rotational position.

30

DISCLOSURE OF INVENTION

The object of the present invention is to reduce the risk of imbalances in the disc stack comprising pressed discs due to imperfections.

This object is achieved by the separating disc initially defined, which is characterized in that the separating disc comprises a plurality of distance members, wherein each distance member is formed by a pressed mark extending radially, and
5 wherein the disc is provided with a guiding arrangement comprising a number of index positions for providing indexing of the disc in the disc package in a rotational position, and wherein the number of index positions are different than the number of the plurality of distance members and wherein the number of index positions are 8-25.

10 Thanks to such indexing of the separating discs in the disc stack it is also possible to achieve a more even separation operation due to a more even distribution around the circumference of the disc package of deviations and flaws of the individual discs.

15 A further advantage of the invention is that a relatively smaller part of the disc surface is covered with caulks compared to a conventional disc. It is estimated that 5% of the surface of a conventional disc is covered with caulks and on a disc according to the invention less than 1% is covered. This means that a separator equipped with such discs may process 4% more fluid at a given separation rate.

20 Due to the fact that the discs are pressed it is possible to keep the production costs down and it is possible to manufacture a large number of identical discs.

To achieve an even abutment of the pressed mark on an adjacent separating
25 disc the pressed marks may exhibit different forms.

The number of the distance members may be one less or one more than the number of index positions.

30 The pressed marks may form upwards steps in the outer surface. The steps may have a staircase-shaped cross-section and the surface area between two pressed marks may be slanting. The steps may have a z-shaped cross section.

The pressed marks may be ridges or ditches in the outer surface extending
35 radially.

The guiding arrangement may also be achieved in different embodiments.

The separating disc may have a central hole for mounting on a rotating member, wherein the guiding arrangement comprises radial recesses extending from
5 the circumference of said central hole.

The separating disc may have a central hole for mounting on a rotating member, wherein the guiding arrangement comprises holes, indentations or elevations along the rim of the central hole.
10

The separating disc may have a central hole for mounting on a rotating member, and wherein the guiding arrangement comprises the central hole which is formed by the same number of sides as there are index positions.

15 The separating disc may comprise a plurality of inlet holes.

The separating disc may have a cone shape having generatrices and the distance members may be curved or inclined in relation to the generatrix.

20 The object is also achieved by the disc package initially defined wherein each separating disc comprises a plurality of distance members extending radially, wherein each distance member is shaped by a pressed mark extending radially, wherein a disc is rotationally displaced in relation to its adjacent discs so that spaces are formed between the discs in the stack, wherein the height of said spaces is defined by the
25 pressed marks, wherein the rotational displacement is provided by a guiding arrangement (27) in each separating disc (20) comprising a number of index positions, wherein the number of index positions are different to the number of the plurality of distance members (25), and wherein two adjacent separating discs (20) are rotationally displaced at least one index position to each other and wherein the number of index
30 positions are 8-25.

The number of the distance members may be one less or one more than the number of index positions.

35

A rotational displacement may be 0.5° - 5° which corresponds to a dislocation of one radial recess if there are 8 – 25 radial recesses around the circumference of the central hole.

- 5 Each of the plurality of separating discs may be displaced the same number of index positions in the same direction in relation to an adjacent disc in the disc package.

Further aspects of the invention are apparent from the dependent claims and the description.

10 **BRIEF DESCRIPTION OF THE DRAWINGS**

Further objects, features and advantages will appear from the following detailed description of several embodiments of the invention with reference to the drawings, in which:

- 15 Fig. 1 discloses a partly sectional side view of a centrifugal separator with a centrifuge rotor.

Fig. 2 discloses a view from above of a separating disc of the disc package.

- 20 Fig. 3 discloses a perspective side view of a disc package of a first embodiment.

Fig. 4 discloses a perspective side view of a section of the disc package.

- 25 Fig. 5 discloses a perspective side view of a section of a different embodiment of the disc package.

DETAILED DESCRIPTION OF EMBODIMENTS

- Fig. 1 discloses a centrifugal separator which is adapted for separation of at least a first component and a second component of a supplied medium. The disclosed
30 centrifugal separator is disclosed as an example and the configuration thereof may be varied. The centrifugal separator comprises a frame 1, which may be non-rotatable or stationary, and a spindle 2 which is rotably journalled in an upper bearing 3 and a lower bearing 4. The spindle 2 carries a centrifuge rotor 5 and is arranged to rotate together

with the centrifuge rotor 5 around an axis x of rotation in relation to the frame 1. The spindle 2 is driven by means of a drive member 6 which is connected to the spindle 2 in a suitable manner in order to rotate the latter at a high velocity, for instance via a drive belt 7 or a gear transmission, or through direct drive, i.e. the rotor (not disclosed) of the drive member 6 is directly connected to the spindle 2 or the centrifuge rotor 5. It is to be noted here that elements having the same function has been provided with identical reference signs in the various embodiments to be described.

The centrifugal separator may comprise a casing 8 which is connected to the frame 1 and which encloses the centrifuge rotor 5. Furthermore, the centrifugal separator comprises at least one inlet 9, which extends through the casing 8 and into a separation space 10 which is formed by the centrifuge rotor 5 for feeding of the medium to be centrifuged, and at least a first outlet for discharge from the separation space 10 of the first component which has been separated from the medium and a second outlet for discharge from the separation space 10 of the second component which has been separated from the medium.

In the separation space 10, there is a disc package 19 which rotates with the centrifuge rotor 5. The disc package 19 comprises or is assembled of a plurality of separating discs 20 which are piled or stacked onto each other in the disc package 19. Each separating disc extends around the axis x of rotation and rotates around the axis x of rotation in a direction R of rotation.

Each separating disc 20 extends along a rotary symmetric, or virtually rotary symmetric, surface which tapers along the axis x of rotation, and has a tapering shape along the axis x of rotation with an outer surface 21, which is convex, and an inner surface 22, which is concave. The tapering shape of the separating discs 20 may also be conical or substantially conical, but it is also possible to let the tapering shape of the separating discs 20 have a generatrix which is curved inwardly or outwardly. The separating discs 20 thus have an angle α of inclination in relation to the axis x of rotation. The angle α of inclination may be 20-70°. Each separating disc 20 also has an outer edge 23 along the radially outer periphery of the separating disc 20 and an inner edge 24 which extends along the radially inner periphery of the separating disc 20 and defines a central opening of the separating disc.

35

Between the separating discs 20, there are distance members 25 which are provided on the outer surface 21 and/or the inner surface 22 and arranged to ensure the formation of an interspace 26 between adjacent separating discs 20 in the disc package 19. The separating discs 20 have a central hole 29 and may be thread around a so called distributor 28. The separating discs 20 are compressed against each other in the disc package 19 with a pre-tensioning force in such a way that the distance members 25 of a separating disc abut sealingly an adjacent separating disc 20. The separating discs 20 may also be fixedly connected to each other, for instance through brazing.

10

The tapering shape of the separating discs 20 has been provided through pressing of a blank of a material against a tool part. The material may be any pressable material, for instance metal material, such as steel, aluminium, titanium, various alloys etc., and also suitable plastic materials. It is to be noted, however, that the separating discs 20 as a consequence of such a pressing may obtain a thickness that varies with the distance from the axis x of rotation.

15

The distance members 25 are as is disclosed more closely in Figs. 4 and 5 formed by pressed marks extending radially thus dividing the disc surface into sectors. The distance members 25 are forming upward steps in the outer surface such that following a disc 20 in a rotational direction each distance member 25 is forming an upward step (or a downward step if the rotation is reverted).

20

Each step has a staircase-shaped cross-section. The step set-off is slightly slanting in the direction of rotation towards the next upward step. Preferably, the slanting may be 1-3°, more preferably around 2°. The step may have a z-shaped cross-section, where the angle between the "legs" of the "z" is less than 90°.

25

Instead of steps the pressed marks may form ridges on or ditches in the outer surface extending radially.

30

The distance members 25 may extend straight radially along the surface of the separating disc or be slightly curved and/or inclined.

Each disc 20 comprised in the disc package 19 are rotationally displaced in relation to its adjacent discs 20. This is effectuated by providing each disc with a guiding arrangement comprising a number of index positions for providing indexing of the discs in the disc package in a rotational position. The number of index positions is different than the number of the plurality of the distance members. The number of index positions is preferably one less or one more than the number of the distance members.

In Fig. 3 is disclosed a package of separating discs 20 stacked on each other having a central hole 29 for mounting on a distributor 28 or another rotating member. The separating discs 20 is provided with a guiding arrangement which comprises radial recesses or notches 27 extending from the circumference of said central hole 29 which is schematically disclosed in Fig. 2.

The radial recesses are preferably evenly distributed along the circumference of the central hole 29 and are in number different than the number of distance members 25. In fig. 3 the number of notches 28 is 20 and the number of distance members 25 is 19. The radial recesses cooperate with axial members e.g. ridges arranged on the rotating member e.g. the distributor 28.

20

To provide a rotational displacement of corresponding distance members of two adjacent discs 20, one of the discs 20 has to be dislocated at least one "notch" i.e. one radial recess. If for instance the number of distance elements 25 is as in fig. 3 19 and the number of radial recesses are 20 the rotational displacement between two adjacent discs 20 will be

25

$$\alpha = 360^\circ/19 - 360^\circ/20 \approx 0.95^\circ$$

if a separating disc 20 is dislocated one radial recess. The rotational displacement is dependent on the number of radial recesses. A preferred displacement would be $0.5^\circ - 5^\circ$ which corresponds to a dislocation of one radial recess i.e. index position, if there are 8 – 25, preferably 16 - 25 radial recesses around the circumference of the central hole. More preferably a displacement of $0.5^\circ - 1.5^\circ$ would be, corresponding to 16 – 25 radial recesses.

35

If an upper separating disc is dislocated one radial recess in the direction of the upward steps in relation to an adjacent lower separating disc broad gap-like separation spaces are provided in the interspace between the two separating discs forming together forming a separation area and the contact surface area between the two separating discs are minimized. The height of said separation spaces is defined by said pressed marks.

Along the circumference of the central hole 29 radially outwards of the notches 28 but inwards of the separation area there may be further distance members 30 fixing the distance between the separating discs 20 of the disc package 19. These distance members 30 may also be pressed marks supporting the separating discs 20 on said distributor 28 and each other. These distance members 30 may be arranged in every sector as in fig. 3 or every other sector and their aim is to absorb at least part of the force with which the disc package compressed with so that the distance elements 25 will not deform the surfaces of the separating discs 20.

It is possible to provide a modified z-shape of the pressed marks as a ridge so that the contact surfaces of the distance members will be formed as lines thus maximizing the area of the interspaces 26 useable as separation area.

20

In one embodiment of a separating disc the guiding arrangement comprises holes, indentations or elevations along the rim of the central hole of the separating disc 20. These holes, indentations or elevations are adapted to cooperate with corresponding holes, indentations or elevations on adjacent separating discs in the same manner previously described.

25

In another embodiment of the separating disc the guiding arrangement comprises the central hole which is formed by the same number of sides as there are index positions adapted to cooperate with a rotating member having the same number of sides.

30

The separating discs 20 may comprise a plurality of inlet holes which due to displacement of a separating disc the same number of index positions in the same direction in relation to its adjacent discs form an inlet channel which is not axial, which would be the case if the separating discs were stacked on each other without

35

dislocation, but winding or spiral-formed. The inlet channel may instead comprise of circumferential inlet slots at the rim of the separating discs 20.

- 5 The invention is not limited to the embodiments described above and shown on the drawings, but can be supplemented and modified in any manner within the scope of the invention as defined by the enclosed claims.

CLAIMS

1. A separating disc (20) adapted to be included in a disc package (19) of a centrifuge rotor (5) of a centrifugal separator adapted for separation of components in a supplied medium,
5 wherein the separating disc (20) extends around an axis of rotation (x) and has a tapering shape along the axis of rotation (x) with an inner surface and an outer surface,
wherein the separating disc (20) comprises a plurality of distance members (25),
wherein each distance member (25) is formed by a pressed mark extending
10 radially,
and wherein the separating disc (20) is provided with a guiding arrangement (27) comprising a number of index positions for providing indexing of the disc in the disc package in a rotational position,
and wherein the number of index positions are different than the number of the
15 plurality of distance members (25), and wherein the number of index positions are 8-25.
2. A separating disc according to claim 1, wherein the number of distance members is one less or one more than the number of index positions.
20
3. A separating disc according to one of claims 1 or 2, wherein the pressed marks form upward steps in the outer surface.
4. A separating disc according to claim 3, wherein a step has a staircase-shaped
25 cross-section and wherein the surface area between two pressed marks are slanting.
5. A separating disc according to claim 3, wherein the step has a z-shaped cross-section.
30
6. A separating disc according to claim 1, wherein the pressed marks are ridges on or ditches in the outer surface extending radially.
7. A separating disc according to one of claims 1-6, wherein the separating disc
35 (20) has a central hole for mounting on a rotating member, and wherein the

guiding arrangement comprises radial recesses extending from the circumference of said central hole.

- 5 8. A separating disc according to one of claims 1-6, wherein the separating disc has a central hole (29) for mounting on a rotating member (2), and wherein the guiding arrangement (27) comprises holes, indentations or elevations along the rim of the central hole (29).
- 10 9. A separating disc according to one of claims 1-6, wherein the separating disc has a central hole (29) for mounting on a rotating member (2), and wherein the guiding arrangement (27) comprises the central hole (29) which is formed by the same number of sides as there are index positions.
- 15 10. A separating disc according to one of claims 1-9, wherein the separating disc (20) comprises a plurality of inlet holes.
- 20 11. A separating disc according to one of claims 1-10, wherein the separating disc (20) have cone shape having generatrices and the distance members (25) are curved or inclined in relation to the generatrix.
- 25 12. A disc package (19) for a centrifuge rotor (5) of a centrifugal separator adapted for separation of components in a supplied medium and comprising a plurality of separating discs (20) according to one of the claims 1-11, which are stacked on each other in the disc package (19),
- 30 wherein each separating disc (20) extends around an axis of rotation (x) and has a tapering shape along the axis of rotation (x) with an inner surface and an outer surface,
- wherein each separating disc (20) comprises a plurality of distance members (25) extending radially, wherein each distance member (25) is shaped by a pressed mark extending radially,
- 35 wherein a separating disc (20) is rotationally displaced in relation to its adjacent discs (20) so that spaces (26) are formed between the discs (20) in the disc package (19), wherein the height of said spaces (26) is defined by the pressed marks,
- wherein the rotational displacement is provided by a guiding arrangement (27) in each separating disc (20) comprising a number of index positions,

wherein the number of index positions is different to the number of the plurality of distance members (25), and wherein two adjacent separating discs (20) are rotationally displaced at least one index position to each other, and wherein the number of index positions are 8-25.

5

13. A disc package according to claim 12, wherein the number of the distance members is one less or one more than the number of index positions.

10

14. A disc package according to one of claims 112 or 13, wherein the rotational displacement is 0.5° - 5° , which corresponds to a dislocation of one radial recess if there are 8 – 25 radial recesses around the circumference of the central hole (29).

15

15. A disc package according to one of claims 112-14, wherein each of the plurality of separating discs (20) is displaced the same number of index positions in the same direction in relation to an adjacent disc (20) in the disc package (19).

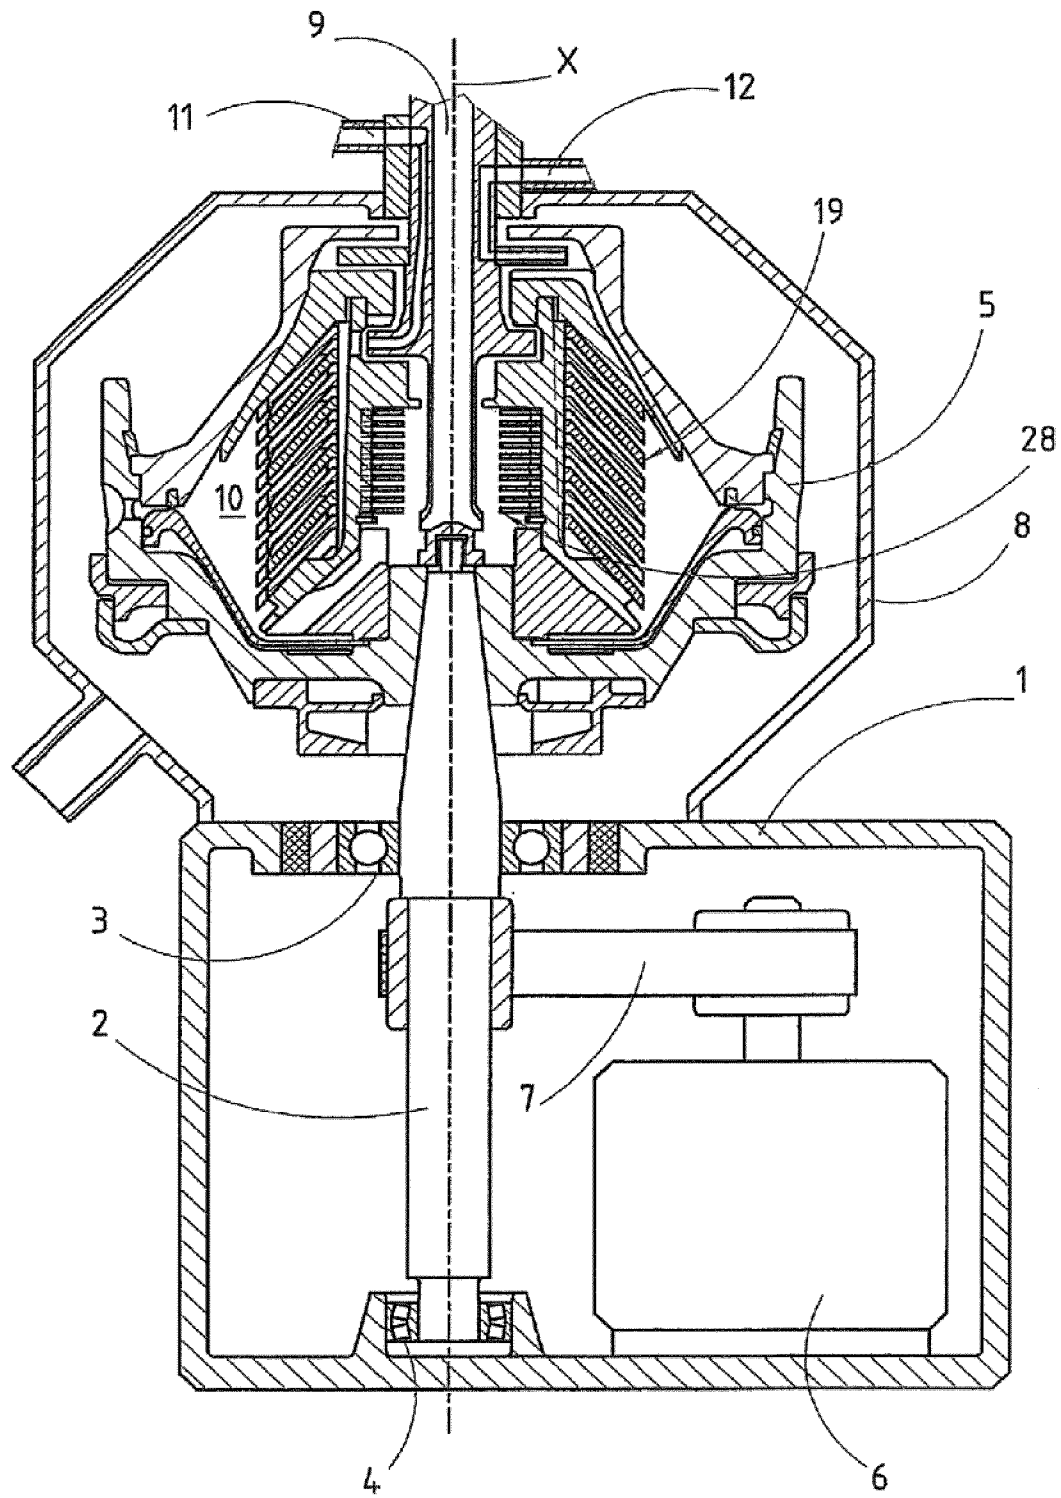
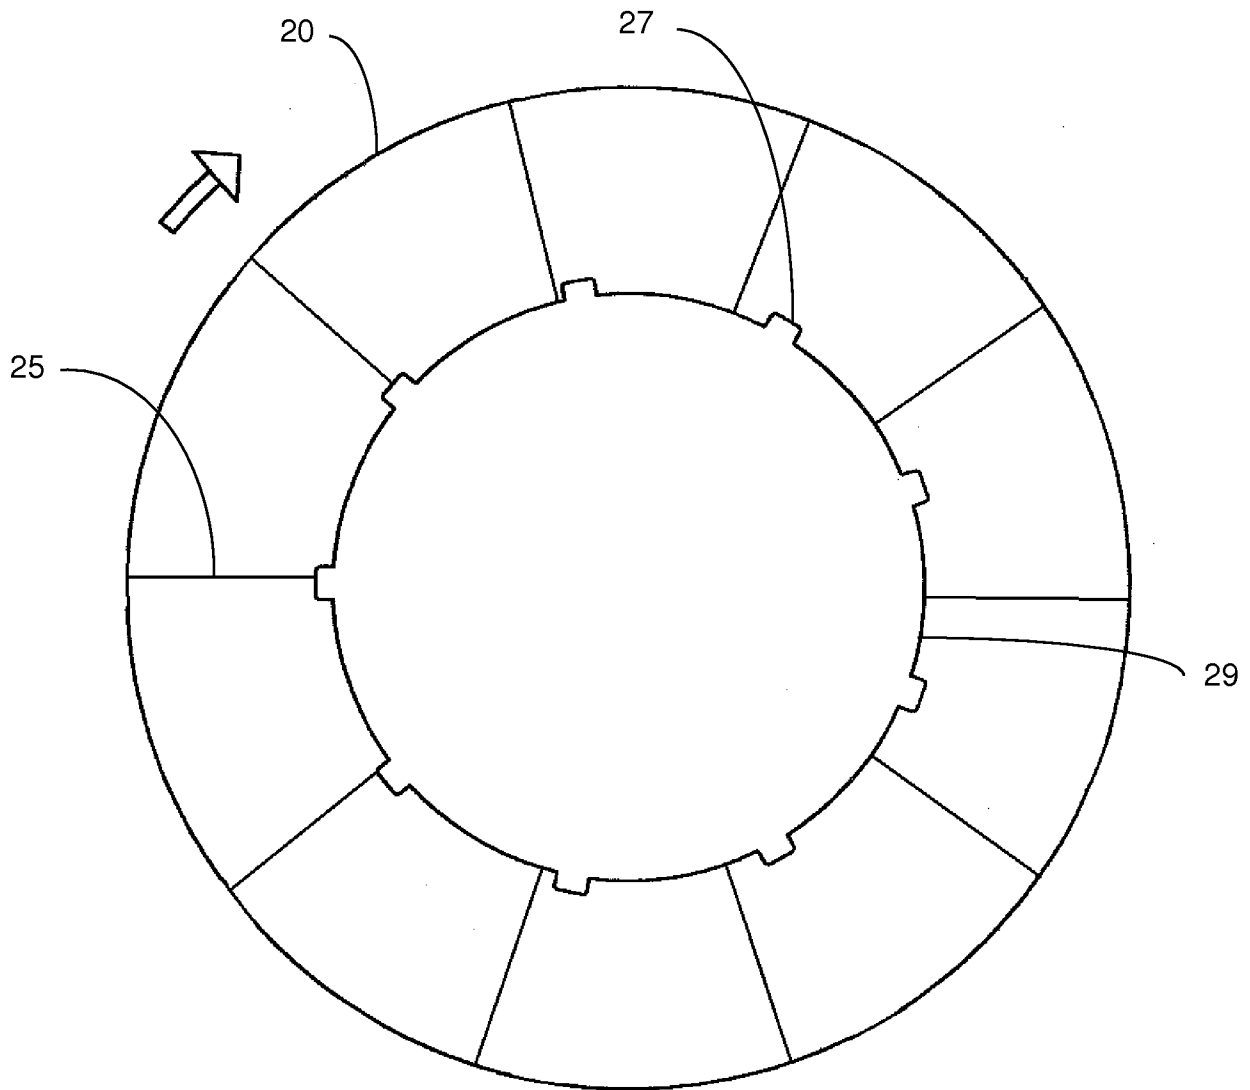


FIG 1

**FIG 2**

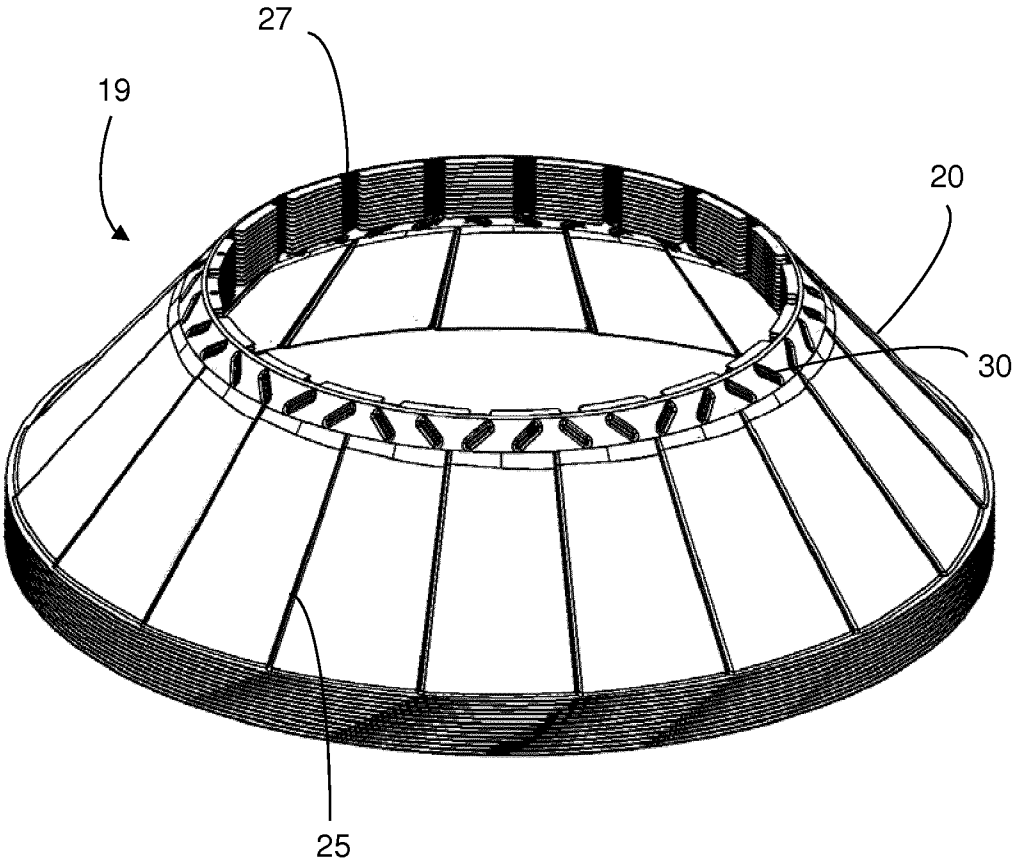


FIG 3

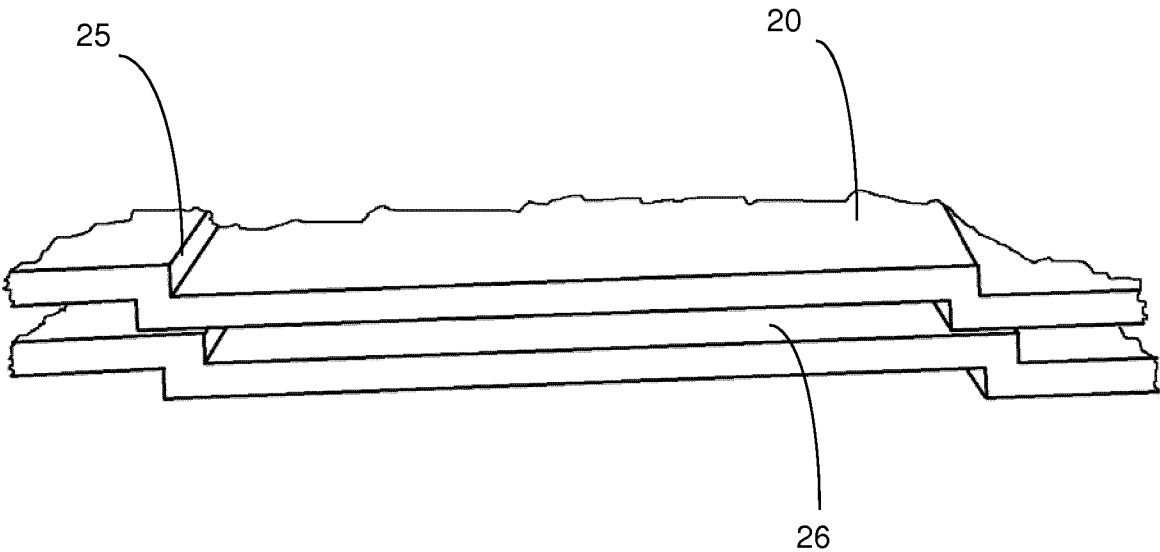
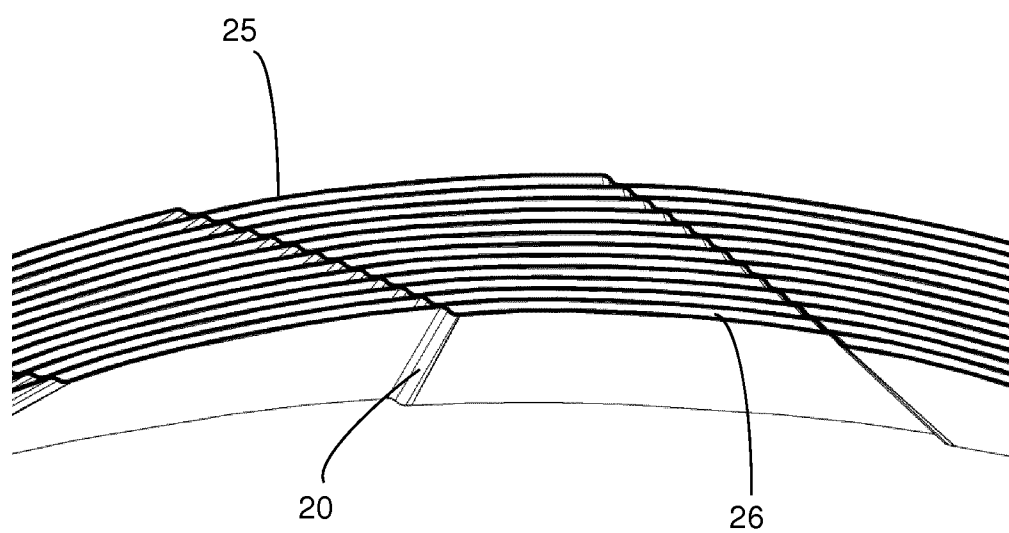


FIG 4

**FIG 5**

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/057706

A. CLASSIFICATION OF SUBJECT MATTER
INV. B04B7/14
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2010/039094 A1 (ALFA LAVAL CORP AB [SE]; KLINTENSTEDT KJELL [SE]; OLSSON SVEN OLOV [SE] 8 April 2010 (2010-04-08) cited in the application	1,3,6-12
Y	page 9, line 27 - page 17, line 24; figures 1-11	4,5,14, 15
X	US 3 409 521 A (SHARPLES THOMAS D) 5 November 1968 (1968-11-05) column 4, line 10 - line 61; figure 5	1,6-9,12
X	WO 2013/162443 A1 (3NINE AB [SE]) 31 October 2013 (2013-10-31) figures 3,4	1,7,8,12
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

1 June 2017

Date of mailing of the international search report

13/06/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Leitner, Josef

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/057706

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DE 100 55 398 C1 (KYFFHAEUSER MASCHF ARTERN GMBH [DE]) 18 April 2002 (2002-04-18) paragraph [0024] - paragraph [0034]; claims; figures -----	14,15
Y	DE 349 709 C (ERNST DIRSCHOWEIT) 7 March 1922 (1922-03-07) figures -----	4,5
A	US 1 006 622 A (BAILEY EDGERLY R [US]) 24 October 1911 (1911-10-24) page 1, line 52 - page 2, line 23; figures 1-5 -----	1,12
A	WO 2004/020105 A2 (3NINE AB [SE]; LAGERSTEDT TORGNY [SE]; INGE CLAES [SE]; FRANZEN PETER) 11 March 2004 (2004-03-11) page 3, line 21 - page 5; figures -----	1,12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2017/057706

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2010039094	A1	08-04-2010	EP 2349576 A1 03-08-2011 SE 0802057 A1 31-03-2010 WO 2010039094 A1 08-04-2010
US 3409521	A	05-11-1968	NONE
WO 2013162443	A1	31-10-2013	EP 2750801 A1 09-07-2014 SE 1250403 A1 24-10-2013 US 2015119225 A1 30-04-2015 WO 2013162443 A1 31-10-2013
DE 10055398	C1	18-04-2002	NONE
DE 349709	C	07-03-1922	NONE
US 1006622	A	24-10-1911	NONE
WO 2004020105	A2	11-03-2004	AU 2003256206 A1 19-03-2004 CN 1942248 A 04-04-2007 EP 1585598 A2 19-10-2005 JP 4217212 B2 28-01-2009 JP 2006508784 A 16-03-2006 SE 0202587 A 03-03-2004 US 2006100083 A1 11-05-2006 WO 2004020105 A2 11-03-2004