



(11) **EP 1 579 724 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
26.09.2007 Bulletin 2007/39

(21) Application number: **03808322.6**

(22) Date of filing: **04.12.2003**

(51) Int Cl.:
H04Q 7/38^(2006.01) H04Q 7/36^(2006.01)

(86) International application number:
PCT/GB2003/005288

(87) International publication number:
WO 2004/060009 (15.07.2004 Gazette 2004/29)

(54) **METHOD AND APPARATUS FOR IMPROVING A TRANSMISSION SIGNAL CHARACTERISTIC OF A DOWNLINK SIGNAL IN A TIME DIVISION MULTIPLE ACCESS WIRELESS COMMUNICATION SYSTEM**

VERFAHREN UND VORRICHTUNG UM EIN ÜBERTRAGUNGSSIGNALKENNZEICHEN EINES ABWÄRTSSIGNALS IN EINEM TDMA DRAHTLOSEN KOMMUNIKATIONSSYSTEM ZU VERBESSERN

PROCEDE ET DISPOSITIF POUR AMELIORER UNE CARACTERISTIQUE DE SIGNAL DE TRANSMISSION D'UN SIGNAL DE LIAISON DESCENDANTE DANS UN SYSTEME DE COMMUNICATION SANS FIL A ACCES DIRECT PAR REPARTITION DANS LE TEMPS

(84) Designated Contracting States:
DE FR GB

(30) Priority: **27.12.2002 US 330944**

(43) Date of publication of application:
28.09.2005 Bulletin 2005/39

(73) Proprietor: **Nortel Networks Limited
St Laurent, Québec H4S 2A9 (CA)**

(72) Inventors:
• **WILSON, Keith
Bishops Stortford,
Hertfordshire CM22 6D (GB)**

• **SMITH, Martin
Chelmsford,
Essex CM1 4XQ (GB)**

(74) Representative: **Hermele, Daniel Stephen et al
Nortel Networks
Intellectual Property Law Group
London Road
Harlow, Essex CM17 9NA (GB)**

(56) References cited:
**EP-A- 0 654 952 EP-A- 1 146 760
WO-A-00/28758 US-B1- 6 301 478**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a method and apparatus for improving a transmission signal characteristic of a downlink signal received at a user equipment in a time division multiple access (TDMA) wireless communication system and particularly but not exclusively to the utilisation of such method and apparatus in a TDMA cellular wireless communications system.

BACKGROUND

[0002] A problem is encountered in cellular wireless communications networks in which user equipments receiving downlink signals at locations towards the outer edges of the networks' cells may experience poor carrier signal to interference signal power ratios (C/I). One consequence of this is that it may not be possible to provide the same levels and types of services, particularly broadband data services, to such user equipments than is possible for user equipments located much closer to system signal sources such as base stations. Alternatively, whilst similar services may be delivered to user equipments located in the outer margins of the cells, the service bit rates for such services may have to be considerably reduced which means that the service being provided is delivered at a much slower rate, is delivered without all the normally available features or is at a greater risk of interruption or disconnection.

[0003] In a cellular wireless communications network with a packet switched time division multiple access (TDMA) downlink, one solution that has been attempted to overcome the abovementioned problem is a scheduling based solution in which the number of TDMA time slots allotted for transmissions to edge of cell user equipments is increased. Whilst it is intuitive that such a scheduling solution will improve the ability of the network to provide edge of cell user equipments with the levels and types of services available to user equipments closer to base stations, for example, experience indicates that, whilst service coverage over the cells of the network is improved, the capacity of the network for delivering services to all user equipments is substantially reduced.

[0004] US 6,301,478 describes a method of reducing interference in a cellular radio communication system in which a base station performs an intra cell 'courtesy' handover to a different frequency. The courtesy handover occurs without any explicit communication between neighbouring base stations.

OBJECTS OF THE INVENTION

[0005] An object of the invention is to provide a method of improving a signal characteristic of a downlink signal received by an edge of cell user equipment in a TDMA cellular wireless communication system.

SUMMARY OF THE INVENTION

[0006] The present invention proposes improving the C/I of edge of cell user equipments by switching off the base station downlink signal transmissions of the strongest downlink signal interferers during the time slots employed for transmitting downlink signals to edge of cell user equipments. In this way, the edge of cell user equipments see a greatly reduced level of downlink signal interference which leads to a greatly increased potential data throughput for said user equipments thus enabling the same levels and types of services to be delivered to such user equipments as would be the case if they were located closer to their respective base stations. The proposed solution offered by the present invention does involve a trade-off between a lowering of the capacity of the network since some downlink signals are prevented from being transmitted in certain TDMA time slots. This will lead to the network being able to serve less user equipments, but experience shows that this reduction in capacity of the network is not as great as is the case where the abovementioned scheduling based solution is employed and yet achieves at least as good, if not better, user equipment coverage.

[0007] A first aspect of the present invention provides a method of improving a signal characteristic of a downlink signal received on a user equipment in a time division multiple access ((TDMA) wireless communication system, comprising, the steps of :

at a user equipment:

A. receiving a desired downlink signal from a signal source in a predetermined TDMA time slot;

B. receiving at least one other signal in said same predetermined TDMA time slot; and

C. measuring a signal quality characteristic of said desired downlink signal; the method comprising the further steps of:

D. comparing said measured signal quality characteristic with a threshold; and

E. where it is determined from said comparison of said measured signal quality characteristic with said threshold that the reception by the user equipment of said at least one other signal has contributed to the measured signal quality characteristic of the desired downlink signal not meeting the threshold, arranging for the source of said at least one other signal to change a transmission signal characteristic of said at least one other signal.

[0008] A second aspect of the present invention pro-

vides a timed division multiple access (TDMA) wireless communication system, comprising:

a user equipment operable to receive a desired downlink signal from a signal source in a predetermined TDMA time slot, to receive at least one other signal in said same predetermined TDMA time slot and to measure a signal quality characteristic of said desired downlink signal, the system further comprising means for comparing said measured signal quality characteristic with a threshold; and, where it is determined from said comparison of said measured signal quality characteristic with said threshold that the reception by the user equipment of said at least one other signal has contributed to the measured signal quality characteristic of the desired downlink signal not meeting the threshold, means for arranging for a source of said at least one other signal to change a transmission signal characteristic of said at least one other signal.

[0009] A third aspect a user equipment for a TDMA wireless communications system, comprising:

a user equipment operable to receive a desired downlink signal from a signal source in a predetermined TDMA time slot, to receive at least one other signal in said same predetermined TDMA time slot and to measure a signal quality characteristic of said desired downlink signal, the system further comprising means for comparing said measured signal quality characteristic with a threshold; and, where it is determined from said comparison of said measured signal quality characteristic with said threshold that the reception by the user equipment of said at least one other signal has contributed to the measured signal quality characteristic of the desired downlink signal not meeting the threshold, means for arranging for a source of said at least one other signal to change a transmission signal characteristic of said at least one other signal.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] In order to show how the invention may be carried into effect, an embodiment of the invention will now be described below by way of example only and with reference to the accompanying figures in which:

Figure 1 is a schematic representation of a TDMA cellular wireless communications network; and

Figure 2 illustrates a TDMA time slot allocation arrangement for a plurality of signal sources in the TDMA cellular wireless communication network of figure 1.

A DETAILED DESCRIPTION OF THE INVENTION

[0011] The best mode of the invention will now be described with reference to the accompanying figures.

[0012] Figure 1 is a schematic representation of a cellular wireless communications network. The network comprises a plurality of contiguous cells 1 to 7, each cell being served by a respective base station 8 to 14 which each comprise a downlink signal source for user equipments 15 located in their respective cells. For ease of convenience, the cells 1 to 7 are schematically represented as being hexagonal in coverage area and only one user equipment is shown as being located towards an edge of the cell denoted 1 adjacent to the cell denoted as 4. It will be understood that each cell will be occupied by a plurality of user equipments and that the downlink signals transmitted by the various base stations 8 to 14 do not abruptly end at the boundaries of the cells but that such signals may be received by a user equipment located in a different cell.

[0013] The user equipment (UE) 15 depicted in figure 1 can be seen to be receiving a desired downlink signal S1 from a first signal source comprising base station 8 but is also receiving what might be termed undesired signals S2, S3 and S4 from other signal sources which, in the illustrated example, respectively comprise base stations 10, 11 and 12 of cells 3, 4 and 5. These signals are transmitted in the same TDMA time slot as the desired downlink signal S1. Signals S2, S3 and S4 can be considered as constituting interferer signals since reception of these signals by user UE15 will degrade the carrier signal to interfere signal power ratio (C/I) for desired downlink signal S1 received by UE15. Equally, signals S2, S3 and S4 could be considered as constituting noise signals with respect to desired downlink signal S1 and consequently the signal to noise ratio of the desired downlink signal S1 received by UE15 would also be degraded by the reception of these signals. In either case, it may not be possible for base station 8 to deliver the same levels and types of services, particularly data services, to UE15 located at the edge of cell 1 than would be the case if said user equipment were located much closer to base station 8. It will be understood that, at a location close to base station 8, the degrading effect on the desired downlink signal S1 received by the user equipment caused by interferer signals S2, S3 and S4 would be greatly diminished and possibly of negligible effect. However, for user equipments located towards the edge of cells, such signals can have a significant impact on reception quality of desired signals.

[0014] At UE15, a transmission signal quality characteristic such as the CIR, SNR, signal to noise and interference ratio (SNIR) or any commonly defined signal characteristic of the desired downlink signal is measured. This measurement of a signal quality characteristic of the desired downlink signal S1 can then be compared with a predetermined threshold. The threshold may be a value set by a network manager element (NE) 16 which deter-

mines whether a certain service or level of service can be efficiently supplied to a user equipment based on a comparison of the measured signal quality characteristic and the threshold. For example, if the CIR value calculated for the desired downlink signal S1 by UE15 is above a certain value then communication of this fact to the NE16 by the UE15 will allow the NE16 to determine that it can provide a requested type of data service or level of service, e.g. bit rate to UE15. It will be understood that the techniques for making such calculations and determining the ability to deliver services are known in the art.

[0015] The present invention recognises that it is possible to improve the transmission signal quality of a desired downlink signal for a user equipment located towards an edge of a cell if it is possible to reduce or remove the degrading effect on the desired downlink signal quality caused by interferer signals from other sources, or possibly from the same source where a cell is sectorised employing overlapping downlink antenna beams.

[0016] The present invention proposes a method of identifying the source or sources of interferer signals that have the most adverse impact on the downlink signal quality received by the user equipment and for arranging for said interferer signals to either not be transmitted at the same time as the desired downlink signal or for certain signal characteristics, for example power, of said interferer signals to be reduced if they are to be still transmitted at the same time as the downlink signal.

[0017] In figure 1 the NE16 which controls the base stations 8 to 14 and indirectly the user equipments 15 serviced by the base stations is shown linked to base station 9 only. It will be understood that NE16 will be connected to all base stations of the network. In the embodiment illustrated in figure 1, the UE15 having measured a signal quality characteristic of its desired downlink signal S1, communicates this to its base station 8 which in turn may communicate the measured signal quality characteristic to the NE16. The NE16 has knowledge of all signals being transmitted in all time slots of the TDMA scheme and, as such, can identify from its knowledge of the communications network topology which of the signals being transmitted in the same time slot as that being utilised by the desired downlink signal S1 to UE15 are candidates for being interferer signals with respect to said desired downlink signal S1. The NE16 can therefore, in response to a comparison of the measured signal quality characteristic of the desired downlink signal S1 communicated to it by UE15 via base station 8 with the threshold, determine if said signal quality characteristic meets a desired level of threshold and, if not, can arrange for candidate interfere signal sources to cease transmission. The NE16 can cause all candidate interferer signals to be prevented from being transmitted in the same TDMA time slot as the desired downlink signal S1. Alternatively, it can select each candidate interferer signal in some defined order and cause each in turn to be not transmitted to said time slot. Until such time as the UE 15 communicates to the NE 16 a measured signal quality character-

istic that does now meet the desired threshold. Alternatively, the NE 16 may choose to instruct the signal sources of the interferer signals to reduce the transmission power of said interferer signals rather than preventing them from continuing to be transmitted in the same TDMA time slot as the desired downlink signal S1. In this way, the effect of the interferer signals is mitigated such that the UE15 achieves a better signal quality reception of its desired downlink signal S1 than would have been the case had those steps not been taken to change a signal characteristic of the interferer signals.

[0018] Reference is made to figure 2 which illustrates a TDMA time slot allocation for a desired downlink signal S1 and interferer signals S2, S3 and S4. In the example illustrated in figure 2, it can be seen that the NE 16 has instructed base stations 11 and 12 to cease transmission of interferer signals S3 and S4 during the same TDMA time slot as the desired downlink signal S1 but has allowed interferer signal S2 to continue to be transmitted during said same TDMA time slot. In this example, it has been determined that the prevention of transmission of interferer signals S3 and S4 during the same TDMA time slot as the desired downlink signal S1 is sufficient to improve the received signal quality by UE15 of desired downlink signal S1 to meet the desired threshold. Whilst this have the effect of reducing the overall capacity of the network, it does not result in all signals in the same time slot as the desired downlink signal being prevented from being transmitted and so the impact on the capacity of the network is not as deleterious as would at first be imagined. For example, the NE 16 will continue to allow other base stations such as 9, 13 and 14 of figure 1 to transmit downlink signals during the same TDMA time slot as desired downlink signal S1 since these are not considered to constitute interferer signals with respect to the reception by UE15 of desired downlink S1.

[0019] The description of how the NE 16 causes a number of candidate interferer signals to be prevented in them from being transmitted in the same TDMA time slot as that of the desired downlink signal S1 appears to comprise a random selection process. However, in a preferred embodiment of the invention, the UE 15 is arranged not only to measure a transmission signal quality characteristic of the desired downlink signal S1 but to also measure a signal characteristic for each interferer signal as a means of ranking said interferer signals as being the most adversely affecting to least adversely affecting interferer signal on the measured signal quality characteristic of the desired downlink signal S1. In this way, the NE 16 can select which of the interferer signal sources should first be caused to cease transmission of such signal in the TDMA time slot of the desired downlink signal S1. This process can be repeated until such time as the UE 15 has communicated to the NE 16 a measured signal quality characteristic that meets a desired level.

[0020] In most circumstances where the topology of a network is known and network characteristics relatively static, the value of threshold for comparing a measured

signal quality characteristic of a desired downlink signal S1 may itself be a static (in time) value. However, in a mobile cellular wireless system where the sources of interferer signals may comprise sources other than base stations of adjacent cells and the network characteristics are changing dynamically, then the NE 16 may be arranged to dynamically vary the value of the threshold determining whether a certain service can be delivered to an edge of cell user equipment.

[0021] Whilst the NE 16 is described as making the comparison of the measured signal quality characteristic communicated to it by UE15 with the threshold, it will be understood that such comparison may be made at the base station 8 in a network where the NE 16 communicates to the base station 8 information concerning which other signal sources are transmitted on the same TDMA time slot as that used by base station 8 for the desired downlink signal S1 to UE15 and that base station 8 is able to communicate either via the NE 16 or directly with other base stations to instruct such stations to change a signal characteristic of an interferer signal. Alternatively, in a distributive wireless communication system in which user equipments can act as relay stations or even base stations, then the method described above might be fully implemented by a user equipment suitably arranged to be able to communicate with other user equipments such that said user equipments share knowledge as to which equipments are transmitting on certain TDMA time slots.

Claims

1. A method of improving a signal characteristic of a downlink signal received on a user equipment (15) in a time division multiple access TDMA wireless communications system, comprising the steps of :

at a user equipment:

- A. receiving a desired downlink signal (S1) from a signal source (18) in a predetermined TDMA time slot;
 - B. receiving at least one other signal (S2; S3;S4) in said same predetermined TDMA time slot; and
 - C. measuring a signal quality characteristic of said desired downlink signal;
- the method comprising the further steps of:
- D. comparing said measured signal quality characteristic with a threshold; and the method being **characterised by** :
 - E. where it is determined from said comparison of said measured signal quality characteristic with said threshold that the reception by the user equipment of said at least one other signal has contributed to the measured signal quality characteristic of the desired downlink signal not meeting the

threshold, arranging for the source of said at least one other signal (10; 11; 12) to change a transmission signal characteristic of said at least one other signal.

2. A method according to claim 1, wherein the change in a transmission signal characteristic of said at least one other signal comprises arranging the source of said at least one other signal to prevent said at least one other signal being transmitted on the predetermined TDMA time slot of the desired downlink signal.
3. A method according to claim 1, wherein the change in a transmission signal characteristic of said at least one other signal comprises arranging for the source of at least one other signal to reduce a transmission power of said at least one other signal.
4. A method according to any of claims 1 to 3, wherein steps A to E of said method of claim 1 are performed at the user equipment.
5. A method according to any of claims 1 to 3, wherein the steps A to C of the method of claim 1 are performed at said user equipment (15) and the steps D and E of the method of claim 1 are performed at a base station (8) comprising the source of the desired downlink signal.
6. A method according to any of claims 1 to 3, wherein the steps A to C of the method of claim 1 are performed at said user equipment and the steps D and E of the method of claim 1 are distributively performed by a base station that comprises the source of the desired downlink signal and a network management element (16) controlling a number of base stations comprising the TDMA wireless communications system.
7. A method according to claim 1, wherein said threshold for comparing a measured transmission signal quality characteristic of the desired downlink signal has a static predetermined value.
8. A method according to claim 1, wherein said threshold for comparing a measured transmission signal quality characteristic of the desired downlink signal has a dynamically varying value.
9. A method according to claim 7 or claim 8, wherein the threshold comprises a value for one of a signal to noise ratio SNR, a signal to interference and noise ratio SNIR and a carrier signal to interference ratio CIR.
10. A method according to claim 1, wherein the user equipment receives a plurality of other signals in said predetermined TDMA time slot in addition to the de-

sired downlink signal, the method comprising the further step of:

- F. determining from a comparison of the measured signal quality characteristic of the desired downlink signal with a threshold which of said plurality of other signals most adversely affects the measured signal quality characteristic and arranging for a source of said most adversely affecting other signal to change a transmission signal characteristic of such signal. 5 10
11. A method according to claim 10, wherein step F of claim 10 includes determining in an order of most adversely affecting to least adversely affecting on said comparison of said measured transmission signal quality characteristic of the desired downlink signal with the threshold and arranging for the sources of said other signals in the order of the most adversely affecting to the least adversely affecting to sequentially change a transmission signal characteristic of said other signals, the sequential process being followed until such time that the comparison of the measured transmission signal quality characteristic of the desired downlink signal with the threshold meets a desired level. 15 20 25
12. A method according to claim 10 or claim 11, wherein the changes in the transmission signal characteristics of said most adversely affecting other signals comprises arranging for the sources of such signals to not transmit such signals in the predetermined TDMA time slot occupied by the desired downlink signal. 30
13. A method according to claim 1, wherein the at least one other signal received by said user equipment in the same predetermined TDMA time slot of the desired downlink signal comprises at least one other desired downlink signal, said desired downlink signal and said at least one other desired downlink signal comprising between them the user equipment downlink signals in a multiple input multiple output MIMO wireless communication scheme. 35 40 45
14. A time division multiple access TDMA wireless communication system, comprising:
- a user equipment (15) operable to receive a desired downlink signal (S1) from a signal source (8) in a predetermined TDMA time slot, to receive at least one other signal (S2;S3;S4) in said same predetermined TDMA time slot and to measure a signal quality characteristic of said desired downlink signal, the system further comprising means for comparing said measured signal quality characteristic with a threshold; and, the system being **characterized by** : where it is 50 55
- determined from said comparison of said measured signal quality characteristic with said threshold that the reception by the user equipment of said at least one other signal has contributed to the measured signal quality characteristic of the desired downlink signal not meeting the threshold, means for arranging for a source of said at least one other signal (10;11; 12) to change a transmission signal characteristic of said at least one other signal.
15. A system according to claim 14, wherein the means for arranging for the source of said at least one other signal to change a transmission signal characteristic of said at least one other signal causes said at least one other signal not to be transmitted on the predetermined TDMA time slot of the desired downlink signal.
16. A system according to claim 14, wherein the means for arranging for the source of said at least one other signal to reduce a transmission power of said at least one other signal.
17. A system according to any of claim 14 to 16, wherein the user equipment includes the means for comparing said measured signal quality characteristic with a threshold and said means for arranging for a source of said at least one other signal to change a transmission signal characteristic of said at least one other signal.
18. A user equipment (15) for a TDMA wireless communications system, comprising:
- a user equipment operable to receive a desired downlink signal (S1) from a signal source (8) in a predetermined TDMA time slot, to receive at least one other signal (S2;S3;S4) in said same predetermined TDMA time slot and to measure a signal quality characteristic of said desired downlink signal, the user equipment further comprising means for comparing said measured signal quality characteristic with a threshold; and, the user equipment being **characterized by** : where it is determined from said comparison of said measured signal quality characteristic with said threshold that the reception by the user equipment of said at least one other signal has contributed to the measured signal quality characteristic of the desired downlink signal not meeting the threshold, means for arranging for a source of said at least one other signal (10;11; 12) to change a transmission signal characteristic of said at least one other signal.
19. A machine readable medium carrying a computer program to implement the method of claim 1.

Patentansprüche

1. Verfahren zur Verbesserung einer Signal-Charakteristik eines von einer Benutzer-Ausrüstung (15) in einem drahtlosen Zeitvielfachzugriffs- (TDMA-) Kommunikationssystem empfangenen Abwärtsstrecken-Signals, mit den folgenden Schritten:

an einer Benutzerausrüstung:

- A. Empfangen eines Abwärtsstrecken-Nutzsignals (S1) von einer Signalquelle (18) in einem vorgegebenen TDMA-Zeitschlitz;
- B. Empfangen von zumindest einem anderen Signal (S2; S3; S4) in dem gleichen vorgegebenen TDMA-Zeitschlitz; und
- C. Messen einer Signalqualitäts-Charakteristik des Abwärtsstrecken-Nutzsignals;

wobei das Verfahren weiterhin die folgenden Schritte umfasst:

- D. Vergleichen des gemessenen Signalqualitäts-Charakteristik mit einem Schwellenwert; und

wobei das Verfahren **dadurch gekennzeichnet ist, dass:**

- E. wenn aus dem Vergleich der gemessenen Signalqualitäts-Charakteristik mit dem Schwellenwert festgestellt wird, dass der Empfang des zumindest einen anderen Signals durch die Benutzer-Ausrüstung dazu beigetragen hat, dass die gemessene Signalqualitäts-Charakteristik des Nutz-Abwärtsstrecken-Signals den Schwellenwert nicht erfüllt, veranlassen, dass die Quelle des zumindest einen anderen Signals (10; 11; 12) die Sende-Signalcharakteristik des zumindest einen anderen Signals ändert.

2. Verfahren nach Anspruch 1, bei dem die Änderung einer Sendesignal-Charakteristik des zumindest einen anderen Signals das Veranlassen umfasst, dass die Quelle des zumindest einen anderen Signals die Aussendung des zumindest einen anderen Signals auf dem vorgegebenen TDMA-Zeitschlitz des Abwärtsstrecken-Nutzsignals verhindert.

3. Verfahren nach Anspruch 1, bei dem die Änderung einer Sendesignal-Charakteristik des zumindest einen anderen Signals das Veranlassen umfasst, dass die Quelle des zumindest einen anderen Signals die Sendeleistung des zumindest einen anderen Signals verringert.

4. Verfahren nach einem der Ansprüche 1 bis 3, bei dem die Schritte A bis E des Verfahrens nach Anspruch 1 an der Benutzer-Ausrüstung ausgeführt werden.

5. Verfahren nach einem der Ansprüche 1 bis 3, bei dem die Schritte A bis C des Verfahrens nach Anspruch 1 an der Benutzer-Ausrüstung (15) ausgeführt werden, und die Schritte D und E des Verfahrens nach Anspruch 1 an einer Basisstation (8) ausgeführt werden, die die Quelle für das Abwärtsstrecken-Nutzsignal umfasst.

6. Verfahren nach einem der Ansprüche 1 bis 3, bei dem die Schritte A bis C des Verfahrens nach Anspruch 1 an der Benutzer-Ausrüstung ausgeführt werden, und die Schritte D und E des Verfahrens nach Anspruch 1 in verteilter Weise von einer Basisstation, die die Quelle für das Abwärtsstrecken-Nutzsignal umfasst, und ein Netzwerk-Verwaltungselement (16) ausgeführt werden, das eine Anzahl von Basisstationen steuert, die das drahtlose TDMA-Kommunikationssystem umfasst.

7. Verfahren nach Anspruch 1, bei dem der Schwellenwert zum Vergleich einer gemessenen Sendesignal-Qualitätscharakteristik des Abwärtsstrecken-Nutzsignals einen statischen vorgegebenen Wert hat.

8. Verfahren nach Anspruch 1, bei dem der Schwellenwert zum Vergleich einer gemessenen Sendesignal-Qualitätscharakteristik des Abwärtsstrecken-Nutzsignals einen sich dynamisch ändernden Wert hat.

9. Verfahren nach Anspruch 7 oder 8, bei dem der Schwellenwert einen Wert für eines von einem Signal-zu-Störverhältnis SNR, einem Signal-zu-Stör- und Rauschverhältnis SNIR und einem Trägersignal-zu-Stör-Verhältnis CIR umfasst.

10. Verfahren nach Anspruch 1, bei dem die Benutzer-Ausrüstung eine Vielzahl anderer Signale in dem vorgegebenen TDMA-Zeitschlitz zusätzlich zu dem Abwärtsstrecken-Nutzsignal empfängt, wobei das Verfahren den weiteren folgenden Schritt umfasst:

- F. Feststellen, aus einem Vergleich der gemessenen Signalqualitäts-Charakteristik des Abwärtsstrecken-Nutzsignals mit einem Schwellenwert, welches der Vielzahl von anderen Signalen in nachteiligster Weise die gemessene Signalqualitäts-Charakteristik beeinflusst, und Veranlassen, dass eine Quelle für das den am stärksten negativen Einfluss aufweisenden anderen Signals eine Sendesignal-Charakteristik dieses Signals ändert.

11. Verfahren nach Anspruch 10, bei dem der Schritt F

- nach Anspruch 10 die Feststellung in einer Reihenfolge von der stärksten nachteiligen Beeinflussung bis zur der am wenigsten nachteiligen Beeinflussung des Vergleichs der gemessenen Sendesignal-Qualitätscharakteristik des Abwärtsstrecken-Nutzsignals mit dem Schwellenwert und das Veranlassen einschließt, dass die Quellen der anderen Signale in der Reihenfolge der stärksten nachteiligen Beeinflussung bis zu der am wenigsten nachteiligen Beeinflussung aufeinanderfolgend eine Sendesignal-Charakteristik der anderen Signale ändern, wobei der sequenzielle Prozess so lange befolgt wird, bis der Vergleich der gemessenen Sendesignal-Qualitätscharakteristik des Abwärtsstrecken-Nutzsignals mit dem Schwellenwert einen gewünschten Pegel erfüllt.
12. Verfahren nach Anspruch 10 oder 11, bei dem die Änderungen der Sendesignal-Charakteristiken der die stärkste nachteilige Wirkung aufweisenden anderen Signale die Veranlassung umfassen, dass die Quellen für derartige Signale diese Signale nicht in dem vorgegebenen TDMA-Zeitschlitz aussenden, der von dem Abwärtsstrecken-Nutzsignal belegt wird.
13. Verfahren nach Anspruch 1, bei dem das zumindest eine andere Signal, das von der Benutzerausrüstung in dem gleichen vorgegebenen TDMA-Zeitschlitz wie das Abwärtsstrecken-Nutzsignal empfangen wird, zumindest ein anderes Abwärtsstrecken-Nutzsignal umfasst, wobei das Abwärtsstrecken-Nutzsignal und das zumindest eine andere Abwärtsstrecken-Nutzsignal untereinander die Benutzer-Ausrüstungs-Abwärtsstrecken-Signale in einem drahtlosen Kommunikationsschema mit mehrfachen Eingängen und mehrfachen Ausgängen MIMO umfassen.
14. Drahtloses Zeitvielfachzugriffs-TDMA-Kommunikationssystem mit:
- einer Benutzer-Ausrüstung (15), die betreibbar ist, um ein-Abwärtsstrecken-Nutzsignal (S1) von einer Signalquelle (8) in einem vorgegebenen TDMA-Zeitschlitz zu empfangen, zumindest ein anderes Signal (S2; S3, S4) in dem gleichen vorgegebenen TDMA-Zeitschlitz zu empfangen, und eine Signalqualitäts-Charakteristik des Nutz-Abwärtsstrecken-Signals zu messen, wobei das System weiterhin Einrichtungen zum Vergleich der gemessenen Signalqualitäts-Charakteristik mit einem Schwellenwert umfasst; und wobei das System **dadurch gekennzeichnet ist, dass**, wenn durch den Vergleich der gemessenen Signalqualitäts-Charakteristik mit einem Schwellenwert festgestellt wird, dass der Empfang des zumindest einen anderen Signals
- gnals durch die Benutzer-Ausrüstung dazu beigetragen hat, dass die gemessene Signalqualitäts-Charakteristik des Abwärtsstrecken-Nutzsignals nicht den Schwellenwert erreicht hat, Einrichtungen zum Veranlassen vorgesehen sind, dass eine Quelle des zumindest einen anderen Signals (10; 11; 12) eine Sendesignal-Charakteristik des zumindest einen anderen Signals ändert.
15. System nach Anspruch 14, bei dem die Einrichtung zum Veranlassen, dass die Quelle des zumindest einen anderen Signals eine Sendesignal-Charakteristik des zumindest einen anderen Signals ändert, bewirkt, dass das zumindest eine andere Signal nicht in dem vorgegebenen TDMA-Zeitschlitz des Abwärtsstrecken-Nutzsignals ausgesandt wird.
16. System nach Anspruch 14, bei dem die Einrichtung zum Veranlassen bewirkt, dass die Quelle des zumindest einen anderen Signals die Sendeleistung des zumindest einen anderen Signals verringert.
17. System nach einem der Ansprüche 14 bis 16, bei dem die Benutzer-Ausrüstung die Einrichtungen zum Vergleich der gemessenen Signalqualitäts-Charakteristik mit einem Schwellenwert und die Einrichtungen zum Veranlassen einschließt, dass eine Quelle des zumindest einen anderen Signals eine Sendesignal-Charakteristik des zumindest einen anderen Signals ändert.
18. Benutzer-Ausrüstung (15) für ein drahtloses TDMA-Kommunikationssystem, mit:
- einer Benutzer-Ausrüstung, die zum Empfang eines Abwärtsstrecken-Nutzsignals (S1) von einer Signalquelle (8) in einem vorgegebenen TDMA-Zeitschlitz, zum Empfang von zumindest einem anderen Signal (S2; S3; S4) in dem gleichen vorgegebenen TDMA-Zeitschlitz und zur Messung einer Signalqualitäts-Charakteristik des Nutz-Abwärtsstrecken-Signals betreibbar ist, wobei die Benutzer-Ausrüstung weiterhin Einrichtungen zum Vergleich der gemessenen Signalqualitäts-Charakteristik mit einem Schwellenwert umfasst; und wobei die Benutzerausrüstung **dadurch gekennzeichnet ist, dass**, wenn aus dem Vergleich der gemessenen Signalqualitäts-Charakteristik mit dem Schwellenwert festgestellt wird, dass der Empfang des zumindest einen anderen Signals durch die Benutzer-Ausrüstung dazu beigetragen hat, dass die gemessene Signalqualitäts-Charakteristik des Nutz-Abwärtsstrecken-Signals nicht den Schwellenwert erreicht hat, Einrichtungen zum Veranlassen vorgesehen sind, dass eine Quelle des zumindest einen anderen

Signals (10; 11; 12) eine Sendesignal-Charakteristik des zumindest einen anderen Signals ändert.

19. Maschinenlesbares Medium, das ein Computerprogramm zur Implementierung des Verfahrens nach Anspruch 1 trägt.

Revendications

1. Procédé d'amélioration d'une caractéristique du signal d'un signal descendant reçu sur un équipement d'utilisateur (15) dans un système de communications sans fil TDMA à accès multiple par répartition dans le temps, comprenant les étapes consistant à :

à un équipement d'utilisateur :

- A. recevoir un signal descendant désiré (S1) d'une source de signal (18) dans un intervalle de temps TDMA prédéterminé ;
- B. recevoir au moins un autre signal (S2 ; S3 ; S4) dans ledit même intervalle de temps TDMA prédéterminé ; et
- C. mesurer une caractéristique de qualité du signal dudit signal descendant désiré ; le procédé comprenant les étapes supplémentaires consistant à :
- D. comparer ladite caractéristique de qualité du signal mesuré à un seuil ; et le procédé étant **caractérisé par**
- E. **le fait que** l'on détermine à partir de ladite comparaison de ladite caractéristique de qualité du signal mesuré audit seuil que la réception par l'équipement d'utilisateur dudit au moins un autre signal a contribué à ce que la caractéristique de qualité du signal mesuré du signal descendant désiré ne satisfasse pas le seuil, s'arrangeant pour que la source dudit au moins un autre signal (10 ; 11 ; 12) change une caractéristique du signal de transmission dudit au moins un autre signal.

2. Procédé selon la revendication 1, dans lequel le changement d'une caractéristique du signal de transmission dudit au moins un autre signal comprend l'arrangement de la source dudit au moins un autre signal pour empêcher ledit au moins un autre signal d'être transmis sur l'intervalle de temps TDMA prédéterminé du signal descendant désiré.
3. Procédé selon la revendication 1, dans lequel le changement d'une caractéristique du signal de transmission dudit au moins un autre signal comprend l'arrangement pour que la source d'au moins un autre signal réduise une puissance de transmis-

sion dudit au moins un autre signal.

4. Procédé selon l'une quelconque des revendications 1 à 3, dans lequel les étapes A à E dudit procédé selon la revendication 1 sont réalisées à l'équipement d'utilisateur
5. Procédé selon l'une quelconque des revendications 1 à 3, dans lequel les étapes A à C du procédé selon la revendication 1 sont réalisées audit équipement d'utilisateur (15) et les étapes D et E du procédé selon la revendication 1 sont réalisées à une station de base (8) comprenant la source du signal descendant désiré.
6. Procédé selon l'une quelconque des revendications 1 à 3, dans lequel les étapes A à C du procédé selon la revendication 1 sont réalisées audit équipement d'utilisateur et les étapes D et E du procédé selon la revendication 1 sont réalisées de manière distributive par une station de base qui comprend la source du signal descendant désiré et un élément de gestion de réseau (16) contrôlant un certain nombre de stations de base comprenant le système de communications sans fil TDMA.
7. Procédé selon la revendication 1, dans lequel ledit seuil de comparaison d'une caractéristique de qualité du signal de transmission mesuré du signal descendant désiré a une valeur prédéterminée statique.
8. Procédé selon la revendication 1, dans lequel ledit seuil de comparaison d'une caractéristique de qualité du signal de transmission mesuré du signal descendant désiré a une valeur de variable dynamiquement.
9. Procédé selon la revendication 7 ou la revendication 8, dans lequel le seuil comprend une valeur pour l'un d'un rapport signal sur bruit SNR, un rapport signal sur interférence et bruit SNIR et un rapport signal porteur sur interférence CIR.
10. Procédé selon la revendication 1, dans lequel l'équipement d'utilisateur reçoit une pluralité d'autres signaux dans ledit intervalle de temps TDMA prédéterminé en plus du signal descendant désiré, le procédé comprenant l'étape supplémentaire consistant à :

F. déterminer à partir d'une comparaison de la caractéristique de qualité du signal mesuré du signal descendant désiré à un seuil lequel de ladite pluralité d'autres signaux affecte le plus défavorablement la caractéristique de qualité du signal mesuré et s'arranger pour qu'une source dudit autre signal affectant le plus défavorablement change une caractéristique du signal

transmission d'un tel signal.

11. Procédé selon la revendication 10, dans lequel l'étape F de la revendication 10 comprend de déterminer dans un ordre d'affectant le plus défavorablement à affectant le moins défavorablement à partir de ladite comparaison de ladite caractéristique de qualité du signal de transmission mesuré du signal descendant désiré au seuil et de s'arranger pour que les sources desdits autres signaux dans l'ordre d'affectant le plus défavorablement à affectant le moins défavorablement changent séquentiellement une caractéristique du signal de transmission desdits autres signaux, le processus séquentiel étant suivi jusqu'à ce moment où la comparaison de la caractéristique de qualité du signal de transmission mesuré du signal descendant désiré au seuil satisfasse un niveau désiré. 5
12. Procédé selon la revendication 10 ou la revendication 11, dans lequel les changements des caractéristiques du signal de transmission desdits autres signaux affectant le plus défavorablement comprend de s'arranger pour que les sources de tels signaux ne transmettent pas de tels signaux dans l'intervalle de temps TDMA prédéterminé occupé par le signal descendant désiré. 10 20 25
13. Procédé selon la revendication 1, dans lequel l'au moins un autre signal reçu par ledit équipement d'utilisateur dans le même intervalle de temps TDMA prédéterminé du signal descendant désiré comprend au moins un autre signal descendant désiré, ledit signal descendant désiré et ledit au moins un autre signal descendant désiré comprenant entre eux les signaux descendants de l'équipement d'utilisateur dans un procédé de communication sans fil MIMO entrée multiple sortie multiple. 30 35
14. Système de communication sans fil TDMA d'accès multiple par répartition dans le temps, comprenant : 40
un équipement d'utilisateur (15) fonctionnant de manière à recevoir un signal descendant désiré (S1) d'une source de signal (8) dans un intervalle de temps TDMA prédéterminé, à recevoir au moins un autre signal (S2 ; S3 ; S4) dans ledit même intervalle de temps TDMA prédéterminé et à mesurer une caractéristique de qualité du signal dudit signal descendant désiré, le système comprenant en outre un moyen pour comparer ladite caractéristique de qualité du signal mesuré à un seuil ; et, le système étant **caractérisé par le fait que** l'on détermine à partir de ladite comparaison de ladite caractéristique de qualité du signal mesuré audit seuil que la réception par l'équipement d'utilisateur dudit au moins un autre signal a contribué à ce que la 45 50 55

caractéristique de qualité du signal mesuré du signal descendant désiré ne satisfasse pas le seuil, un moyen pour s'arranger pour qu'une source dudit au moins un autre signal (10 ; 11 ; 12) change une caractéristique du signal de transmission dudit au moins un autre signal.

15. Système selon la revendication 14, dans lequel le moyen pour s'arranger pour que la source dudit au moins un autre signal change une caractéristique du signal de transmission dudit au moins un autre signal entraîne que ledit au moins un autre signal ne soit pas transmis sur l'intervalle de temps TDMA prédéterminé du signal descendant désiré. 10 15
16. Système selon la revendication 14, dans lequel le moyen pour s'arranger pour que la source dudit au moins un autre signal réduise une puissance de transmission dudit au moins un autre signal. 20
17. Système selon l'une quelconque des revendications 14 à 16, dans lequel l'équipement d'utilisateur comprend le moyen pour comparer ladite caractéristique de qualité du signal mesuré à un seuil et ledit moyen pour s'arranger pour qu'une source dudit au moins un autre signal change une caractéristique du signal de transmission dudit au moins un autre signal. 25
18. Equipement d'utilisateur (15) pour un système de communications sans fil TDMA, comprenant : 30
un équipement d'utilisateur fonctionnant de manière à recevoir un signal descendant désiré (S1) d'une source de signal (8) dans un intervalle de temps TDMA prédéterminé, à recevoir au moins un autre signal (S2 ; S3 ; S4) dans ledit même intervalle de temps TDMA prédéterminé et à mesurer une caractéristique de qualité du signal dudit signal descendant désiré, l'équipement d'utilisateur comprenant en outre un moyen pour comparer ladite caractéristique de qualité du signal mesuré à un seuil ; et, l'équipement d'utilisateur étant **caractérisé par le fait que** l'on détermine à partir de ladite comparaison de ladite caractéristique de qualité du signal mesuré audit seuil que la réception par l'équipement d'utilisateur dudit au moins un autre signal a contribué à ce que la caractéristique de qualité du signal mesuré du signal descendant désiré ne satisfasse pas le seuil, un moyen pour s'arranger pour qu'une source dudit au moins un autre signal (10 ; 11 ; 12) change une caractéristique du signal de transmission dudit au moins un autre signal. 35 40 45 50 55
19. Support lisible par machine mémorisant un programme informatique pour mettre en place le procédé selon la revendication 1. 60

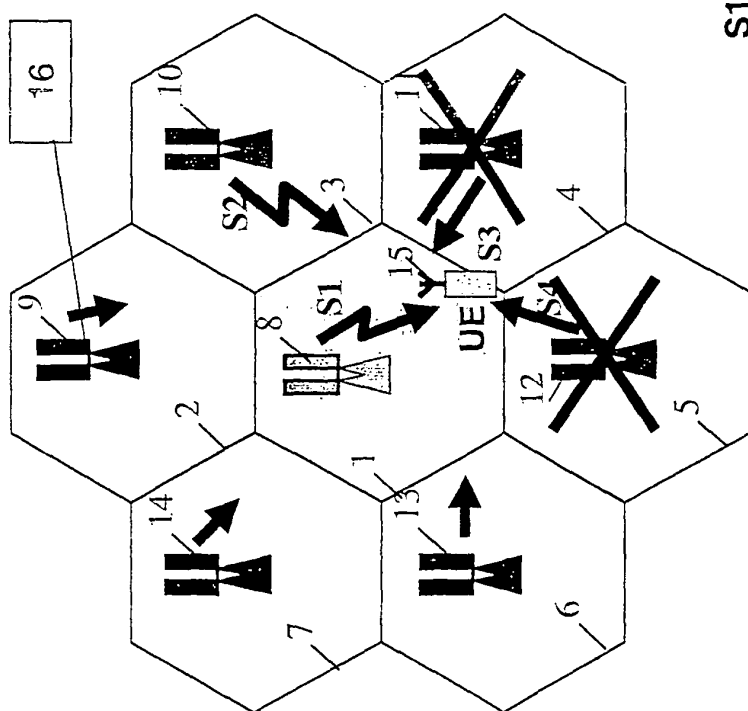


Figure 1

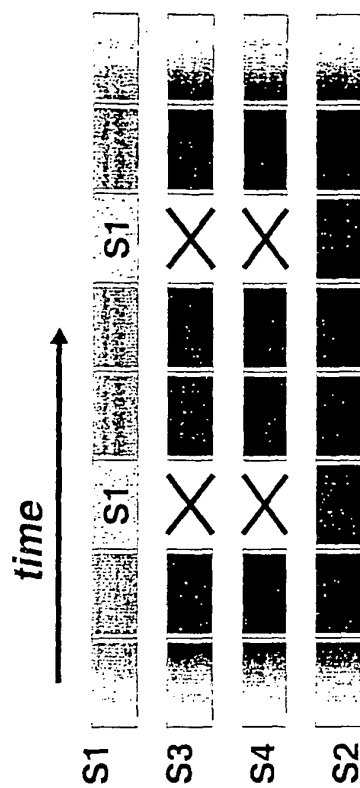


Figure 2

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6301478 B [0004]