

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 August 2003 (28.08.2003)


PCT

(10) International Publication Number  
**WO 03/070424 A1**

- (51) International Patent Classification<sup>7</sup>: **B23Q 3/12**, B23B 31/26
- (21) International Application Number: PCT/IB03/00365
- (22) International Filing Date: 4 February 2003 (04.02.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0317/02 22 February 2002 (22.02.2002) CH
- (71) Applicant (for all designated States except US): **BALLADO INVESTMENTS INC.** [PA/PA]; Arango Orillac Building, 3rd floor, 54th Street, Nueva Urbanizacion Obarrio, Panama 5 (PA).
- (72) Inventor; and  
(75) Inventor/Applicant (for US only): **AMMANN, Beat** [CH/CH]; Via Dante Aligheri 5, CH-6830 Chiasso (CH).
- (74) Agent: **FIAMMENGHI-DOMENIGHETTI, Delfina**; Fiammenghi-Fiammenghi, Via San Gottardo, 15, CH-6900 Lugano (CH).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: SPINDLE WITH AXIALLY ACTING COLLET-OPENING DEVICE

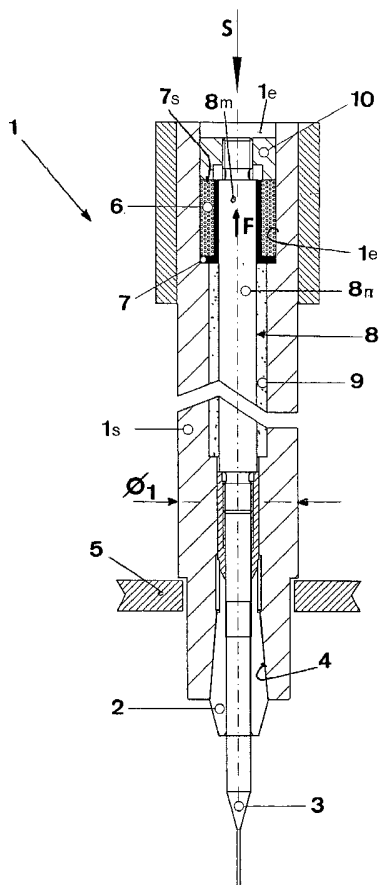

(57) Abstract: A description is given of a spindle (1) for machining at high rotational speeds, comprising a tool-holding taper collet (2) with radial slits (2r) that is kept closed to clamp a tool (3) by pressing it axially against a seat (4) of complementary shape by the reaction force (F) of pre-compressed elastic means (6) interposed between the tool-holding collet (2) and the body (1s) of the spindle (1), and is opened by moving it axially away from the said seat (4) by applying an axial force (S) to it to further compress the said precompressed elastic means (6). In the spindle (1) of the invention the said elastic means are a sleeve (6) of elastic material housed coaxially between the inside wall of a cavity (1e) formed in the said body (1s) of the spindle (1) and a shaped collar (7) of epoxy resin applied coaxially around the outer surface of the free end (8m) of the tool-holding collet (2).



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,  
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,  
GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

- 1 -

Spindle with axially acting collet-opening device

The present invention relates to machine tools that use spindles that rotate at high speeds, such as those of  
5 drilling assemblies for printed circuit boards.

More particularly, the invention relates to a spindle of the abovementioned type fitted with a tool-holding taper collet that can flex elastically to clamp the  
10 tool owing to the existence of a number of radial slits which give it the necessary elasticity. In these spindles, as is known to those skilled in the art, closure of the tool-holding collet is achieved by drawing it into a complementary tapering cavity,  
15 causing the various sectors of the end part of the clamp which are separated by the abovementioned radial slits to flex, squeezing and clamping the tool between themselves.

20 The collet is inserted into the said complementary cavity by the reaction of precompressed elastic means interposed between the body of the tool-holding collet and the body of the spindle. If an axial force is then applied to the said collet, further compressing the  
25 abovementioned elastic means by a suitable amount, the contrary effect is obtained, that is the collet is opened allowing the tool to be extracted from it.

In the prior art, the elastic means described above  
30 take the form of a series of Belleville washers arranged coaxially around the tool-holding collet, which are in contact with a special part of the collet, on which they exert a predetermined pressure due to the abovementioned precompression, keeping it closed during  
35 machining. If an axial force is applied to the tool-holding collet, via a rod passing through the interior of the spindle cavity containing the Belleville washers, the latter are further compressed to bring about this opening action of the collet.

- 2 -

However, the system described above has certain troublesome drawbacks: firstly, at the extremely high rotational speeds of the spindle that are currently  
5 achievable (over 100,000 rpm), the said Belleville washers are drawn round by the rotation, creating effects of unbalance which cause vibrations harmful to machining accuracy. Also, to accommodate Belleville  
10 washers with specifications suitable for the job, a large-diameter cavity must be formed in the spindle, which means that the spindle itself must have a large diameter and consequently a large mass.

Moreover, with the system currently in use, it is  
15 necessary, as already discussed, to operate from the outside with a rod which must move cyclically into contact with the end of the tool-holding collet and exert upon it a force (of the order of some 2,000 N) which, over time, owing in part to the situation of  
20 point loading that occurs, can deform the tip and/or alignment of the rod, causing problems of accuracy and service life.

In order to solve all the problems listed briefly  
25 above, the inventor of the present innovation has devised a spindle of the type defined above, in which the said elastic means are not Belleville washers but instead a sleeve of elastic material (rubber or another elastomer) which also, under conditions of  
30 precompression, keeps the tool-holding collet in the closed position as described. This sleeve is fitted onto the free end of an extension of the said tool-holding collet, which ends near the corresponding end of the spindle, and can be reached without having  
35 to insert, as discussed, a long rod down into the body of the spindle.

In order for the radial expansion of the said sleeve not to create braking forces on the tool-holding

- 3 -

collet, there is installed between the collet and the sleeve a shaped steel collar which, having a low coefficient of friction, does not significantly oppose the axial movement of the tool-holding collet.

5

For similar reasons there is interposed, between the body of the spindle and the tool-holding collet, in that part of its extension which is not surrounded by the abovementioned sleeve, an epoxy resin bush, which  
10 can be formed inside the spindle itself during the assembly operation and has a low coefficient of friction and permits movements in the axial direction of the tool-holding collet with virtually zero play.

15 The subject of the present invention is therefore a spindle for machining at high rotational speeds as described in the appended Claim 1.

A more detailed description will now be given of a preferred illustrative embodiment of a spindle  
20 according to the invention, selected from among the many that could be produced by a person skilled in the art in keeping with the teachings contained in the abovementioned Claim 1.

25

In the course of this description reference will also be made to the appended drawings, which show:

- in Figure 1, a longitudinal section, reduced in length, through a spindle of the type described  
30 above produced in accordance with the prior art;
- in Figure 2, a longitudinal section, reduced in length, through a spindle of the same type as in Figure 1, but produced in accordance with the invention.

35

To begin with Figure 1, this shows that a spindle 101 in accordance with the prior art consists of a body 101s provided with a cavity 101e in which a

- 4 -

tool-holding collet 2 is inserted coaxially, with a drilling tool 3 inserted in turn into the latter.

On the free end of the said tool-holding collet 2 is a  
5 flange 110 that is in contact with the series 15 of  
superposed Belleville washers arranged coaxially around  
the said tool-holding collet 2. The Belleville washers  
are precompressed by a suitable amount when the spindle  
101 and the tool-holding collet are assembled, so that  
10 their elastic reaction exerts a force  $F$  on the  
abovementioned flange 110 such as to push the tapered  
part of the tool-holding collet 2 into a cavity 4 of  
complementary shape formed in the body 101s of the  
spindle. This causes it to contract elastically and  
15 clamps the tool 3 inside it. As already mentioned, this  
contraction is made possible by the existence of a  
number of radial slits (not shown in the drawings but  
obvious to those skilled in the art) formed in that  
part of the tool-holding collet which is intended to  
20 accommodate the shank of the tool.

To open the tool-holding collet 2, which will be  
abbreviated to "collet" below, a force  $S$  is applied in  
the opposite direction to the said reaction force  $F$  of  
25 the series of Belleville washers 15. This further  
compresses the washers and causes the collet 2 to move  
axially far enough to disengage its tapered part from  
the seat 4, so that it opens due to the elastic return  
of the sectors of its part that contains the tool 3  
30 shank, these sectors being separated from each other by  
the abovementioned radial slits.

This force  $S$  is applied through a rod 13 aligned  
coaxially with the collet 2, which is cyclically  
35 pressed against the aforesaid end part of the collet 2  
to which the flange 110 is attached.

Figure 2 by contrast shows that a spindle 1 according  
to the invention likewise has a body 1s provided with a

- 5 -

coaxial cavity 1e that contains the tool-holding collet 2 to which a tool 3 is fixed. In this case the collet 2 is provided with an extension 8, on the free end 8m of which is fitted a flange 10, the longitudinal section 5 which is in the shape of an inverted U, with the two sides of the U pressing via their ends against the surface 7s of a sleeve 6 of precompressed elastic material, for example rubber, which is housed coaxially between the inner wall of the said cavity 1e of the 10 body 1s of the spindle 1 and a shaped steel collar 7 applied coaxially to the outer surface of the said end 8m of the extension 8 of the collet 2. As already stated, the function of this shaped collar is to prevent interference between the sleeve 6, when it 15 deforms radially, and the collet 2, which could otherwise undesirably increase the force S necessary to move the collet 2 axially to open it.

The operations of closing and opening the collet 2 are 20 similar to those already described with reference to the case discussed earlier: the elastic reaction F of the precompressed sleeve 6 on the said inverted-U flange 10 of the collet 2 holds the latter in the closed, tool-clamping position, and to open the collet 25 2, the said force S is applied to the end 8m of its extension 8, further compressing the elastic sleeve 6 and moving the said collet 2 axially the necessary distance. To facilitate the axial movement of the collet the inventor has interposed, between the part 8n 30 of the said extension 8 of the collet 2 which is not surrounded by the said elastic sleeve 6 and the body 1s of the spindle 1, a bush 9 of epoxy resin with a low coefficient of friction, which as mentioned earlier can be injected during the actual assembly stage, producing 35 a fit with virtually zero play that permits relative movements between the collet 2 and the spindle 1 in precise alignment with their longitudinal axes, which coincide precisely with each other.

- 6 -

As already noted, owing to the characteristics of the component parts of the spindle 1 of the invention, and in particular those of the elastic sleeve 6, the spindle 1 according to the invention achieves the desired object, making the cavity 1e of the spindle 1 of a much smaller diameter compared with spindles of conventional type: a comparison of Figures 1 and 2, which basically show the spindles at the same scale, will show that the outside diameter  $\varnothing_1$  of the spindle 1 of the invention is about 25% less than the outside diameter  $\varnothing_{101}$  of a spindle 101 of conventional type.

Though this is well known to those skilled in the art, it is relevant to add a final detail on how both spindles 1 and 101 described above work: when the said force S is being applied to the collet 2 to open it by moving it axially relative to the body of the spindle, the body is prevented from moving by supporting it against a fixed contact surface 5.

20

Claims

1. Spindle (1) for machining at high rotational  
5 speeds, comprising a tool-holding taper collet (2)  
with radial slits (2r) that is kept closed to  
clamp a tool (3) by pressing it axially against a  
seat (4) of complementary shape by the reaction  
10 force (F) of precompressed elastic means (6)  
interposed between the tool-holding collet (2) and  
the body (1s) of the spindle (1), and is opened by  
moving it axially away from the said seat (4) by  
applying an axial force (S) to it to further  
15 compress the said precompressed elastic means (6),  
which spindle is characterized in that the said  
elastic means are a sleeve (6) of elastic material  
housed coaxially between the inside wall of a  
cavity (1e) formed in the said body (1s) of the  
20 spindle (1) and a shaped collar (7) of epoxy resin  
applied coaxially around the outer surface of the  
free end (8m) of an extension (8) of the  
tool-holding collet (2).
2. Spindle according to Claim 1, in which there is  
25 interposed between that part (8n) of the said  
extension (8) of the tool-holding collet (2) which  
is not surrounded by the said shaped collar (7),  
and the body (1s) of the spindle (2), a bush (9)  
which is also made of epoxy resin.
3. Spindle according to one of the previous claims,  
30 in which the said free end (8m) of the extension  
(8) of the tool-holding collet (2) is fitted  
securely with a flange (10), the longitudinal  
35 section of which is an inverted U, with the two  
sides of the U pressing via their ends against  
that surface (7s) of the said sleeve (6) which is  
furthest from the inner end of the said cavity  
(1e) of the spindle (1).


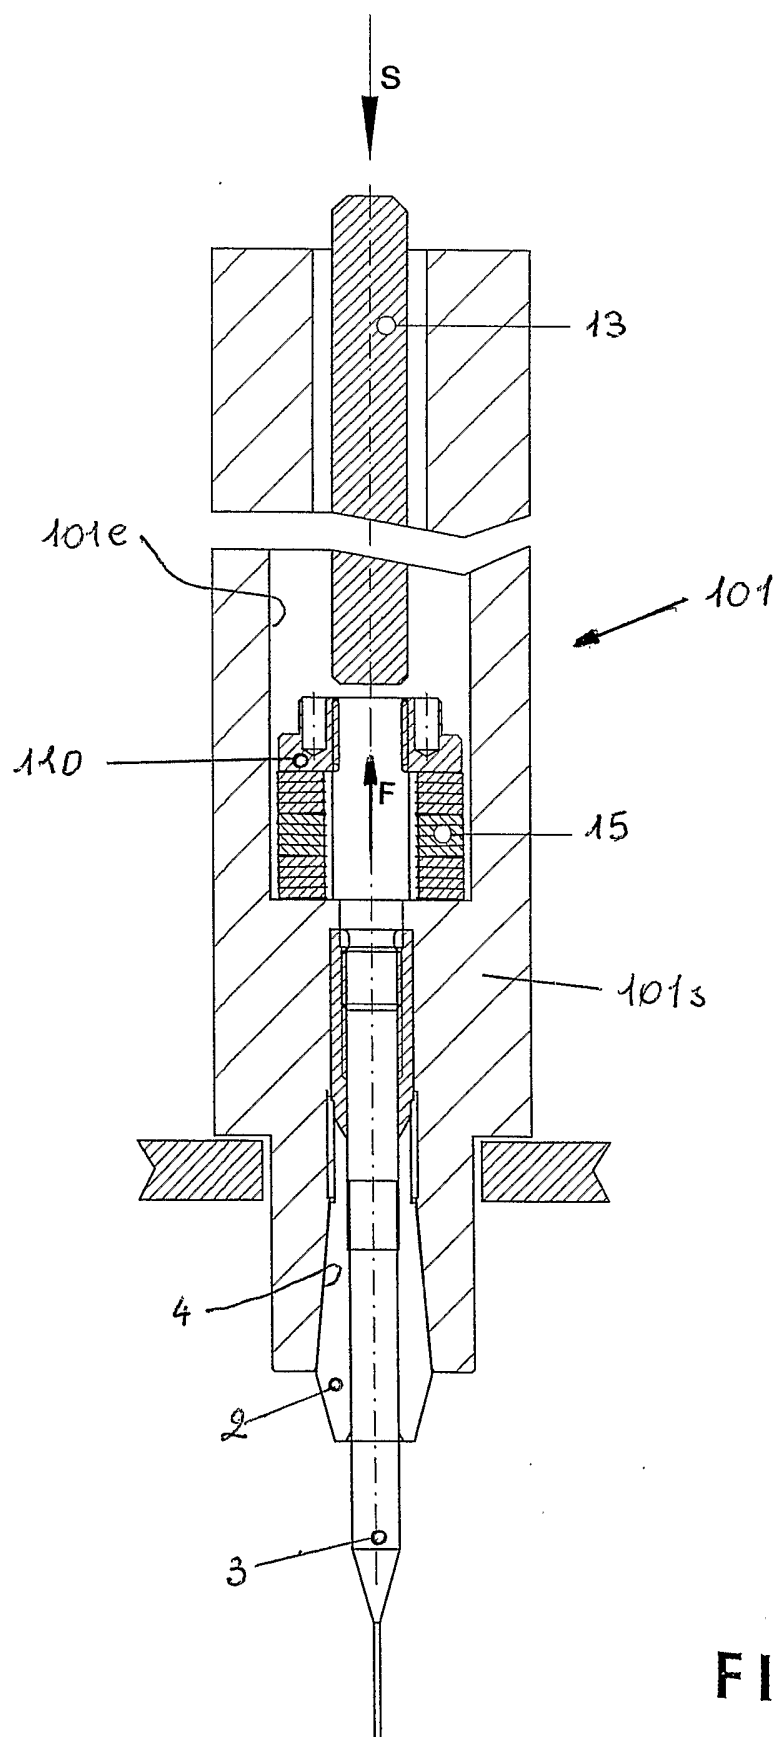


FIG. 1

FIG. 2

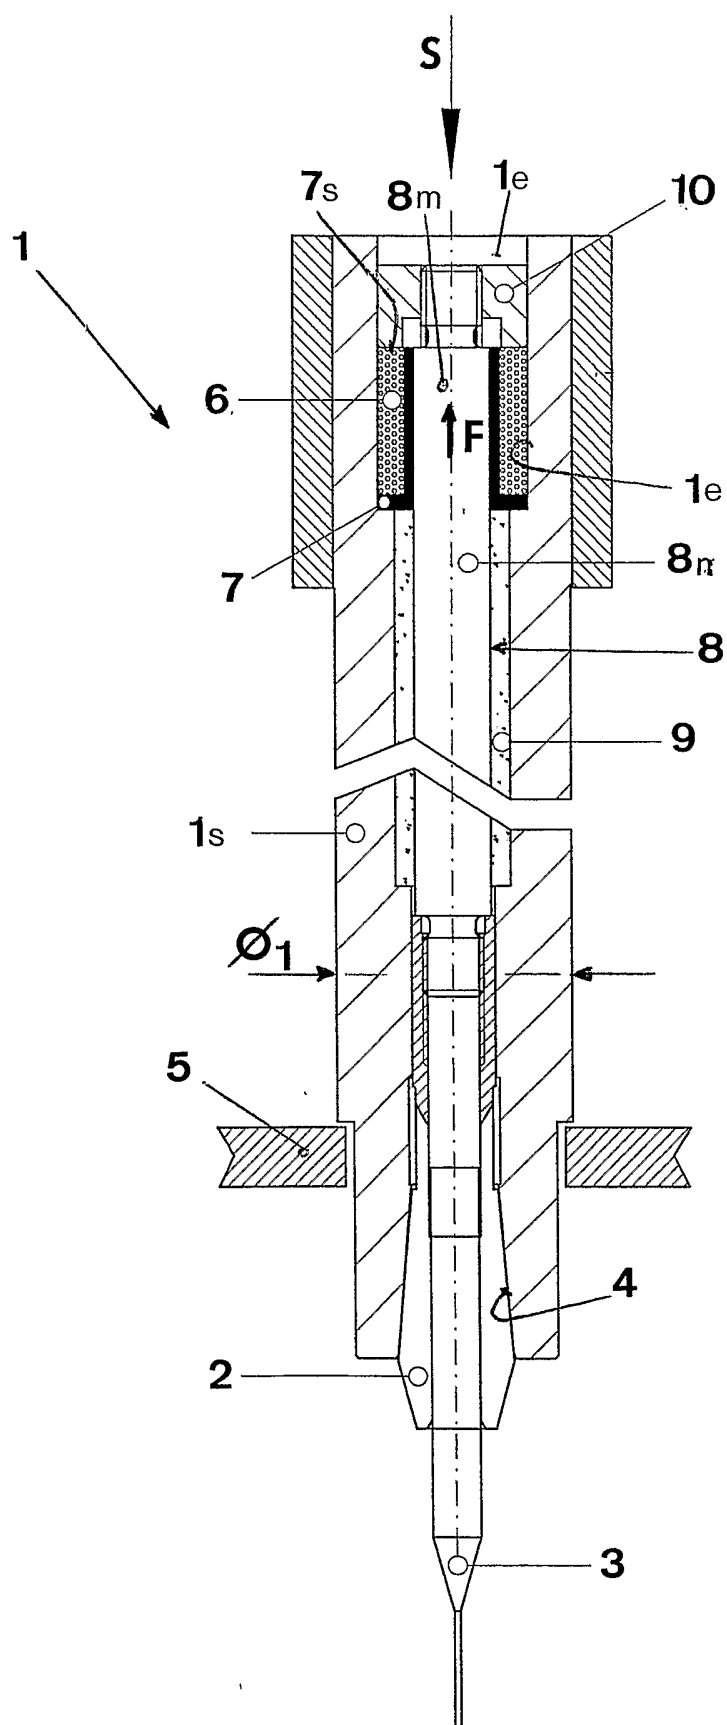

# INTERNATIONAL SEARCH REPORT

PCT/IB 03/00365

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 B23Q3/12 B23B31/26

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 B23Q B23B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages             | Relevant to claim No. |
|------------|------------------------------------------------------------------------------------------------|-----------------------|
| A          | EP 0 909 601 A (SODICK CO LTD)<br>21 April 1999 (1999-04-21)<br>abstract; figure 1             | 1                     |
| A          | US 4 986 704 A (NARUSHIMA HIROSHI ET AL)<br>22 January 1991 (1991-01-22)<br>the whole document | 1                     |
| A          | EP 0 271 355 A (SCHWARTZMAN EVERETT H)<br>15 June 1988 (1988-06-15)<br>abstract; figure 1      | 1                     |

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

7 May 2003

Date of mailing of the international search report

21/05/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Lasa, A

# INTERNATIONAL SEARCH REPORT

patent family members

PCT/IB 03/00365

| Patent document<br>cited in search report |   | Publication<br>date |    | Patent family<br>member(s) | Publication<br>date |
|-------------------------------------------|---|---------------------|----|----------------------------|---------------------|
| EP 0909601                                | A | 21-04-1999          | JP | 10277862 A                 | 20-10-1998          |
|                                           |   |                     | EP | 0909601 A1                 | 21-04-1999          |
|                                           |   |                     | US | 6287059 B1                 | 11-09-2001          |
|                                           |   |                     | WO | 9843767 A1                 | 08-10-1998          |
| US 4986704                                | A | 22-01-1991          | JP | 1140903 A                  | 02-06-1989          |
|                                           |   |                     | JP | 1709549 C                  | 11-11-1992          |
|                                           |   |                     | JP | 3078204 B                  | 13-12-1991          |
|                                           |   |                     | DE | 3838959 A1                 | 08-06-1989          |
|                                           |   |                     | GB | 2212746 A ,B               | 02-08-1989          |
| EP 0271355                                | A | 15-06-1988          | US | 4790700 A                  | 13-12-1988          |
|                                           |   |                     | DE | 3769101 D1                 | 08-05-1991          |
|                                           |   |                     | EP | 0271355 A2                 | 15-06-1988          |
|                                           |   |                     | JP | 1055442 A                  | 02-03-1989          |
|                                           |   |                     | US | 4913605 A                  | 03-04-1990          |