

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 January 2008 (31.01.2008)

PCT

(10) International Publication Number
WO 2008/014095 A1

(51) International Patent Classification:

E21B 33/12 (2006.01) *E21B 33/128* (2006.01)
E21B 33/127 (2006.01)

(21) International Application Number:

PCT/US2007/072844

(22) International Filing Date: 5 July 2007 (05.07.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

11/493,286 26 July 2006 (26.07.2006) US

(71) Applicant (for all designated States except US): **BAKER HUGHES INCORPORATED** [US/US]; P.o. Box 4740, Houston, TX 77027 (US).

(71) Applicant and

(72) Inventor (for all designated States except US): **O'BRIEN, Robert, S.** [US/US]; 23226 Hazel Field, Katy, TX 77494 (US).

(74) Agent: **PORTER, Andre, J.**; Division Intellectual Property Counsel, Baker Oil Tools Division, -Baker Hughes Incorporated, P.o. Box 4740, Houston, TX 77027 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SWELLING PACKER ELEMENT WITH ENHANCED SEALING FORCE

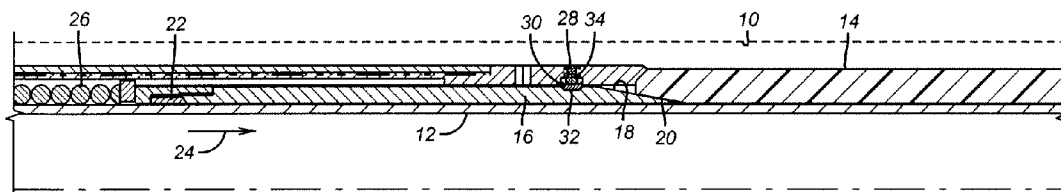

(57) Abstract: A packer that uses an element that swells to the set position is disclosed having a device that boosts the set force of the swollen element against the borehole. The force is axially applied at one end or two and preferably comprises a cone driven by a stored or applied force such that the cone is driven between the element and the mandrel that supports the element. Initiation of the boost force can be varied in its timing and the power behind the cone can come from a variety of sources such as a spring, hydrostatic pressure, or applied forces, to name a few. The movement of the cone is locked to prevent reversal of its motion when the packer is set. The swelling enhances the engagement of the element to the cone to minimize relative movement between them.

WO 2008/014095 A1

APPLICATION FOR PATENT

Title: Swelling Packer Element with Enhanced Sealing Force

Inventor: Robert S. O'Brien

FIELD OF THE INVENTION

[0001] The field of the invention is packers for downhole use that employ a sealing element that swells where the setting force is enhanced beyond the swelling with an applied force preferably axially in at least one direction.

BACKGROUND OF THE INVENTION

[0002] Packers for downhole use come in a variety of constructions. Some involve high ratios of expansion as between the set and the run in positions. These designs usually involve a collapsing petal shaped backup ring so as to control extrusion when the element is compressed axially over a stroke that is substantially longer than more conventional compression set packers. An example of such a design is USP 6,827,150. Other packer designs also address the extrusion issue as a result of setting the packer in a variety of ways, as shown for example in USP 5,941,313. Some packers use an element that can swell and expand a mandrel that lies beneath it, as illustrated in USP 6,834,725 and published application US 2004/0194971 A1.

[0003] One issue that arises with sealing elements that swell is that they get softer upon swelling and do not grip as firmly. Upon a change in well conditions such as temperature fluctuations or differential pressure variations, such set packers can lose their grip. In designs that do not involve mandrel expansion under a swelling element this is a concern for operators. Mandrel expansion increases the radial force on the swollen element but still leaves the issue of the swollen material being softer after swelling, which presents a risk of leakage or loss of grip. Swelling element packers are desirable in that they can be run in the well quickly and can assume a set position after leaving time to run them into position. Interaction with well fluids initiates the swelling to the point where sealing contact is obtained. It is advantageous to boost the sealing force of a

swelling element in some way to better insure sealing integrity under a variety of conditions.

[0004] One approach to dealing with the sealing integrity concern can be seen in US 2005/0072579 in the context of a compression set packer. The variations disclosed in this reference deal with creation of potential energy in an element that is covered by the sealing element initially and which takes on a potential energy force when the sealing element that surrounds it is axially compressed. In one design the potential energy storing element is a swelling material disposed within the sealing element. These designs apply a very limited boost force by virtue of the positioning wholly under the sealing element and further dependence on movement of mandrel components that compress the element to additionally provide a potential energy force. The boosting device in this design is akin to a beam supported at opposed ends where the ends are pushed together to bend it. The middle of such a device can collapse due to lack of support if overloaded during setting or from the element due to changed conditions downhole.

[0005] Other references in the area of seals used in downhole applications are USP 6,923,263 and 5,851,013 as well as US Application 2005/0241833 and GB Applications 2,403,744 and 2,373,799.

[0006] The present invention addresses the need to boost the set of a swelling element in a variety of solutions. Preferably a cone shaped sleeve is driven axially in at least one direction adjacent at least one end of the swelling element so that preferably it can travel between the mandrel and the element and preferably have its motion locked in against reverse movement. These and other advantages of the present invention will be more apparent to those skilled in the art from a review of the description of the preferred embodiment and the associated drawings while the claims appended below denote the full scope of the invention.

SUMMARY OF THE INVENTION

[0007] A packer that uses an element that swells to the set position is disclosed having a device that boosts the set force of the swollen element against the borehole. The

force is axially applied at one end or two and preferably comprises a cone driven by a stored or applied force such that the cone is driven between the element and the mandrel that supports the element. Initiation of the boost force can be varied in its timing and the power behind the cone can come from a variety of sources such as a spring, hydrostatic pressure, or applied forces, to name a few. The movement of the cone is locked to prevent reversal of its motion when the packer is set. The swelling enhances the engagement of the element to the cone to minimize relative movement between them.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Figure 1 shows the run in condition for a packer with a swelling element;

[0009] Figure 2 shows the onset of the boost force being applied to the element;

[0010] Figure 3 shows the element fully swollen and engaged to the cone.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0011] Figure 1 shows an open hole **10** with a mandrel **12** positioned in the desired location. A sealing element **14** is mounted to the mandrel **12** and is preferably made of a material that swells in the fluids found in the wellbore or added to it as opposed to being compressed along a mandrel to gain an initial seal. For example, the element **14** can be made of rubber. A cone **16** has a leading taper **18** and the element **14** has a complementary taper **20**. The cone carries a ratchet lock **22** that allows the cone **16** to move in the direction of arrow **24** but to have its movement in a reverse direction prevented. One way a potential energy force can be stored against the cone **16** is to use a precompressed spring **26**. The run in position in Figure 1 for the cone **16** can be retained against the force of the spring **26** with a release device **28**, which can be a shear pin, for example. In Figure 1 the release device comprises a lock ring **30** in a groove **32** on the cone **16**. A release **34** allows the ring **30** to spring out of groove **32** at the desired time to allow the stored force of spring **26** to drive cone **16** under the element **14**. The triggering event for release of the cone **16** for movement can be varied. The release **34** can be actuated chemically, electrically, acoustically, mechanically or other ways that will get the cone **16** moving. The timing of the release can be before, during swelling or after the

element **14** has finished swelling. Figure 2, for example shows movement of the cone **16** under the element **14** before the element **14** has had much if any swelling. Figure 3 shows the element **14** fully swollen. It should be noted that element **14** has swollen into groove **32** formerly occupied by ring **30** for run in. This helps reduce the tendency of relative movement between the element **14** and the cone **16**, which is now locked in position by ratchet lock **22**.

[0012] It should be noted that the element **14** can have a boost applied at opposite ends in opposed directions with boost devices that are either identical or different. Rather than using a cone with a taper **18** the final component that contacts the element **14** can abut it rather than go under it along the mandrel **12**. Alternatively, the contact can be a combination of abutting the element **14** on end and sliding under it, as shown in the Figures. The cone **16** can also include an end ring **36** shown schematically in Figure 3 to act as an extrusion barrier to the swollen element **14** after it is placed in service. Triggers for the boost may include atmospheric chambers, explosive charges or hydrostatic pressure as a few examples. The boost technique can be applied to cups at ends of a sealing element. The boost can be a compressing force independent of a compressive force applied to the sealing element in the case of a compression set packer. With a swelling element, the boost can be independent of the trigger that starts the swelling or the same trigger can be used to initiate the swelling and release the boost device. Those events can either be initiated at the same time or be delayed depending on the application.

[0013] The above description is illustrative of the preferred embodiment and many modifications may be made by those skilled in the art without departing from the invention whose scope is to be determined from the literal and equivalent scope of the claims below.

I claim:

1. A packer for sealing a wellbore, comprising:
a mandrel having a longitudinal axis;
a sealing element mounted to said mandrel and capable of swelling to seal off the wellbore;
at least one boost device movable in a direction of said longitudinal axis to enhance the sealing created by said swelling of said sealing element.
2. The packer of claim 1, wherein:
said boost device moves along said mandrel.
3. The packer of claim 1, wherein:
said boost device moves between said element and said mandrel.
4. The packer of claim 3, wherein:
said boost device comprises a cone.
5. The packer of claim 4, wherein:
said boost device is movable in a single direction toward said element.
6. The packer of claim 4, wherein:
said boost device is selectively retained by a lock.
7. The packer of claim 6, wherein:
said lock is unlocked by exposure to well fluid that makes said element swell.
8. The packer of claim 6, wherein:
said lock is unlocked independently of exposure to fluids that start said element swelling.
9. The packer of claim 6, wherein:
said boost device stores a force that is released by said lock.
10. The packer of claim 9, wherein:
said force stored by said boost device is created independently of swelling by said element.
11. The packer of claim 2, wherein:
said boost device abuts an end of said element.

12. The packer of claim **3**, wherein:
said element swells into engagement with said boost device that impedes relative movement of said element in the direction of said longitudinal axis.
13. The packer of claim **1**, wherein:
said boost device further comprises an extrusion barrier that contacts an end of said element.
14. The packer of claim **1**, wherein:
said boost device comprises opposing boost devices at opposed ends of said element that are movable toward each other.
15. The packer of claim **14**, wherein:
said boost devices are identical and movable only in one direction to get closer to each other.
16. The packer of claim **15**, wherein:
said boost devices each comprise a cone that is movable along said mandrel and under said element.
17. The packer of claim **16**, wherein:
said boost devices store a force that is selectively released before, during or after conclusion of swelling by said element.
18. The packer of claim **17**, wherein:
said stored force comprises at least one of a spring, an atmospheric chamber, an explosive charge and a piston.
19. The packer of claim **14**, wherein:
said boost devices further comprise an extrusion barrier.
20. The packer of claim **17**, wherein:
said force is stored by a selectively releasable lock that operates independently of the trigger for swelling in said element.

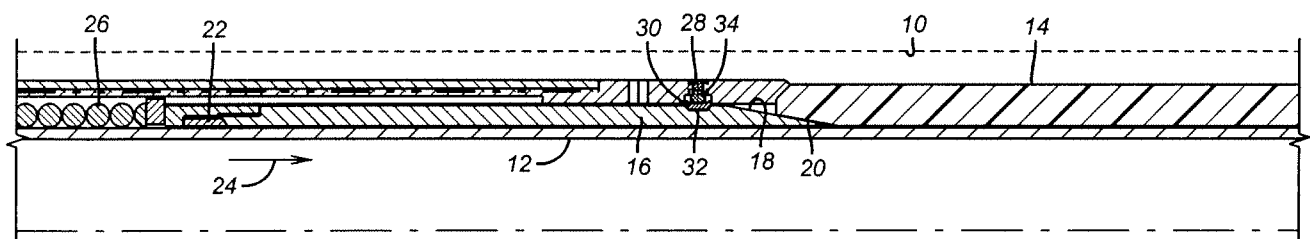


FIG. 1

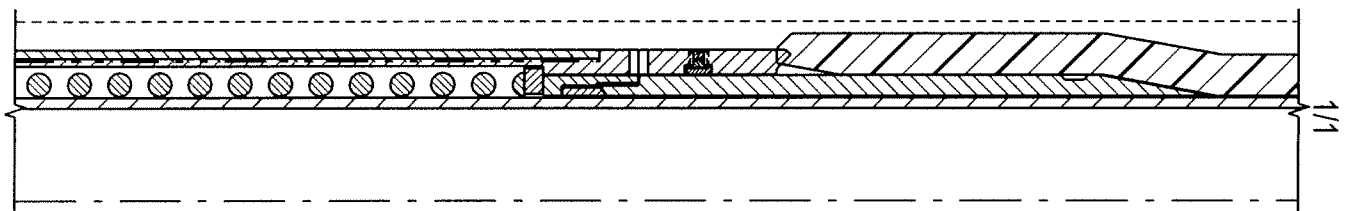


FIG. 2

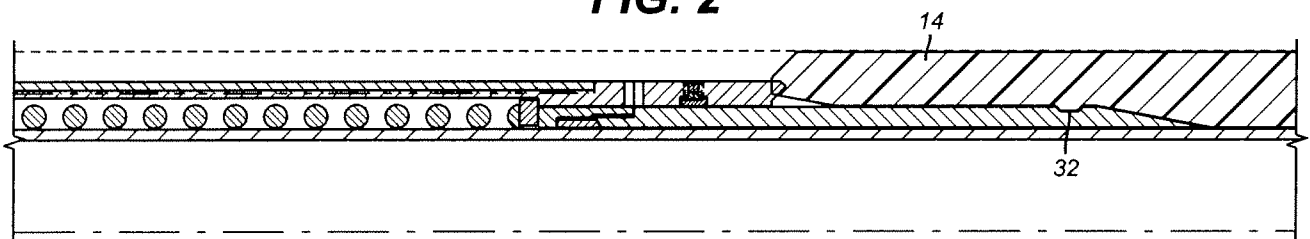


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2007/072844

A. CLASSIFICATION OF SUBJECT MATTER
INV. E21B33/12 E21B33/127 E21B33/128

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2 241 532 A (BARNES CHARLES H) 13 May 1941 (1941-05-13)	1-5, 11-16,19
Y	page 1, column 2, line 6 - line 46; figure 3	9,10,17, 18,20
Y	page 1, column 1, line 42 - line 49 -----	
Y	US 4 515 213 A (ROGEN NEIL E [US] ET AL) 7 May 1985 (1985-05-07)	9,10,17, 18,20
	column 2, line 58 - line 63; figures 1,3 column 5, line 3 - line 31 -----	
P,X	US 2007/144733 A1 (MURRAY DOUGLAS J [US] ET AL) 28 June 2007 (2007-06-28) paragraph [0059] ----- -/--	1-3,5,6, 8,10,11

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

29 October 2007

Date of mailing of the international search report

06/11/2007

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Dantinne, Patrick

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2007/072844

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	WO 2006/098631 A (EASY WELL SOLUTIONS AS [NO]; FREYER RUNE [NO]) 21 September 2006 (2006-09-21) claim 5; figures 1-3 -----	1-6, 11
E	US 2007/163777 A1 (MURRAY DOUGLAS J [US] ET AL) 19 July 2007 (2007-07-19) paragraph [0039]; claim 1; figure 2 -----	1, 2, 4-7, 9-18, 20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2007/072844

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2241532	A	13-05-1941	NONE	
US 4515213	A	07-05-1985	NONE	
US 2007144733	A1	28-06-2007	NONE	
WO 2006098631	A	21-09-2006	AU 2006223760 A1	21-09-2006
US 2007163777	A1	19-07-2007	WO 2007084657 A1	26-07-2007