(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 0 703 083 B1

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
22.12.1999 Bulletin 1999/51

(51) Int. Cl.^{6}: **B41J 2/175**

(21) Application number: **95114563.0**

(22) Date of filing: **15.09.1995**

(54) **Ink cartridge for ink jet printer**

Tintenkassette für Tintenstrahldrucker

Cartouche d'encre pour imprimante à jet d'encre

(84) Designated Contracting States:
CH DE FR GB IT LI SE

(30) Priority: **16.09.1994 JP 24851894**
11.09.1995 JP 25810295

(43) Date of publication of application:
27.03.1996 Bulletin 1996/13

(60) Divisional application:
99110235.1 / 0 936 073

(73) Proprietor:
SEIKO EPSON CORPORATION
Shinjuku-ku Tokyo (JP)

(72) Inventors:
- **Kobayashi, Takao**
  Suwa-shi, Nagano (JP)
- **Shinada, Satoshi**
  Suwa-shi, Nagano (JP)
- **Usui, Kiyofumi**
  Suwa-shi, Nagano (JP)
- **Hiraide, Shoichi**
  Suwa-shi, Nagano (JP)
- **Koshino, Kazuo**
  Suwa-shi, Nagano (JP)
- **Miyazawa, Hisashi**
  Suwa-shi, Nagano (JP)
- **Mochizuki, Seiji**
  Suwa-shi, Nagano (JP)

(74) Representative:
Diehl, Hermann, Dr. Dipl.-Phys. et al
DIEHL, GLÄSER, HILTL & PARTNER
Patentanwälte
Augustenstrasse 46
80333 München (DE)

(56) References cited:

EP-A- 0 261 764	**EP-A- 0 536 980**
EP-A- 0 553 535	**EP-A- 0 581 531**
EP-A- 0 624 475	**EP-A- 0 625 424**
EP-A- 0 640 482	**EP-A- 0 640 484**
EP-A- 0 665 108	**US-A- 4 183 031**
US-A- 4 967 207	**US-A- 4 968 998**
US-A- 5 280 300	

EP 0 703 083 B1

Description

[0001] The present invention relates to an ink cartridge and a method of charging ink into the cartridge.

[0002] In an ink jet printer in which the carriage carrying the ink jet recording head also carries an ink container, measures are taken to prevent pressure fluctuations of the ink due to the oscillation of the ink caused by the movement of the carriage, and defective printing due to foaming. That is, as proposed in EP-A-581531, the ink container of an ink jet printer is divided into two regions. A porous body is accommodated in a region on the recording head side, and ink is contained in the other region.

[0003] Such structure is advantageous in obviating inconvenience caused by the oscillation of the ink to a possible extent since the ink is supplied to the recording head through the porous body.

[0004] However, the porous body functions merely as a filter, and this means that it is the ink within the ink chamber, not the ink in the porous body, that substantially is the remaining amount of ink. Therefore, when the ink within the ink chamber runs out, the printer can no longer print. In addition, in a color printer or the like that uses inks of a plurality of colors, the amounts of remaining ink vary from one ink chamber to another even if the inks of all the colors have been supplied simultaneously since all the inks are not necessarily consumed equally in color printing. As a result, ink remains within the cartridge in liquid form when the cartridge is replaced, and when the cartridge is discarded the ink may leak out and contaminate the environment. In addition, the user may unnecessarily become apprehensive over unbalanced consumption of ink and the possibility of one of the colors running out.

[0005] The present invention intends to overcome these problems. The object is solved by an ink cartridge according to independent claim 1, by an ink jet recording apparatus according to independent claim 20 and by the system for supplying ink to an ink jet recording apparatus of independent claim 25.

[0006] Further advantages, features, aspects and details of the invention are evident from the dependent claims, the description and the accompanying drawings. The claims are intended to be understood as a first non limiting approach of defining the invention in general terms.

[0007] The invention relates generally to an ink cartridge and more specifically to an ink cartridge suitable for an ink jet printer in which a carriage carries an ink jet recording head and an ink cartridge and in which the ink is replenished by replacing the cartridge.

[0008] Generally speaking in accordance with the invention, an ink cartridge for an ink jet printer is provided. The ink cartridge includes: an ink chamber for retaining liquid ink; a foam chamber maintained in fluid communication with the ink chamber through a communication hole; and an ink supply port formed in a wall of the ink cartridge. A porous body for absorbing ink is accommodated in the foam chamber. The ink cartridge supplies the ink within the ink chamber to a recording head via the porous body and the ink supply port. The porous body is compressed in at least a region of the porous body confronting the ink supply port so that the compression ratio in the vicinity of the ink supply port becomes high. The ratio between the amount of ink initially charged in the ink chamber and that of ink absorbed in the porous body is in the range from 1:1 to 1:3.

[0009] Accordingly, it is an aspect of the invention to provide an ink cartridge capable of avoiding environmental pollution and unnecessary apprehension on the part of the user by totally absorbing all of the ink remaining in the cartridge in liquid form at the time of replacing the ink cartridge in the porous body.

[0010] Another aspect of the invention is to provide an ink cartridge capable of preventing leakage of the ink to the outside by causing all the ink to be absorbed in the porous body at the time of discarding the cartridge.

[0011] A further aspect of the invention is to provide an ink cartridge capable of relating the timing at which the ink within the ink chamber runs out to an indication to the user of a "near end" condition.

[0012] The invention accordingly comprises the apparatus embodying features of construction, combinations of elements and arrangement of parts which are exemplified in the following detailed disclosure

[0013] For a fuller understanding of the invention, reference is made to the following description taken in connection with the accompanying drawings, in which:

FIGS. 1a and 1b are cross sectional views respectively showing an ink cartridge depicted in accordance with a first embodiment of the invention;

FIGS. 2a and 2b are diagrams respectively showing the structure of the upper surface of a foam chamber of a frame body, in which FIG. 2a shows a condition before a seal is bonded; and FIG. 2b shows a condition after the seal has been bonded;

FIG. 3 is a diagram and cross-sectional view illustrative of an exemplary method of charging ink into the cartridge;

FIG. 4 is a cross-sectional view showing how a packing member of the ink cartridge is fitted with an ink supply needle when the ink cartridge is attached to a recording head;

FIG. 5 is a graph showing a relationship between ink consumption, pressure, and amount of ink remaining within the ink chamber; and

FIG. 6 and FIG. 7 are cross-sectional views respectively showing other exemplary packing members for sealing the ink supply needle.

[0014] Referring first to FIGS. 1a and 1b, an ink cartridge constructed in accordance with a first embodiment of the invention is shown. In FIGS. 1a and 1b, reference numeral 1 denotes a container main body, which is divided into three chambers 4, 5, 6 by partition plates 2, 3. Each of the chambers 4, 5, 6 is further divided into a foam chamber and an ink chamber by a partition, only foam chamber 411, ink chamber 412 and partition 410 of chamber 4, being visible in FIG. la. The remaining chambers 5 and 6 are essentially identical to chamber 4, foam chambers 511 and 611 of chambers 5 and 6 being visible in FIG. 1b. Each foam chamber 411, 511, 611 is designed to accommodate a respective porous body 420, 520, 620, made of an elastic material that is suitable for absorbing ink, and each ink chamber as exemplified by ink chamber 412 is designed to directly contain liquid ink. The volumes of the porous bodies 420, 520, 620 before insertion in the respective foam chambers 411, 511, 611 are larger than the capacity of the respective foam chambers 411, 511 and 611, so that each of the porous bodies 420, 520 or 620 is accommodated in the respective foam chamber 411, 511 or 611 in a compressed condition.

[0015] An ink supply port shaped to receive an ink supply needle of a recording head is arranged at the lower end of each of the respective foam chambers 411, 511 and 611, ink supply ports 413 and 513 of foam chambers 411 and 511 respectively being visible in FIG. 1b. The opening of the container main body 1 is sealed with a cover member 16 that has exhausting through holes 414, 514 and 614 and ink injecting through holes 415, 515 and 615 at positions confronting the respective foam chambers 411, 511 and 611 (see FIGS. 1a, 1b, 2a, 2b).

[0016] The remainder of the features will be described with respect to chamber 4, but it is understood that parallel structure exists in both chambers 5 and 6. Projections 416a and 416b are formed so as to surround through holes 414 and 415, respectively at regions on the bottom surface of cover member 16 confronting foam chamber 411. These projections 416a and 416b bias porous body 420 onto the bottom surface of the corresponding foam chamber 411 in which ink supply port 413 is formed.

[0017] Projections 416a which confront ink supply port 413 are formed so as to be longer than projections 416b so that the lower end of projection 416a is positioned lower than that of projection 416b. This allows porous body 420 in the vicinity of ink supply port 413 to be compressed at the highest pressure.

[0018] On the bottom of foam chamber 411 is an inwardly projected portion 422 that compresses porous body 420 conjointly with cover member 16. At an upper portion of projected portion 422 is a recessed portion 423 and one end of through hole 424. Recessed portion 423 forms an empty space with a predetermined open area, and through hole 424 communicates with recessed portion 423 at one end thereof and communicates with a packing member 430 (to be described later) at the other end thereof.

[0019] A filter 425 is fixed to the top of recessed portion 423. Filter 425 has a 15x30 mm^2 ink passage area. Packing member 430 is attached to the lower end of through hole 424. Packing member 430 is made of an elastic material and has the uppermost opening tapered downward so as to have its upper opening wider than its lower opening.

[0020] Reference is now made to FIG. 4, which depicts packing member 30 similar to packing member 430. As shown in FIG. 4, packing member 30 is made of an elastic material such as rubber and has a tapered portion 32 so as to be funnel-shaped. A cylindrical portion 31 has walls which are thicker than the other walls of packing member 30. An annular projection 31a is formed in the outer periphery of cylindrical portion 31 to be received in a corresponding groove on the wall of the ink supply port to hold the packing member in place. Cylindrical portion 31 is coupled through a thin-walled connecting portion 34 that is connected to the large diameter portion of tapered portion 32 so that packing member 30 is fitted with ink supply port 13 so that the upper annular end 33 of tapered portion 32 abuts the confronting innermost stepped portion of the of ink supply port such as stepped portion 413a (FIG. 1a). Further, the inner diameter of a lower opening 32a of tapered portion 32 is set to such a value as to be slightly smaller than the outer diameter of an ink supply needle 50.

[0021] As a result of this construction, packing member 30 is reliably retained in the ink supply port by cylindrical portion 31, and the upward movement of annular upper end 33 of packing member 30 is blocked by the corresponding innermost stepped portion of the ink supply port, such as stepped portion 413a. Therefore, packing member 30 becomes firmly fixed to the ink supply port when attaching and detaching the ink supply needle 50 thereto and therefrom. Further, since tapered portion 32, which ensures airtightness with respect to ink supply needle 50, is fixed to the ink supply port by thin-walled connecting portion 34, tapered portion 32 is movable to some extent without being so deformed as to break the airtight seal with ink supply needle 50. As a result, tapered portion 32 can be maintained in airtight contact with respect to ink supply needle 50 while absorbing a relative positional displacement of the ink supply body with respect to ink supply needle 50.

[0022] Each partition, such as partition 410 dividing a foam chamber such as foam chamber 411, from an ink chamber such as ink chamber 412 has a gas-liquid replacement communication hole such as communication hole 419, visible in FIG. la, which is an elongated hole extending a predetermined height directly from the bottom of the container. Each gas-liquid replacement communication hole preferably extends over only a portion of the width of the partition. Discussion will now continue with respect to compartment 4, keeping in mind that compartments 5 and 6 have parallel structure. Porous body 420 is accommodated in foam chamber 411 so that part of porous body 420 is in contact with communication hole 419 and so that porous body 420 is elastically compressed by the portion of partition wall 410 adjacent communication hole 419 to some extent.

[0023] In use, when a sufficient quantity of ink is consumed during printing by passing through ink supply port 413 as needed from porous body 420, ink passes from ink chamber 412 through gas-liquid replacement communication hole 419 and air passes from exhausting through hole 414 (which acts as an ambient air vent as more particularly described below), through porous body 420, through gas-liquid replacement communication hole 419 to ink chamber 412. Porous body 420 is compressed so as to be raised about 5 to 10 mm from the bottom surface of container 1 by projected portion 422. As a result, porous body 420 receives a tensile force acting in a direction indicated by an arrow A in Fig. la, which in turn decreases the rate of compression in a region B close to communication hole 419, thereby making it likely that the replacement of the air within the communication hole 419 with the ink within the ink chamber 412 will be affected.

[0024] To obviate this problem, the embodiment of the invention is designed so that porous body 420 comes in intimate contact with communication hole 419 reliably by setting a distance C between projected portion 422 and communication hole 419 to not less than 1.5 times of the height of projected portion 422.

[0025] As a result of this design, porous body 420 is most highly compressed in the vicinity of filter 425 on top of the projected portion 422 and less compressed toward communication hole 419. Thus, the capillary force gradually increases accordingly toward the top of projected portion 422 from communication hole 419, thereby allowing the ink within ink chamber 412 to be introduced to the through hole 424 reliably.

[0026] Reference is now made to FIGS. 2a and 2b which depict an outer view of an example of cover member 16. In FIG. 2a and 2b, reference numerals 414, 514 and 614 and 415, 515 and 615 denote the aforementioned through holes that are formed in the region under which porous bodies 420, 520 and 620 are respectively contained. One group of the through holes, through holes 414, 514 and 614 in this example are connected to air communication ports 441, 541, 641 through meandering grooves 440, 540, 640.

[0027] These grooves 440, 540, 640 form capillary tubes when a seal 42 covering through holes 414, 514 and 614, and 415, 515 and 615 as well as the air communication ports 441, 541 and 641 has been bonded to cover 16 after an ink injecting operation (to be described later) has been performed. A cutting line 44, shown in FIG. 2b, is provided in advance at a portion of seal 42 close to air communication ports 441, 541 and 641, so that the air communication ports can be exposed simply by pulling up a tongue strip 45, to provide ambient air to the interior of the foam chambers while minimizing evaporation of ink therefrom.

[0028] In order to fill each chamber 4, 5 and 6 of the thus designed cartridge, the cartridge is placed in a chamber under negative pressure with the ink supply ports thereof sealed by a film, such as film 446 sealing ink supply port 413, as shown in FIG. 3 (depicting only compartment 4, which is parallel in structure to compartments 5 and 6). Under this condition, one injecting needle N401 and the other injecting needle N402 are inserted while keeping exhausting through hole 414 and ink injecting through hole 415 airtight using sealing members S414, S415. Injecting needle N401 is inserted into the upper space of foam chamber 411 above porous body 420, and injecting needle N402 is inserted toward the bottom of foam chamber 411 through porous body 420 so as to be as close to communication hole 419 as possible. An exhauster P4 is connected to injecting needle N401, and the other injecting needle N402 is closed by a valve V401.

[0029] When exhauster P4 is operated under this condition, foam chamber 411 and ink chamber 412 are further evacuated. When these chambers 411 and 412 are evacuated to a predetermined pressure, the exhauster P4 is stopped to hold a predetermined pressure. Thereafter, the other injecting needle N402 is placed in fluid communication with a measuring tube K4 by opening valve V401. Then, the ink contained within measuring tube K4 is absorbed into porous body 420, and flows into ink chamber 412 via communication hole 419.

[0030] The valve V401 of the injecting needle N402 is closed when a certain amount of ink is flown into the cartridge from the measuring tube K4, so that the exhauster P4 is released to ambient air and accordingly the foam chamber 411 and the ink chamber 412 have atomospheric pressure. For this operation, the ink contained in the foam chamber 411 flows downwardly. Under this condition, the injecting needles N401 and N402 are removed from the seal through holes 414 and 415. In this condition where the measuring tube K4 is in a decompressed condition, the valve V402 is released to allow ink to introduce and then the valve V402 is closed and the system stands by until the next ink injection is operated.

[0031] When such an amount of ink as defined by the measuring tube K4 has been introduced, injecting needles N401 and N402 and sealing members S414 and S415 are removed and seal 42 is bonded to the outer surface of cover member 16 to seal through holes 414, 514 and 614 and 415, 515 and 615, meandering grooves 440, 540 and 640, and air communication ports 441, 541 and 641 under the evacuated condition.

[0032] As a result, foam chamber 411 and ink chamber 412 are maintained in a low pressure (below atmospheric) state, which keeps the injected ink also in a low pressure state. Since the ink is injected into ink chamber 412 via porous body 420 in this way, the ink can be spread out into each of the tiny holes of porous body 420. In addition, the entire inside of the cartridge can be maintained in a low pressure state, which in turn prevents the pressure from excessively increasing due to an increase in temperature during storage. Hence, the ink charging rate can be improved, and the cartridge can therefore be downsized.

[0033] The thus constructed cartridge is designed to cause the throughholes 414, 514 and 614 of foam chambers 411, 511 and 611 to communicate with respective air communication ports 441, 541 and 641 through capillary tubes formed by grooves 440, 540 and 640 and seal 42 when tongue strip 45 is removed. Therefore, the cartridge can prevent leakage of the ink from the throughholes irrespective of differences in pressure with respect to the recording head, while preventing evaporation of the ink.

[0034] Referring again to FIG. 4, when an ink supply port such as ink supply port 413 of the ink cartridge is aligned with an ink supply needle 50 of the recording head and pushed thereon under this condition, a tapered portion 51 of ink supply needle 50 abuts the hole of the packing member while passing through a film 46. Tapered portion 32 of packing member 30, which is funnel shaped to be gradually expanded upward, allows ink supply needle 50 to pass therethrough while being elastically deformed while in elastic contact with the tapered portion 51.

[0035] If ink supply needle 50 is used in such a manner as to be inserted into packing member 30, the ink supply port and ink supply needle 50 can be sealed reliably. That is, even if the ink supply needle of the recording head is slightly displaced horizontally with respect to the center of packing member 30, tapered portion 32 accommodates ink supply needle 50 by the elasticity thereof once the point of ink supply needle 50 has been fitted into the hole of packing member 30.

[0036] When the ink is consumed due to printing, the amount of ink in porous body 420 is reduced and as a result, the pressure is also decreased. Therefore, pressure within ink chamber 412 overcomes the ink retaining force of porous body 420 in the vicinity of communication hole 419 so that air bubbles are admitted into ink chamber 412 through communication hole 419. As a result, the pressure within ink chamber 412 is increased to aid in transferring the ink into foam chamber 411.

[0037] The ink introduced into foam chamber 411 slightly increases the ink level in foam chamber 411 when it is absorbed by porous body 420, and when the ink retaining force of porous body 420 in the vicinity of communication hole 419 reaches equilibrium with the pressure within the ink chamber 412, the flow of ink from ink chamber 412 to foam chamber 411 stops.

[0038] FIG. 5 depicts the ink levels during this process. In FIG. 5, reference character A denotes the pressure of the porous body in foam chamber 411; and reference character B, the amount of ink within ink chamber 412. As is apparent from this diagram, when the ink initially charged into porous body 420 has been consumed to a predetermined level w1 and the pressure of porous body 420 has been reduced to a predetermined value, i.e., to such an extent as to allow the pressure within ink chamber 412 to overcome the ink retaining force of porous body 420 in the vicinity of communication hole 419, the ink within ink chamber 412 gradually flows into foam chamber 411 until the ink retaining force of porous body 420 in the vicinity of communication hole 419 is restored to equilibrium with the pressure within ink chamber 412.

[0039] Therefore, although the ink within ink chamber 412 gradually decreases, the pressure of porous body 420 is maintained substantially constant, thereby allowing the ink to be supplied to the recording head under a predetermined pressure difference.

[0040] When the ink has been consumed to a predetermined level w2 by the recording head, printing can be continued with the ink that has been absorbed by porous body 420 since an amount of ink equal to that when the ink has been intermittently supplied from ink chamber 412 to foam chamber 411 still remains in porous body 420 although the ink within ink chamber 412 has been depleted. A predetermined amount of ink Δw can still be supplied to the recording head until printing can no longer be continued from the time all ink within the ink chamber 412 has been absorbed by porous body 420. To positively utilize this feature of the invention, the ratio in volume of foam chamber 411 to the ink chamber 412 is set so that the amount of ink contained in foam chamber 411 is from the same to three times that contained in ink chamber 412. When the ink has been consumed to a predetermined level w3, no more ink is supplied from porous body 420 to the printer head and no further printing will take place.

[0041] A preferred embodiment will now be described in detail hereinbelow. The liquid absorbing rate of porous body 420 is 80%, in other words, the porous body can absorb ink amounting to 80% of its volume, for example. If the ratio in volume between foam chamber 411 and ink chamber 412 is set to 2:1, then about 20% of the total amount of ink charged in the ink tank is consumed at an initial stage from foam chamber 411 (W1 of FIG. 5), about 40% of the total amount of ink charged in the ink tank is retained in porous body 420, and about 40% of the total amount of ink charged in the ink tank is retained in ink chamber 412 and is gradually absorbed into foam chamber 411 to be used up. When the ink within ink chamber 412 has been used up (W2 in FIG. 5), 40% of the total amount of ink charged still remains in foam chamber 411. Thereafter, the ink that is equivalent to 30% of the total amount of ink charged in the ink tank is consumed during printing, so that about 10% of the total amount of ink initially charged in the ink tank finally remains within foam chamber 411 after printing can no longer be performed. In this embodiment, the porous member is initially charged with about 3/2 times the amount of ink initially charged into ink chamber 412.

[0042] If container main body 1 is formed of an essentially transparent or translucent material, in the case of supplying inks of three colors out of a single cartridge, variations in ink levels within the ink chambers attributable to inconsistent ink consumption can be identified by a visual check, which in turn contributes to freeing the user from needlessly worrying about how much ink still remains in the respective ink chambers and from potentially running out of ink of a particular color. In addition, since the inks are unlikely to be present in any of the ink chambers in liquid form but rather are absorbed by the respective porous bodies at the time the used cartridge is discarded, the leakage of the inks from the cartridge can be prevented. This result can be assured if the user is alerted by means of an instruction to replace the used cartridge with a new one when all of the ink within each of the ink chambers have been supplied to their associated porous bodies. This contributes to a more environmentally sound product. Moreover, since the absence of ink within an ink chamber 412 indicates a near-end condition of the ink within the whole cartridge, the ink can be replenished readily by preparing a new cartridge in order to protect against the running out of ink.

[0043] Reference is now made to FIG. 6 which depicts an example of a packing member 630 for sealing the ink supply needle constructed in accordance with a second embodiment of the invention. Elements similar to those in the first embodiment are given like reference numerals. This packing member is characterized as having a self-aligning ring, which is made of a soft resin material and includes a ringlike needle surrounding seal 60, a ringlike port surrounding seal 61, and a thin-walled conical connecting ring 62 that connects needle surrounding seal 60 to port surrounding seal 61 so that both seals 60 and 61 are integrated with each other. Needle surrounding seal 60 has a circular cross-section whose inner diameter is slightly smaller than the outer diameter of ink supply needle 50. Port surrounding seal 61 has a circular section whose outer diameter is slightly larger than the inner diameter of ink supply port 13. Port surrounding seal 61 is arranged on the ink supply needle insertion entrance side of packing member 630.

[0044] A movable bush 64 is attached to the outer circumferential surface of needle surrounding seal 60 so as to prevent the expansion of the outer diameter of seal 60. Movable bush 64 is L-shaped in cross-section taken in the radial direction and has a smaller diameter than the inner diameter of the innermost portion of ink supply port 13. A fixed bush 65 is arranged inside the port surrounding seal 61. Fixed bush 65 is L-shaped in section to serve as a guide for inserting ink supply needle 50. Fixed bush 65 is mounted so that movable bush 64 is allowed to come in slidable contact with the innermost stepped portion 13a of supply port 13 in such a manner as to set port surrounding seal 61 into ink supply port 13 while insuring fixed bush 65 does not come into contact with needle surrounding seal 60.

[0045] Further, radially extending linear projections 66 are formed on the surface of movable bush 64 is maintained in slidable contact with the innermost stepped portion 13a of ink supply port 13. A plurality of through holes 67 are formed between the linear projections 66, so that when the ink is injected with the inside of the cartridge evacuated to a negative pressure, the air within the packing member is allowed to escape to the outside of the self-aligning ring through holes 67 between the linear projections 66.

[0046] When the cartridge is inserted with an ink supply needle 50 aligned with an ink supply port 13, ink supply needle 50 pierces film 46 that seals ink supply port 13, and passes through film 46 into the through hole while being maintained in intimate contact with movable bush 64. Ink supply needle 50 is arranged so that tapered portion 51 thereof is allowed to go along the innermost portion of needle surrounding seal 60. In addition, thin-walled conical connecting ring 62 can be deformed to permit needle surrounding seal 60 and movable bush 64 to be displaced in the radial direction, so that the outer circumference of ink supply needle 50 is sealed without excessively deforming needle surrounding seal 60 itself. Needle surrounding seal 60 and bush 64 thus perform a self-alignment function.

[0047] Reference is now made to FIG. 7 which depicts a packing member 730 for sealing ink supply needle 50 constructed in accordance with third embodiment of the invention. Elements similar to those in the previous embodiments are given like reference numerals. Packing member 730 includes a first annular seal 70, a second annular seal 71, and a bush 72. Seal 70 has a circular cross-section and is an elastic member that abuts innermost stepped portion 13a of ink supply port 13. Seal 71 has a circular cross-section and is an elastic member that is located on the film 46 side of seal 70. Bush 72 is provided to fix these two seals 70 and 71 to ink supply port 13, with seals 70 and 71 being maintained in elastic contact with each other. The inner diameter of each of the two seals 70 and 71 is selected so as to be slightly smaller than the outer diameter of ink supply needle 50 and the outer diameter of each of the seals 70 and 71 is selected so as to be slightly larger than the inner diameter of ink supply port 13.

[0048] When the cartridge is pushed into position for use with ink supply port 13 of the cartridge aligned with ink supply needle 50, ink supply needle 50 pierces film 46 and passes through second seal 71 and first seal 70. Although part of the film 46 enters into ink supply port 13 while being biased by ink supply needle 50 at this instance, second seal 71 located on the lower side of first seal 70 blocks the upward movement of film 46. As a result, first seal 70 can reliably seal the circumference of the ink supply needle 50.

[0049] It will thus be seen that the aspects set forth above, among those made apparent from the preceding description are efficiently obtained and, since certain changes may be made in carrying out the above method and in the constructions set forth without department from the scope of the invention, it is intended that all matter contained in the above description and shown in the accompanying drawings shall be interpreted as illustrative and not in a limiting sense.

[0050] It is also to be understood that the following claims are intended to cover all of the generic and specific features of the invention herein described and all statements of the scope of the invention which, as a matter of language, might be said to fall therebetween.

Claims

1. An ink cartridge for an ink jet printer, comprising: a main body (1) shaped to define an ink chamber (412) for retaining liquid ink and a foam chamber (411, 511, 611) maintained in fluid communication with said ink chamber through a communication hole (419); an ink supply port (413, 513, 613) formed in a wall of said foam chamber (411); and a porous body (420, 520, 620) for absorbing ink being accommodated within said foam chamber (411, 511, 611) so that the compression of said porous body in at least a region confronting said ink supply port (413, 513, 613) is higher than the compression in a region not confronting said ink supply port (413, 513, 613); whereby said ink cartridge supplies ink from said ink chamber (412) via said porous body (420, 520, 620) and said ink supply port (413, 513, 613),
characterized in that
the ratio between the amount of ink initially charged in said ink chamber (412) and that of ink absorbed in said porous body (420, 520, 620) is in the range of from 1:1 to 1:3.

2. The ink cartridge of claim 1, wherein at least a portion of said main body (1) in the region of said ink chamber (412) is formed of one of a transparent and a translucent material to permit the amount of liquid ink in the ink chamber (412) to be visually determined.

3. The ink cartridge of claims 1 or 2, wherein the volume of the porous member (420, 520, 620) before insertion in said foam chamber (411, 511, 611) is greater than the volume of the foam chamber (411, 511, 611) so that the porous member (420, 520, 620) is compressed in the region of said communication hole (419), said ink supply port (413, 513, 613) being formed from a projecting member (422) extending into said foam chamber (411, 511, 611) and formed with an opening (424) at its distal end for receipt of ink from said porous member (420, 520, 620), said projecting member (422) being spaced from said communication hole (419) a distance such that the compression of said porous member (420, 520, 620) adjacent said communication hole (419) is less than the compression of the porous member (420, 520, 620) at the distal end of said projecting member (422) and essentially gradually increases from said communication hole (419) to the distal end of said projecting member (422).

4. The ink cartridge of claim 3, wherein the distance between said projecting member (422) and said communication hole (419) is not less than 1.5 times of the height of said projecting member (422).

5. The ink cartridge of one of the preceding claims, further comprising: an ink injecting throughhole (415, 515, 615) and an exhausting throughhole (414, 514, 614) formed in the region of said main body (1) confronting said foam chamber (411, 511, 611); and a meandering groove (440, 540, 640) formed in an outer surface of said main body (1) and communicating with one of said throughholes (414, 415, 514, 515, 614, 615) and a seal member (42) on said outer surface, said throughholes (414, 415, 514, 515, 614, 615) and groove (440, 540, 640) defining a passage between ambient air and said one throughhole.

6. The ink cartridge of one of the preceding claims, further comprising: a projecting portion of said ink supply port (413, 513, 613) projecting inwardly into said foam chamber (411, 511, 611), the wall of said main body (1) facing the distal end of said projecting portion being formed with projections extending into said foam chamber in a region essentially opposite said distal end.

7. The ink cartridge of one of the preceding claims, further comprising a packing member (30, 430, 730, 630) of said ink supply port dimensioned to receive an ink supply needle (50) of said ink jet printer.

8. The ink cartridge of claim 7, wherein said packing member (30, 430, 730, 630) is formed as a funnel-shaped packing made of an elastic material so as to have the opening facing the interior of the foam chamber (411, 511, 611) wider than a lower opening (32a).

9. The ink cartridge of claim 7 or 8, wherein said packing member (30, 430, 630, 730) further comprises: a cylindrical portion (31) which is thick-walled and is supported by an inner surface of said ink supply port; and a tapered portion (32) which is connected to said cylindrical portion (31) through a thin-walled connecting portion (34).

10. The ink cartridge of one of claims 7 to 9, wherein said packing member (30, 430, 730, 630) is formed into a self-aligning seal including: a first annular seal member (60, 70) whose inner diameter is slightly smaller than an outer diameter of said ink supply needle (50) and whose outer diameter is smaller than the adjacent inner diameter of said ink

supply port (413, 513, 613); a second annular seal member (61, 71) whose outer diameter is slightly larger than the adjacent inner diameter of said ink supply port (413, 513, 613); and a thin-walled connecting member (62) connecting said first (60, 70) and second seal members (61, 71) to each other, whereby said first annual seal member can be displaced laterally in said ink supply port.

11. The ink cartridge of one of claims 7 to 10, further comprising: an annular movable bush (64) being arranged on an outer circumferential surface of said first seal member (60) serving to regulate expansion of said first seal member during insertion of said ink supply needle.

12. The ink cartridge of one of claims 7 to 11, further comprising: a fixed bush (65) arranged on an inner circumferential surface of said second seal member (61) to fix said second seal member to the interior of said ink supply port.

13. The ink cartridge of one of claims 7 to 12, said packing member (30, 430, 530, 630) comprising: a first annular seal member (71) in contact with a bush (72); and a second annular seal member (70) in contact with said first annular seal member (71) and said ink supply port, each said seal member having an inner diameter slightly smaller than an outer diameter of the ink supply needle (50).

14. The ink cartridge of one of the preceding claims, further comprising: a plurality of sets of said foam and ink chambers, each set of chambers consisting of a foam chamber and an ink chamber containing a different color ink, said sets of chambers being integrated into a single ink cartridge, each of said foam chambers containing one of said porous bodies.

15. The ink cartridge of claim 14, wherein at least a portion of said main body in the region of said ink chamber is formed of one of a transparent and a translucent material to permit the amount of liquid ink in the ink chamber to be visually determined.

16. The ink cartridge of claim 14 or 15, and including a projected portion of the ink supply port in each foam chamber which projects toward an inside of the foam chamber, said projected portion locally elastically biasing the porous body in the associated foam chamber in the vicinity of the distal end of said projected portion so that a compression in the vicinity of said ink supply port is locally increased.

17. The ink cartridge of one of the claims 14 to 16, further comprising: a projection for biasing each porous body onto the ink supply port formed on an inner wall of said foam chamber confronting the ink supply port.

18. The ink cartridge of one of the claims 14 to 17, wherein the volume of each of said porous bodies before insertion in the associated foam chamber is larger than the volume of the associated foam chamber.

19. The ink cartridge of claim 18, wherein said porous member is compressed in the region of said communication hole, said ink supply port being formed from a projecting member extending into said foam chamber and formed with an opening at its distal end for receipt of ink from said porous member, said projecting member being spaced from said communication hole a distance such that the compression of said porous member adjacent said communication hole is less than the compression of the porous member at the distal end of said projecting member and essentially gradually increases from said communication hole to the distal end of said projecting member.

20. An ink jet recording apparatus for outputting ink onto a recording medium, comprising: a recording head for ejecting ink; and an ink tank cartridge removably mountable onto said recording head of said ink jet recording apparatus for delivery of ink thereto, including: a main body (1) shaped to define an ink chamber for retaining liquid ink (412) and a foam chamber (411, 511, 611) maintained in fluid communication with said ink chamber through a communication hole (419); an ink supply port (413, 513, 613) formed in a wall of said foam chamber (411, 511, 611); and a porous body (420, 520, 620) for absorbing ink being accommodated within said foam chamber (411, 511, 611) so that the compression of said porous body in at least a region confronting said ink supply port is higher than the compression in a region not confronting said ink supply port whereby said ink cartridge supplies ink from said ink chamber via said porous body and said ink supply port, characterised in that the ratio between the amount of ink initially charged in said ink chamber and that of ink absorbed in said porous body is in the range of from 1:1 to 1:3.

21. The ink jet recording apparatus of claim 20, wherein at least a portion of said main body (1) in the region of said ink chamber is formed of one of a transparent and a translucent material to permit the amount of liquid ink in the ink chamber to be visually determined.

22. The ink jet recording apparatus of claim 20 or 21, wherein the volume of the porous member before insertion in said foam chamber (411, 511, 611) is greater than the volume of the foam chamber (411, 511, 611) so that the porous member (420, 520, 620) is compressed in the region of said communication hole (419), said ink supply port (413, 513, 613) being formed from a projecting member (422) extending into said foam chamber (411, 511, 611) and formed with an opening at its distal end for receipt of ink from said porous member, said projecting member being spaced from said communication hole a distance such that the compression of said porous member adjacent said communication hole is less than the compression of the porous member at the distal end of said projecting member and essentially gradually increases from said communication hole to the distal end of said projecting member.

23. The ink jet recording apparatus of one of the claims 20 to 22, wherein the distance between said projecting member (422) and said communication hole (419) is not less than 1.5 times of the height of said projecting member.

24. The ink jet recording apparatus of one of claims 20 to 23, further comprising: an ink injecting through-hole (415, 515, 615) and an exhausting through-hole (414, 514, 614) formed in the region of said main body (1) confronting said foam chamber (411, 511, 611) and a meandering groove (440, 540, 640) formed in an outer surface of said main body (1) and communicating with one of said througholes and a seal member (42) on said outer surface, said throughholes and groove defining a passage between ambient air and said one throughhole.

25. A system for supplying ink to an ink jet recording apparatus and outputting ink onto a recording medium, said system comprising: a recording head for ejecting ink; and an ink tank cartridge removably mountable onto said recording head of said ink jet recording apparatus for delivery of ink thereto, including: a main body (1) shaped to define an ink chamber for retaining liquid ink (412) and a foam chamber (411, 511, 611) maintained in fluid communication with said ink chamber through a communication hole (419); an ink supply port (413, 513, 613) formed in a wall of said foam chamber (411, 511, 611); and a porous body (420, 520, 620) for absorbing ink being accommodated within said foam chamber (411, 511, 611) so that the compression of said porous body in at least a region confronting said ink supply port is higher than the compression in a region not confronting said ink supply port whereby said ink cartridge supplies ink from said ink chamber via said porous body and said ink supply port, characterised in that the ratio between the amount of ink initially charged in said ink chamber and that of ink absorbed in said porous body is in the range of from 1:1 to 1:3.

26. The system of claim 25, wherein at least a portion of said main body (1) in the region of said ink chamber is formed of one of a transparent and a translucent material to permit the amount of liquid ink in the ink chamber to be visually determined.

27. The system of claim 25 or 26, wherein the volume of the porous member (420, 520, 620) before insertion in said foam chamber is greater than the volume of the foam chamber (411, 511, 611) so that the porous member is compressed in the region of said communication hole (419), said ink supply port (413, 513, 613) being formed from a projecting member (422) extending into said foam chamber and formed with an opening at its distal end for receipt of ink from said porous member, said projecting member being spaced from said communication hole a distance such that the compression of said porous member adjacent said communication hole is less than the compression of the porous member at the distal end of said projecting member and essentially gradually increases from said communication hole to the distal end of said projecting member.

28. The system of one of claims 25 to 27, wherein the distance between said projecting member and said communication hole is not less than 1.5 times of the height of said projecting member.

29. The system of one of the claims 25 to 28, further comprising: an ink injecting throughhole (415, 515, 615) and an exhausting throughhole (414, 514, 614) formed in the region of said main body (1) confronting said foam chamber (411, 511, 611); and a meandering groove (440, 540, 640) formed in an outer surface of said main body (1) and communicating with one of said throughholes and a seal member (42) on said outer surface, said throughholes and groove defining a passage between ambient air and said one throughhole.

Patentansprüche

1. Tintenpatrone für einen Tintenstrahldrucker mit: einem Hauptkörper (1), der derart geformt ist, daß eine Tintenkammer (412) zur Aufnahme von flüssiger Tinte und eine Schaumkammer (411, 511, 611), die in Fluidverbindung mit der Tintenkammer durch ein Verbindungsloch (419) gehalten ist, festgelegt werden; einer in einer Wand der Schaumkammer (411) ausgebildeten Tintenzuführöffnung (413, 513, 613); und einem porösen Körper (420, 520, 620) zur Absorption von Tinte, der derart in der Schaumkammer (411, 511, 611) untergebracht ist, daß die Kompression des porösen Körpers in

wenigstens einem Bereich, der der Tintenzuführöffnung (413, 513, 613) zugewandt ist, höher ist als die Kompression in einem Bereich, der nicht der Tintenzuführöffnung (413, 513, 613) zugewandt ist; wobei die Tintenpatrone Tinte von der Tintenkammer (412) über den porösen Körper (420, 520, 620) und die Tintenzuführöffnung (413, 513, 613) zuführt,
dadurch gekennzeichnet, daß
das Verhältnis zwischen der ursprünglich in die Tintenkammer (412) eingebrachten Tintenmenge und der von dem porösen Körper (420, 520, 620) absorbierten Tintenmenge im Bereich von 1:1 bis 1:3 liegt.

2. Tintenpatrone gemäß Anspruch 1, bei der wenigstens ein Abschnitt des Hauptkörpers (1) im Bereich der Tintenkammer (412) aus einem Material ausgewählt aus der Gruppe bestehend aus einem transparenten und einem durchsichtigen Material gebildet ist, damit die in der Tintenkammer (412) befindliche Tintenmenge visuell bestimmbar ist.

3. Tintenpatrone gemäß Anspruch 1 oder 2, bei der das Volumen des porösen Elements (420, 520, 620) vor dem Einbringen in die Schaumkammer (411, 511, 611) größer ist als das Volumen der Schaumkammer (411, 511, 611), so daß das poröse Element (420, 520, 620) im Bereich des Verbindungslochs (419) komprimiert wird, wobei die Tintenzuführöffnung (413, 513, 613) aus einem vorspringenden Element (422) ausgebildet ist, das sich in die Schaumkammer (411, 511, 611) erstreckt und mit einer an dessen distalen Ende ausgebildeten Öffnung (424) zur Aufnahme von Tinte aus dem porösen Element (420, 520, 620) versehen ist, wobei das vorspringende Element (422) derart um eine Distanz von dem Verbindungsloch (419) entfernt angeordnet ist, daß die Kompression des porösen Elements (420, 520, 620) benachbart zu dem Verbindungsloch (419) weniger stark ist als die Kompression des porösen Elements (420, 520, 620) am distalen Ende des vorspringenden Elements (422) und sich im wesentlichen graduell von dem Verbindungsloch (419) zu dem distalen Ende des vorspringenden Teils (422) erhöht.

4. Tintenpatrone gemäß Anspruch 3, bei der die Distanz zwischen dem vorspringenden Element (422) und dem Verbindungsloch (419) nicht weniger als das 1,5-fache der Höhe des vorspringenden Elements (422) beträgt.

5. Tintenpatrone gemäß einem der vorstehenden Ansprüche, die des weiteren umfaßt: ein Tinteneinspritzdurchgangsloch (415, 515, 615) sowie ein Auslaßdurchgangsloch (414, 514, 614), die in dem Bereich des Hauptkörpers (1) ausgebildet und der Schaumkammer (411, 511, 611) zugewandt sind; eine mäandernde Nut (440, 540, 640), die in der äußeren Oberfläche des Hauptkörpers (1) gebildet ist und mit einem der Durchgangslöcher (414, 415, 514, 515, 614, 615) und einem Dichtungselement (42) auf der äußeren Oberfläche verbunden ist, wobei die Durchgangslöcher (414, 415, 514, 515, 614, 615) und die Nut (440, 540, 640) einen Durchlaß zwischen Umgebungsluft und dem einen Durchgangsloch festlegen.

6. Tintenpatrone gemäß einem der vorhergehenden Ansprüche, die des weiteren umfaßt: einen vorspringenden Abschnitt der Tintenzuführöffnung (413, 513, 613), der nach innen in die Schaumkammer (411, 511, 611) vorsteht, wobei die Wand des Hauptkörpers (1), die dem distalen Ende des vorspringenden Abschnitts zugewandt ist, mit Vorsprüngen ausgebildet ist, die sich in die Schaumkammer in einem Bereich erstrecken, der im wesentlichen dem distalen Ende gegenüber liegt.

7. Tintenpatrone gemäß einem der vorhergehenden Ansprüche, die des weiteren ein Abdichtungselement (30, 430, 730, 630) der Tintenzuführöffnung aufweist, das derart dimensioniert ist, daß es eine Tintenzuführnadel (50) des Tintenstrahldruckers aufnehmen kann.

8. Tintenpatrone gemäß Anspruch 7, bei der das Aodichtungsteil (30, 430, 730, 630) aus einer trichterförmigen Aodichtung aus elastischem Material derart ausgebildet ist, daß die dem Inneren der Schaumkammer (411, 511, 611) zugewandte Öffnung breiter ist als eine untere Öffnung (32a).

9. Tintenpatrone gemäß Anspruch 7 oder 8, bei der das Abdichtungselement (30, 430, 630, 730) weiterhin umfaßt: einen zylindrischen Abschnitt (31), der dickwandig ausgebildet ist und von einer inneren Oberfläche der Tintenzuführöffnung gestützt wird; sowie einen sich verjüngenden Abschnitt (32), der mit dem zylindrischen Abschnitt (31) durch einem dünnwandigen Verbindungsabschnitt (34) verbunden ist.

10. Tintenpatrone gemäß einem der Ansprüche 7 bis 9, bei der das Abdichtungselement (30, 430, 730, 630) aus einer sich selbstausrichtenden Dichtung gebildet ist, die umfaßt: ein erstes ringförmiges Dichtungselement (60,70), dessen Innendurchmesser geringfügig kleiner ist als ein Außendurchmesser der Tintenzuführnadel (50) und dessen Außendurchmesser kleiner ist als der benachbarte Innendurchmesser der Tintenzuführöffnung (413,

513, 613); ein zweites ringförmiges Dichtungselement (61, 71), dessen Außendurchmesser geringfügig größer ist als der benachbarte Innendurchmesser der Tintenzuführöffnung (413, 513, 613); sowie ein dünnwandiges Verbindungselement (62), das das erste Dichtungselement (60, 70) und das zweite Dichtungselement (61, 71) miteinander verbindet, wobei das erste ringförmige Dichtungselement lateral in der Tintenzuführöffnung versetzt werden kann.

11. Tintenpatrone gemäß einem der Ansprüche 7 bis 10, die des weiteren umfaßt: eine ringförmige bewegliche Buchse (64), die auf einer äußeren Umfangsoberfläche des ersten Dichtungselements (60) angeordnet ist und dazu dient, die Ausdehnung des ersten Dichtungselements während des Einsetzens der Tintenzuführnadel zu regulieren.

12. Tintenpatrone gemäß einem der Ansprüche 7 bis 11, die des weiteren umfaßt: eine feste Buchse (65), die auf einer inneren Umfangsoberfläche des zweiten Dichtungselements (61) angeordnet ist, um das zweite Dichtungselement an dem Inneren der Tintenzuführöffnung zu fixieren.

13. Tintenpatrone gemäß einem der Ansprüche 7 bis 12, wobei das Abdichtungselement (30, 430, 530, 630) umfaßt: ein erstes ringförmiges Dichtungselement (71) in Kontakt mit einer Buchse (72); und ein zweites ringförmiges Dichtungselement (70) in Kontakt mit dem ersten ringförmigen Dichtungselement (71) und der Tintenzuführöffnung, wobei jedes Dichtungselement einen Innendurchmesser aufweist, der geringfügig kleiner ist als ein Außendurchmesser der Tintenzuführnadel (50).

14. Tintenpatrone gemäß einem der vorhergehenden Ansprüche, die des weiteren umfaßt: eine Mehrzahl von Schaum- und Tintenkammernsätzen, wobei jeder Kammersatz aus einer Schaumkammer und einer Tintenkammer mit unterschiedlicher Farbtinte besteht; wobei die Kammersätze in einer einzigen Tintenpatrone integriert sind, wobei jede der Schaumkammern einen der porösen Körper enthält.

15. Tintenpatrone gemäß Anspruch 14, bei der wenigstens ein Abschnitt des Hauptkörpers im Bereich der Tintenkammer aus einem Material ausgewählt aus der Gruppe bestehend aus einem transparenten und einem durchsichtigen Material gebildet ist, um die in der Tintenkammer befindliche Tintenmenge visuell zu bestimmen.

16. Tintenpatrone gemäß Anspruch 14 oder 15, die einen vorspringenden Abschnitt der Tintenzuführöffnung in jeder Schaumkammer aufweist, der zur Innenseite der Schaumkammer vorsteht, wobei der vorspringende Abschnitt den porösen Körper in der zugeordneten Schaumkammer in der Nähe des distalen Ende des vorspringenden Abschnitts derart lokal elastisch vorspannt, daß eine Kompression in der Nähe der Tintenzuführöffnung lokal erhöht wird.

17. Tintenpatrone gemäß einem der Ansprüche 14 bis 16, die weiterhin umfaßt: einen Vorsprung zum Vorspannen jedes porösen Körpers auf die Tintenzuführöffnung, der an einer inneren Wand der Schaumkammer der Tintenzuführöffnung zugewandt ausgebildet ist.

18. Tintenpatrone gemäß einem der Ansprüche 14 bis 17, bei der das Volumen jedes porösen Körpers vor dem Einsetzen in die zugeordnete Schaumkammer größer ist als das Volumen der zugeordneten Schaumkammer.

19. Tintenpatrone gemäß Anspruch 18, bei der das poröse Element im Bereich des Verbindungslochs komprimiert wird, wobei die Tintenzuführöffnung aus einem vorspringenden Element gebildet ist, das sich in die Schaumkammer erstreckt und mit einer an seinem distalen Ende ausgebildeten Öffnung zur Aufnahme von Tinte aus dem porösen Element versehen ist, wobei das vorspringende Element derart um eine Distanz von dem Verbindungsloch entfernt angeordnet ist, daß die Kompression des porösen Elements benachbart zu dem Kommunikationsloch weniger stark ist als die Kompression des porösen Elements am distalen Ende des vorspringenden Elements und sich im wesentlichen graduell von dem Verbindungsloch zu dem distalen Ende des vorspringenden Teils erhöht.

20. Tintenstrahlaufzeichnungsvorrichtung zur Ausgabe von Tinte auf ein Aufzeichnungsmedium, mit: einem Aufzeichnungskopf zum Ausstoß von Tinte; und einer Tintenpatrone, die lösbar auf dem Aufzeichnungskopf der Tintenstrahlaufzeichnungsvorrichtung anbringbar ist, um diesem Tinte zuzuführen, umfassend: einen Hauptkörper (1), der derart geformt ist, daß eine Tintenkammer zur Aufnahme von flüssiger Tinte (412) und eine Schaumkammer (411, 511, 611), die in Fluidverbindung mit der Tintenkammer durch ein Verbindungsloch (419) gehalten ist, festgelegt werden; eine in einer Wand der Schaumkammer (411, 511, 611) ausgebildete Tintenzuführöffnung (413, 513, 613); und einem porösen Körper (420, 520, 620) zur Absorption von Tinte, der derart in der Schaumkammer (411, 511, 611) untergebracht ist, daß die Kompression des porösen Körpers in wenigstens einem Bereich, der

der Tintenzuführöffnung zugewandt ist, höher ist als die Kompression in einem Bereich, der nicht der Tintenzuführöffnung zugewandt ist; wobei die Tintenpatrone Tinte von der Tintenkammer über den porösen Körper und die Tintenzuführöffnung zuführt,
dadurch gekennzeichnet, daß
das Verhältnis zwischen der ursprünglich in die Tintenkammer eingebrachte Tintenmenge und der von dem porösen Körper absorbierten Tintenmenge im Bereich von 1:1 bis 1:3 liegt.

21. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 20, bei der wenigstens ein Abschnitt des Hauptkörpers (1) im Bereich der Tintenkammer aus einem Material ausgewählt aus der Gruppe bestehend aus einem transparenten und einem durchsichtigen Material gebildet ist, damit die in der Tintenkammer befindliche Tintenmenge visuell bestimmbar ist.

22. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 20 oder 21, bei der das Volumen des porösen Elements vor dem Einbringen in die Schaumkammer (411, 511, 611) größer ist als das Volumen der Schaumkammer (411, 511, 611), so daß das poröse Element (420, 520, 620) im Bereich des Verbindungslochs (419) komprimiert wird, wobei die Tintenzuführöffnung (413, 513, 613) aus einem vorspringenden Element (422) ausgebildet ist, das sich in die Schaumkammer (411, 511, 611) erstreckt und mit einer an dessen distalen Ende ausgebildeten Öffnung zur Aufnahme von Tinte aus dem porösen Element versehen ist, wobei das vorspringende Element derart um eine Distanz von dem Verbindungsloch entfernt angeordnet ist, daß die Kompression des porösen Elements benachbart zu dem Verbindungsloch weniger stark ist als die Kompression des porösen Elements am distalen Ende des vorspringenden Elements und sich im wesentlichen graduell von dem Verbindungsloch zu dem distalen Ende des vorspringenden Teils erhöht.

23. Tintenstrahlaufzeichnungsvorrichtung gemäß einem der Ansprüche 20 bis 22, bei der die Distanz zwischen dem vorspringenden Element (422) und dem Verbindungsloch (419) nicht weniger als das 1,5-fache der Höhe des vorspringenden Elements beträgt.

24. Tintenstrahlaufzeichnungsvorrichtung gemäß einem der Ansprüche 20 bis 23, die des weiteren umfaßt: ein Tinteneinspritzdurchgangsloch (415, 515, 615) sowie ein Auslaßdurchgangsloch (414, 514, 614), die in dem Bereich des Hauptkörpers (1) ausgebildet sind, der der Schaumkammer (411, 511, 611) zugewandt ist und eine mäandernde Nut (440, 540, 640), die in der äußeren Oberfläche des Hauptkörpers (1) gebildet ist und mit einem der Durchgangslöcher und einem Dichtungselement (42) auf der äußeren Oberfläche verbunden ist, wobei die Durchgangslöcher und die Nut einen Durchlaß zwischen Umgebungsluft und dem einen Durchgangsloch festlegen.

25. System zur Zufuhr von Tinte in eine Tintenstrahlaufzeichnungsvorrichtung und zur Ausgabe von Tinte auf ein Aufzeichnungsmedium, wobei das System umfaßt:
einen Aufzeichnungskopf zum Ausstoß von Tinte; und eine Tintenpatrone, die lösbar auf dem Aufzeichnungskopf der Tintenstrahlaufzeichnungsvorrichtung anbringbar ist, um diesem Tinte zuzuführen, umfassend: einen Hauptkörper (1), der derart geformt ist, daß eine Tintenkammer zur Aufnahme von flüssiger Tinte (412) und eine Schaumkammer (411, 511, 611), die in Fluidverbindung mit der Tintenkammer durch ein Verbindungsloch (419) gehalten ist, festgelegt werden; eine in einer Wand der Schaumkammer (411, 511, 611) ausgebildete Tintenzuführöffnung (413, 513, 613); und einem porösen Körper (420, 520, 620) zur Absorption von Tinte, der derart in der Schaumkammer (411, 511, 611) untergebracht ist, daß die Kompression des porösen Körpers in wenigstens einem Bereich, der der Tintenzuführöffnung zugewandt ist, höher ist als die Kompression in einem Bereich, der nicht der Tintenzuführöffnung zugewandt ist; wobei die Tintenpatrone Tinte von der Tintenkammer über den porösen Körper und die Tintenzuführöffnung zuführt,
dadurch gekennzeichnet, daß
das Verhältnis zwischen der ursprünglich in die Tintenkammer eingebrachte Tintenmenge und der von dem porösen Körper absorbierten Tintenmenge im Bereich von 1:1 bis 1:3 liegt.

26. System gemäß Anspruch 25, bei dem wenigstens ein Abschnitt des Hauptkörpers (1) im Bereich der Tintenkammer aus einem Material ausgewählt aus der Gruppe bestehend aus einem transparenten und einem durchsichtigen Material gebildet ist, damit die in der Tintenkammer (412) befindliche Tintenmenge visuell bestimmbar ist.

27. System gemäß Anspruch 25 oder 26, bei dem das Volumen des porösen Elements (420, 520, 620) vor dem Einbringen in die Schaumkammer größer ist als das Volumen der Schaumkammer (411, 511, 611), so daß das poröse Element im Bereich des Verbindungslochs (419) komprimiert wird, wobei die Tintenzuführöffnung (413, 513, 613) aus einem vorspringenden Element (422) ausgebildet ist, das sich in die Schaumkammer erstreckt und mit einer an dessen distalen Ende ausgebildeten Öffnung zur Aufnahme von Tinte aus dem porösen Element versehen ist, wobei das vorspringende Element derart um eine Distanz von dem Verbindungsloch entfernt angeordnet ist, daß die Kompression des porösen Elements benachbart zu dem Kommunikationsloch weniger stark ist als die Kompression des porösen Elements am distalen Ende des vorspringenden Elements und sich im wesentlichen graduell von dem Verbindungsloch zu dem distalen Ende des vorspringenden Teils erhöht.

28. System gemäß einem der Ansprüche 25 bis 27, bei dem die Distanz zwischen dem vorspringenden Element und dem Verbindungsloch nicht weniger als das 1,5-fache der Höhe des vorspringenden Elements beträgt.

29. System gemäß einem der Ansprüche 25 bis 28, das des weiteren umfaßt: ein Tinteneinspritzdurchgangsloch (415, 515, 615) sowie ein Auslaßdurchgangsloch (414, 514, 614), die in dem Bereich des Hauptkörpers (1) ausgebildet sind, der der Schaumkammer (411, 511, 611) zugewandt ist; und eine mäandernde Nut (440, 540, 640), die in der äußeren Oberfläche des Hauptkörpers (1) gebildet ist und mit einem der Durchgangslöcher und einem Dichtungselement (42) auf der äußeren Oberfläche verbunden ist, wobei die Durchgangslöcher und die Nut einen Durchlaß zwischen Umgebungsluft und dem einen Durchgangsloch festlegen.

Revendications

1. Cartouche d'encre pour une imprimante à jet d'encre, comportant : un corps principal (1) conformé afin de définir une chambre d'encre (412) destinée à retenir de l'encre liquide et une chambre de mousse (411, 511, 611) maintenue en communication de fluide avec ladite chambre d'encre par l'intermédiaire d'un trou de communication (419); un orifice d'alimentation en encre (413, 513, 613) formé dans une paroi de ladite chambre de mousse (411); et un corps poreux (420, 520, 620) destiné à absorber l'encre qui est reçue dans ladite chambre de mousse (411, 511, 611) de sorte que la compression dudit corps poreux dans au moins une zone face au dit orifice d'alimentation en encre (413, 513, 613) est plus grande que la compression dans une zone qui ne fait pas face au dit orifice d'alimentation en encre (413, 513, 613); de sorte que ladite cartouche d'encre délivre l'encre de ladite chambre d'encre (412) par l'intermédiaire dudit corps poreux (420, 520, 620) et dudit orifice d'alimentation en encre (413, 513, 613),
caractérisée en ce que
le rapport entre la quantité d'encre initialement chargée dans ladite chambre d'encre (412) et celle d'encre absorbée dans ledit corps poreux (420, 520, 620) est dans la plage de 1 : 1 à 1 : 3.

2. Cartouche d'encre selon la revendication 1, dans laquelle au moins une partie dudit corps principal (1) dans la zone de ladite chambre d'encre (412) est formée dans une matière transparente ou translucide afin de permettre à la quantité d'encre liquide dans la chambre d'encre (412) d'être déterminée visuellement.

3. Cartouche d'encre selon la revendication 1 ou 2, dans laquelle le volume du corps poreux (420, 520, 620) avant insertion dans ladite chambre de mousse (411, 511, 611) est plus grand que le volume de la chambre de mousse (411, 511, 611) de sorte que le corps poreux (420, 520, 620) est comprimé dans la zone dudit trou de communication (419), ledit orifice d'alimentation en encre (413, 513, 613) étant formé par un élément saillant (422) qui s'étend dans ladite chambre de mousse (411, 511, 611) et formé avec une ouverture (424) à son extrémité distale pour la réception d'encre provenant dudit corps poreux (420, 520, 620), ledit élément saillant (422) étant espacée dudit trou de communication (419) d'une distance telle que la compression dudit corps poreux (420, 520, 620) de façon adjacente au dit trou de communication (419) est inférieure à la compression du corps poreux (420, 520, 620) à l'extrémité distale dudit élément saillant (422) et augmente essentiellement progressivement depuis ledit trou de communication (419) jusqu'à l'extrémité distale dudit élément saillant (422).

4. Cartouche d'encre selon la revendication 3, dans lequel la distance entre ledit élément saillant (422) et ledit trou de communication (419) n'est pas inférieure à 1,5 fois la hauteur dudit élément saillant (422).

5. Cartouche d'encre selon l'une des revendications précédentes, comportant en outre : un trou débouchant d'injection d'encre (415, 515, 615) et un trou débouchant d'échappement (414, 514, 614) formés dans la zone dudit corps principal (1) face à ladite chambre de mousse (411, 511, 611); et une rainure sinueuse (440, 540, 640) formée dans une surface extérieure dudit corps principal (1) et communiquant avec un desdits trous débouchants (414, 415, 514, 515, 614, 615) et un élément d'étanchéité (42) sur ladite surface extérieure, lesdits trous débouchants (414, 415, 514, 515, 614, 615) et la rainure (440, 540, 640) définissant un passage entre l'air ambiant et ledit premier trou débouchant.

6. Cartouche d'encre selon l'une des revendications précédentes, comportant en outre : une partie saillante dudit orifice d'alimentation en encre (413, 513, 613) qui dépasse vers l'intérieur dans ladite chambre de mousse (411, 511, 611), la paroi dudit corps principal (1) faisant face à l'extrémité distale de ladite partie saillante qui est formée avec des saillies qui s'étendent dans ladite chambre de mousse dans une zone essentiellement opposée à ladite extrémité distale.

7. Cartouche d'encre selon l'une des revendications précédentes, comportant en outre un élément de garniture d'étanchéité (30, 430, 730, 630) dudit orifice d'alimentation en encre dimensionné afin de recevoir une aiguille d'alimentation en encre (50) de ladite imprimante à jet d'encre.

8. Cartouche d'encre selon la revendication 7, dans laquelle ledit élément de garniture d'étanchéité (30, 430, 730, 630) est formé comme une garniture d'étanchéité en forme d'entonnoir fabriquée dans une matière élastique de façon à avoir l'ouverture face à l'intérieur de la chambre de mousse (411, 511, 611) plus large qu'une ouverture inférieure (32a).

9. Cartouche d'encre selon la revendication 7 ou 8, dans laquelle ledit élément de garniture d'étanchéité (30, 430, 630, 730) comporte en outre : une partie cylindrique (31) qui est à paroi épaisse et est supportée par une surface interne dudit orifice d'alimentation en encre; et une partie conique (32) qui est reliée à ladite partie cylindrique (31) par l'intermédiaire d'une partie de raccordement à paroi mince (34).

10. Cartouche d'encre selon l'une des revendications 7 à 9, dans laquelle ledit élément de garniture d'étanchéité (30, 430, 730, 630) est sous la forme d'un joint à auto-alignement comprenant : un premier élément d'étanchéité annulaire (60, 70) dont le diamètre interne est légèrement plus petit qu'un diamètre externe de ladite aiguille d'alimentation en encre (50) et dont le diamètre externe est plus petit que le diamètre interne adjacent dudit orifice d'alimentation en encre (413, 513, 613); un deuxième élément d'étanchéité annulaire (61, 71) dont le diamètre externe est légèrement plus grand que le diamètre interne adjacent dudit orifice d'alimentation en encre (413, 513, 613); et un élément de raccordement conique à paroi mince (62) reliant lesdits premier (60, 70) et deuxième éléments d'étanchéité (61, 71) l'un à l'autre, de sorte que ledit premier élément annulaire d'étanchéité peut être déplacé latéralement dans ledit orifice d'alimentation en encre.

11. Cartouche d'encre selon une des revendications 7 à 10, comportant en outre : un manchon mobile annulaire (64) qui est disposé sur une surface circonférentielle externe dudit premier élément d'étanchéité (60) servant à réguler l'expansion dudit premier élément d'étanchéité pendant l'insertion de ladite aiguille d'alimentation en encre.

12. Cartouche d'encre selon l'une des revendications 7 à 11, comportant en outre : un manchon fixe (65) disposé sur une surface circonférentielle interne dudit deuxième élément d'étanchéité (61) afin de fixer ledit deuxième élément d'étanchéité sur l'intérieur dudit orifice d'alimentation en encre.

13. Cartouche d'encre selon l'une des revendications 7 à 12, ledit élément de garniture d'étanchéité (30, 430, 530, 630) comportant : un premier élément d'étanchéité annulaire (71) en contact avec un manchon (72); et un deuxième élément d'étanchéité annulaire (70) en contact avec ledit premier élément d'étanchéité annulaire (71) et ledit orifice d'alimentation en encre, chaque dit élément d'étanchéité ayant un diamètre interne légèrement plus faible qu'un diamètre externe de ladite aiguille d'alimentation en encre (50).

14. Cartouche d'encre selon l'une des revendications précédentes, comportant en outre : plusieurs ensembles desdites chambres de mousse et d'encre, chaque ensemble de chambre se composant d'une chambre de mousse et d'une chambre d'encre contenant une encre de couleur différente, lesdits ensembles de chambre étant intégrés dans une unique cartouche d'encre, chacune desdites chambres de mousse contenant un desdits corps poreux.

15. Cartouche d'encre selon la revendication 14, dans laquelle au moins une partie dudit corps principal dans la zone de ladite chambre d'encre est formée dans une matière transparente ou translucide afin de permettre à la quantité d'encre liquide dans la chambre d'encre d'être déterminée visuellement.

16. Cartouche d'encre selon la revendication 14 ou 15, et comprenant une partie saillante de l'orifice d'alimentation en encre dans chaque chambre de mousse qui dépasse vers un intérieur de la chambre de mousse, ladite partie saillante poussant élastiquement localement le corps poreux dans la chambre de mousse associé au voisinage de l'extrémité distale de ladite partie saillante de sorte qu'une compression au voisinage dudit orifice d'alimentation en encre est localement accrue.

17. Cartouche d'encre selon l'une des revendications 14 à 16, comportant en outre : une saillie destinée à pousser chaque corps poreux sur l'orifice d'alimentation en encre formé sur une paroi intérieure de ladite chambre de mousse face à l'orifice d'ali-

mentation en encre.

18. Cartouche d'encre selon l'une des revendications 14 à 17, dans laquelle le volume de chacun desdits corps poreux avant insertion dans la chambre de mousse associée est plus grand que le volume de la chambre de mousse associée.

19. Cartouche d'encre selon la revendication 18, dans laquelle ledit élément poreux est comprimé dans la zone dudit trou de communication, ledit orifice d'alimentation en encre étant formé par un élément saillant qui s'étend dans ladite chambre de mousse et formé avec une ouverture au niveau de son extrémité distale pour la réception d'encre provenant dudit élément poreux, ledit élément saillant étant espacé dudit trou de communication d'une distance telle que la compression dudit élément poreux de façon adjacente au dit trou de communication est inférieure à la compression de l'élément poreux au niveau de l'extrémité distale dudit élément saillant et augmente essentiellement progressivement depuis ledit trou de communication jusqu'à l'extrémité distale dudit élément saillant.

20. Appareil d'enregistrement à jet d'encre destiné à délivrer de l'encre sur un support d'enregistrement, comportant : une tête d'enregistrement destinée à éjecter de l'encre; et une cartouche de réservoir d'encre pouvant être montée de façon amovible sur ladite tête d'enregistrement dudit appareil d'enregistrement à jet d'encre afin de délivrer de l'encre, comprenant : un corps principal (1) conformé afin de définir une chambre d'encre destinée à retenir de l'encre liquide (412) et une chambre de mousse (411, 511, 611) maintenue en communication de fluide avec ladite chambre d'encre par l'intermédiaire d'un trou de communication (419); un orifice d'alimentation en encre (413, 513, 613) formé dans une paroi de ladite chambre de mousse (411); et un corps poreux (420, 520, 620) destiné à absorber l'encre qui est reçue dans ladite chambre de mousse (411, 511, 611) de sorte que la compression dudit corps poreux dans au moins une zone face au dit orifice d'alimentation en encre est plus grande que la compression dans une zone qui ne fait pas face au dit orifice d'alimentation en encre, de sorte que ladite cartouche d'encre délivre l'encre de ladite chambre d'encre par l'intermédiaire dudit corps poreux et dudit orifice d'alimentation en encre, caractérisé en ce que le rapport entre la quantité d'encre initialement chargée dans ladite chambre d'encre et celle d'encre absorbée dans ledit corps poreux est dans la plage de 1 : 1 à 1 : 3.

21. Appareil d'enregistrement à jet d'encre selon la revendication 20, dans lequel au moins une partie dudit corps principal (1) dans la zone de ladite chambre d'encre est formée dans une matière transparente ou translucide afin de permettre à la quantité d'encre liquide dans la chambre d'encre d'être déterminée visuellement.

22. Appareil d'enregistrement à jet d'encre selon la revendication 20 ou 21, dans lequel le volume de l'élément poreux avant insertion dans ladite chambre de mousse (411, 511, 611) est plus grand que le volume de la chambre de mousse (411, 511, 611) de sorte que l'élément poreux (420, 520, 620) est comprimé dans la zone dudit trou de communication (419), ledit orifice d'alimentation en encre (413, 513, 613) étant formé par un élément saillant (422) qui s'étend dans ladite chambre de mousse (411, 511, 611) et formé avec une ouverture à son extrémité distale pour la réception d'encre provenant dudit élément poreux, ledit élément saillant étant espacé dudit trou de communication d'une distance telle que la compression dudit élément poreux de façon adjacente au dit trou de communication est inférieure à la compression de l'élément poreux à l'extrémité distale dudit élément saillant et augmente essentiellement progressivement depuis ledit trou de communication jusqu'à l'extrémité distale dudit élément saillant.

23. Appareil d'enregistrement à jet d'encre selon l'une des revendications 20 à 22, dans lequel la distance entre ledit élément saillant (422) et ledit trou de communication (419) n'est pas inférieure à 1,5 fois la hauteur dudit élément saillant.

24. Appareil d'enregistrement à jet d'encre selon l'une des revendications 20 à 23, comportant en outre : un trou débouchant d'injection d'encre (415, 515, 615) et un trou débouchant d'échappement (414, 514, 614) formés dans la zone dudit corps principal (1) face à ladite chambre de mousse (411, 511, 611); et une rainure sinueuse (440, 540, 640) formée dans une surface extérieure dudit corps principal (1) et communiquant avec un desdits trous débouchants et un élément d'étanchéité (42) sur ladite surface extérieure, lesdits trous débouchants et la rainure définissant un passage entre l'air ambiant et ledit premier trou débouchant.

25. Système destiné à délivrer de l'encre à un appareil d'enregistrement à jet d'encre et à délivrer de l'encre sur un support d'enregistrement, ledit système comportant : une tête d'enregistrement destinée à éjecter de l'encre; et une cartouche de réservoir d'encre pouvant être montée de façon amovible sur ladite tête d'enregistrement dudit appareil d'enregistrement à jet d'encre afin de délivrer de l'encre, comprenant : un corps principal (1) conformé afin de définir une chambre d'encre destinée à retenir de l'encre liquide (412) et une chambre de mousse (411, 511, 611) maintenue en communication de fluide avec ladite chambre d'encre par l'intermédiaire d'un trou de communication (419); un orifice d'alimentation en encre (413, 513, 613) formé dans une paroi de ladite chambre de mousse (411); et un corps poreux (420, 520, 620) destiné à absorber l'encre qui est reçue dans ladite chambre de mousse (411, 511, 611) de sorte que la compression dudit corps poreux dans au moins une zone face au dit orifice d'alimentation en encre est plus grande que la compression dans une zone qui ne fait pas face au dit orifice d'alimentation en encre, de sorte que ladite cartouche d'encre délivre l'encre de ladite chambre d'encre par l'intermédiaire dudit corps poreux et dudit orifice d'alimentation en encre, caractérisé en ce que le rapport entre la quantité d'encre initialement chargée dans ladite chambre d'encre et celle d'encre absorbée dans ledit corps poreux est dans la plage de 1 : 1 à 1 : 3.

26. Système selon la revendication 25, dans lequel au moins une partie dudit corps principal (1) dans la zone de ladite chambre d'encre est formée dans une matière transparente ou translucide afin de permettre à la quantité d'encre liquide dans la chambre d'encre d'être déterminée visuellement.

27. Système selon la revendication 25 ou 26, dans lequel le volume de l'élément poreux avant insertion dans ladite chambre de mousse est plus grand que le volume de la chambre de mousse (411, 511, 611) de sorte que l'élément poreux est comprimé dans la zone dudit trou de communication (419), ledit orifice d'alimentation en encre (413, 513, 613) étant formé par un élément saillant (422) qui s'étend dans ladite chambre de mousse et formé avec une ouverture à son extrémité distale pour la réception d'encre provenant dudit élément poreux, ledit élément saillant étant espacé dudit trou de communication (419) d'une distance telle que la compression dudit élément poreux de façon adjacente au dit trou de communication est inférieure à la compression de l'élément poreux à l'extrémité distale dudit élément saillant et augmente essentiellement progressivement depuis ledit trou de communication jusqu'à l'extrémité distale dudit élément saillant.

28. Système selon l'une des revendications 25 à 27, dans lequel la distance entre ledit élément saillant et ledit trou de communication n'est pas inférieure à 1,5 fois la hauteur dudit élément saillant.

29. Système selon l'une des revendications 25 à 28, comportant en outre : un trou débouchant d'injection d'encre (415, 515, 615) et un trou débouchant d'échappement (414, 514, 614) formés dans la zone dudit corps principal (1) face à ladite chambre de mousse (411, 511, 611); et une rainure sinueuse (440, 540, 640) formée dans une surface extérieure dudit corps principal (1) et communiquant avec un desdits trous débouchants et un élément d'étanchéité (42) sur ladite surface extérieure, lesdits trous débouchants et la rainure définissant un passage entre l'air ambiant et ledit premier trou débouchant.

FIG. 1a

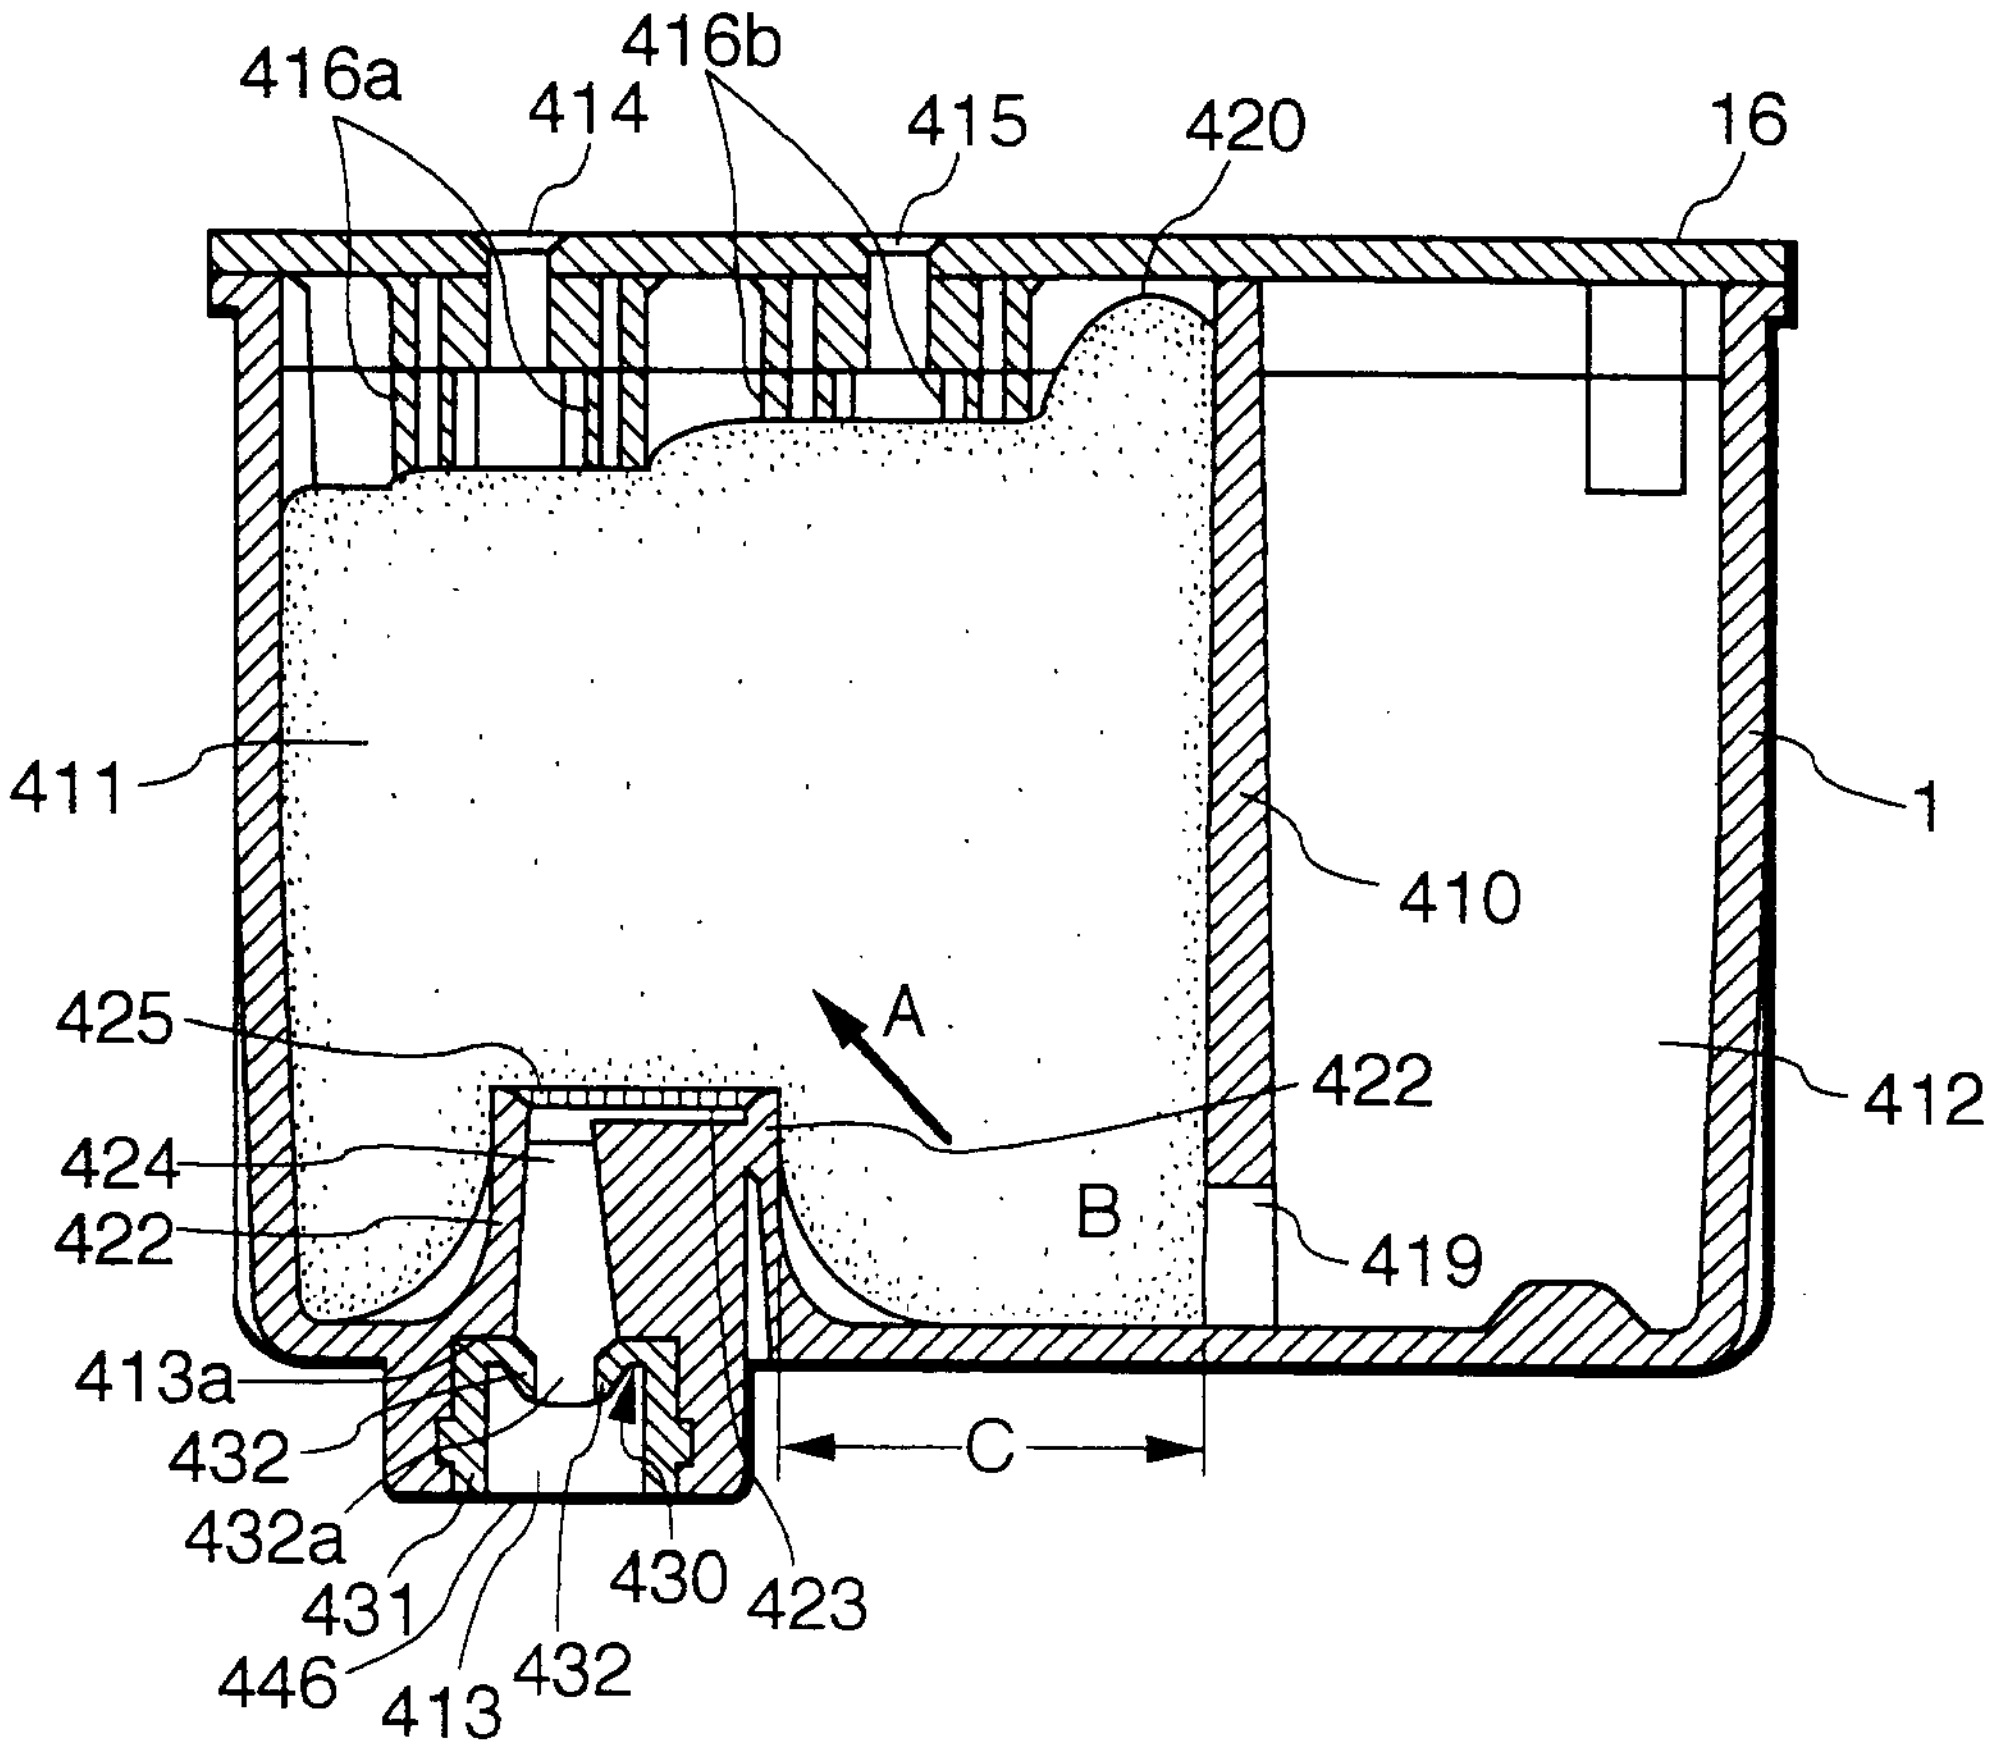
416a
414
416b
415
420
16
411
1
410
425
A
422
412
424
422
B
419
413a
C
432
432a
430
423
431
446
413
432

FIG. 1b

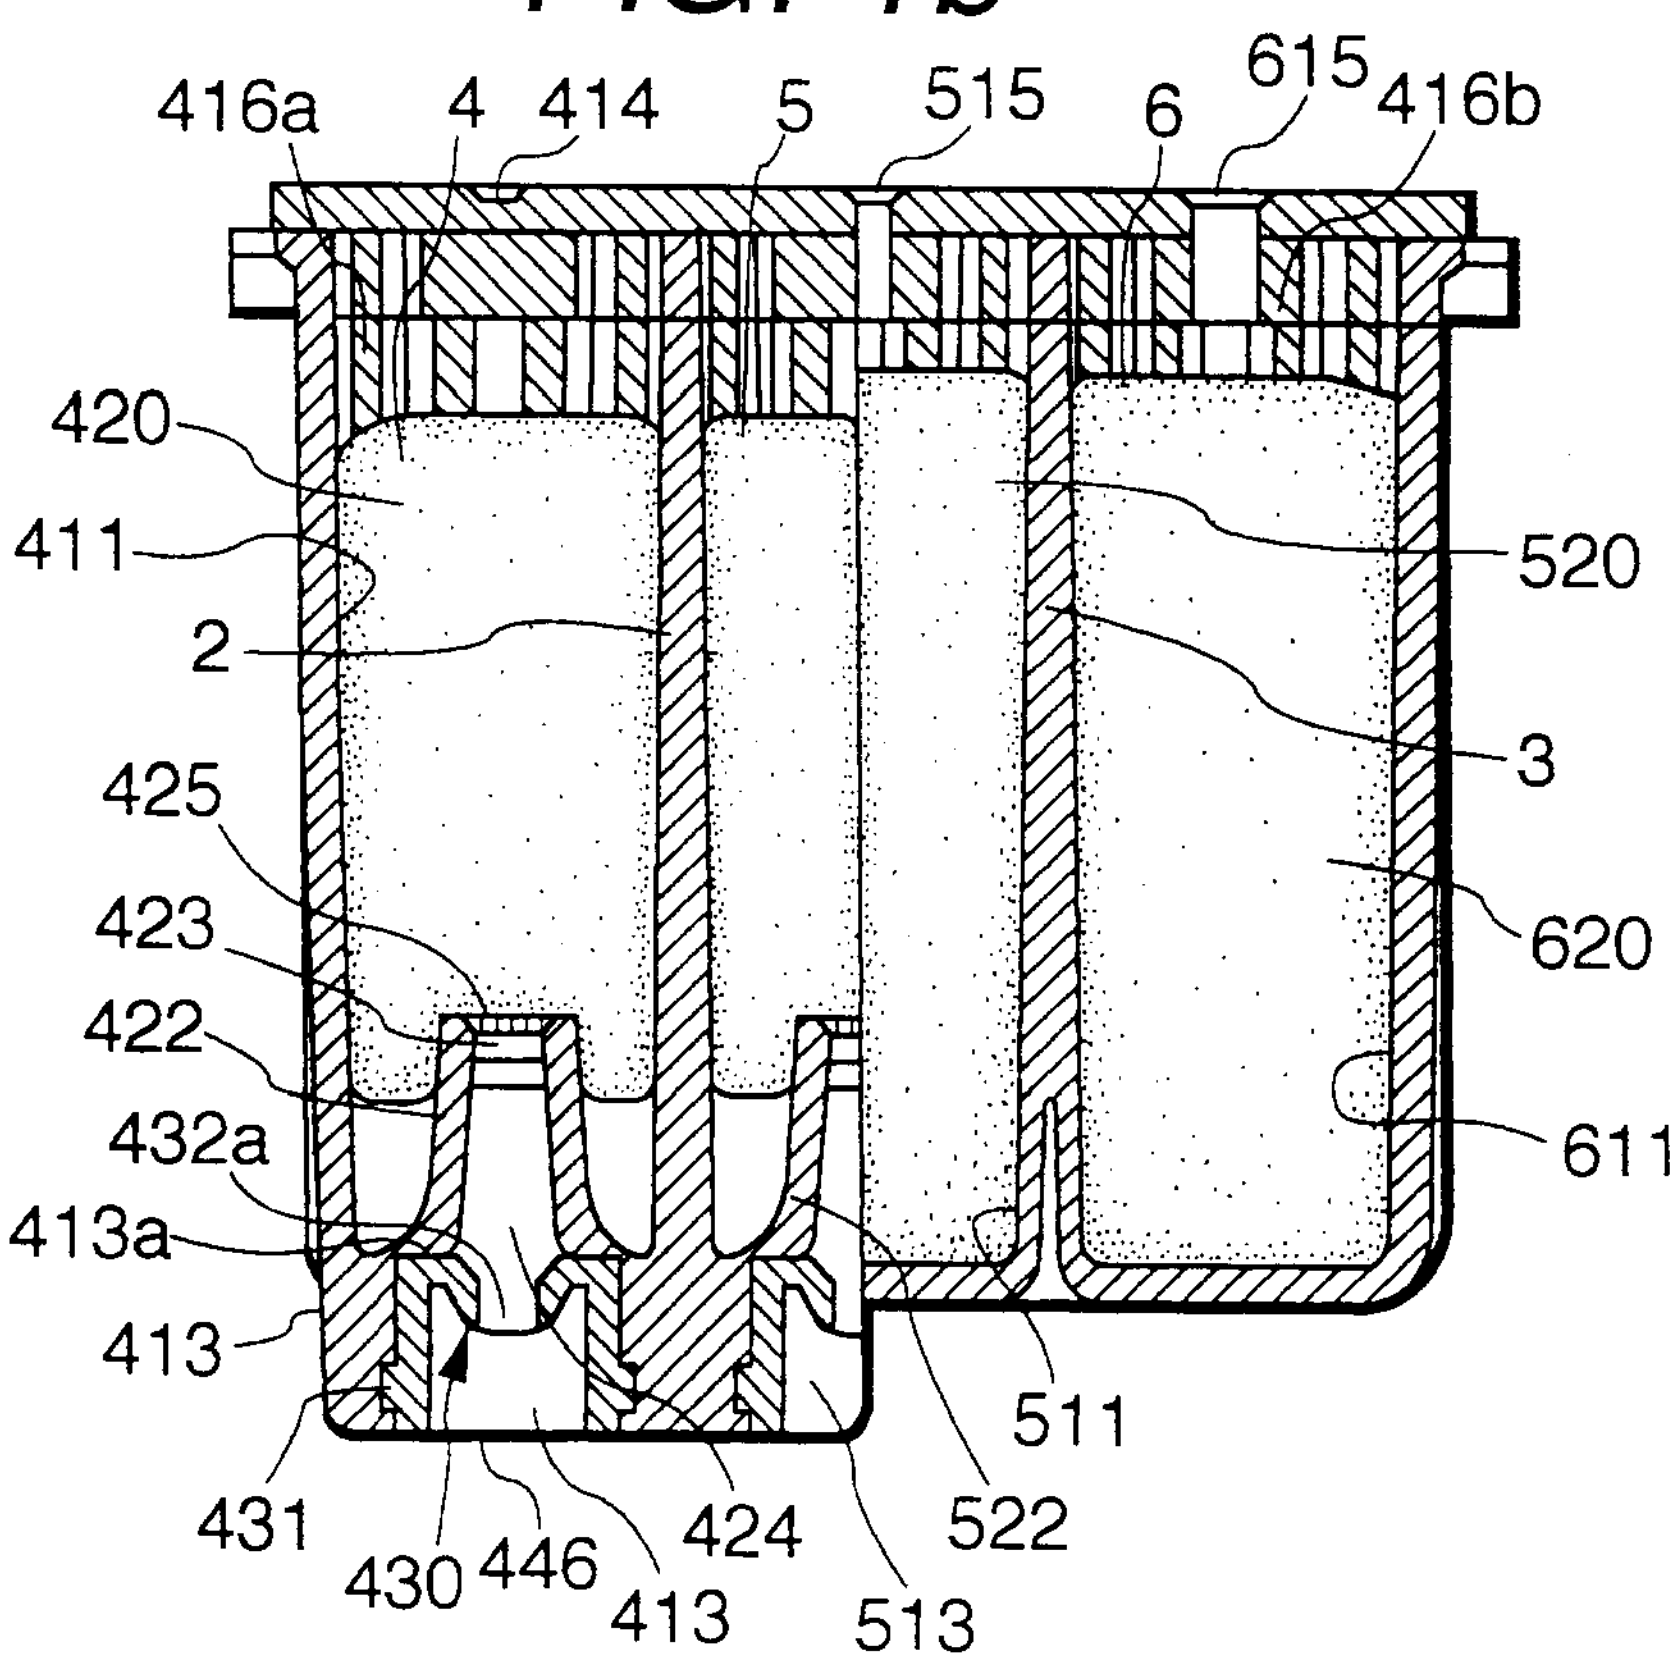
416a
4
414
5
515
6
615
416b
420
411
520
2
3
425
620
423
422
611
432a
413a
413
511
431
430
446
424
522
413
513

FIG. 2a

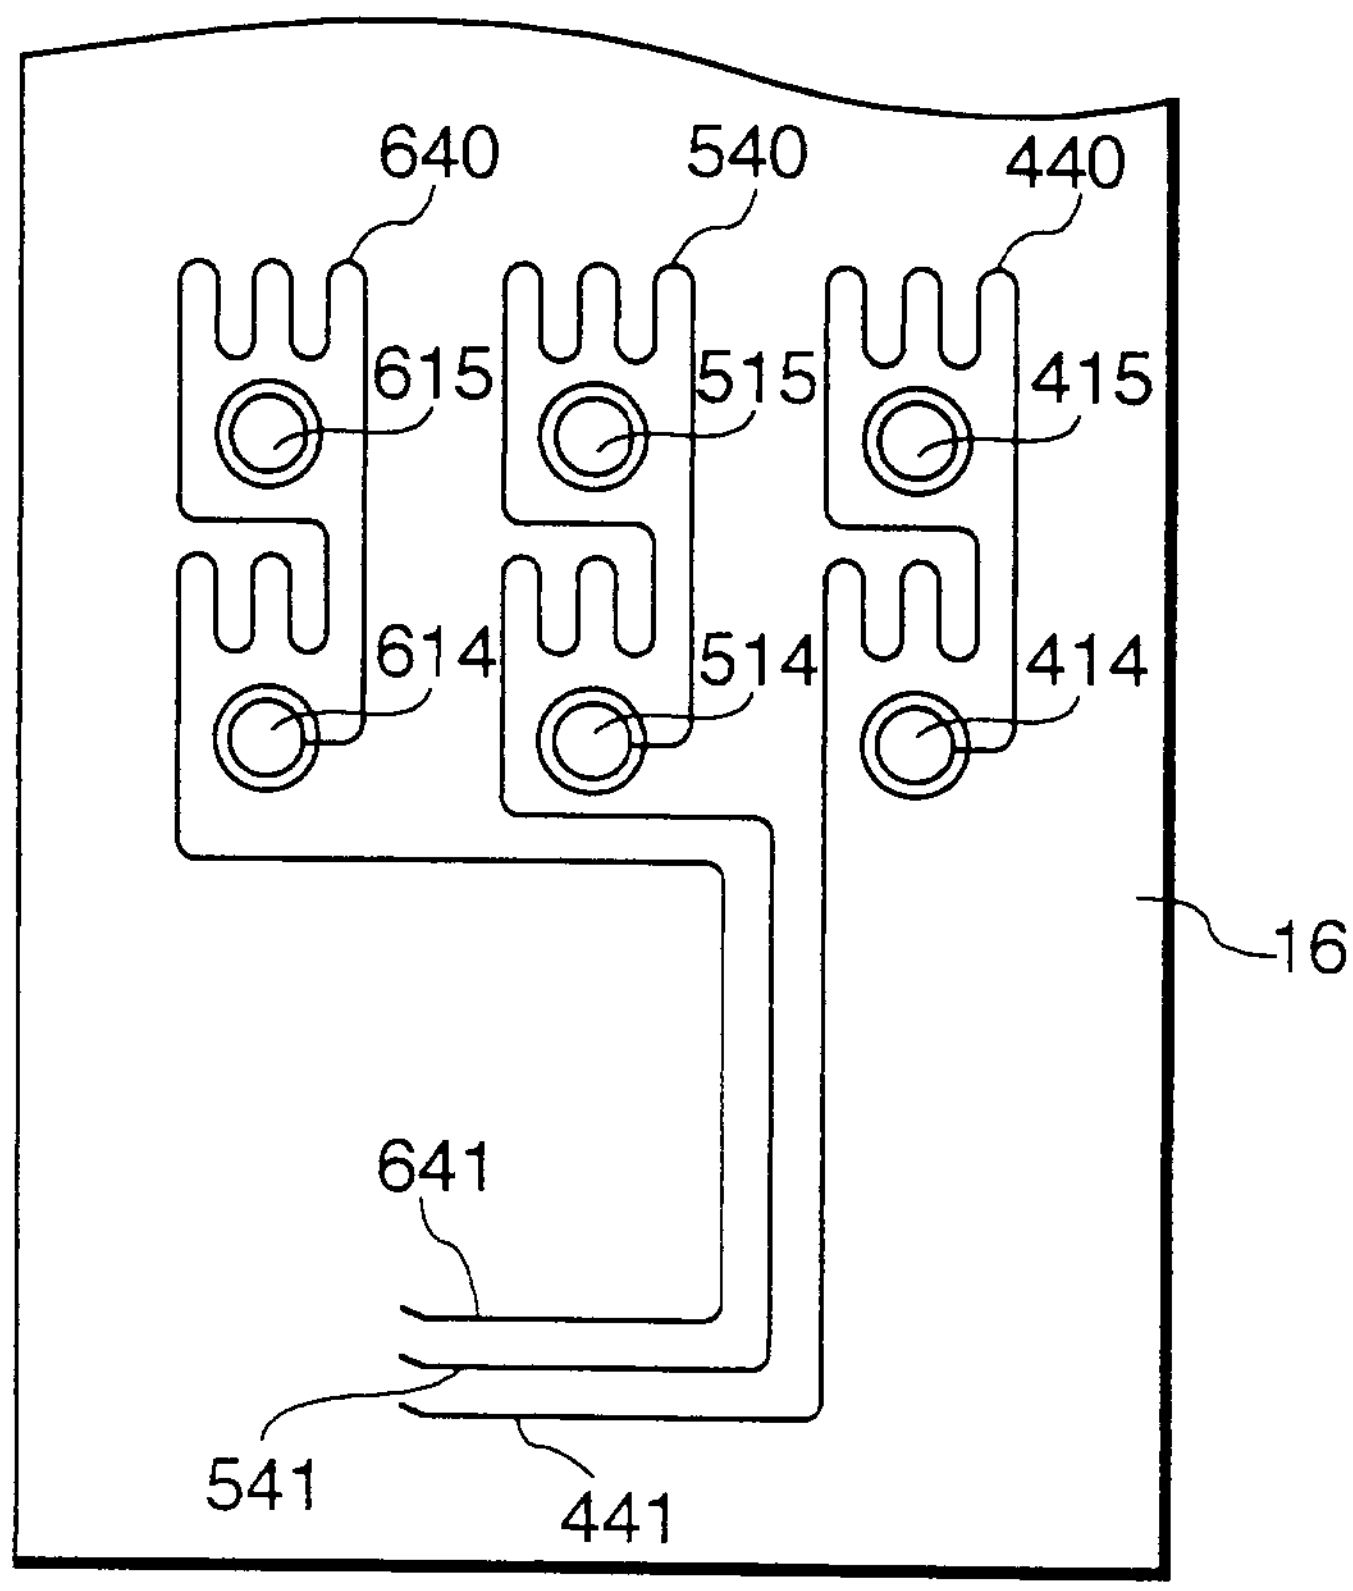
640
540
440
615
515
415
614
514
414
16
641
541
441

FIG. 2b

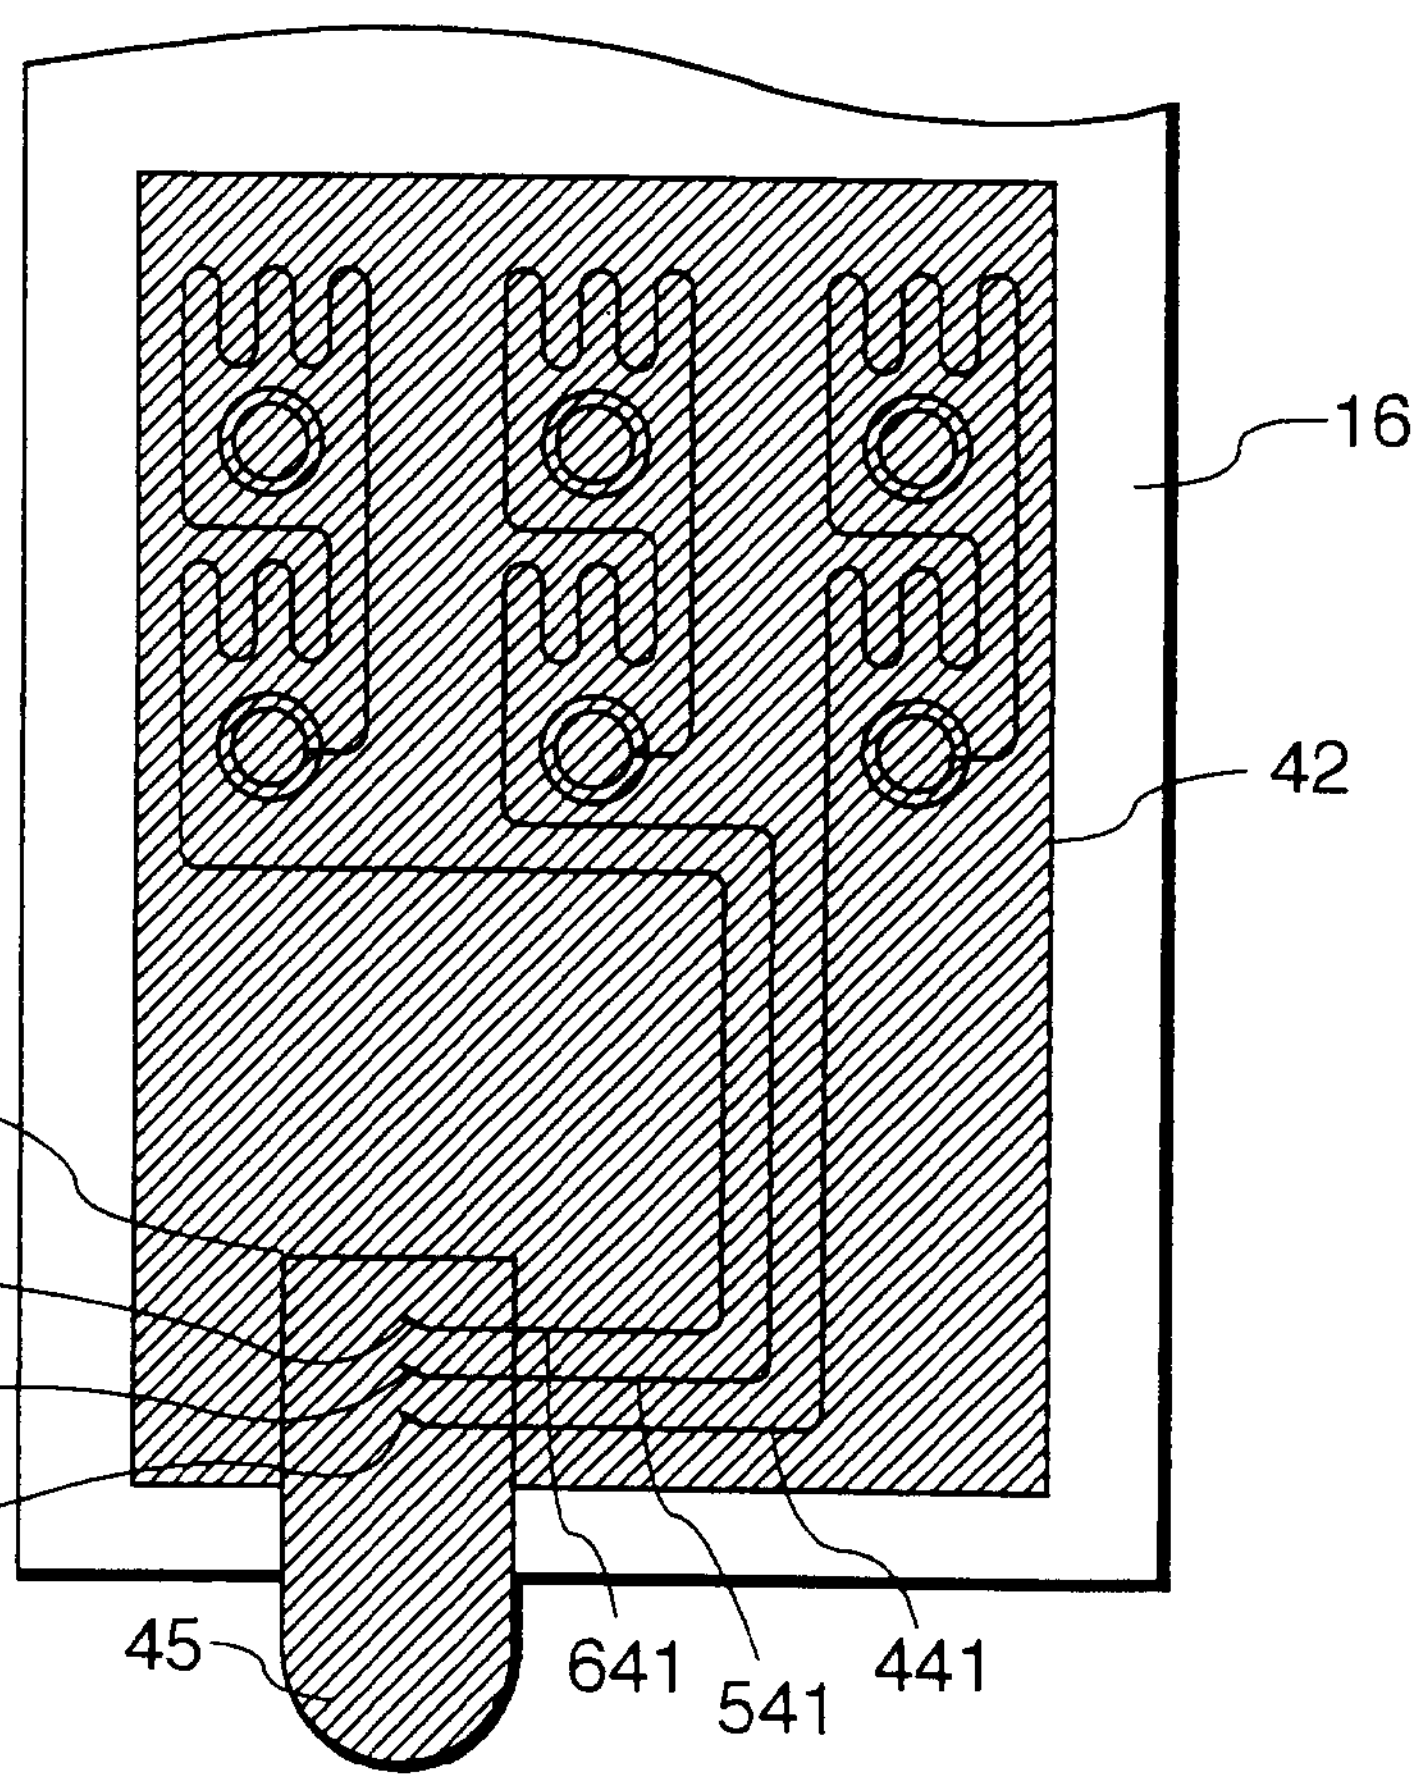
16
42
44
41
41
41
45
641
541
441

FIG. 3

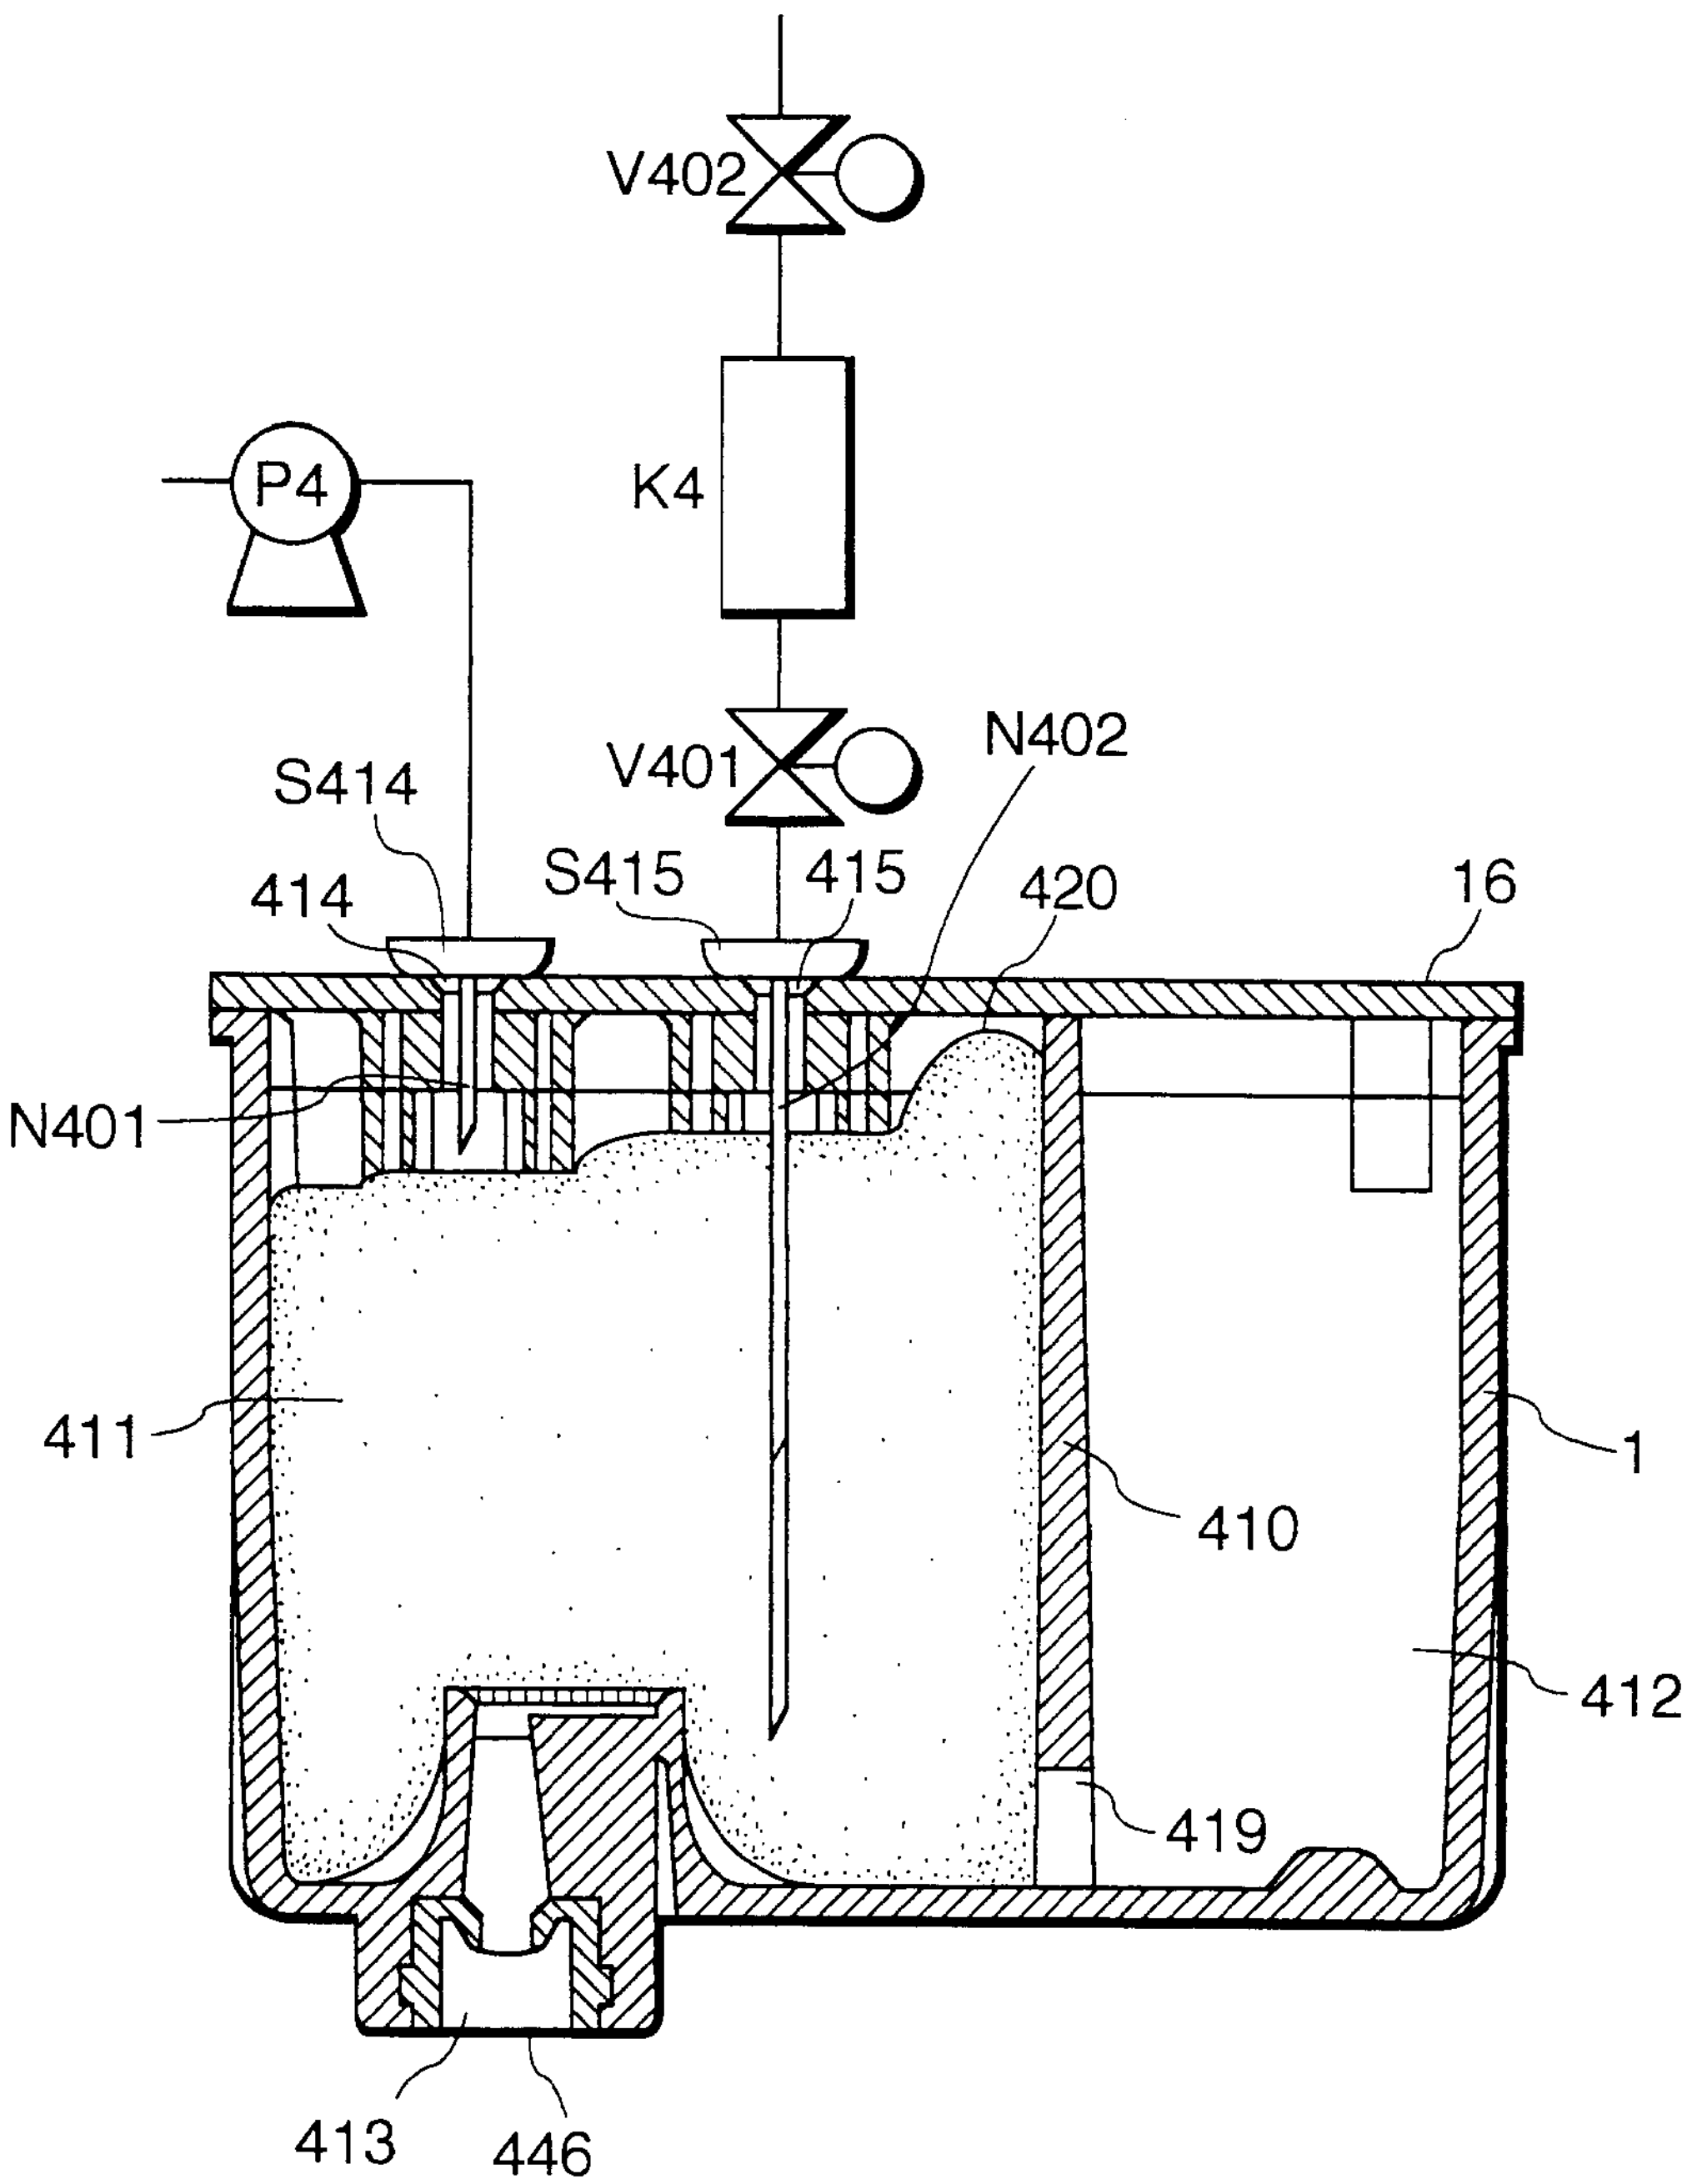
V402
K4
P4
V401
N402
S414
S415
414
415
420
16
N401
411
410
1
412
419
413
446

FIG. 4

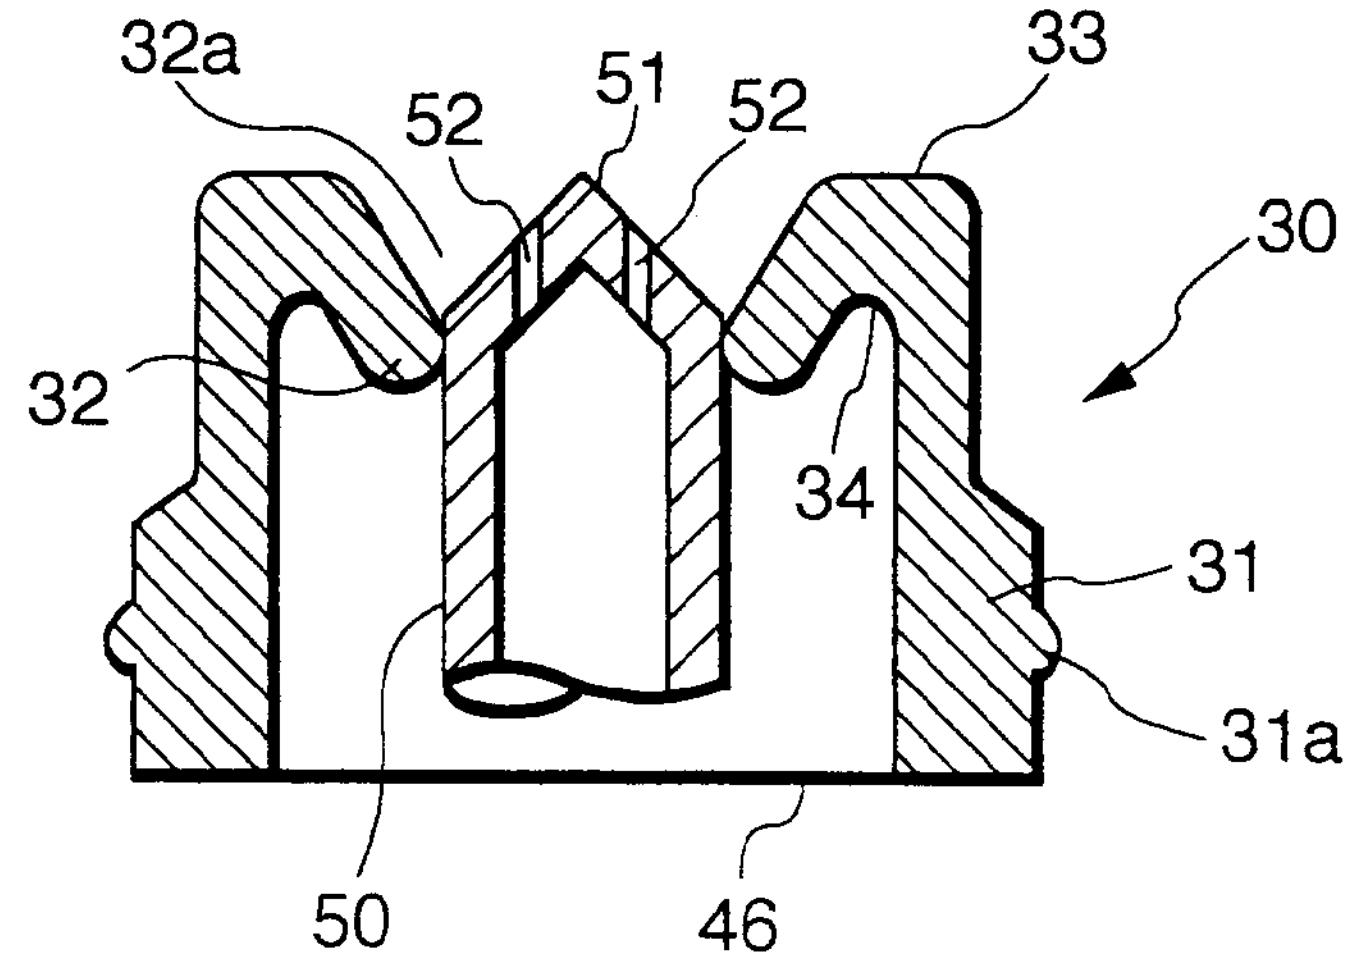
32a
52
51
52
33
30
32
34
31
31a
50
46

FIG. 5

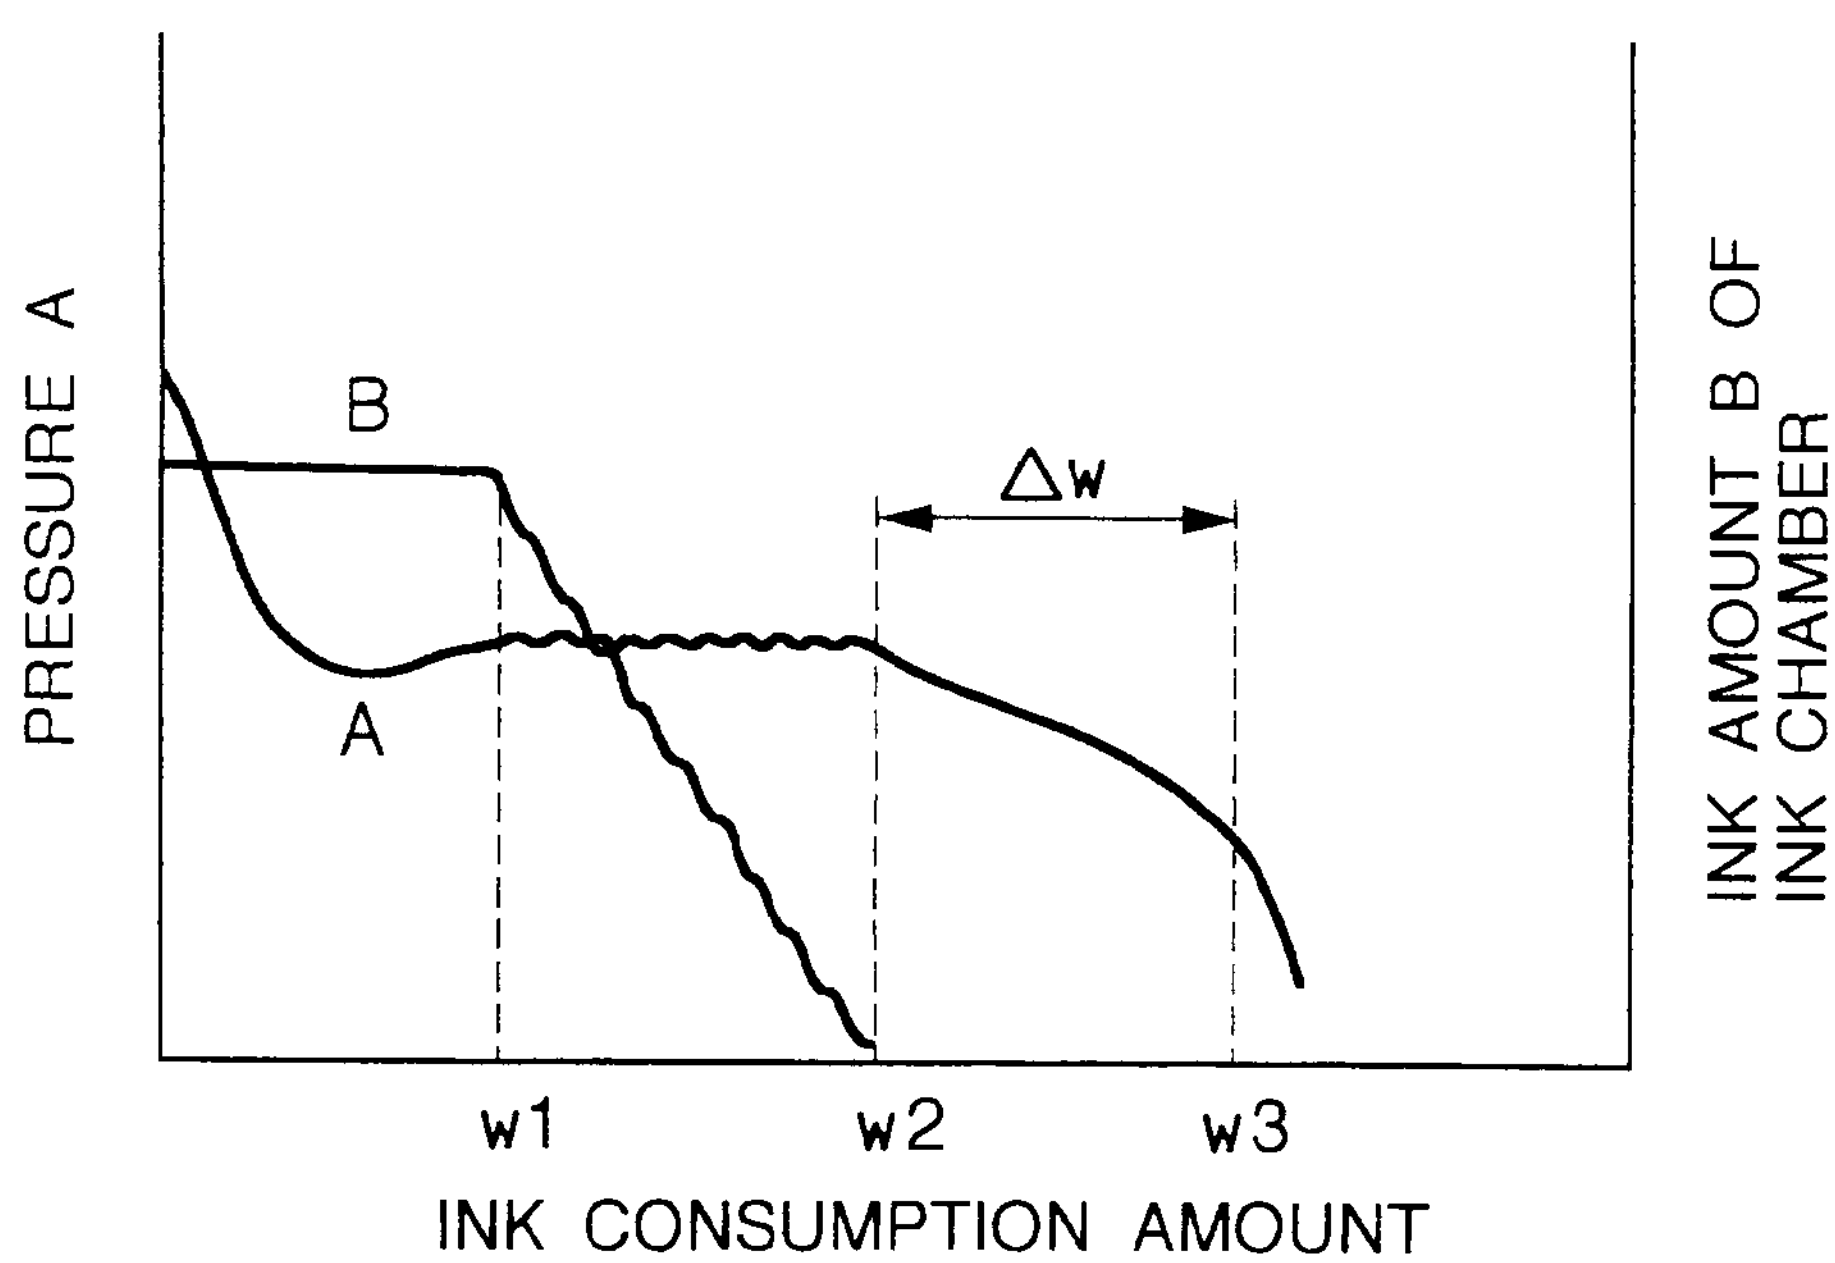
PRESSURE A
B
A
Δw
INK AMOUNT B OF
INK CHAMBER
w1
w2
w3
INK CONSUMPTION AMOUNT

FIG. 6

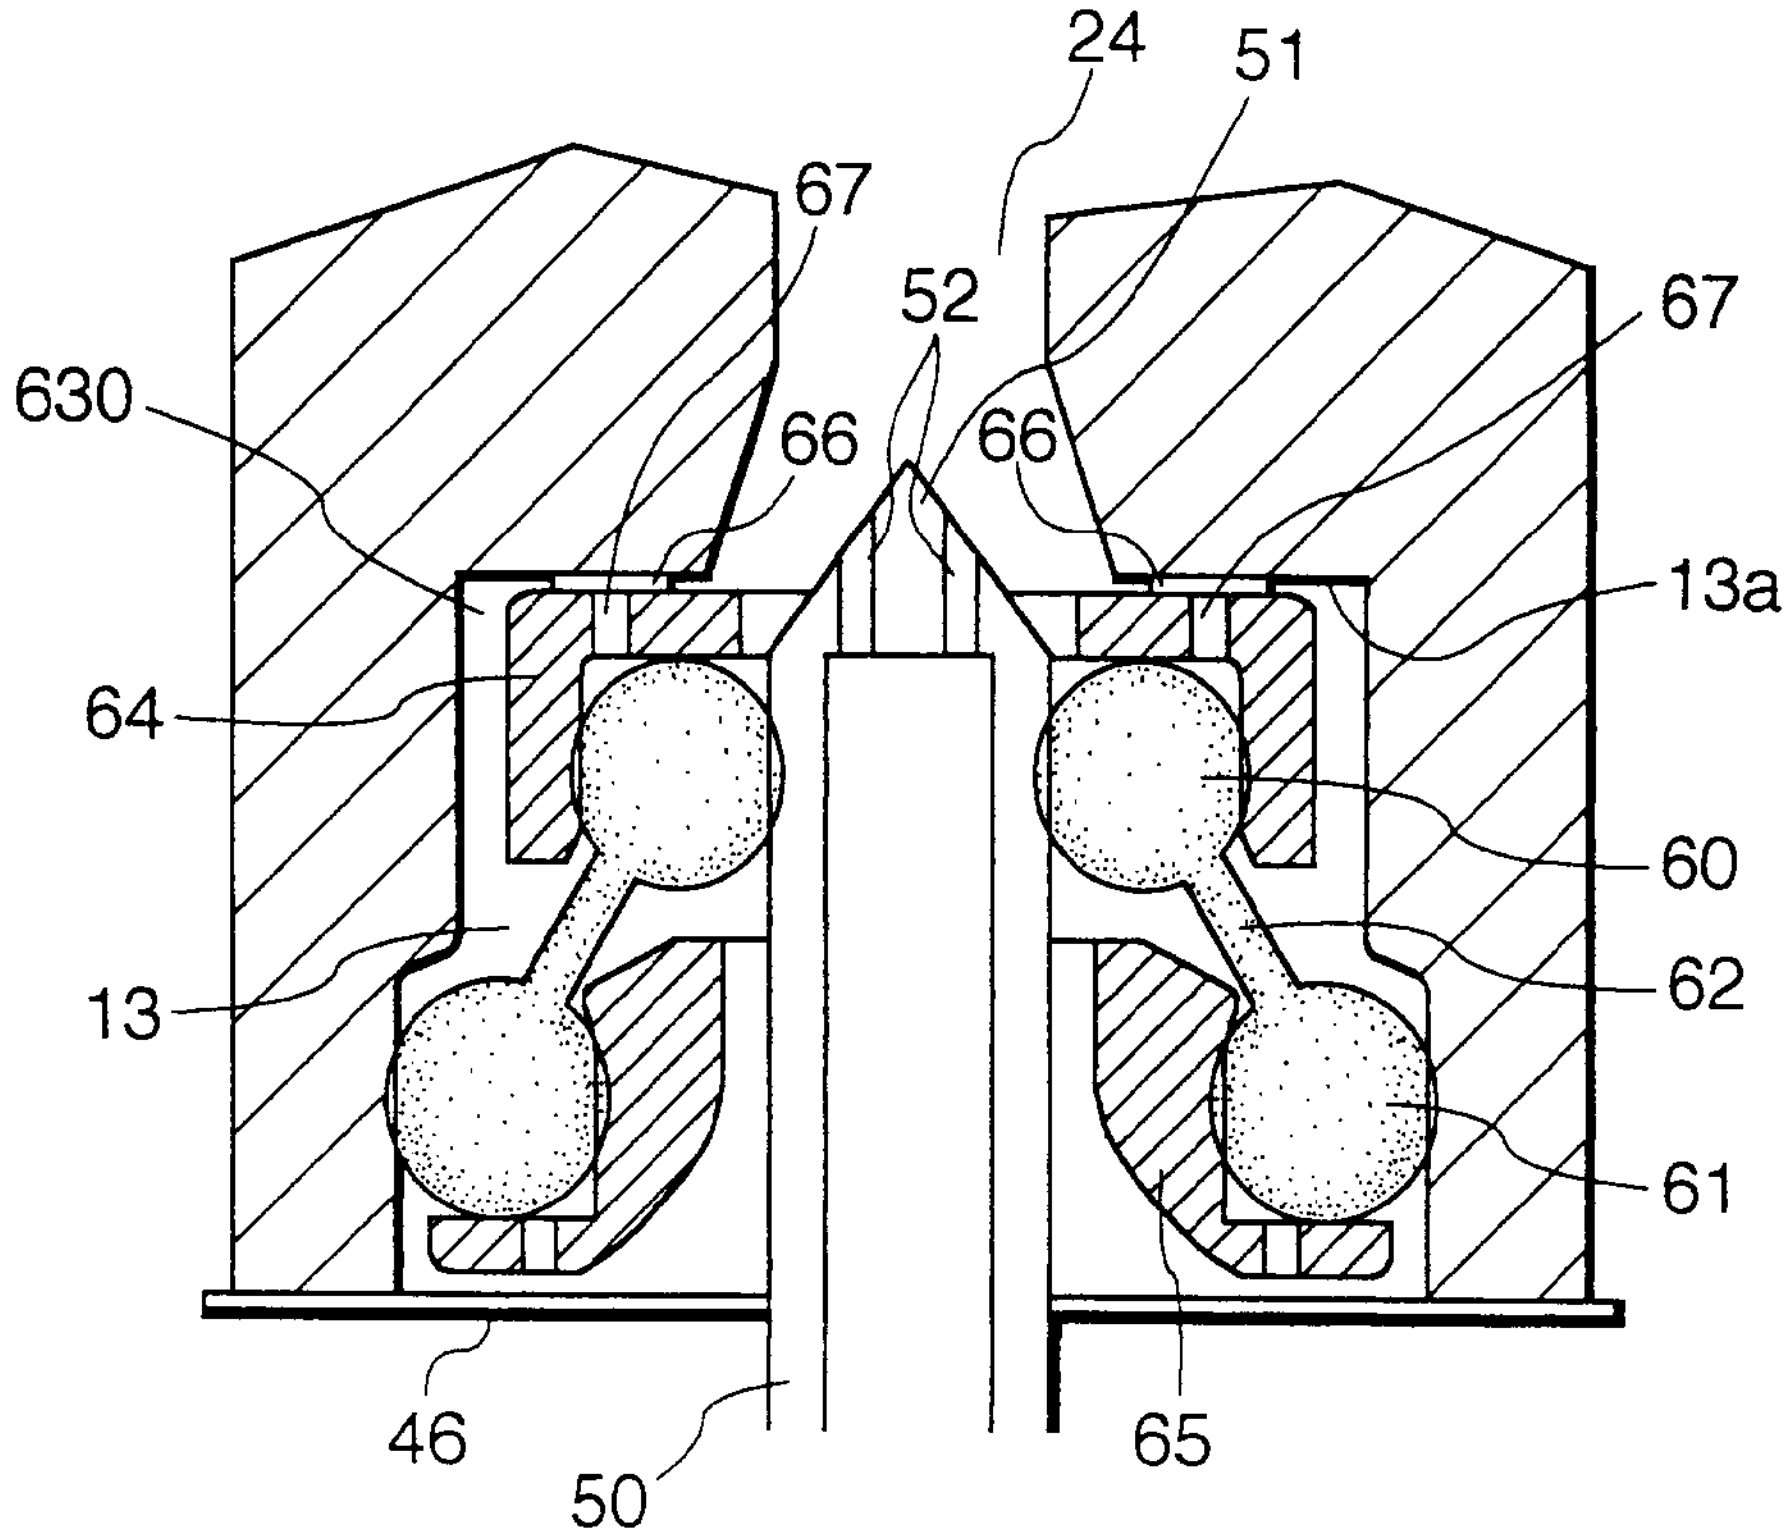
24
51
67
52
630
66
66
67
13a
64
60
13
62
61
46
50
65

FIG. 7

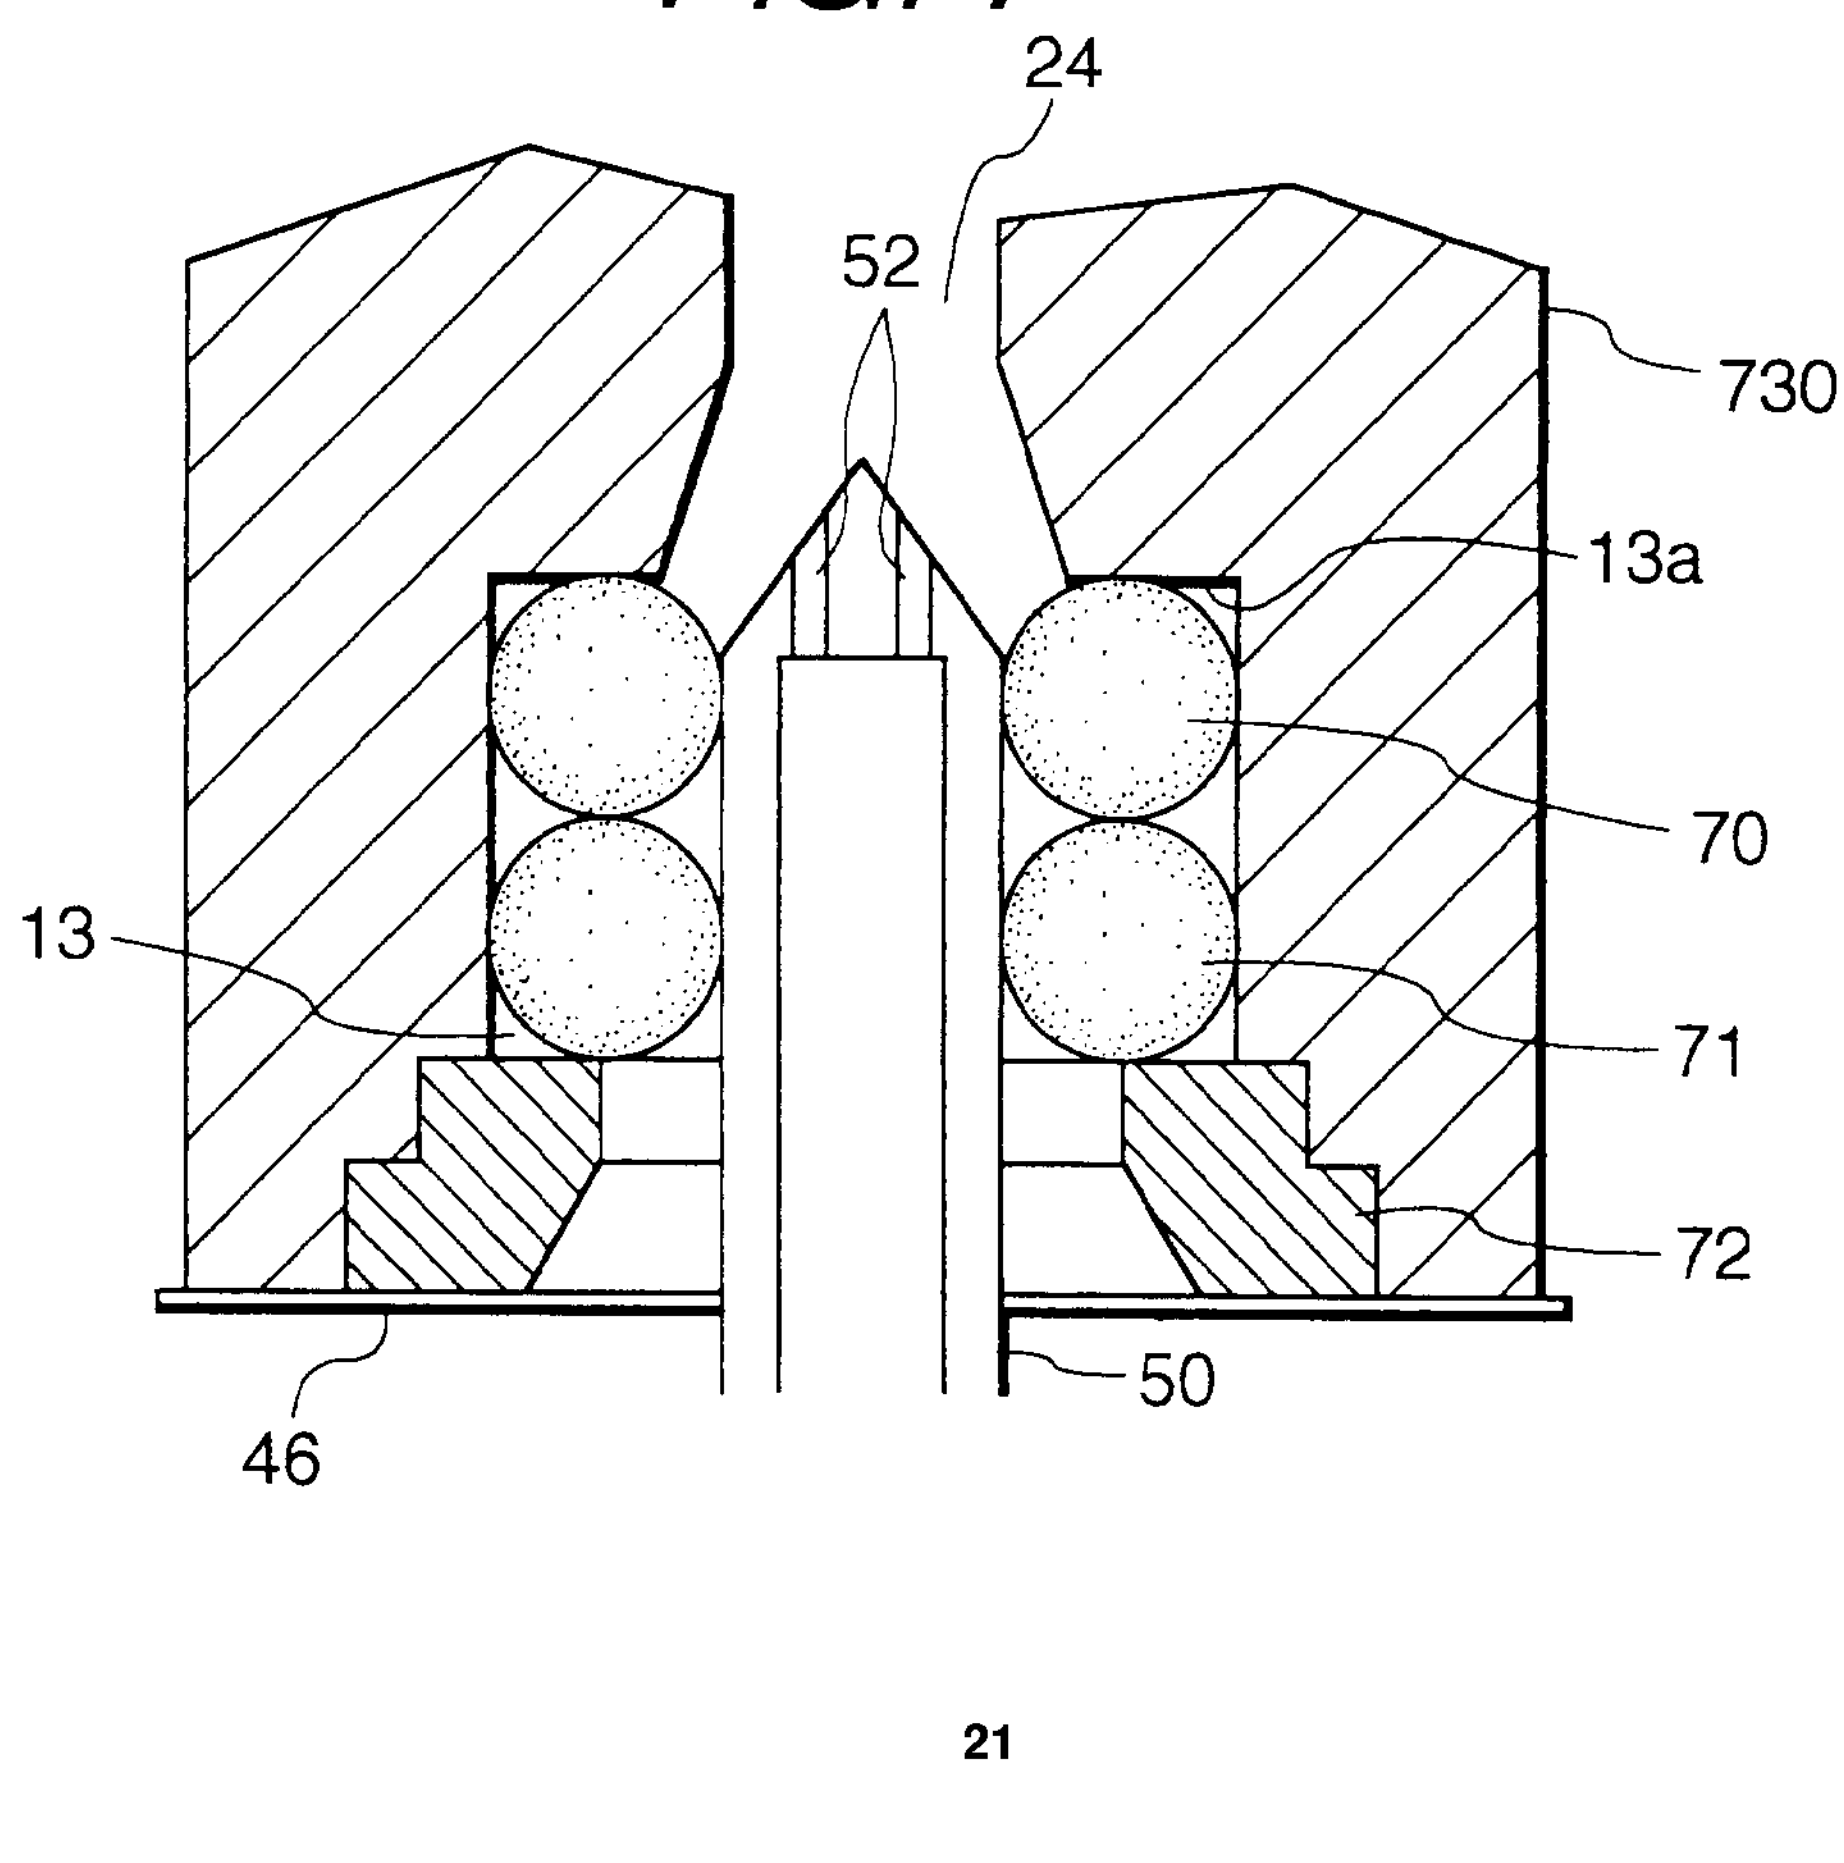
24
52
730
13a
70
13
71
72
50
46