




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E02D 5/54, 5/38	A1	(11) International Publication Number: WO 00/01893 (43) International Publication Date: 13 January 2000 (13.01.00)
(21) International Application Number: PCT/AU99/00539 (22) International Filing Date: 2 July 1999 (02.07.99) (30) Priority Data: PP 4451 2 July 1998 (02.07.98) AU PP 7681 14 December 1998 (14.12.98) AU (71)(72) Applicant and Inventor: LAWSON, Robert [AU/AU]; Lot 10, Alfred Street, Baringhup, VIC 3463 (AU). (74) Agent: CARTER SMITH & BEADLE; 2 Railway Parade, P.O. Box 557, Camberwell, VIC 3124 (AU).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: IMPROVED CONSTRUCTIONAL SUPPORT**(57) Abstract**

A constructional support including a central support member (4) having a central longitudinal axis, three guide means (1, 2, 3) secured to the central support member (4) in an equilateral triangular configuration, the guide means (1, 2, 3) extending from the central support member (4) at an acute angle of less than 30°, the guide means (1, 2, 3) receiving tubular anchor means for engaging the ground, and including means for securing the anchor means in the guide means (1, 2, 3).

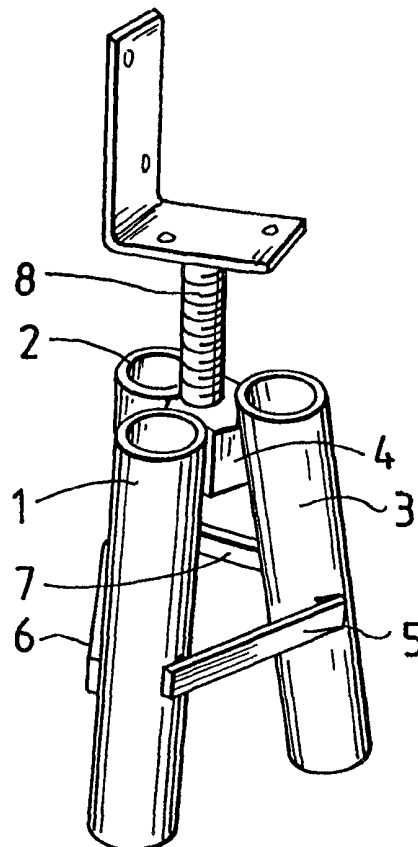

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

IMPROVED CONSTRUCTIONAL SUPPORT

This invention relates to improvements in constructional supports of the type capable of supporting building structures.

Background of the Invention

5 Concrete and wooden stumps and piers are commonly used to support building structures constructed from timber beams, fabricated steel beams, aluminium beams and other structural materials. The concrete and wooden stumps and piers support a frame structure adapted to support flooring materials of various types to which internal frames constructed of various materials are in turn attached to form the
10 complete building structure. The installation of concrete or wooden stumps or piers is labour intensive, requiring numerous holes and/or footings to be formed in the ground followed by the installation of the stumps or piers set at the required levels. Where a building is to be constructed on unstable soils, the stumps must be buried to a level where stable soil is present to provide the necessary support for the stump.

15 As a result of extensive testing and investigation, an alternative constructional support which performs satisfactorily in most soil types, including unstable soils or reactive clays, has been developed. The support can be installed by relatively unskilled operators, and does not require excavation or the formation of concrete footings.

20 The patent literature discloses several pile arrangements with angular anchor legs, such as SU949066 and SU947284, but these arrangements are not suitable for use in most domestic constructions. Similarly, New Zealand Patent 272260 discloses a driven foundation post arrangement with angled diagonally placed anchor posts. This arrangement does not lend itself to adaption from a driven foundation post
25 arrangement to a relatively simple building stump replacement.

Summary of Invention and Object

 It is the object of the present invention to provide a constructional support adapted to replace concrete or wooden stumps or piers in building constructions which provides at least equivalent support for a building structure and is installed with less
30 difficulty than the known methods of installing concrete and wooden stumps or piers.

The invention provides a constructional support including a central support means for a load bearing member having a central longitudinal axis, three guide means secured to said support means and arranged in an equilateral triangular configuration, said guide means having passages with longitudinal axes extending angularly with respect to said central axis at an acute angle less than about 30°, said guide means being constructed to receive, as a snug fit, elongate substantially tubular anchor means for engaging the ground, and means for securing said anchor means in said guide means after said anchor means have been driven into the ground.

In the present specification, the term "tubular" is not restricted to circular configurations but includes oval, square, hexagonal, octagonal and other generally symmetrical configurations.

The invention also provides a method of installing a constructional support as defined above, including the steps of locating the constructional support in the required position on the ground, partially engaging the constructional support with the ground, inserting an elongate drilling means in each guide means in turn and drilling the ground along the axis of each guide means to a predetermined depth, inserting a tubular anchor means into each guide means, and securing each anchor means to each guide means or to the support.

Following the insertion of the anchor means, they are filled with a suitable grouting means. Alternatively or additionally, a further tubular means may be inserted into each anchor means to provide additional rigidity.

In one form of the invention, the central support means is adapted for engagement by said load bearing member adapted to support part of a building structure, such as a bearer support. If the bearer support is threaded, the central means may be threaded, or adjustment nuts may be fitted to the bearer support at positions above and below the central support means, to enable the bearer support to be rigidly secured with respect to the central support means. Alternatively, the bearer support may have a substantially tubular portion, in which case the central support member is configured to receive said substantially tubular portion.

The three guide means are preferably substantially tubular members and are secured together by means of an apertured plate or a threaded nut or the like defining

said central support means, said tubular members being connected in the required angular orientation by bracing means, such as struts, which interconnect adjacent tubular members.

5 The guide means may comprise three lengths of plastics pipe held in an equilateral triangular pattern by means of a molded plastics collar or plate defining said central support means and engaging said pipes adjacent one end and holding them in an equilateral triangular pattern, said pipes also being engaged by a further molded plastic collar or plate, defining said bracing means closer to the other end of said pipes and which maintains said pipes in the required angular orientation while bracing them
10 with respect to each other.

In a still further form of the invention, three metal tubular members defining the guide means are secured by welding to a central tubular riser defining the central support, the tubular members being skewed in a plane parallel to the central longitudinal axis of the riser so that the ends of the tubular members are accessible for
15 drilling and for receiving the anchor means without being fouled by the central riser. Since the guide means are securely welded to the central riser, the bracing struts or bracing collar of the previous embodiments are not required.

The central riser is adapted to receive a bearer support, which is adjustable in height by telescoping the bearer support to the required level and bolting the support
20 to the riser as required.

In the above embodiments, each of the guide means is preferably arranged at an acute angle to the central perpendicular axis or plane of the load support at an angle of about 5 to 20° to the central axis, and preferably at about 10° to 15° to the central axis.

25 The guide means are adapted to receive the anchor means as a snug fit within the passage. Where the pipes are plastic, they are fixed in position by a suitable plastics glue or by self-tapping screw means engaging the guide means and the anchor pipe engaged therein. If the guide pipes are metal and/or the anchor pipes are metal, screws are used to secure the anchor pipes in the guide pipes, or a blocking collar is
30 secured in the open end of each guide means.

In use, the support is placed on the ground in the required position and at about the required level and the guide means are used to guide a drill for drilling holes adapted to receive the tubular anchor means to the required depth.

In order that the invention may be more readily understood, two presently preferred embodiments of the invention will now be described with reference to the accompanying drawings in which:

Figure 1 is a perspective view of a first constructional support member showing an attached threaded bearer support;

Figure 2 is a top plan view of a second constructional support embodying the invention;

Figure 3 is a side elevation of the constructional support of Figure 2;

Figure 4 is an elevation of the third embodiment of the constructional support;

Figure 4A is a schematic elevation showing a bearer support attached to the constructional support;

Figure 5 is a schematic illustration showing the support being installed by means of a hand post driver;

Figure 5A is a plan view of the support of Fig. 4, and

Figure 6 is a perspective view from the lower one end of the support of Fig. 4.

Dimensions illustrated in these drawings are typical rather than restrictive.

Description of the Preferred Embodiments

Referring to Figure 1, the constructional support comprises three lengths of steel tubing 1,2 and 3 arranged in a equilateral triangular pattern, similar to that illustrated in Figure 2, with each tube 1,2 and 3 extending outwardly from a central perpendicular axis at an acute angle of about 10°. The tubes 1, 2 and 3 are held together at the top by a central threaded nut 4, to which each of the tubes 1, 2 and 3 are welded. The tubes 1, 2 and 3 are braced at a lower position by three straps 5, 6 and 7, each of which is welded to an adjacent tube 1, 2 and 3 to brace the tubes 1, 2 and 3 in the above defined angular orientation.

The central nut 4 is adapted to receive a threaded bearer support 8 of known configuration, as shown. Alternatively, the central nut 4 may be unthreaded or may

comprise an apertured plate and the threaded support 8 is fixed adjustably by locking nuts above and below the central member.

In use the support is driven partly into the ground until the struts 5, 6 and 7 are about level with the ground. The tubes 1, 2 and 3 are then used to guide a drill which
5 drills three holes to the required depth in the ground. Following drilling, three plastic or metal anchor pipes (not shown) are inserted as a snug fit into the tubes 1, 2 and 3 and are driven into the drilled holes in the ground to the required depth. The anchor pipes are secured to the tubes by self-tapping screws, or secured against escape from the guide tubes 1, 2 and 3 by collars of the type shown in broken outline in Fig. 4, and
10 are then filled with a cement slurry or some other reinforcing material, if desired. The length of each anchor pipe is selected according to the soil type, but is typically about 300 to 450 mm for stable soils and about 450 to 550 mm for unstable soils. For particularly unstable soils, such as reactive clays, it may be necessary for the anchor tubes to be of a length sufficient to engage stable soil.

Referring now to Figures 2 and 3, in this embodiment, three plastic pipes 10,
15 11 and 12 which may be made from recycled plastics such as recycled PET, are held in an equilateral triangular configuration, illustrated in Figure 2, by a molded plastic plate 13 having accurately formed openings receiving the pipes 10, 11 and 12 as a friction fit. The collar 13 comprises a flat plate of molded plastics having a central
20 hole 14 drilled and tapped with a suitable thread capable of receiving a threaded bearer support of the type shown in Figure 1. Alternatively, as described above, the hole 14 is untapped and locking nuts are positioned above and below the collar 13.

The pipes 10, 11 and 12 are held in an angular orientation of about 10° to a central perpendicular axis by a second molded collar or plate 15, illustrated in Figure
25 3, having accurately positioned openings which receive the pipes 10, 11 and 12 in the configuration shown and maintain them in this position under the loadings expected to be experienced in use.

This embodiment of the invention is used in a manner equivalent to that described above, and in each case, the plastic anchor pipes (not shown), which are
30 received in the guide pipes 10 to 12 as a snug fit, are held in their final driven positions

by plastics cement or by screws engaging the guide pipes and the anchor pipes or by collars similar to those described below.

Referring now to Figures 4 to 6, the constructional support embodying the invention comprises three lengths of steel tubing 20, 21 and 22, welded in an equilateral triangular configuration to a central riser in the form of a further length of steel tubing 23. Each of the guide tubes 20, 21 and 22 extends angularly to the central riser tube 23 in a plane parallel to the central vertical axis of the riser 23. In this way, the guide tubes 20, 21 and 22 are skewed with respect to the central riser so that their upper ends are free to receive a drill followed by metal or plastic anchor pipes as in the previous embodiments.

By providing a rigid central riser to which the guide tubes 20, 21 and 22 are securely welded, the bracing plates of the embodiment of Figure 1 are not required and the relatively expensive central nut 4 is replaced by a less expensive tubular riser by means of which the constructional support can be driven into the ground for installation by means of a hand held post driver, as illustrated schematically in Figure 5 of the drawings.

The central riser 23 is adapted to receive a bearer support which can be drilled and bolted at any desired adjusted height, as shown in Figure 4A.

In the embodiment of Figures 4 to 6, it has been found that the guide tubes 20, 21 and 22 are most conveniently arranged at an angle of about 15° to a plane coincident with the central vertical axis of the riser 23 and passing through each of the guide tubes 20, 21 and 22. This angle may be changed without reducing the effectiveness of the support, the only requirement being that the ends of the guide tubes 20, 21 and 22 are free to receive a drill and anchor tube without being fouled by the central riser tube 23.

The support of Figures 4 to 6 can be inexpensively fabricated using a jig and a welding machine. The fabrication process lends itself to automation whereby production costs can be further reduced.

It will be appreciated that the above embodiments of the invention stress the importance of arranging the guide pipes in an equilateral triangular pattern since this pattern provides equal support in every direction of the supporting device while

minimising fabrication costs. The embodiments also stress the need for the anchor means to be tubular and to be a snug fit within the guide pipes. This does not require both the guide pipes and the anchor pipes to be of the same configuration, although this is probably most convenient, but rather that the anchor pipes should engage the guide pipes sufficiently to prevent the anchor pipes moving externally to any material extent within the guide pipes.

The support of the present invention provides a viable, relatively low cost, alternative to wooden or concrete stumps and is in effect a three legged stump or a three legged mini-piling system in which the anchor pipes which engage the holes drilled in the ground constitute small piles which provide the necessary constructional support for bearers engaging the bearer support engaged with the central nut or opening in the top collar of the support, or the central riser. It will be appreciated that the collar described above may have any desired shape, including a rectangular shape which is adapted to engage a bearer channel. Similarly, in the embodiment of Figure 1, the central nut 4 can be replaced by a metal support plate, similar to collar 13 to which the guide pipes are secured such as by welding.

The embodiment of Figure 4 provides a relatively inexpensive alternative to the embodiment of Figure 1 which lends itself to efficient fabrication techniques. In each of the above embodiments the anchor pipes can be held in the guide tubes by means of self tapping threaded screws or by means of narrow collars, such as 24 illustrated in Figure 4, engaging the upper ends of the pipes 20 to 22 and held in place by anchor screws 25. Where plastic anchor pipes are used, the anchoring performance can be improved by the insertion of a galvanized metal pipe within the anchor pipe and extending for at least part of the length of the plastic pipe, the galvanized metal pipe being filled with suitable grouting material to seal the pipe, the outer plastic pipe acting to protect the galvanized pipe against corrosion from the surrounding soil.

CLAIMS:

1. A constructional support including a central support means for a load bearing member having a central longitudinal axis, three guide means secured to said support means and arranged in an equilateral triangular configuration, said guide means
5 having passages with longitudinal axis extending angularly with respect to said central perpendicular axis and at an acute angle less than about 30° , said guide means being constructed to receive, as a snug fit, elongate substantially tubular anchor means for engaging the ground, and means for securing said anchor means in said guide means after said anchor means have been driven into the ground.
- 10 2. The constructional support of claim 1, wherein the central support means is adapted for engagement by a load bearing member adapted to support part of a building structure.
3. The constructional support of claim 2, wherein the load bearing support member is threaded, and the central supporting means is correspondingly threaded.
- 15 4. The constructional support of claim 2, wherein the load bearing support member has a tubular portion, said central support means being correspondingly tubular to receive the load bearing support, and means for securing the load bearing support member in the central support means.
5. The constructional support of claim 1, wherein the guide means include three
20 separate substantially tubular members secured in said equilateral triangular pattern by means of an apertured plate defining said central support means, said tubular members being connected in the required angular orientation by bracing struts which interconnect adjacent tubular members.
6. The constructional support of claim 1, wherein the guide means includes
25 three lengths of plastic pipe held in an equilateral triangular pattern by means of a molded plastics collar or plate defining said central means and engaging said pipes adjacent one end and holding them in an equilateral triangular pattern, said pipes also being engaged by a further molded plastic collar or plate closer to the other end of said pipes and which maintains said pipes in the required angular orientation
30 while bracing them with respect to each other.

7. The constructional support of claim 1, wherein the guide means include three separate tubular members of metal secured by welding to a central tubular riser, the tubular members being skewed in a plane parallel to the central longitudinal axis of the riser so that the ends of the tubular members are accessible for drilling and for receiving the anchor means without being fouled by the central riser.
8. The constructional support of any preceding claim, wherein said guide means are arranged at an acute angular to the central perpendicular axis at an angle of about 5° to 20° to the central perpendicular axis.
9. The constructional support of claim 8, wherein said angle is about 10° to 15° to the central perpendicular axis.
10. The support of any preceding claim, wherein the securing means include a threaded screw engaging each guide means and the corresponding anchor means.
11. The support of any one of claims 1 to 9, wherein the securing means is a collar secured in the upper end of each guide means.
12. A constructional support substantially as hereinbefore described with reference to Figure 1, Figures 2 and 3, or Figures 4 to 6 of the accompanying drawings.
13. A method of installing a constructional support as claimed in any preceding claim, including the steps of locating the constructional support in the required position on the ground, partially engaging the constructional support with the ground, inserting an elongate drilling means in each guide means in turn and drilling the ground along the axis of each guide means to a predetermined depth, inserting a tubular anchor means into each guide means, and securing each anchor means to each guide means or to the support.
14. The method of claim 13, wherein each anchor means is filled with a grouting material.
15. The method of claim 13 or 14, further comprising inserting an additional anchoring means into each anchor means to provide additional rigidity.

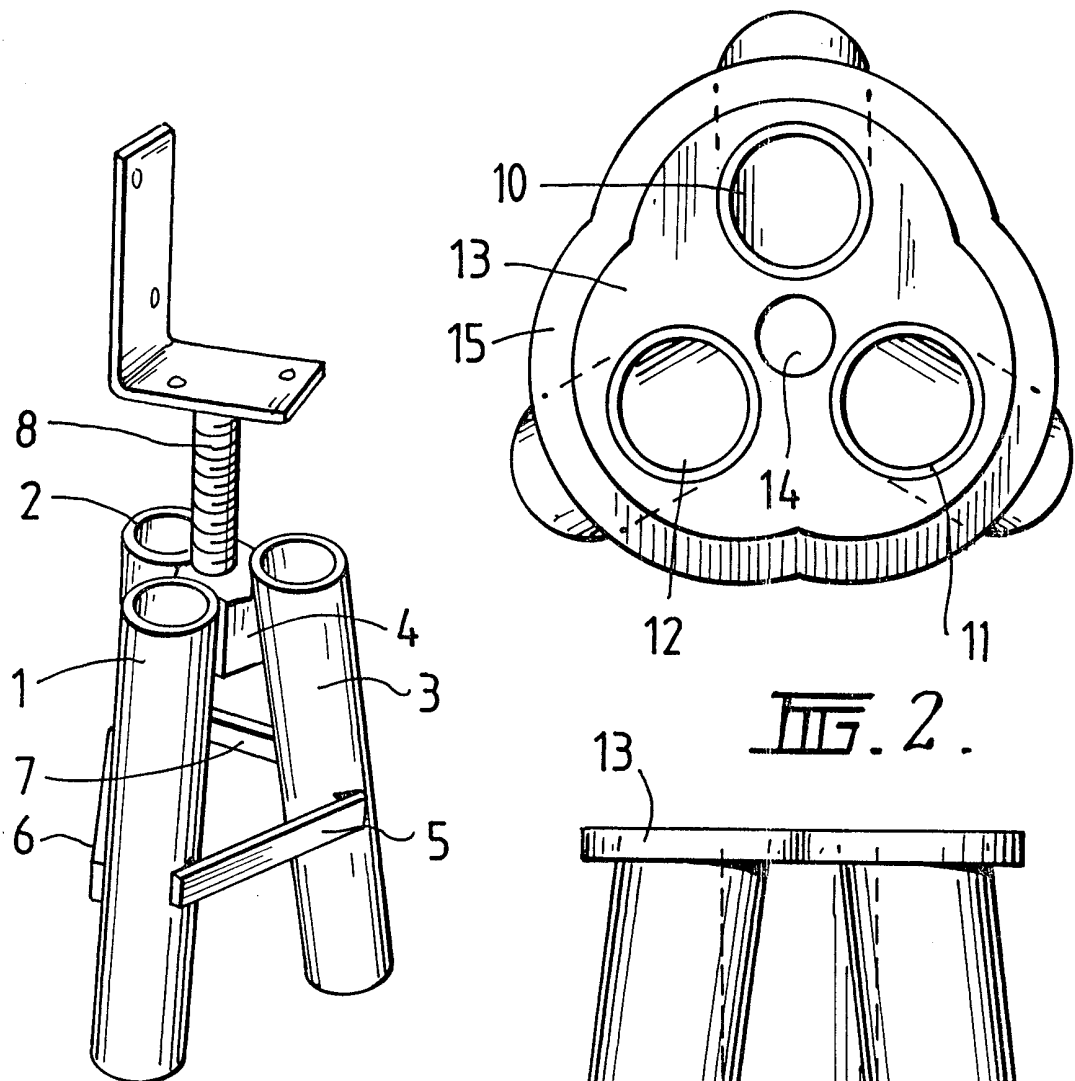
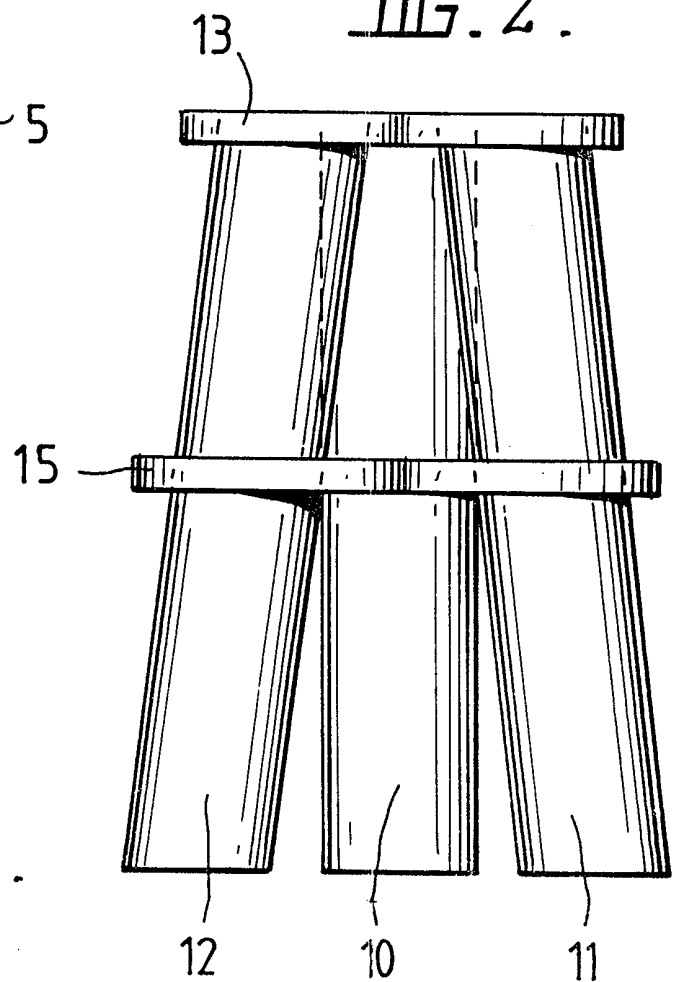
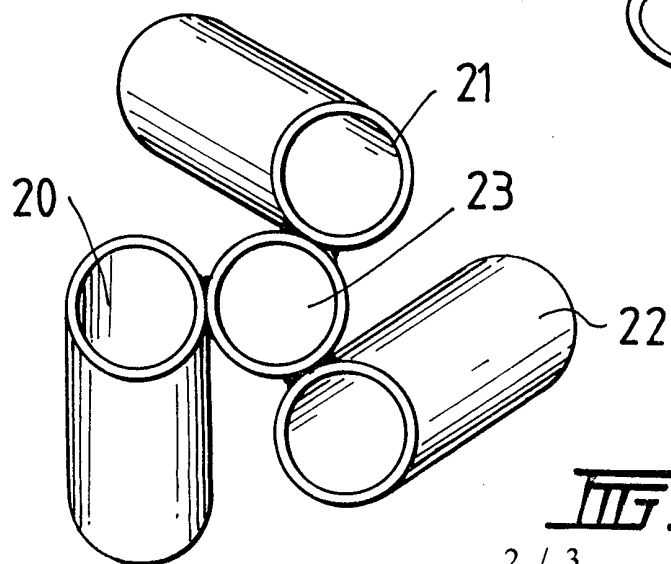
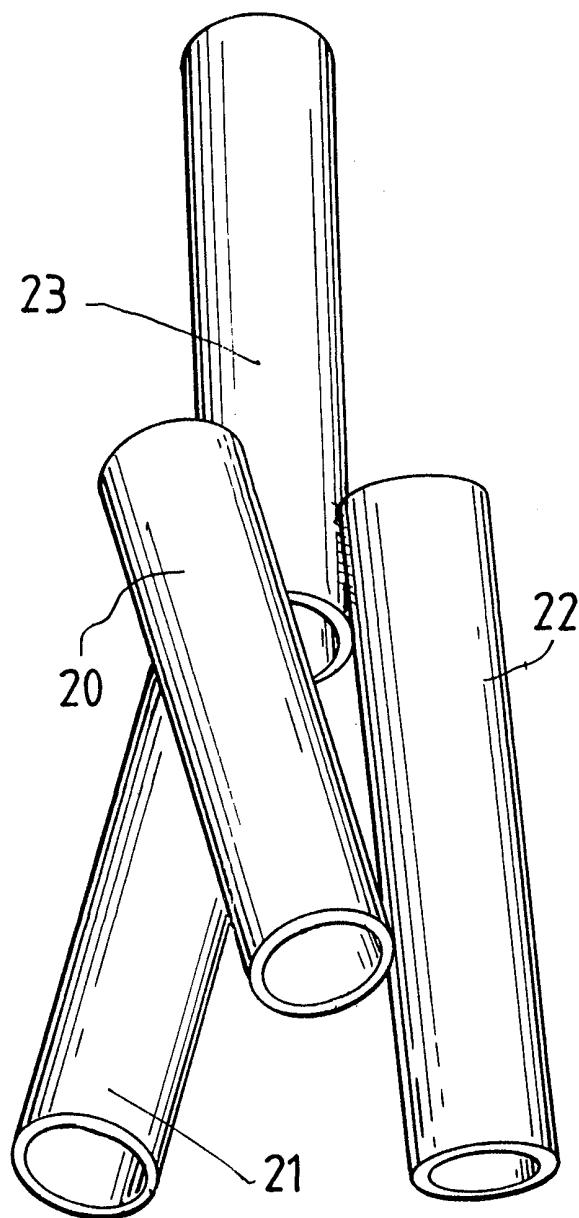
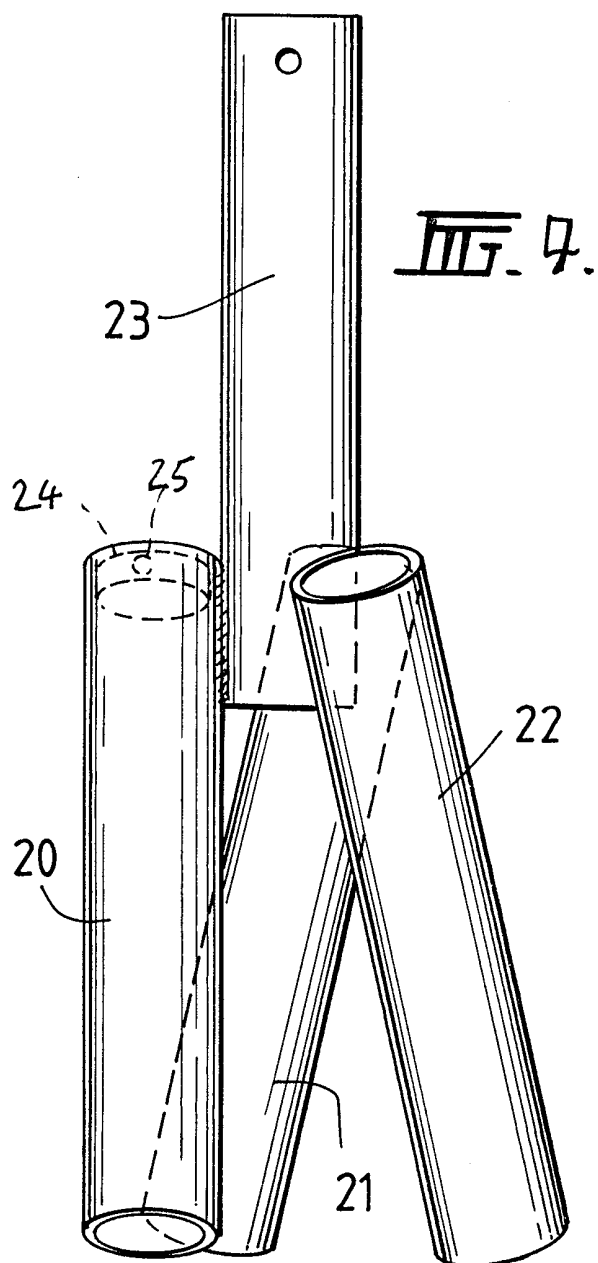


FIG. 1.

FIG. 3.





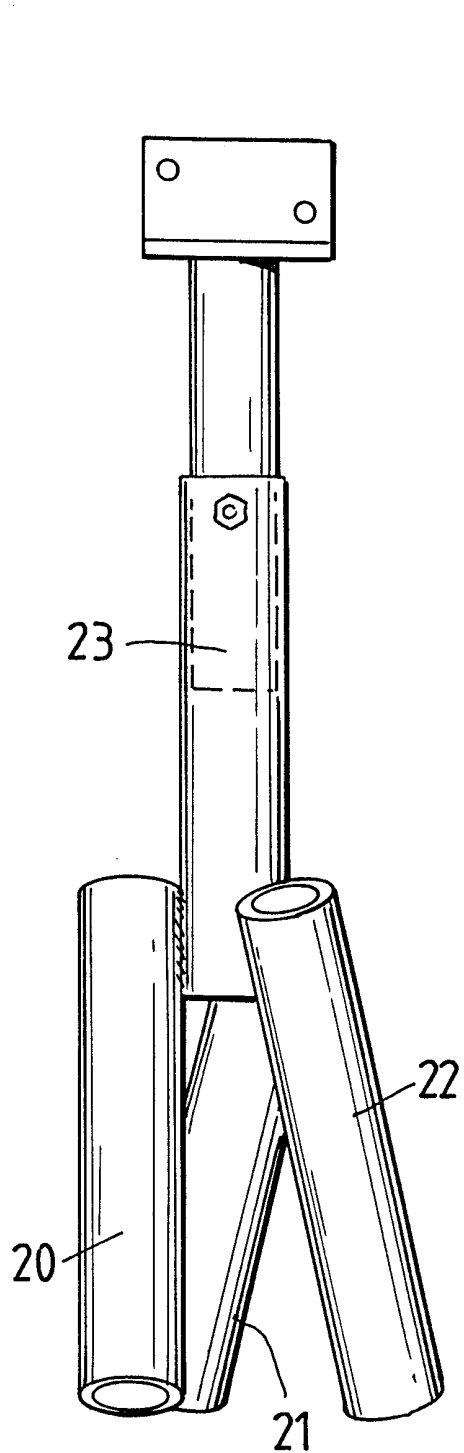


FIG. 4A.

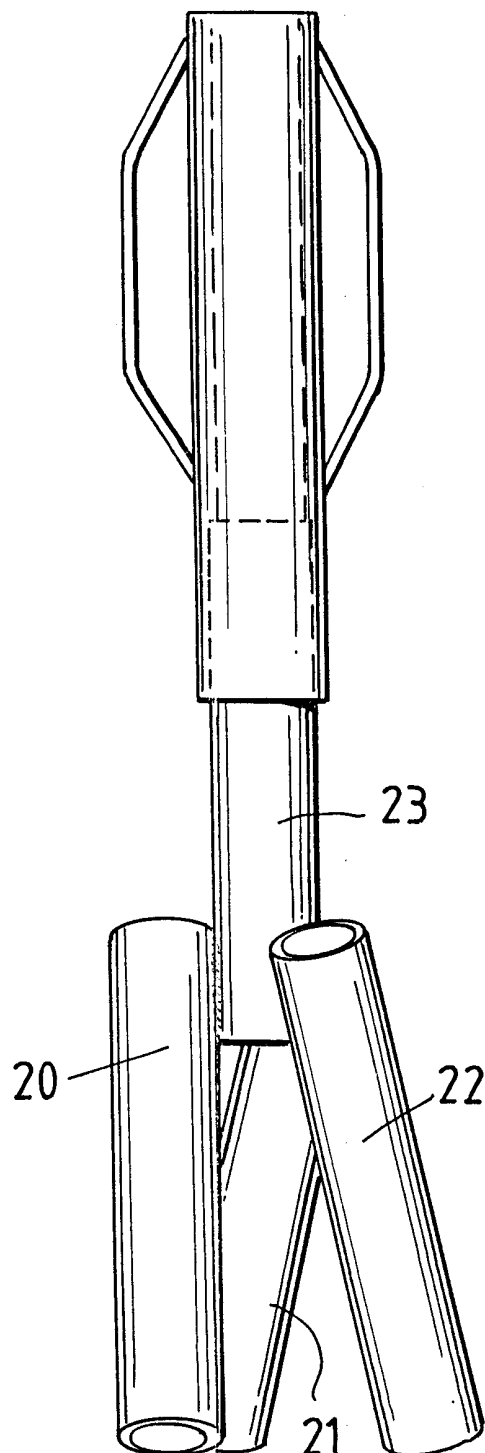


FIG. 5.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU 99/00539

A. CLASSIFICATION OF SUBJECT MATTER																						
Int Cl ⁶ : E02D 5/54, 5/38																						
According to International Patent Classification (IPC) or to both national classification and IPC																						
B. FIELDS SEARCHED																						
Minimum documentation searched (classification system followed by classification symbols) IPC E02D																						
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU IPC E02D 5/-																						
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) DERWENT footing:, foundation, boring, drill:, driv:, screw:, guid:, templ: JAPIO footing:, foundation, boring, drill:, driv:, screw:, guid:, templ:																						
C. DOCUMENTS CONSIDERED TO BE RELEVANT																						
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																				
X	NZ 272260 (HANSEN) 29 January 1997 Whole document	1 to 15																				
X	Patent Abstracts of Japan, JP, 61-057721 A (Nippon Steel Corp) 24 March 1986	1 to 15																				
<input type="checkbox"/> Further documents are listed in the continuation of Box C <input type="checkbox"/> See patent family annex																						
<p>* Special categories of cited documents:</p> <table border="0"> <tr> <td>"A"</td> <td>document defining the general state of the art which is not considered to be of particular relevance</td> <td>"T"</td> <td>later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"E"</td> <td>earlier application or patent but published on or after the international filing date</td> <td>"X"</td> <td>document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"L"</td> <td>document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"Y"</td> <td>document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"O"</td> <td>document referring to an oral disclosure, use, exhibition or other means</td> <td>"&"</td> <td>document member of the same patent family</td> </tr> <tr> <td>"P"</td> <td>document published prior to the international filing date but later than the priority date claimed</td> <td></td> <td></td> </tr> </table>			"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E"	earlier application or patent but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family	"P"	document published prior to the international filing date but later than the priority date claimed		
"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																			
"E"	earlier application or patent but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																			
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																			
"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family																			
"P"	document published prior to the international filing date but later than the priority date claimed																					
Date of the actual completion of the international search 25 August 1999		Date of mailing of the international search report 27 AUG 1999																				
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No.: (02) 6285 3929		Authorized officer COLIN FITZGIBBON Telephone No.: (02) 6283 2226																				