



(51) International Patent Classification:

B22D 23/00 (2006.01) *C22C 45/00* (2006.01)
C22B 9/20 (2006.01) *F27B 3/08* (2006.01)
C22C 1/00 (2006.01)

(21) International Application Number:

PCT/FI2012/050458

(22) International Filing Date:

11 May 2012 (11.05.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20115527 27 May 2011 (27.05.2011) FI

(71) Applicant (for all designated States except US): **AALTO UNIVERSITY FOUNDATION** [FI/FI]; P.O. Box 11000, FI-00076 Aalto Helsinki (FI).

(72) Inventors; and

(75) **Inventors/Applicants (for US only): SOINILA, Erno** [FI/FI]; Kivivuorenkuja 4 C 47, FI-01620 Vantaa (FI). **PIHLAJAMÄKI, Tuomas** [FI/FI]; Majurinkulma 2 C 67, FI-Espoo 02600 (FI). **BOSSUYT, Sven** [FR/FI]; Vattuniemenkatu 25 G 9, FI-Helsinki 00210 (FI). **HÄNNINEN, Hannu** [FI/FI]; Mechelininkatu 19 A 13, FI-00100 Helsinki (FI).

(74) **Agent: LEITZINGER OY**; Tammasaarenkatu 1, FI-00180 Helsinki (FI).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: AN ARC MELTING AND TILT CASTING APPARATUS

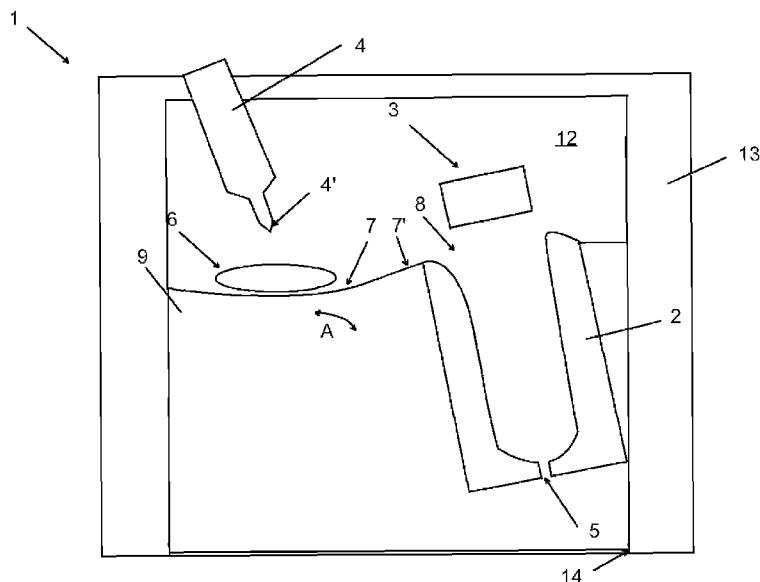


Fig. 1

(57) **Abstract:** The invention is related to an arc melting and tilt casting apparatus (1) having a casting (13) provided with a vacuum chamber (12) for housing a hearth having a melting trough (7) and pouring means (7'), arc-melting electrode means (4, 4') passing through the casing in the chamber (12), a mold (2) having a melt receiving orifice (8), vacuum generating means, sealing means for maintaining the vacuum in the chamber and tilting means for tilting the apparatus to cause the melt (6) to flow from the melting trough via the pouring means in the mold through the mold orifice. The hearth and mold (2) are connected together and moveable as a single unit (9) in the vacuum chamber and out from the chamber.

AN ARC MELTING AND TILT CASTING APPARATUS

The present invention is related to a combined arc melting and tilt casting apparatus used, e.g. for the manufacture of bulk metallic glass materials.

5

Tilt casting is reported to produce the best fatigue endurance in Zr-based bulk metallic glasses. Incorporating the alloying and casting facilities in a single piece of equipment reduces the amount of laboratory space and capital investment needed. Eliminating the sample transfer step from the
10 production process also saves time and reduces sample contamination. The glass forming ability in many alloy systems, such as Zr-based glass-forming alloys, deteriorates rapidly with increasing oxygen content of the specimen.

Bulk metallic glasses are amorphous metals, with a diameter larger than 1
15 mm, that solidified without detectable crystallization. Upon heating from the solid state these alloys exhibit a glass transition, after which they remain metastable for a finite length of time in the super-cooled liquid region, before crystallizing. Enhanced stability against crystallization is usually achieved by alloying multiple elements with significant difference ($>12\%$) in atomic
20 radius and negative heats of mixing among constituent elements. The critical casting diameters of known BMG alloys typically range from 1 mm to 100 mm. BMG alloys have been found in many different alloy groups (Pd-, Mg-, Ln-, Zr-, Ti-, Fe-, Co-, Ni- and Cu-based systems) and new alloys have been discovered and reported with a variety of different properties. By casting
25 BMG alloys, without cold working or heat treatment, complex shapes can be produced with excellent mechanical properties: purely plastic deformation up to a yield strain of typically 2 %, resulting in tensile strength from 1500 MPa to 5500 MPa, with Youngs modulus from 70 MPa to 275 MPa. The lack of grain boundaries in the BMG materials also results in very accurate surface
30 finish and enhances corrosion resistance. Several recent reviews testify to

the widespread interest in these materials both from a fundamental science perspective and for practical applications.

Different methods may be used to produce amorphous metals, each with its own advantages and disadvantages, whose relative importance depends on the alloy composition and the intended purpose. Strictly speaking, an amorphous solid is called a glass only if it was formed when a liquid state underwent a glass transition. Thus, metallic glasses are formed by melting the constituents to obtain a molten alloy with the desired composition, and then quenching the molten alloy below its glass transition temperature. Often, pre-alloying to obtain the desired composition and quenching to the glassy state are entirely separate processes, carried out in different apparatuses. Prior to the discovery of bulk glass-forming alloy compositions, the rapid quenching methods required to avoid crystallization for most metallic glass-formers meant that these materials could be produced in glassy form only as thin ribbons, foils or wires. The significance of BMGs can be attributed in large part to the versatility of metal mold casting methods in producing different shapes, as well as larger objects, out of metallic glass. If needed, casting can be followed by additional shaping or patterning steps — involving machining operations or superplastic forming in the viscous super-cooled liquid region — but usually the pre-alloying and casting steps are decisive for the quality of the final part.

For alloying, induction melting and arc melting under inert atmosphere are commonly used, both with water-cooled copper crucibles. Both methods allow precise control of the melting process in laboratory scale production. Typically, the process chamber is repeatedly evacuated to a pressure below 1×10^{-3} Pa and backfilled with purified argon, then purged of any remaining oxygen by titanium gettering before the constituent metals are melted for alloying. It is standard practice to flip over the pre-alloyed ingot and remelt it several times to ensure that its composition is uniform. When the process

chamber must be opened to air to flip the ingot, renewing the inert atmosphere takes time, wastes argon, and risks contaminating the BMG with oxygen. Oxygen is harmful for BMG manufacture because, for some of the phases whose crystallization competes with glass formation, the crystallization kinetics are enhanced by oxygen. As a result, BMG samples contaminated with oxygen typically are inferior to high-purity samples. So not only is it quicker and more economical to perform the necessary manipulation of the ingot without repeatedly opening the process chamber: it also produces better samples.

10

For casting BMG, variants of metal mold casting are most commonly used. The method of quenching described in the earliest reports of bulk metallic glass formation in the Pd-Ni-P system —and earlier work on marginally bulk glass forming Pd-Si based alloys — did not involve metal mold casting. For some alloys, direct quenching of remelted pre-alloyed ingots in a fused silica container, especially in combination with fluxing, is still the preferred method for making high-quality BMG samples. However, it is difficult to produce complex shapes by this method, and the dimensional tolerances and surface quality obtained by direct quenching methods are not as good as those obtained by metal mold casting. A relatively simple version of metal mold casting consists of induction melting an pre-alloyed ingot in a fused silica crucible that has an orifice at the bottom, and then applying gas pressure to eject the molten BMG forming alloy into a mold placed beneath the crucible. High vacuum induction melting and argon pressure casting apparatus, with a linear feedthrough for moving the fused quartz crucible from the induction coil to the mold orifice, was found to be very versatile in easily producing different specimen shapes, such as bars, rods, wedges, rings, bar, and "dogbone" tensile specimen. In a laboratory setting —where process conditions are often varied —it is particularly convenient to be able to view the sample through the quartz crucible during melting. However, because the same quartz crucible is a possible source of oxygen contamination, it

30

may sometimes be preferable to use other crucible materials, such as graphite. More sophisticated casting methods such as suction casting, tilt casting, squeeze casting and cap casting may produce better quality specimens, e.g., because they can more consistently and more uniformly fill
5 the mold and achieve higher cooling rates. In particular, BMG specimens produced by the combination of tilt casting with cap casting or squeeze casting, compared to those produced by conventional tilt casting, have been reported to exhibit larger critical casting diameter and improved ductility.

10 The aim of the present invention is to create a versatile instrument, in which high purity conditions can be maintained throughout the process, even when melting alloys with high affinity for oxygen. To this end the arc melting and tilt casting apparatus having a casing provided with a vacuum chamber for housing a hearth having a melting trough and pouring means, arc-melting
15 electrode means passing through the casing in the chamber, a mould having a melt receiving orifice, vacuum generating means, sealing means for maintaining the vacuum in the chamber and tilting means for tilting the apparatus to cause the melt to flow from the melting trough via the pouring means in the mold through the mold orifice, is characterized in that the
20 hearth and mold are connected together and moveable as a single unit in the vacuum chamber and out from the chamber.

The design of the present invention provides a high-vacuum chamber to be filled with a low-oxygen atmosphere, and takes special care to keep the
25 system hermetically sealed throughout the process. In particular, movements of the arc-melting electrode and sample manipulator arm are accommodated by deformable metal bellows, rather than sliding O-ring seals, and the whole furnace is tilted for tilt casting.

30 It is known that in high vacuum systems each feedthrough and each seal produces a measurable leak. Sliding O-ring seals, where a moving surface

slides against the O-ring that provides the vacuum seal, are particularly prone to leaking. Also, when a vacuum chamber has been opened to atmosphere, it takes a long time to evacuate moisture adsorbed from the air onto the inside surfaces of the vacuum chamber^{7 9}. To provide the high-purity conditions desired for BMG processing, the main process chamber should therefore have as few feedthroughs and as little surface area as possible. Nevertheless, the apparatus should allow the full range of motions and manipulations needed to carry out each step of the process, preferably without opening the chamber to atmosphere.

10

The apparatus is equipped with a manipulator arm so that, for pre-alloying, the sample can be flipped and remelted without opening the chamber. It also has provisions for piston suction casting and cap casting for small specimens. For a wide range of alloy compositions and sample sizes, the complete process from pre-alloying to high-quality net-shape casting can be carried out in a continuous sequence using this apparatus. Furthermore, the critical feedthroughs in this apparatus feature ultra-high vacuum (UHV) construction methods, using flexible metal bellows for all moveable parts, and an all-metal gas line connects the chamber to a supply of high-purity inert gas. Thus, a high-purity atmosphere can be maintained throughout the entire processing sequence.

15
20

The invention will be described more specifically in the following with reference to the attached drawing the only Fig. 1 of which shows schematically an exemplary embodiment of the present invention. Only those features which are needed for understanding the invention have been shown in the Fig. 1 and it should be understood that the apparatus includes several other features necessary for its operation but they are obvious for one skilled in the art and, therefore, they are not considered necessary to be described here.

25
30

The apparatus 1 as shown in Fig. 1 includes a casing 13 having a high-vacuum chamber 12 therein. The arc-melting electrode 4 having, e.g. a tungsten tip 4', passes through the top side of the casing. A water-cooled hearth having a melting trough 7 and pouring means 7' is placed in the vacuum chamber. A mold 2 having a melt receiving orifice 8 is also inside the vacuum chamber 12. The apparatus includes also vacuum generating means (not shown), sealing means (not shown) for maintaining the vacuum in the chamber and tilting means (not shown) for tilting the apparatus to cause the melt 6 to flow from the melting trough 7 via the pouring means in the mold 2 through the mold orifice 8. An arrow A shows tilting of the apparatus. The improved feature of the present invention is that the hearth and mold are connected together and moveable as a single unit 9 in the vacuum chamber and out from the chamber. In the embodiment shown in Fig. 1 the unit 9 is raised from the bottom side of the apparatus through an opening 14.

Connection 5 for suction casting and means 3 for cap casting are also provided in the embodiment shown. These means are preferably connected to the unit 9 by connecting means (not shown) to be moved in the vacuum chamber and out from the chamber together with the unit 9.

The water-cooled copper hearth inside the chamber features a single large melting trough 7 with a pouring nozzle 7' leading to the mould orifice 8, and a smaller trough (not shown) for titanium gettering. The hearth is attached from below, to avoid any "internal leaks" from gas pockets that might otherwise be trapped between the hearth and the chamber. A standard ISO-K 200 O-ring seal (not shown) with centering ring separates the vacuum from the cooling water circulating underneath the copper hearth. Belleville spring washers (not shown) ensure that differential thermal expansion when the furnace is operated does not cause excessive decreases or increases in the clamp force maintained on the O-ring seal. To load a new charge into the

furnace, the unit 9 is released from the rest of the chamber and lowered on a pneumatic lift (not shown) provided for that purpose.

An arc-melter necessarily includes a feedthrough for the arc melting electrode. The electrode is a water-cooled conductor that can carry an electrical current up to 500 A and can handle the 30 kV high-voltage arc-ignition spark. This current needs to be electrically isolated from the chamber potential at operating pressures and atmospheres to avoid damage to the chamber. Furthermore, the electrode should be moveable; with a freely moveable electrode tip, the operator can deliver the energy of the plasma arc precisely where it is needed to melt the sample. The feedthrough should allow a range of motions covering every possible position of the sample in the melting trough as well as the titanium getter. This freedom of movement is realized with a flexible edge-welded metal bellows (not shown), between the top side of the chamber and the electrical feedthrough (not shown) for the electrode. The electrical feedthrough is constructed of two fluoropolymer (PTFE) insulators clamped onto either side of a copper flange which is brazed onto the electrode rod. Standard ISO-K 100 O-ring seals and centering rings seal the vacuum side. The tungsten electrode tip 4' is secured with two screws to the brazed electrode tip assembly which seals the end of the water-cooled electrode rod.

To assist the operator with delicate movements of the electrode tip 4' and to prevent movements that would damage the hearth or the bellows, a mechanism for supporting the electrode is also necessary. The weight of the electrode rod and the atmospheric pressure when the chamber is evacuated amount to a force in excess of 800 N drawing the electrode towards the copper hearth. A mechanism (not shown) with pneumatically actuated servo control in the vertical direction carries this load.

Tilt casting requires a mechanism for pouring the melt from the crucible into the mold. Often this is done with a sliding O-ring seal, in which a rigid connector carrying cooling water for the metal crucible also allows to tilt the crucible towards the mold. In the present apparatus, the whole chamber is
5 tilted. This eliminates a potentially troublesome sliding O-ring seal.

Claims

1. An arc melting and tilt casting apparatus (1) having a casing (13) provided with a vacuum chamber (12) for housing a hearth having a melting trough
5 (7) and pouring means (7'), arc-melting electrode means (4, 4') passing through the casing in the chamber (12), a mold (2) having a melt receiving orifice (8), vacuum generating means, sealing means for maintaining the vacuum in the chamber and tilting means for tilting the apparatus to cause the melt (6) to flow from the melting trough via the pouring means in the
10 mold through the mold orifice, **characterized** in that the hearth and mold (2) are connected together and moveable as a single unit (9) in the vacuum chamber and out from the chamber.
2. The apparatus of claim 1, **characterized** in that the casing (13) has an
15 opening (14) in the bottom side thereof and the hearth and mold unit (9) is moveable in the vacuum chamber (12) from below through the opening (14).
3. The apparatus of claim 1 or 2, **characterized** in that it further includes means for cap casting (3) and/or suction casting (5).
20
4. The apparatus of claim 3, **characterized** in that the means for cap casting (3) and/or suction casting (5) are connected to the unit (9) to be moved together with the unit.

1/1

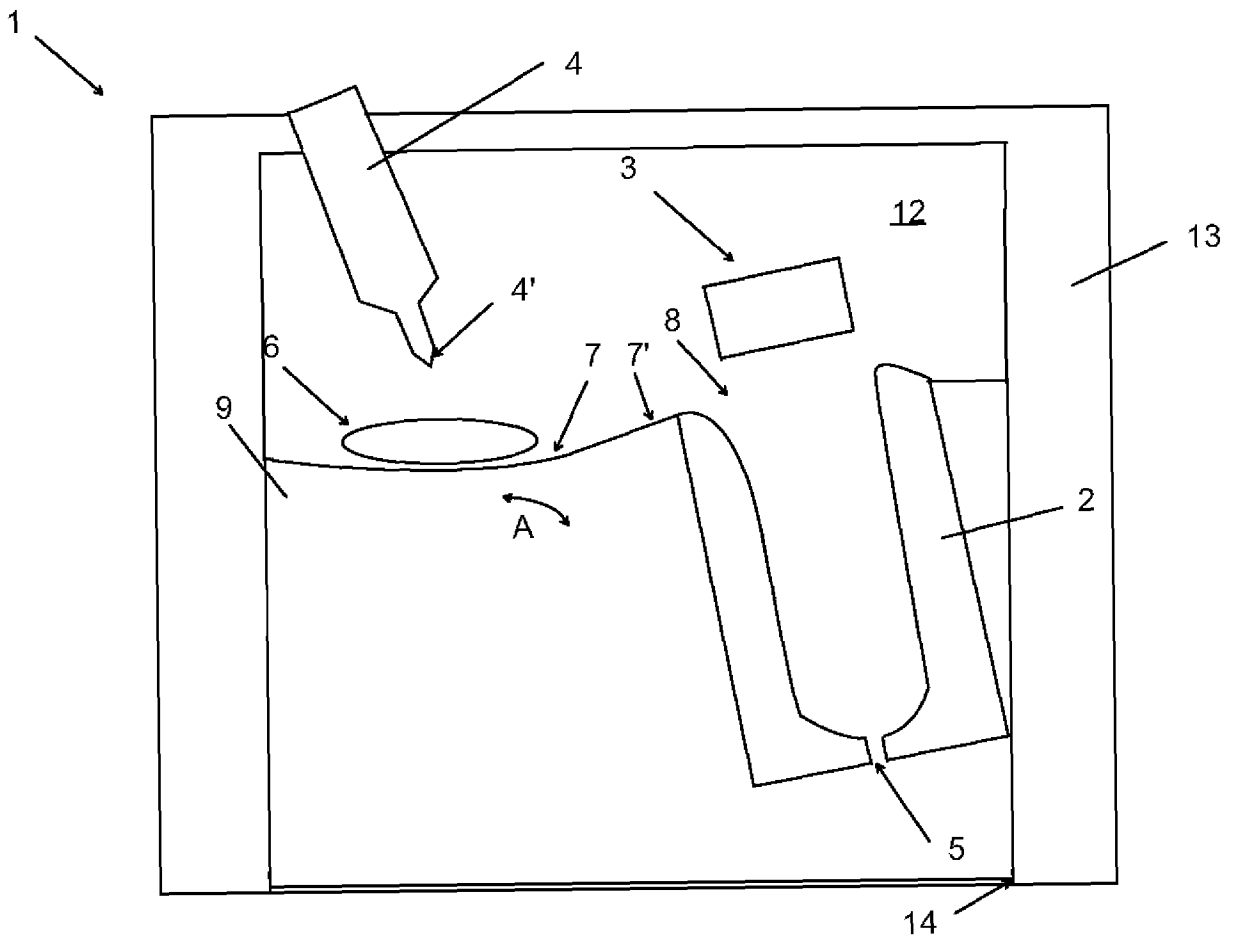


Fig. 1

INTERNATIONAL SEARCH REPORT

International application No
PCT/FI2012/050458

A. CLASSIFICATION OF SUBJECT MATTER

INV. B22D23/00 C22B9/20 C22C1/00 C22C45/00 F27B3/08
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B22D C22B C22C F27B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2003 290909 A (YOKOYAMA YOSHIHIKO; NISSHIN GIKEN KK) 14 October 2003 (2003-10-14)	1,2
Y	abstract paragraph [0028]; figures 1-5 -----	3,4
Y	JP 2009 068101 A (UNIV TOHOKU) 2 April 2009 (2009-04-02) abstract paragraphs [0007], [0009]; figures 1-10 -----	3,4
A	DE 35 21 086 A1 (MKB ENEBRA METALLGUSS GES MBH [DE]) 18 December 1986 (1986-12-18) the whole document -----	1,2
A	US 3 977 462 A (OHARA ISAO) 31 August 1976 (1976-08-31) the whole document ----- -/--	1,2



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

16 August 2012

Date of mailing of the international search report

28/08/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Baumgartner, Robin

INTERNATIONAL SEARCH REPORT

International application No

PCT/FI2012/050458

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2 125 080 A (MERRICK ALBERT W) 26 July 1938 (1938-07-26) the whole document -----	1,2

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/FI2012/050458

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 2003290909	A	14-10-2003	JP 4164851 B2	15-10-2008
			JP 2003290909 A	14-10-2003

JP 2009068101	A	02-04-2009	NONE	

DE 3521086	A1	18-12-1986	NONE	

US 3977462	A	31-08-1976	DE 2500521 A1	04-12-1975
			IT 1038141 B	20-11-1979
			JP 875904 C	10-08-1977
			JP 50147195 A	26-11-1975
			JP 52001235 B	13-01-1977
			US 3977462 A	31-08-1976

US 2125080	A	26-07-1938	NONE	
