

(19)



(11)

**EP 4 290 143 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**19.02.2025 Bulletin 2025/08**

(21) Application number: **22177831.9**

(22) Date of filing: **08.06.2022**

(51) International Patent Classification (IPC):

**F24D 19/10** <sup>(2006.01)</sup> **F24D 17/00** <sup>(2022.01)</sup>  
**F24H 1/20** <sup>(2022.01)</sup> **F24H 15/148** <sup>(2022.01)</sup>  
**F24H 15/152** <sup>(2022.01)</sup> **F24H 15/172** <sup>(2022.01)</sup>  
**F24H 15/223** <sup>(2022.01)</sup> **F24H 15/225** <sup>(2022.01)</sup>  
**F24H 15/269** <sup>(2022.01)</sup> **F24H 15/355** <sup>(2022.01)</sup>  
**F24H 15/421** <sup>(2022.01)</sup> **F24H 15/457** <sup>(2022.01)</sup>  
**G05B 17/00** <sup>(2006.01)</sup>

(52) Cooperative Patent Classification (CPC):

**F24H 1/20; F24D 17/00; F24D 19/1063;**  
**F24H 15/148; F24H 15/152; F24H 15/172;**  
**F24H 15/223; F24H 15/225; F24H 15/269;**  
**F24H 15/355; F24H 15/421; F24H 15/457**

(54) **METHOD AND CONTROLLER TO OPERATE A HOT WATER STORAGE DEVICE HEATER AND HOT WATER STORAGE DEVICE**

VERFAHREN UND STEUERUNG FÜR DEN BETRIEB DER HEIZUNG EINER  
WARMWASSERSPEICHERVORRICHTUNG UND WARMWASSERSPEICHERVORRICHTUNG

PROCÉDÉ ET APPAREIL DE COMMANDE POUR FAIRE FONCTIONNER UN RÉCHAUFFEUR DE  
DISPOSITIF DE STOCKAGE D'EAU CHAUDE ET DISPOSITIF DE STOCKAGE D'EAU CHAUDE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB**  
**GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO**  
**PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:  
**13.12.2023 Bulletin 2023/50**

(73) Proprietor: **Pittway Sarl**  
**1180 Rolle (CH)**

(72) Inventors:

• **HURST, Andrew**  
**Blantyre G72 9BX (GB)**

• **BRYCE, Alastair Tan**  
**Queenzieburn G65 9EB (GB)**  
• **PROBIN, Robert John**  
**South Lanarkshire G74 1HG (GB)**

(74) Representative: **Sturm, Christoph**  
**Patentanwälte Sturm Weilnau Franke**  
**Partnerschaft mbB**  
**Unter den Eichen 5 (Haus C-Süd)**  
**65195 Wiesbaden (DE)**

(56) References cited:

**EP-A1- 3 078 942 WO-A1-2016/189416**  
**WO-A1-2022/035891 DE-A1- 102021 124 584**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** The present invention relates to a method to operate a hot water storage device. Further, the present invention relates to a controller to operate a hot water storage device and to a hot water storage device.

**[0002]** Hot water storage devices known from prior art comprise a tank configured to store water, wherein the tank has a bottom wall, a top wall and a side wall extending between the bottom wall and the top wall. Hot water storage devices known from prior art further comprise a heating unit positioned at a first distance from the bottom wall, wherein the heating unit is configured to heat the water stored within the tank, namely in such a manner that water heated by the heating unit rises up within the tank such that the heated water is stratified above unheated water within the tank. Hot water storage devices known from prior art further comprise a temperature sensor positioned at a distance from the bottom wall, the temperature sensor being configured to measure a water temperature of the heated water. Hot water storage devices known from prior art further comprise a controller being configured to control the heating unit and thereby the water temperature of the heated water stored within the tank. Heating of the water within the tank may be initiated when the temperature of the water within the tank falls under a respective threshold.

**[0003]** GB 2 518 365 A, US 2009 / 0 188 486 A1, US 11 060 763 B2, US 10 295 199 B2 and US 7 971 796 B2 disclose hot water storage devices.

**[0004]** Controllers of a hot water storage devices known from prior art keep permanently a defined water volume within the tank of the hot water storage device at a defined hot water temperature, either 24 hours per day and 7 days per week or according to a daily ON/OFF schedule of the hot water storage device when the hot water storage device is in the ON status. Keeping the defined water volume within the tank of the hot water storage device permanently at a defined hot water temperature is energy inefficient and creates carbon emissions when no actual hot water demand is present.

**[0005]** DE 10 2021 124 584 A1 and WO 2016/ 189 416 disclose further prior art.

**[0006]** Against this background a novel method to operate a hot water storage device as defined in claim 1 and a novel controller of a hot water storage device as defined in claim 11 as well as a novel hot water storage device as defined in claim 13 are provided that allow an energy efficient operation of a hot water storage device with lower carbon emissions.

**[0007]** The method according to claim 1 determines from a water temperature measurement signal provided by the at least one temperature sensor a water usage profile, said water usage profile providing for defined time intervals of a day and/or for defined days of a week a nominal temperature and a nominal volume of the heated water to be stored within the tank.

**[0008]** The method according to claim 1 operates the

heating unit in such a manner that for each defined time interval of a day and/or for each defined day of a week the actual temperature and the actual volume of the heated water stored within the tank corresponds automatically to the respective nominal value of the water usage profile.

**[0009]** According to claim 1, for each respective time interval of each respective day a confidence factor associated with the nominal temperature and the nominal volume of the heated water to be stored within the tank is determined, wherein the confidence factor depends on the frequency and from the amount of a hot water demand in the respective time interval of the respective day. Based on the confidence factor the nominal value pair used for the operation of the hot water storage device may be changed.

**[0010]** According to a first alternative, the at least one water temperature measurement signal provided by the at least one temperature sensor is provided to a database like a cloud-database, wherein the database determines the water usage profile providing for each respective time interval of a respective day of a week the nominal temperature and the nominal volume of the heated water to be stored within the tank, and wherein the controller operates the heating unit of basis of said water usage profile provided by the database to the controller. In the first alternative, the functionality of the method is split up between the database and the controller.

**[0011]** According to a second alternative, the at least one water temperature measurement signal provided by the at least one temperature sensor is provided to the controller, wherein the controller determines the water usage profile providing for each respective time interval of a respective day of a week the nominal temperature and the nominal volume of the heated water to be stored within the tank, and wherein the controller operates the heating unit of basis of said water usage profile. In the second alternative, the functionality of the method is provided by the controller only.

**[0012]** The controller of the hot water storage device according to claim 11 is configured to determine from a water temperature measurement signal provided by the at least one temperature sensor of the hot water storage device a water usage profile, said water usage profile providing for defined time intervals of a day and/or for defined days of a week a nominal temperature and a nominal volume of the heated water to be stored within the tank.

**[0013]** The controller of the hot water storage device according to claim 11 is configured to operate the heating unit of the hot water storage device in such a manner that for each defined time interval of a day and/or for each defined day of a week the actual temperature and the actual volume of the heated water stored within the tank of the hot water storage device corresponds automatically to the respective nominal value of the water usage profile.

**[0014]** The controller of the hot water storage device according to claim 11 is configured to determine for each respective time interval of each respective day a con-

fidence factor associated with the nominal temperature and the nominal volume of the heated water to be stored within the tank, wherein the confidence factor depends on the frequency and the amount of a hot water demand in the respective time intervals of the respective day.

**[0015]** The method as well as the controller of the hot water storage device according to the present disclosure allow an energy efficient operation of a hot water storage device with lower carbon emissions. The water usage profile is determined from the water temperature measurement signal provided by the at least one temperature sensor. Said water usage profile provides for each respective time interval of a day and for each respective day of a week the nominal temperature and the nominal volume of the heated water to be stored within the tank. So, the water usage profile does not only provide a nominal value for the water temperature but also a nominal value for the volume of the heated water to be stored within the tank.

**[0016]** Preferably, the water usage profile is determined from a first water temperature measurement signal provided by a first temperature sensor positioned at a second distance from the bottom wall of the tank and from a second water temperature measurement signal provided by the second temperature sensor positioned at a third distance from the bottom wall of the tank and/or from an average water temperature signal of the first water temperature measurement signal and the second water temperature measurement signal, wherein said second distance is greater than said first distance and said third distance is greater than said second distance. This allows an even more precise control of the temperature and of the volume of the heated water within the tank to provide an energy efficient operation of a hot water storage device with lower carbon emissions.

**[0017]** Preferably, the water usage profile is determined as a function of a change rate of the at least one water temperature measurement signal in the respective time interval of the respective day and/or as a function of a frequency and as a function of an amount of a hot water demand in the respective time interval of the respective day. This allows to determine the water usage profile in a reliable and simple manner.

**[0018]** Preferably, the water usage profile is determined in such a manner that for each respective time interval of each respective day of a week a nominal value pair comprising the nominal temperature and the nominal volume of the heated water to be stored within the tank is determined, namely a nominal value pair N of a set of nominal value pairs comprising at least the following nominal value pairs: pair 1: first nominal volume and first nominal temperature, pair 2: first nominal volume and second nominal temperature, pair 3: second nominal volume and first nominal temperature, pair 4: second nominal volume and second nominal temperature, wherein the second nominal volume is greater than the first nominal volume, and wherein the second nominal temperature is greater than the first nominal temperature.

The set of nominal value pairs on basis of which the water usage profile for each respective time interval of each respective day of a week is determined may comprise the following additional nominal value pair: pair 5: third volume and second nominal temperature, wherein the third nominal volume is greater than the second nominal volume. The set of nominal value pairs on basis of which the water usage profile for each respective time interval of each respective day of a week is determined may comprise the following additional nominal value pair: pair 0: fourth volume and fourth nominal temperature, wherein the fourth nominal volume is smaller than the first nominal volume and the fourth nominal temperature is smaller than the first nominal temperature. Pair 0 may correspond to an OFF status or STANDBY status of the hot water storage device 10. Pairs 1 to 5 all belong to an ON status of the hot water storage device 10. With pairs 1 to 4 a respective volume of heated water is stratified above unheated water within the tank. With pair 5 the tank may become de-stratified such that the full volume of the tank is filled with heated water. This allows a simple and reliable, energy efficient operation of a hot water storage device with lower carbon emissions using a limited number of nominal value pairs defining the nominal temperature and the nominal volume of the heated water to be stored within the tank.

**[0019]** Preferably, the confidence factor of a respective time interval is increased if the frequency of hot water demands and/or the amount of a hot water demand in the respective time interval is above a respective upper threshold within the respective time interval of the respective day. The confidence factor of a respective time interval is decreased if the frequency of hot water demands and/or the amount of a hot water demand in the respective time interval is below a respective lower threshold within the respective time interval of the respective day. The confidence factor of a respective time interval remains unchanged if the frequency of hot water demands and/or the amount of a hot water demand in the respective time interval is above a respective lower threshold and below the respective upper threshold. A change of the confidence factor of a respective time interval of a respective day may affect the confidence factor of time intervals adjoining the respective time interval in which the confidence factor has changed. Such a confidence factor allows a simple and reliable change of the nominal value pair used in a respective time interval to control temperature and volume of heated water stored within the tank of the hot water storage device and to provide an energy efficient operation of a hot water storage device with lower carbon emissions.

**[0020]** Preferably at an initial state or at an initialization state of the hot water storage device, the water usage profile of each time interval of each day is initialized with the pair N (N=2 or 3 or 4) of the nominal value pairs, preferably with pair 4. If the confidence factor of the respective time interval of the respective day is below a lower limit, then the water usage profile of the respec-

tive time is changed to pair N-1 of the nominal value pairs. If the confidence factor of the respective time interval of the respective day is above an upper limit, then the water usage profile of the respective time interval is changed to pair N+1 of the nominal value pairs. If the confidence factor of the respective time interval of the respective day is above the lower limit and below the upper limit, then the water usage profile of the respective time interval remains at pair N of the nominal value pairs. This allows an simple and reliable change of the nominal value pair used in a respective time interval to control temperature and volume of the heated water within the tank to provide an energy efficient operation of a hot water storage device with lower carbon emissions.

**[0021]** Further on, a hot water storage device as defined in the claim 15 having such a controller is provided.

**[0022]** Preferred developments of the invention are provided by the dependent claims and the description which follows. Exemplary embodiments are explained in more detail on the basis of the drawing, in which:

- Figure 1 shows a schematic block diagram of a hot water storage device having a tank, a heating unit, temperature sensors and a controller,
- Figure 2 the tank of the hot water storage device in different conditions,
- Figure 3 a detail of a water usage profile for time intervals of the same,
- Figure 4 a time diagram to illustrate some details how the determine the water usage profile.

**[0023]** Figure 1 shows a hot water storage device 10. The water hot storage device 10 comprises a tank 11 configured to store water. The tank 11 of the hot water storage device 10 has a bottom wall 12, a top wall 13 and a side wall 14 extending between the bottom wall 12 and the top wall 13.

**[0024]** The hot water storage device 10 further comprises a heating unit 15 positioned at a first distance from the bottom wall 12 of the tank 11. The heating unit 15 is configured to heat the water stored within the tank 11 in such a manner that water heated by the heating unit 15 rises up within the tank 11 such that the heated water is stratified above unheated water within the tank 11.

**[0025]** Figure 1 shows a pipe 16 through which heated water can be taken out of the tank 11 in order to provide the heated water to a hot water consumer 17. The pipe 16 is connected to the top wall 13 or to the side wall 14 adjacent to the top wall 13. Figure 1 further shows a pipe 18 through which unheated water can be provided to the tank 11 in order to replace the volume of water which has been taken out of the tank 11 through the pipe 16. The pipe 18 is connected to the bottom wall 12 or to the side wall 14 adjacent to the bottom wall 12.

**[0026]** The hot water storage device 10 further comprises at least one temperature sensor 19, 20 positioned at a distance from the bottom wall 12, wherein the at least

one temperature sensor 19, 20 is configured to measure a water temperature of the heated water stored within the tank 11.

**[0027]** In the preferred embodiment shown in Figure 1, the hot water storage device 10 comprises a first temperature sensor 19 positioned at a second distance from the bottom wall 12 of the tank 11, said second distance being greater than said first distance, and a second temperature sensor 20 positioned at a third distance from the bottom wall 12 of the tank 11, said third distance being greater than said second distance. Both temperature sensors 19, 20 are assigned to the side wall 14 of the tank. Both temperature sensors 19, 20 are configured to measure a water temperature of the heated water stored within the tank 11.

**[0028]** The hot water storage device 10 further comprises a controller 21. The controller 21 is configured to control the heating unit 15 and thereby the water temperature of the water stored within the tank 11.

**[0029]** The controller 21 provides a control signal to the heating unit 15 in order to control the operation of the heating unit 15 of the hot water storage device 10.

**[0030]** The controller 21 is configured to receive a respective water temperature measurement signal from the respective temperature sensor 19, 20.

**[0031]** Figure 1 further shows an optional recirculation pipe 22 extending between the pipe 16 and the tank 11. A pump 23 is assigned to the recirculation pipe 22. The pump 23 and recirculation pipe 22 may be used to recirculate the heated water taken out of the tank 11 through the tank 11. The recirculation pipe 22 is connected to the bottom wall 12 or to the side wall 14 adjacent to the bottom wall 12. With the pump 23 the water within the tank 11 may be de-stratified.

**[0032]** Controllers of a hot water storage device known from prior art keep permanently a de-fined water volume within the tank of the hot water storage device at a defined hot water temperature, either 24 hours per day and 7 days per week or according to a daily ON/OFF schedule of the hot water storage device when the same is in the ON status. Keeping the defined water volume within the tank of the hot water storage device permanently at a defined hot water temperature is energy inefficient and creates carbon emissions when no actual hot water demand is present.

**[0033]** According to the present disclosure, the controller 21 of the hot water storage device 10 is configured to determine from a water temperature measurement signal provided by at least one temperature sensor 19, 22 a water usage profile, said water usage profile providing for defined time intervals of a day and/or for defined days of a week a nominal temperature and a nominal volume of the heated water to be stored within the tank 11 of the hot water storage device 10.

**[0034]** Preferably, the controller 21 is configured to determine from a first water temperature measurement signal provided by the first temperature sensor 19 and from a second water temperature measurement signal

provided by the second temperature sensor 20 and/or from an average water temperature signal of the first water temperature measurement signal and the second water temperature measurement signal the water usage profile providing for defined time intervals of a day and/or for defined days of a week the nominal temperature and the nominal volume of the heated water to be stored within the tank 11 of the hot water storage device 10.

**[0035]** The controller 21 according to the present disclosure is configured to operate the heating unit 15 of the hot water storage device 10 in such a manner that for each defined time interval of a day and/or for each defined day of a week the actual temperature and the actual volume of the heated water stored within the tank 11 of the hot water storage device 10 corresponds automatically to the respective nominal value of the water usage profile.

**[0036]** The controller 21 of the hot water storage device 10 according to the present disclosure allows an energy efficient operation of a water storage device with lower carbon emissions.

**[0037]** If the controller 21 is configured to determine the water usage profile, the functionality of the present disclosure is provided by the controller 21 only. In this case the at least one water temperature measurement signal provided by the at least one temperature sensor 19, 20 is provided to the controller 21, wherein the controller 21 determines the water usage profile providing for each respective defined time interval of a respective day of a week the nominal temperature and the nominal volume of the heated water to be stored within the tank, and wherein the controller 21 operates the heating unit 15 of basis of said water usage profile.

**[0038]** Alternatively, the functionality of the present disclosure may be split up between the controller 21 and a database 24 like a cloud database. In this alternative, the at least one water temperature measurement signal provided by the at least one temperature sensor 19, 20 is provided to the database 24 preferably through the controller 21, wherein the database 24 determines the water usage profile providing for each respective defined time interval of a respective day of a week the nominal temperature and the nominal volume of the heated water to be stored within the tank, and wherein the controller 21 operates the heating unit 15 of basis of said water usage profile provided by the database 24 to the controller 21.

**[0039]** Figure 2 shows the tank 11 in different conditions. The conditions can be provided with the method and controller 21 of the present disclosure.

**[0040]** In condition I of Figure 2, the tank 11 stores a first volume V1 of heated water being stratified above unheated water within the tank 11. In condition I of Figure 2, the volume V1 has a size that the first, lower temperature sensor 19 measures the temperature of the unheated water and the second, upper temperature sensor 20 measures the temperature of the heated water. The second, upper temperature sensor 20 measures the

temperature of the heated water of volume V1 in a lower section of volume V1, preferably adjacent to or abutting a lower boundary surface of volume V1. In condition I of Figure 2, the heated water being present at the first volume V1 may have a first, relative low temperature T1 of example given 45°C or a second, relative high temperature T2 of example given 60°C.

**[0041]** In condition II of Figure 2, the tank 11 stores a second volume V2 of heated water being stratified above unheated water within the tank 11. The second volume is greater than the first volume. In condition II of Figure 2, the volume V2 has a size that the first, lower temperature sensor 19 and the second, upper temperature sensor 20 both measure the temperature of the heated water. The first, lower temperature sensor 19 measures the temperature of the heated water of volume V2 in a lower section of volume V2, preferably adjacent to or abutting a lower boundary surface of volume V2. In condition II of Figure 2, the heated water being present at the first volume V2 may have the first, relative low temperature T1 of example given 45°C or the second, relative high temperature T2 of example given 60°C.

**[0042]** In both conditions I and II of Figure 2, the heated water of the respective volume V1, V2 is stratified above unheated water within the tank 11.

**[0043]** In condition III of Figure 2, the tank 11 stores a third volume V3 of heated water occupying the entire volume of the tank 11. In condition III of Figure 2, no unheated water is present within the tank 11 and the tank 11 is de-stratified. In condition III of Figure 2, the first, lower temperature sensor 19 and the second, upper temperature sensor 20 both measure the temperature of the heated water. In condition III of Figure 2, the heated water being present at the first volume V3 has the second, relative high temperature T2 of example given 60°C.

**[0044]** Depending on the above combination of the volumes V1, V2, V3 of the heated water within the tank 11 and the temperatures T1, T2 the tank 11 may have different conditions in case the hot water storage device 10 is in an ON status. A sixth condition may be the OFF status of hot water storage device 10.

**[0045]** The controller 21 of the hot water storage device 10 may be configured to determine the water usage profile as a function of the change rate of the at least one water temperature measurement signal in the respective time interval of the respective day. The controller 21 may further be configured to determine the water usage profile as a function of a frequency and as a function of an amount of a hot water demand in the respective time intervals of the respective day.

**[0046]** The controller 21 of the hot water storage device 10 may be configured to determine the water usage profile in such a manner that for each respective time interval of each respective day of a week a nominal value pair comprising the nominal temperature and the nominal volume of the heated water to be stored within the tank 11 is determined, namely a nominal value pair of a set of nominal value pairs comprising at least:

Pair 1: first nominal volume and first nominal temperature.

Pair 2: first nominal volume and second nominal temperature.

Pair 3: second nominal volume and first nominal temperature.

Pair 4: second nominal volume and second nominal temperature.

**[0047]** The second nominal volume of the heated water to be stored in the tank 11 is greater than the first nominal volume of the heated water to be stored in the tank 11. The second nominal temperature of the heated water to be stored in the tank 11 is greater than the first nominal temperature of the heated water to be stored in the tank 11.

**[0048]** Pairs 1 and 2 may be used to provide condition I of Figure 2, namely pair 1 a first volume V1 of heated water having the first temperature T1 and pair 2 a first volume V1 of heated water having the second temperature T2.

**[0049]** Pairs 3 and 4 may be used to provide condition II of Figure 2, namely pair 3 a second volume V2 of heated water having the first temperature T1 and pair 4 a second volume V2 of heated water having the second temperature T2.

**[0050]** The nominal value pairs on basis of which the water usage profile for each respective time interval of each respective day of a week is determined may comprise the following additional nominal value pair:

Pair 5: third nominal volume and second nominal temperature.

**[0051]** The third nominal volume is greater than the second nominal volume.

**[0052]** Pair 5 may be used to provide condition III of Figure 2, namely a third volume V3 of heated water having the second temperature T2.

**[0053]** The second nominal volume and thereby the second volume V2 is greater than the first nominal volume and thereby the first volume V1. A ratio R2/1 between the second nominal volume and thereby the second volume V2 and the first nominal volume and thereby the first volume V1 may be from 2:1 to 4:1, preferably from 2.5:1 to 3.5:1. The third nominal volume and thereby the third volume V3 is greater than the first and second nominal volume and thereby the first volume V1 and second volume V2. A ratio R3/1 between the third nominal volume and thereby the third volume V3 and the first nominal volume and thereby the first volume V1 may be from 3:1 to 5:1, preferably from 3.5:1 to 4.5:1. In any case the ratio R3/1 is greater than the ratio R2/1. In an embodiment the ratio R2/1 may be 3:1 and the ratio R3/1 may be 4:1. These ratios are of exemplary nature.

**[0054]** The nominal value pairs on basis of which the water usage profile for each respective time interval of each respective day of a week is determined may comprise the following additional nominal value pair:

Pair 0: fourth nominal volume and fourth nominal tem-

perature.

**[0055]** The fourth nominal volume is smaller than the first nominal volume and fourth nominal temperature is smaller than the first nominal temperature.

**[0056]** Pair 0 may be used to provide as sixth condition of the hot water storage device 10 corresponding preferably to the OFF status or STANDBY status of hot water storage device 10 in which no heated water is stored with the tank 11 of the hot water storage device 10.

**[0057]** The water usage profile based on nominal value pairs may also be determined by the database 24.

**[0058]** The controller 21 of the hot water storage device 10 is configured to determine for each respective time interval of each respective day a confidence factor associated with the nominal temperature and the nominal volume of the heated water to be stored within the tank 11.

**[0059]** The confidence factor depends on the frequency and from the amount of a hot water demand in the respective time interval of the respective day. The amount of a hot water demand corresponds to the duration of the same or to the volume of heated water taken out of the tank 11 in connection with the respective hot water demand. The amount of the hot water demand may be determined on basis of the time needed to replace the heated water taken out of the tank, namely to recover the hot volume and temperature of the water within the tank according to the nominal volume and nominal temperature.

**[0060]** The controller 21 of the hot water storage device 10 is configured to increase the confidence factor of a respective time interval if the frequency of hot water demands and/or the amount of a hot water demand in the respective time interval is above a respective upper threshold.

**[0061]** The controller 21 of the hot water storage device 10 is configured to decrease the confidence factor of a respective time interval if the frequency of hot water demands and/or the amount of a hot water demand in the respective time interval is below a respective lower threshold.

**[0062]** The controller 21 of the hot water storage device 10 is configured to remain the confidence factor of a respective time interval unchanged if the frequency of hot water demands and/or the amount of a hot water demand in the respective time interval is above a respective lower threshold and below the respective upper threshold.

**[0063]** The confidence factor of the respective time intervals may also be determined by the database 24.

**[0064]** A change of the confidence factor of a respective time interval of a respective day may affect the confidence factor of time intervals adjoining the respective time interval in which the confidence factor has changed on basis of a weight factor. Example give, if the confidence factor of a time interval may change by 10%, the confidence factor of time intervals adjoining said respective time interval may change by 5% if a weight factor of 50% is used or by 2.5% if a weight factor

of 25% is used.

**[0065]** At an initial state or at an initialization state of the hot water storage device 10, the water usage profile of each time interval of each day is initialized with the pair N (N=2 or 3 or 4) of the nominal value pairs. Preferably, the water usage profile of each time interval of each day is initialized with the pair 4, meaning that for each time interval of each day the controller 21 would use the second nominal volume and the second nominal temperature to control the volume and temperature of the heated water within the tank 11.

**[0066]** During operation of the hot water storage device 10 the confidence factor is determined as described above as a function of the frequency and as a function of the amount of a hot water demand in the respective time intervals of the respective day. The amount depends on the change rate of the respective water temperature measurement signal and preferably the time to recover the heated water within the tank 11 according to the nominal volume and nominal temperature.

**[0067]** If the confidence factor of the respective time interval of the respective day is below a lower limit, the water usage profile of said time interval is changed from pair N to pair N-1. In other words, if the initialized nominal value pair or actual nominal value pair of a respective time interval is pair 3 but the confidence factor of said respective time interval is below the lower limit, pair 2 is used as new nominal value pair for said respective time interval. If there is no pair N-1 available, the actual pair is preferably remained unchanged. There may be a factor in the above learning algorithm that provides a time-based decay or forgetfulness. This would allow the confidence factor to reduce over time if there is no water usage over a certain time frame. A rate of memory loss produced by this decay or forgetfulness may depend on the implementation of the hot water storage device 10 in the field.

**[0068]** If the confidence factor of the respective time interval of the respective day is above an upper limit, the water usage profile of said time interval is changed from pair N to pair N+1. In other words, if the initialized nominal value pair or actual nominal value pair of a respective time interval is pair 4 but the confidence factor of said respective time interval is above the upper limit, pair 5 is used as new nominal value pair for said respective time interval. If there is no pair N+1 available, the actual pair is remained unchanged.

**[0069]** If the confidence factor of the respective time interval of the respective day is above the lower limit and below the upper limit, the water usage profile of said time interval is remained at pair N. In other words, if the initialized nominal value pair or actual nominal value pair of a respective time interval is pair 5 and the confidence factor of the respective time interval of the respective day is above the lower limit and below the upper limit, pair 5 is kept unchanged as nominal value pair for said respective time interval.

**[0070]** Figure 3 shows a detail of a water usage profile

30 for six individual time intervals 31 of the water usage profile 30. In Figure 3, each time interval has a duration of 15 minutes. The time intervals 31 may have a longer or shorter duration than 15 minutes. Figure 3 further shows actual nominal value pairs 32 for each of the time intervals 31 defining the nominal temperature and the nominal volume of the heated water to be stored within the tank 11. Pair 3 is valid for time intervals 31a, 31b. Pair 5 is valid for time intervals 31c, 31d, 31e. Pair 4 is valid for time intervals 31f. Figure 3 further shows actual confidence factors 33 determined for each time intervals 31. For time interval 31a the confidence factor of 30% as been determined which may cause a subsequent change to pair 2 for time interval 31a. For time interval 31f the confidence factor of 90% as been determined which may cause a subsequent change to pair 5 for time interval 31f.

**[0071]** Figure 4 shows an average water temperature signal 40 determined from said first and second water temperature measurement signals provided by said first and second temperature sensors 19, 20. At times t1, t2 the respective change rate of the average water temperature signal 40 is relatively small but higher than a change rate caused by thermal losses of the tank 11. This is determined as a relatively small amount of a hot water demand in the respective time interval of the respective day. At time t3 the respective change rate of the average water temperature signal 40 is relatively high. This is determined as a relatively large amount of a hot water demand in the respective time interval of the respective day. Depending on the amount and frequency of such water demands the confidence factor 33 is determined for each time interval 31. The amount of a water demand may be determined on basis of the time needed to recover the water within the tank according to the nominal volume and nominal temperature.

**[0072]** The controller 21 defines both the temperature and volume of the heated water within the tank 11 of the water storage device on basis of the determined water usage profile. At a peak demand (corresponding to nominal value pair 5) the water of the whole volume V3 of the tank 11 is heated up to temperature T2 using the pump 23. This state elevates the thermal energy stored within the tank 11 above the normal maximum capacity of the tank 11. This state may be initiated by external factors like communicated energy tariffs from the cloud.

**[0073]** At time intervals with a small hot water demand a smaller volume V1 at the first temperature T1 is sufficient (corresponding to nominal value pair 1). The hot water storage device 10 minimizes the energy required to heat the water and minimizes heat loss over time as well as an energy inefficient operation of the hot water storage device 10. The hot water storage device 10 can be operated very energy efficiently with lower carbon emissions. Based on the detected water usage (see Figure 4) which influences the confidence factor 33 a learned pattern of nominal value pairs 32 is built up which is used to operate the hot water storage device 10 over time.

**[0074]** At an initial state or at an initialization state of the

controller 21, the nominal value pair 32 of each time interval is preferably chosen so that the hot water storage device 10 is operated by the controller 21 at full capacity. The controller 21 may adapt on basis of the confidence factors the nominal value pair 32 of each time interval 31 individually.

List of reference signs

**[0075]**

|    |                                  |    |
|----|----------------------------------|----|
| 10 | hot water storage device         | 10 |
| 11 | tank                             |    |
| 12 | bottom wall                      |    |
| 13 | top wall                         | 15 |
| 14 | side wall                        |    |
| 15 | heating unit                     |    |
| 16 | pipe                             |    |
| 17 | hot water consumer               |    |
| 18 | pipe                             | 20 |
| 19 | temperature sensor               |    |
| 20 | temperature sensor               |    |
| 21 | controller                       |    |
| 22 | recirculation pipe               |    |
| 23 | pump                             | 25 |
| 24 | database                         |    |
| 30 | water usage profile              |    |
| 31 | time interval                    |    |
| 32 | nominal value pair               | 30 |
| 33 | confidence factors               |    |
| 40 | average water temperature signal |    |

**Claims**

1. Method to operate a hot water storage device (10), the hot water storage device (10) comprising

a tank (11) configured to store water, 40  
 a heating unit (15) positioned at a first distance from a bottom wall (12) of the tank (11), the heating unit (15) being configured to heat the water stored within the tank (11) such that heated water rises up within the tank (11) and is stratified above unheated water within the tank (11), 45  
 at least one temperature sensor (19, 20) positioned at a distance from the bottom wall (12) of the tank (11) being greater than said first distance, 50  
 a controller (21) configured to control the heating unit (15),  
 the method comprising the following steps:

determine from a water temperature measurement signal provided by the at least one temperature sensor (19, 20) a water usage

profile, said water usage profile providing for defined time intervals of a day and/or for defined days of a week a nominal temperature and a nominal volume of the heated water to be stored within the tank, wherein the water usage profile is determined on basis of a frequency and of an amount of a hot water demand in the respective time intervals of the respective day, operate the heating unit (15) in such a manner that for each defined time interval of a day and/or for each defined day of a week the actual temperature and the actual volume of the heated water stored within the tank corresponds automatically to the respective nominal value of the water usage profile,

**characterized by** the following step:

determine for each respective time interval of each respective day a confidence factor associated with the nominal temperature and the nominal volume of the heated water to be stored within the tank, wherein the confidence factor depends on the frequency and the amount of a hot water demand in the respective time intervals of the respective day.

2. Method of claim 1, wherein

the hot water storage device (10) has a first temperature sensor (19) positioned at a second distance from the bottom wall (12) of the tank (11) and a second temperature sensor (20) positioned at a third distance from the bottom wall (12) of the tank (11), said second distance being greater than said first distance and said third distance being greater than said second distance,

said water usage profile is determined from a first water temperature measurement signal provided by the first temperature sensor (19) and from a second water temperature measurement signal provided by the second temperature sensor (20) and/or from an average water temperature signal of said first and second water temperature measurement signals.

3. Method of claim 1 or 2, wherein the water usage profile is determined on basis the change rate of the respective water temperature measurement signal in the respective time interval of the respective day.

4. Method of one of claims 1 to 3, wherein the water usage profile is determined in such a manner that for each respective time interval of each respective day of a week a nominal value pair comprising the nominal temperature and the nominal volume of the

heated water to be stored within the tank is determined, namely a nominal value pair of a set of nominal value pairs comprising at least:

- pair 1: first nominal volume and first nominal temperature, 5  
 pair 2: first nominal volume and second nominal temperature,  
 pair 3: second nominal volume and first nominal temperature, 10  
 pair 4: second nominal volume and second nominal temperature,  
 wherein the second nominal volume is greater than the first nominal volume,  
 wherein the second nominal temperature is greater than the first nominal temperature. 15
5. Method of claim 4, wherein the set of nominal value pairs on basis of which the water usage profile for each respective time interval of each respective day of a week is determined comprises the following additional nominal value pair: 20
- pair 5: third nominal volume and second nominal temperature, and/or 25  
 pair 0: fourth nominal volume and fourth nominal temperature,  
 wherein the third nominal volume is greater than the second nominal volume  
 wherein the fourth nominal volume is smaller than the first nominal volume and the fourth nominal temperature is smaller than the first nominal temperature. 30
6. Method of one of claims 1-5, wherein 35
- the confidence factor is increased if the frequency of hot water demands and/or the amount of a hot water demand is above a respective upper threshold within the respective time interval of the respective day, 40  
 the confidence factor is decreased if the frequency of hot water demands and/or the amount of a hot water demand is below a respective lower threshold within the respective time interval of the respective day, 45  
 the confidence factor remains unchanged if the frequency of hot water demands and/or the amount of a hot water demand is above a respective lower threshold and below the respective upper threshold. 50
7. Method of one of claims 1 to 6, wherein 55
- at an initial state or at an initialization state of the hot water storage device (10) the water usage profile of each time interval of each day of a week is initialized with the pair N (N=2 or 3 or 4) of the

nominal value pairs,  
 if the confidence factor of the respective time interval of the respective day is below a lower limit, the water usage profile is changed to pair N-1 of the nominal value pairs,  
 if the confidence factor of the respective time interval of the respective day is above an upper limit, the water usage profile is changed to pair N+1 of the nominal value pairs,  
 if the confidence factor of the respective time interval of the respective day is above the lower limit and below the upper limit, the water usage profile remains at pair N of the nominal value pairs.

8. Method of one of claims 6 to 7, wherein a change of the confidence factor of a respective time interval of a respective day affects the confidence factor of time intervals adjoining the respective time interval in which the confidence factor has changed.
9. Method of one of claims 1 to 8, wherein the at least one water temperature measurement signal provided by the at least one temperature sensor (19, 20) is provided to a database (24) like a cloud-database, wherein the database (24) determines the water usage profile providing for each respective defined time interval of a respective day of a week the nominal temperature and the nominal volume of the heated water to be stored within the tank, and wherein the controller (21) operates the heating unit (15) of basis of said water usage profile provided by the database (24) to the controller (21).
10. Method of one of claims 1 to 8, wherein the at least one water temperature measurement signal provided by the at least one temperature sensor (19, 20) is provided to the controller (21), wherein the controller (21) determines the water usage profile providing for each respective defined time interval of a respective day of a week the nominal temperature and the nominal volume of the heated water to be stored within the tank, and wherein the controller (21) operates the heating unit (15) of basis of said water usage profile.
11. Controller (21) for a hot water storage device (10),  
 the hot water storage device (10) comprising  
 a tank (11) configured to store water,  
 a heating unit (15) positioned at a first distance from a bottom wall (12) of the tank (11),  
 at least one temperature sensor (19, 20) positioned at a distance from the bottom wall (12) of the tank (11), said distance being greater than said first distance,

wherein the controller (21) is configured to control the heating unit (15) and thereby the water temperature of the water stored within the tank (11),

wherein the controller (21) is configured to determine from a water temperature measurement signal provided by the at least one temperature sensor (19, 20) a water usage profile, said water usage profile providing for defined time intervals of a day and/or for defined days of a week a nominal temperature and a nominal volume of the heated water to be stored within the tank, wherein the water usage profile is determined on basis of a frequency and of an amount of a hot water demand in the respective time intervals of the respective day,

wherein the controller (21) is configured to operate the heating unit (15) in such a manner that for each defined time interval of a day and/or for each de-fined day of a week the actual temperature and the actual volume of the heated water stored withing the tank corresponds automatically to the respective nominal value of the water usage profile, **characterized in that**

the controller (21) is configured to determine for each respective time interval of each respective day a confidence factor associated with the nominal temperature and the nominal volume of the heated water to be stored within the tank, wherein the confidence factor depends on the frequency and the amount of a hot water demand in the respective time intervals of the respective day.

12. Controller (21) of claim 11, wherein the controller is configured to automatically carry out the method of one of claims 2-10.

13. Hot water storage device (10), comprising

a tank (11) configured to store water, the tank (11) having a bottom wall (12), a top wall (13) and a side wall (14) extending between the bottom wall (12) and the top wall (13),

a heating unit (15) positioned at a first distance from the bottom wall (12), the heating unit (15) being configured to heat the water stored within the tank (11) in such a manner that water heated by the heating unit (15) rises up within the tank (11) such that the heated water is stratified above unheated water within the tank (11),

at least one temperature sensor (19, 20) positioned at a distance from the bottom wall (12), the at least one temperature sensor (19, 20) being configured to measure a water temperature of the heated water,

a controller (21) according to one of claims 11 to 12.

## Patentansprüche

1. Verfahren zum Betreiben einer Warmwasserspeichervorrichtung (10), wobei die Warmwasserspeichervorrichtung (10) aufweist:

einen Tank (11), der dazu ausgestaltet ist, Wasser zu speichern,

eine Heizeinheit (15), die in einem ersten Abstand von einer Bodenwand (12) des Tanks (11) positioniert ist, wobei die Heizeinheit (15) dazu ausgestaltet ist, das im Tank (11) gespeicherte Wasser derart zu erwärmen, dass erwärmtes Wasser im Tank (11) aufsteigt und über nicht erwärmtem Wasser im Tank (11) geschichtet ist, zumindest einen Temperatursensor (19, 20), der in einem Abstand von der Bodenwand (12) des Tanks (11) positioniert ist, der größer als der erste Abstand ist,

eine Steuervorrichtung (21), die dazu ausgestaltet ist, die Heizeinheit (15) zu steuern, wobei das Verfahren die folgenden Schritte aufweist:

Bestimmen eines Wassernutzungsprofils aus einem Wassertemperaturmesssignal, das durch den zumindest einen Temperatursensor (19, 20) bereitgestellt wird, wobei das Wassernutzungsprofil für definierte Zeitintervalle eines Tages und/oder für definierte Tage einer Woche eine Solltemperatur und ein Sollvolumen des im Tank zu speichernden erwärmten Wassers bereitstellt, wobei das Wassernutzungsprofil auf Basis einer Häufigkeit und einer Menge eines Warmwasserbedarfs in den jeweiligen Zeitintervallen des jeweiligen Tages bestimmt wird,

Betreiben der Heizeinheit (15) derart, dass für jedes definierte Zeitintervall eines Tages und/oder für jeden definierten Tag einer Woche die tatsächliche Temperatur und das tatsächliche Volumen des im Tank gespeicherten erwärmten Wassers automatisch dem jeweiligen Sollwert des Wassernutzungsprofils entspricht,

**gekennzeichnet durch** den folgenden Schritt:

Bestimmen eines Konfidenzfaktors für jedes jeweilige Zeitintervall jedes jeweiligen Tages, der der Solltemperatur und dem Sollvolumen des im Tank zu speichernden erwärmten Wassers zugeordnet ist, wobei der Konfidenzfaktor von der Häufigkeit und der Menge eines Warmwasserbedarfs in den jeweiligen Zeitintervallen des jeweiligen Tages abhängt.

## 2. Verfahren nach Anspruch 1, wobei

wobei die Warmwasserspeichervorrichtung (10) einen ersten Temperatursensor (19), der in einem zweiten Abstand von der Bodenwand (12) des Tanks (11) positioniert ist, und einen zweiten Temperatursensor (20) aufweist, der in einem dritten Abstand von der Bodenwand (12) des Tanks (11) positioniert ist, wobei der zweite Abstand größer als der erste Abstand ist und der dritte Abstand größer als der zweite Abstand ist, wobei das Wassernutzungsprofil aus einem ersten Wassertemperaturmesssignal, das durch den ersten Temperatursensor (19) bereitgestellt wird, und aus einem zweiten Wassertemperaturmesssignal, das durch den zweiten Temperatursensor (20) bereitgestellt wird, und/oder aus einem durchschnittlichen Wassertemperaturmesssignal des ersten und des zweiten Wassertemperaturmesssignals bestimmt wird.

## 3. Verfahren nach Anspruch 1 oder 2, wobei das Wassernutzungsprofil auf Basis der Änderungsrate des jeweiligen Wassertemperaturmesssignals in dem jeweiligen Zeitintervall des jeweiligen Tages bestimmt wird.

## 4. Verfahren nach einem der Ansprüche 1 bis 3, wobei das Wassernutzungsprofil derart bestimmt wird, dass für jedes jeweilige Zeitintervall jedes jeweiligen Tages einer Woche ein Sollwertpaar bestimmt wird, das die Solltemperatur und das Sollvolumen des im Tank zu speichernden erwärmten Wassers aufweist, nämlich ein Sollwertpaar aus einem Satz von Sollwertpaaren, der zumindest aufweist:

Paar 1: erstes Sollvolumen und erste Solltemperatur,  
 Paar 2: erstes Sollvolumen und zweite Solltemperatur,  
 Paar 3: zweites Sollvolumen und erste Solltemperatur,  
 Paar 4: zweites Sollvolumen und zweite Solltemperatur,  
 wobei das zweite Sollvolumen größer als das erste Sollvolumen ist,  
 wobei die zweite Solltemperatur größer als die erste Solltemperatur ist.

## 5. Verfahren nach Anspruch 4, wobei der Satz von Sollwertpaaren, auf dessen Basis das Wassernutzungsprofil für jedes jeweilige Zeitintervall jedes jeweiligen Tages einer Woche bestimmt wird, das folgende zusätzliche Sollwertpaar aufweist:

Paar 5: drittes Sollvolumen und zweite Solltemperatur, und/oder  
 Paar 6: viertes Sollvolumen und vierte Solltemperatur,

peratur,  
 wobei das dritte Sollvolumen größer als das zweite Sollvolumen ist,  
 wobei das vierte Sollvolumen kleiner als das erste Sollvolumen ist und die vierte Solltemperatur kleiner als die erste Solltemperatur ist.

## 6. Verfahren nach einem der Ansprüche 1-5, wobei

der Konfidenzfaktor erhöht wird, wenn die Häufigkeit von Warmwasseranforderungen und/oder die Menge einer Warmwasseranforderung innerhalb des jeweiligen Zeitintervalls des jeweiligen Tages über einem jeweiligen oberen Schwellenwert liegt,  
 der Konfidenzfaktor verringert wird, wenn die Häufigkeit von Warmwasseranforderungen und/oder die Menge einer Warmwasseranforderung innerhalb des jeweiligen Zeitintervalls des jeweiligen Tages unter einem jeweiligen unteren Schwellenwert liegt,  
 der Konfidenzfaktor unverändert bleibt, wenn die Häufigkeit von Warmwasseranforderungen und/oder die Menge einer Warmwasseranforderung über einem jeweiligen unteren Schwellenwert und unter dem jeweiligen oberen Schwellenwert liegt.

## 7. Verfahren nach einem der Ansprüche 1 bis 6, wobei

in einem Anfangszustand oder in einem Initialisierungszustand der Warmwasserspeichervorrichtung (10) das Wassernutzungsprofil jedes Zeitintervalls jedes Tages einer Woche mit dem Paar N (N=2 oder 3 oder 4) der Sollwertpaare initialisiert wird,  
 wenn der Konfidenzfaktor des jeweiligen Zeitintervalls des jeweiligen Tages unter einem unteren Grenzwert liegt, das Wassernutzungsprofil auf Paar N-1 der Sollwertpaare geändert wird,  
 wenn der Konfidenzfaktor des jeweiligen Zeitintervalls des jeweiligen Tages über einem oberen Grenzwert liegt, das Wassernutzungsprofil auf Paar N+1 der Sollwertpaare geändert wird,  
 wenn der Konfidenzfaktor des jeweiligen Zeitintervalls des jeweiligen Tages über dem unteren Grenzwert und unter dem oberen Grenzwert liegt, das Wassernutzungsprofil bei Paar N der Sollwertpaare bleibt.

## 8. Verfahren nach einem der Ansprüche 6 bis 7, wobei eine Änderung des Konfidenzfaktors eines jeweiligen Zeitintervalls eines jeweiligen Tages den Konfidenzfaktor von Zeitintervallen beeinflusst, die an das jeweilige Zeitintervall angrenzen, in dem sich der Konfidenzfaktor geändert hat.

## 9. Verfahren nach einem der Ansprüche 1 bis 8, wobei

das zumindest eine Wassertemperaturmesssignal, das durch den zumindest einen Temperatursensor (19, 20) bereitgestellt wird, einer Datenbank (24) wie einer Cloud-Datenbank bereitgestellt wird, wobei die Datenbank (24) das Wassernutzungsprofil be-  
 5 stimmt, das für jedes jeweilige definierte Zeitintervall eines jeweiligen Tages einer Woche die Solltemperatur und das Sollvolumen des im Tank zu speichernden erwärmten Wassers bereitstellt, und wobei die  
 10 Steuervorrichtung (21) die Heizeinheit (15) auf Basis des Wassernutzungsprofils betreibt, das der Steuervorrichtung (21) durch die Datenbank (24) bereitgestellt wird.

10. Verfahren nach einem der Ansprüche 1 bis 8, wobei das zumindest eine Wassertemperaturmesssignal, das durch den zumindest einen Temperatursensor (19, 20) bereitgestellt wird, der Steuervorrichtung (21) bereitgestellt wird, wobei die Steuervorrichtung (21) das Wassernutzungsprofil bestimmt, das für  
 20 jedes jeweilige definierte Zeitintervall eines jeweiligen Tages einer Woche die Solltemperatur und das Sollvolumen des im Tank zu speichernden erwärmten Wassers bereitstellt, und wobei die Steuervorrichtung (21) die Heizeinheit (15) auf Basis des  
 25 Wassernutzungsprofils betreibt.

11. Steuervorrichtung (21) für eine Warmwasserspeichervorrichtung (10),

wobei die Warmwasserspeichervorrichtung (10) aufweist:

einen Tank (11), der dazu ausgestaltet ist, Wasser zu speichern,  
 35 eine Heizeinheit (15), die in einem ersten Abstand von einer Bodenwand (12) des Tanks (11) positioniert ist, zumindest einen Temperatursensor (19, 20), der in einem Abstand von der Bodenwand (12) des Tanks (11) positioniert ist,  
 40 wobei dieser Abstand größer als der erste Abstand ist,

wobei die Steuervorrichtung (21) dazu ausgestaltet ist, die Heizeinheit (15) und dadurch die Wassertemperatur des im Tank (11) gespeicherten Wassers zu steuern,  
 45 wobei die Steuervorrichtung (21) dazu ausgestaltet ist, aus einem Wassertemperaturmesssignal, das durch den zumindest einen Temperatursensor (19, 20) bereitgestellt wird, ein Wassernutzungsprofil zu bestimmen, wobei das Wassernutzungsprofil für definierte Zeitintervalle eines Tages und/oder für definierte Tage einer Woche eine Solltemperatur und ein Sollvolumen des im Tank zu speichernden erwärmten Wassers bereitstellt, wobei das Wassernut-

zungsprofil auf Basis einer Häufigkeit und einer Menge eines Warmwasserbedarfs in den jeweiligen Zeitintervallen des jeweiligen Tages bestimmt wird,

wobei die Steuervorrichtung (21) dazu ausgestaltet ist, die Heizeinheit (15) derart zu betreiben, dass für jedes definierte Zeitintervall eines Tages und/oder für jeden definierten Tag einer Woche die tatsächliche Temperatur und das tatsächliche Volumen des im Tank gespeicherten erwärmten Wassers automatisch dem jeweiligen Sollwert des Wassernutzungsprofils entspricht, **dadurch gekennzeichnet, dass**  
 die Steuervorrichtung (21) dazu ausgestaltet ist, für jedes jeweilige Zeitintervall jedes jeweiligen Tages einen Konfidenzfaktor zu bestimmen, der der Solltemperatur und dem Sollvolumen des im Tank zu speichernden erwärmten Wassers zugeordnet ist, wobei der Konfidenzfaktor von der Häufigkeit und der Menge eines Warmwasserbedarfs in den jeweiligen Zeitintervallen des jeweiligen Tages abhängt.

12. Steuervorrichtung (21) nach Anspruch 11, wobei die Steuervorrichtung dazu ausgestaltet ist, das Verfahren nach einem der Ansprüche 2-10 automatisch durchzuführen.

13. Warmwasserspeichervorrichtung (10), aufweisend:

einen Tank (11), der dazu ausgestaltet ist, Wasser zu speichern, wobei der Tank (11) eine Bodenwand (12), eine obere Wand (13) und eine Seitenwand (14) aufweist, die sich zwischen der Bodenwand (12) und der oberen Wand (13) erstreckt,  
 eine Heizeinheit (15), die in einem ersten Abstand von der Bodenwand (12) positioniert ist, wobei die Heizeinheit (15) dazu ausgestaltet ist, das im Tank (11) gespeicherte Wasser derart zu erwärmen, dass durch die Heizeinheit (15) erwärmtes Wasser im Tank (11) aufsteigt, sodass das erwärmte Wasser über nicht erwärmtem Wasser im Tank (11) geschichtet ist,  
 zumindest einen Temperatursensor (19, 20), der in einem Abstand von der Bodenwand (12) positioniert ist, wobei der zumindest eine Temperatursensor (19, 20) dazu ausgestaltet ist, eine Wassertemperatur des erwärmten Wassers zu messen,  
 eine Steuervorrichtung (21) nach einem der Ansprüche 11 bis 12.

## Revendications

1. Procédé pour faire fonctionner un dispositif de stockage d'eau chaude (10), le dispositif de stockage

d'eau chaude (10) comprenant

une cuve (11) configurée pour stocker de l'eau,  
une unité chauffante (15) positionnée à une  
première distance d'une paroi de fond (12) de  
la cuve (11), l'unité chauffante (15) étant confi-  
gurée pour chauffer l'eau stockée à l'intérieur de  
la cuve (11) de telle manière que l'eau chauffée  
s'élève à l'intérieur de la cuve (11) et se stratifie  
au-dessus de l'eau non chauffée à l'intérieur de  
la cuve (11),  
au moins un capteur de température (19, 20)  
positionné à une distance de la paroi de fond  
(12) de la cuve (11) qui est supérieure à ladite  
première distance,  
un contrôleur (21) configuré pour commander  
l'unité chauffante (15),  
le procédé comprenant les étapes suivantes :

détermination, à partir d'un signal de me-  
sure de température d'eau fourni par l'au  
moins un capteur de température (19, 20),  
d'un profil d'utilisation d'eau, ledit profil d'u-  
tilisation d'eau fournissant, pour des inter-  
valles de temps définis d'un jour et/ou pour  
des jours définis d'une semaine, une tem-  
pérature nominale et un volume nominal de  
l'eau chauffée à stocker à l'intérieur de la  
cuve, le profil d'utilisation d'eau étant déter-  
miné sur la base d'une fréquence et d'une  
quantité d'un besoin en eau chaude dans  
les intervalles de temps respectifs du jour  
respectif,  
fonctionnement de l'unité chauffante (15)  
de telle manière que, pour chaque intervalle  
de temps défini d'un jour et/ou pour chaque  
jour défini d'une semaine, la température  
effective et le volume effectif de l'eau chauf-  
fée stockée à l'intérieur de la cuve corres-  
pondent automatiquement à la valeur no-  
minale respective du profil d'utilisation  
d'eau,  
**caractérisé par** l'étape suivante :  
détermination, pour chaque intervalle de  
temps respectif de chaque jour respectif,  
d'un facteur de confiance associé à la tem-  
pérature nominale et au volume nominal de  
l'eau chauffée à stocker à l'intérieur de la  
cuve, le facteur de confiance étant en fonc-  
tion de la fréquence et de la quantité d'un  
besoin en eau chaude dans les intervalles  
de temps respectifs du jour respectif.

## 2. Procédé selon la revendication 1,

le dispositif de stockage d'eau chaude (10) étant  
pourvu d'un premier capteur de température  
(19) positionné à une deuxième distance de la

paroi de fond (12) de la cuve (11) et d'un deu-  
xième capteur de température (20) positionné à  
une troisième distance de la paroi de fond (12)  
de la cuve (11), ladite deuxième distance étant  
supérieure à ladite première distance et ladite  
troisième distance étant supérieure à ladite deu-  
xième distance,  
ledit profil d'utilisation d'eau étant déterminé à  
partir d'un premier signal de mesure de tempé-  
rature d'eau fourni par le premier capteur de  
température (19) et à partir d'un deuxième si-  
gnal de mesure de température d'eau fourni par  
le deuxième capteur de température (20) et/ou à  
partir d'un signal de température d'eau moyen  
desdits premier et deuxième signaux de mesure  
de température d'eau.

3. Procédé selon la revendication 1 ou 2, le profil d'u-  
tilisation d'eau étant déterminé sur la base d'un taux  
de variation du signal de mesure de température  
d'eau respectif dans l'intervalle de temps respectif  
du jour respectif.

4. Procédé selon l'une des revendications 1 à 3, le profil  
d'utilisation d'eau étant déterminé de telle manière  
que, pour chaque intervalle de temps respectif de  
chaque jour respectif d'une semaine, une paire de  
valeurs nominales comprenant la température no-  
minale et le volume nominal de l'eau chauffée à  
stocker à l'intérieur de la cuve soit déterminée, à  
savoir une paire de valeurs nominales d'un en-  
semble de paires de valeurs nominales comprenant  
au moins :

paire 1 : premier volume nominal et première  
température nominale,  
paire 2 : premier volume nominal et deuxième  
température nominale,  
paire 3 : deuxième volume nominal et première  
température nominale,  
paire 4 : deuxième volume nominal et deuxième  
température nominale,  
le deuxième volume nominal étant supérieur au  
premier volume nominal,  
la deuxième température nominale étant supé-  
rieure à la première température nominale.

5. Procédé selon la revendication 4, l'ensemble de  
paires de valeurs nominales sur la base duquel le  
profil d'utilisation d'eau pour chaque intervalle de  
temps respectif de chaque jour respectif d'une se-  
maine est déterminé comprenant la paire de valeurs  
nominales supplémentaire suivante :

paire 5 : troisième volume nominal et deuxième  
température nominale, et/ou  
paire 0 : quatrième volume nominal et quatrième  
température nominale,



- le troisième volume nominal étant supérieur au deuxième volume nominal,  
le quatrième volume nominal étant inférieur au premier volume nominal et la quatrième température nominale étant inférieure à la première température nominale.
6. Procédé selon l'une des revendications 1 à 5,
- le facteur de confiance étant augmenté si la fréquence de besoins en eau chaude et/ou la quantité d'un besoin en eau chaude sont/est supérieures/supérieure à un seuil supérieur respectif au sein de l'intervalle de temps respectif du jour respectif,
- le facteur de confiance étant diminué si la fréquence de besoins en eau chaude et/ou la quantité d'un besoin en eau chaude sont/est inférieures/inférieure à un seuil inférieur respectif au sein de l'intervalle de temps respectif du jour respectif,
- le facteur de confiance restant inchangé si la fréquence de besoins en eau chaude et/ou la quantité d'un besoin en eau chaude sont/est supérieures/supérieure à un seuil inférieur respectif et inférieures/inférieure au seuil supérieur respectif.
7. Procédé selon l'une des revendications 1 à 6,
- à un état initial ou à un état d'initialisation du dispositif de stockage d'eau chaude (10), le profil d'utilisation d'eau de chaque intervalle de temps de chaque jour d'une semaine étant initialisé avec la paire N (N=2 ou 3 ou 4) des paires de valeurs nominales,
- si le facteur de confiance de l'intervalle de temps respectif du jour respectif est inférieur à une limite inférieure, le profil d'utilisation d'eau étant modifié pour la paire N-1 des paires de valeurs nominales,
- si le facteur de confiance de l'intervalle de temps respectif du jour respectif est supérieur à une limite supérieure, le profil d'utilisation d'eau étant modifié pour la paire N+1 des paires de valeurs nominales,
- si le facteur de confiance de l'intervalle de temps respectif du jour respectif est supérieur à la limite inférieure et inférieur à la limite supérieure, le profil d'utilisation d'eau restant à la paire N des paires de valeurs nominales.
8. Procédé selon l'une des revendications 6 à 7, une modification du facteur de confiance d'un intervalle de temps respectif d'un jour respectif ayant une incidence sur le facteur de confiance d'intervalles de temps jouxtant l'intervalle de temps respectif dans lequel le facteur de confiance a été modifié.
9. Procédé selon l'une des revendications 1 à 8, l'au moins un signal de mesure de température d'eau fourni par l'au moins un capteur de température (19, 20) étant fourni à une base de données (24) telle qu'une base de données dans le cloud, la base de données (24) déterminant le profil d'utilisation d'eau fournissant, pour chaque intervalle de temps défini respectif d'un jour respectif d'une semaine, la température nominale et le volume nominal de l'eau chauffée à stocker à l'intérieur de la cuve, et le contrôleur (21) faisant fonctionner l'unité chauffante (15) sur la base dudit profil d'utilisation d'eau fourni par la base de données (24) au contrôleur (21).
10. Procédé selon l'une des revendications 1 à 8, l'au moins un signal de mesure de température d'eau fourni par l'au moins un capteur de température (19, 20) étant fourni au contrôleur (21), le contrôleur (21) déterminant le profil d'utilisation d'eau fournissant, pour chaque intervalle de temps défini respectif d'un jour respectif d'une semaine, la température nominale et le volume nominal de l'eau chauffée à stocker à l'intérieur de la cuve, et le contrôleur (21) faisant fonctionner l'unité chauffante (15) sur la base dudit profil d'utilisation d'eau.
11. Contrôleur (21) pour un dispositif de stockage d'eau chaude (10),
- le dispositif de stockage d'eau chaude (10) comprenant
- une cuve (11) configurée pour stocker de l'eau,
- une unité chauffante (15) positionnée à une première distance d'une paroi de fond (12) de la cuve (11),
- au moins un capteur de température (19, 20) positionné à une distance de la paroi de fond (12) de la cuve (11), ladite distance étant supérieure à ladite première distance,
- le contrôleur (21) étant configuré pour commander l'unité chauffante (15) et, de ce fait, la température d'eau de l'eau stockée à l'intérieur de la cuve (11),
- le contrôleur (21) étant configuré pour déterminer, à partir d'un signal de mesure de température d'eau fourni par l'au moins un capteur de température (19, 20), un profil d'utilisation d'eau, ledit profil d'utilisation d'eau fournissant, pour des intervalles de temps définis d'un jour et/ou pour des jours définis d'une semaine, une température nominale et un volume nominal de l'eau chauffée à stocker à l'intérieur de la cuve, le profil d'utilisation d'eau étant déterminé sur la base d'une fréquence et d'une quantité d'un besoin en eau chaude dans les intervalles de

temps respectifs du jour respectif,  
 le contrôleur (21) étant configuré pour faire fonctionner l'unité chauffante (15) de telle manière que, pour chaque intervalle de temps défini d'un jour et/ou pour chaque jour défini d'une semaine, la température effective et le volume effectif de l'eau chauffée stockée à l'intérieur de la cuve correspondent automatiquement à la valeur nominale respective du profil d'utilisation d'eau, **caractérisé en ce que**  
 le contrôleur (21) est configuré pour déterminer, pour chaque intervalle de temps respectif de chaque jour respectif, un facteur de confiance associé à la température nominale et au volume nominal de l'eau chauffée à stocker à l'intérieur de la cuve, le facteur de confiance étant en fonction de la fréquence et de la quantité d'un besoin en eau chaude dans les intervalles de temps respectifs du jour respectif.

12. Contrôleur (21) selon la revendication 11, le contrôleur étant configuré pour mettre automatiquement en œuvre le procédé selon l'une des revendications 2 à 10.

13. Dispositif de stockage d'eau chaude (10), comprenant

une cuve (11) configurée pour stocker de l'eau, la cuve (11) étant pourvue d'une paroi de fond (12), d'une paroi de dessus (13) et d'une paroi latérale (14) s'étendant entre la paroi de fond (12) et la paroi de dessus (13),  
 une unité chauffante (15) positionnée à une première distance de la paroi de fond (12), l'unité chauffante (15) étant configurée pour chauffer l'eau stockée à l'intérieur de la cuve (11) de telle manière que l'eau chauffée par l'unité chauffante (15) s'élève à l'intérieur de la cuve (11) de sorte que l'eau chauffée se stratifie au-dessus de l'eau non chauffée à l'intérieur de la cuve (11),  
 au moins un capteur de température (19, 20) positionné à une distance de la paroi de fond (12), l'au moins un capteur de température (19, 20) étant configuré pour mesurer une température d'eau de l'eau chauffée,  
 un contrôleur (21) selon l'une des revendications 11 à 12.

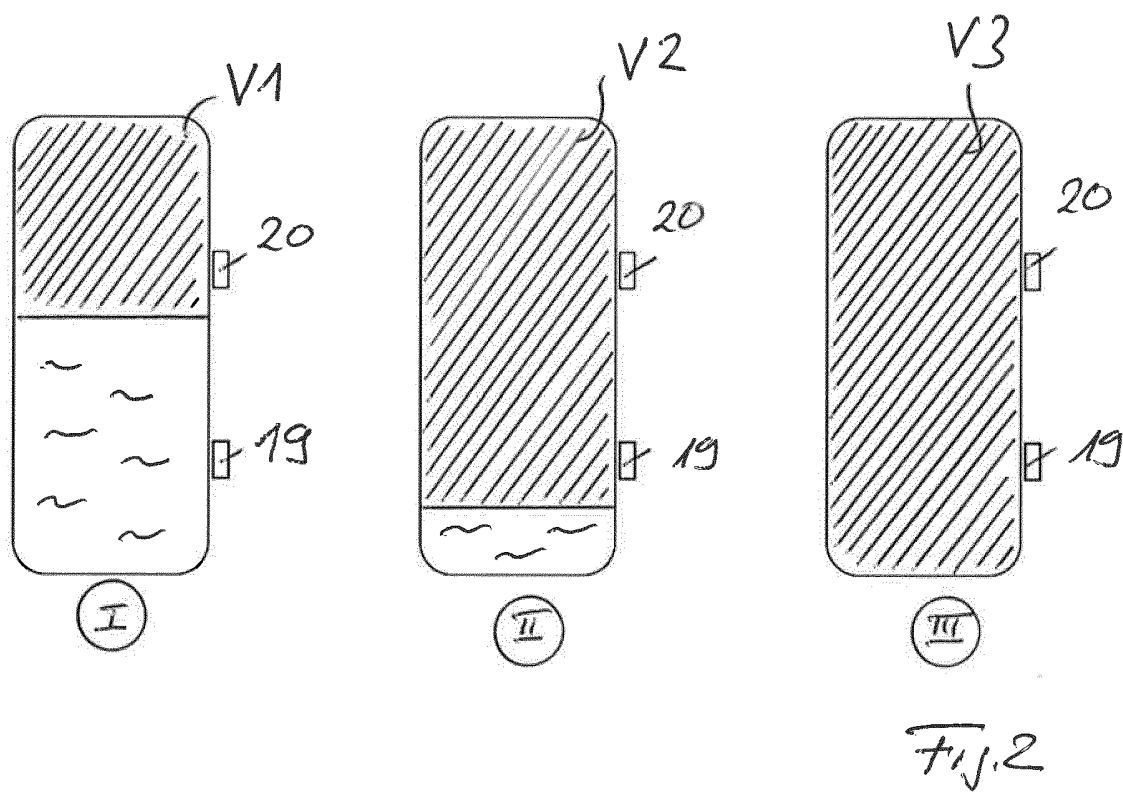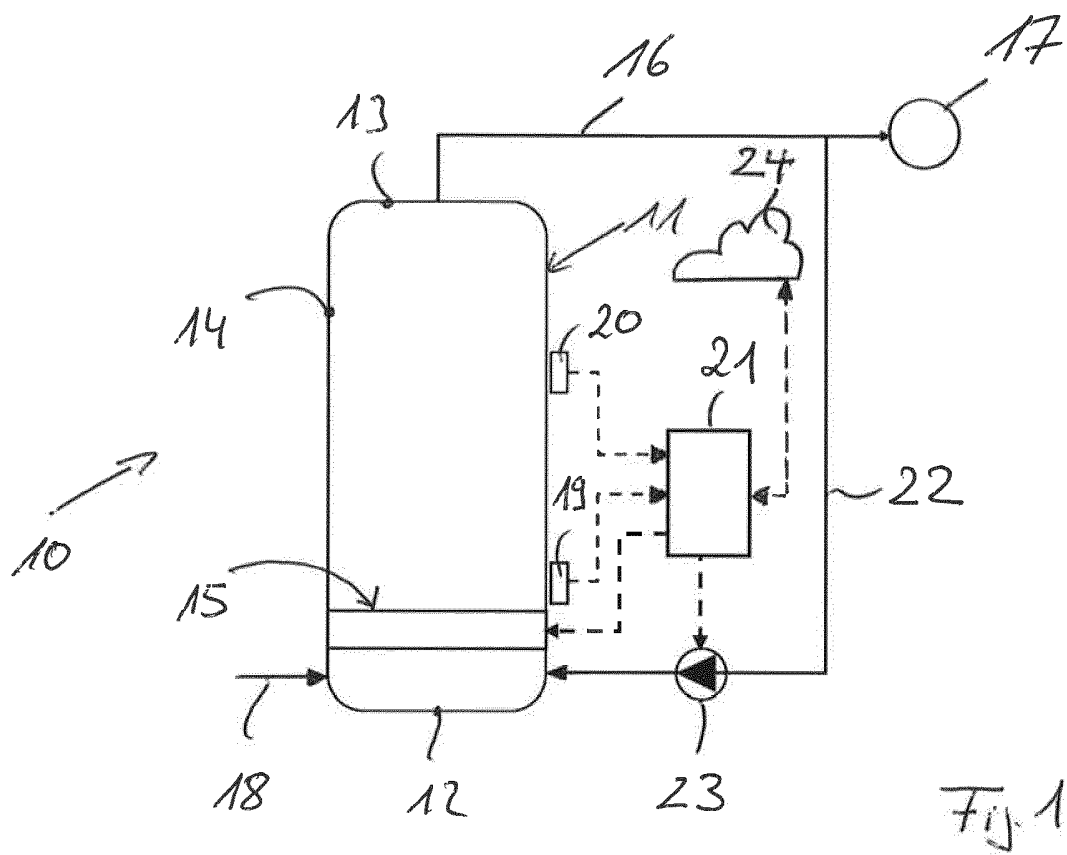

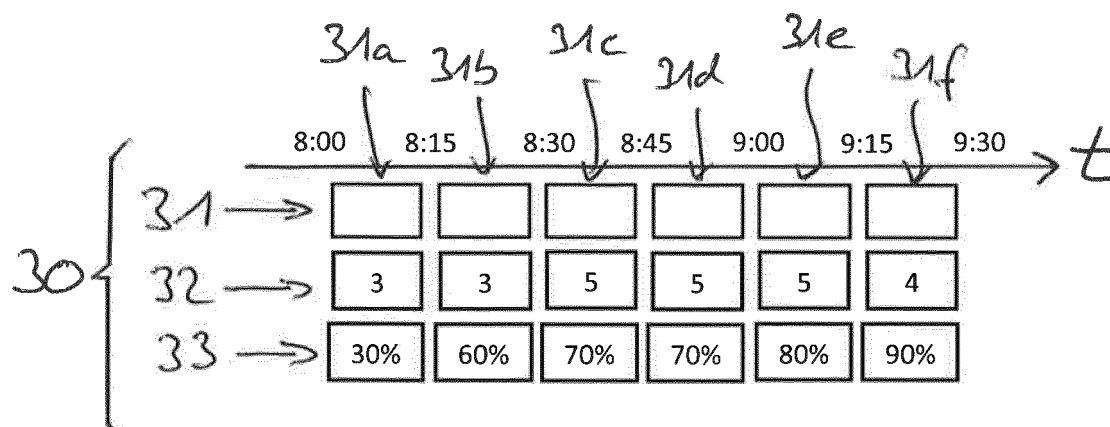


Fig. 3

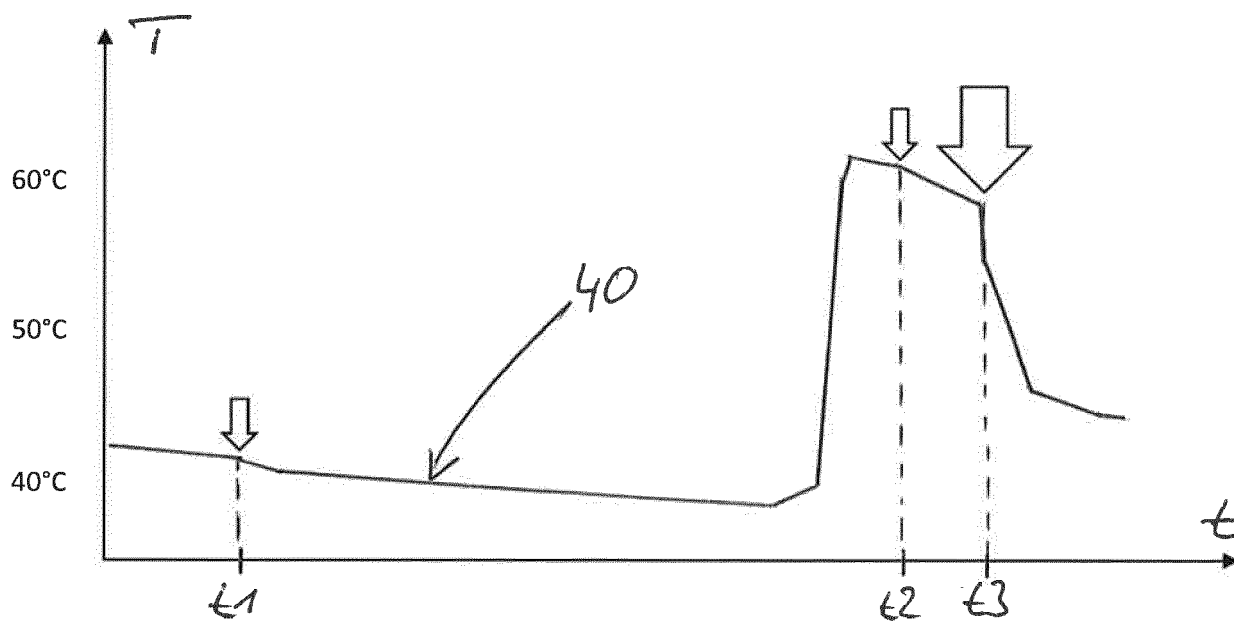


Fig. 4

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- GB 2518365 A [0003]
- US 20090188486 A1 [0003]
- US 11060763 B2 [0003]
- US 10295199 B2 [0003]
- US 7971796 B2 [0003]
- DE 102021124584 A1 [0005]
- WO 2016189416 A [0005]