



(11) **EP 2 884 169 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
27.07.2016 Bulletin 2016/30

(51) Int Cl.:
F23C 10/10^(2006.01)

(21) Application number: **13197372.9**

(22) Date of filing: **16.12.2013**

(54) **Fluidized bed apparatus**

Wirbelbettvorrichtung

Appareil à lit fluidisé

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME

(43) Date of publication of application:
17.06.2015 Bulletin 2015/25

(73) Proprietor: **Doosan Lentjes GmbH**
40880 Ratingen (DE)

(72) Inventors:
• **Pohl, Klaus-Dieter**
51766 Engelskirchen (DE)
• **Blättermann, Pieter**
40625 Düsseldorf (DE)

• **Koch, Pieter**
61440 Oberursel (DE)
• **Narin, Oguzhan**
45549 Sprockhövel (DE)

(74) Representative: **Becker, Thomas**
Patentanwälte
Becker & Müller
Turmstrasse 22
40878 Ratingen (DE)

(56) References cited:
EP-A2- 0 679 837 US-A- 5 299 532
US-A- 5 522 160 US-A- 5 772 969
US-A- 5 911 201 US-B1- 6 305 330
US-B2- 7 520 249

EP 2 884 169 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention relates to so-called Circulating Fluidized Bed Apparatus (CFBA) and its components, in particular

- a Circulating Fluidized Bed Reactor (CFBR) designed as a combustor, incineration reactor, boiler, gasifier, steam generator etc. as disclosed - i.a. - in US 6,802,890 B2. In a typical CFBR gas (air) is passed through a permeable grate-like bottom area of the reactor, which grate (grid) supports a fluidized bed of particulate material, the so-called incineration charge, mostly including a fuel-like material such as coal. This gives the fuel material and other components within the fluidized bed the behaviour of a boiling liquid.

[0002] The aerated particulate material/fuel mixture allows to promote the incineration process and effectivity.

[0003] The Incineration charge is fluidized by the air/gas, often blown in via nozzles. The fluidized bed comprises a so-called denseboard area, above said grate and adjacent to the said permeable reactor bottom, while the density of the particulate material within the fluidized bed gets less within the upper part of the reactor space, also called the freeboard area of the fluidized bed.

[0004] The reaction chamber is often limited by outer water tube walls; made of tubes, through which water runs, wherein said tubes are either welded directly to each other to give a wall structure or with fins/ribs between parallel running tube sections.

[0005] As most of said fuel materials like coal, timber etc. contain sulphur and/or harmful substances it is necessary to clean the gases leaving the reaction chamber, in a suitable way.

[0006] The CFBR typically has at least one outlet port at its upper end, wherein said outlet port allows the mixture of gas and solid particles exhausted from the reactor, to flow into at least one associated separator.

- The separator, for example a cyclone separator, serves to separate solid particles (the particulate material, including ash) from said gas. A typical design of such a separator is disclosed in US 4,615,715. Again the outer walls of the separator can be designed with hollow spaces to allow water flowing through.
- Means for the transfer of said separated solid particles into at least one Fluidized Bed Heat Exchanger (FBHE) via a corresponding inlet port of said FBHE. These means may be ducts/pipes/channels or the like.
- A syphon along the way from the separator to the CFBR and/or FBHE to allow decoupling of pressure (fields) between separator and CFBR.

- At least one Fluidized Bed Heat Exchanger (FBHE) allowing to use the heat, provided by the particulate material, for generating power, for example to heat up and increase the pressure of a steam transported as a heat transfer medium via tubes or the like, through said FBHE and further to turbines or the like.

- The FBHE is equipped with at least one outlet port, also called return means, for at least part of the solid particles on their way out of the FBHE and back into the Circulating Fluidized Bed Reactor CFBR.

[0007] Numerous designs of such apparatus and components have been developed over the past decades.

[0008] Nevertheless there is a continuous demand for improvements, especially with respect to energy efficiency (typical capacity range: 50-600MW - electrical -), effectiveness, simple construction, avoidance of mechanical and thermo-mechanical stresses, compactness (typical data of a reactor chamber are: height:30-60m, width: 13-40m, depth: 15-40m).

[0009] US 7520249 B2 discloses a CFBR comprising a reaction chamber which is subdivided into a combustion sub-chamber and a cooling sub-chamber as well as at least one separator, that receives flue gas from the combustion sub-chamber and separates particles from said flue gas. The CFBR further comprises an external bed, which receives particles from such separator, and provides the particles to the combustion sub-chamber again.

[0010] US 5299532 refers to a CFBR with a number of heat exchangers for the solid particles, extracted from a combustion chamber, wherein the number of heat exchangers communicate with each other via corresponding openings, through which the solid particles may flow to mix.

[0011] It is an object of the invention to improve the functionality of such CFBR.

[0012] The invention provides the following improvement with respect to a Circulating Fluidized Bed Apparatus, hereinafter also called CFBA, fluidized bed apparatus or apparatus and its components.

[0013] The improvement refers to a fluidized bed apparatus according to claim 1.

[0014] The totally suspended (for example hanging) construction allows to adapt the thermal expansions of the associated construction elements and avoids mechanical forces, thermo-mechanical forces and/or moments between adjacent construction parts.

[0015] Different thermal loads within the CFBR and an associated FBHE typically lead to different thermal expansions of both construction elements (parts of the apparatus). Accordingly return means (for the solid particles), for example a solid return duct, extending from the FBHE to the CFBR, typically undergoes considerable thermo-mechanical stresses, which now can be avoided.

[0016] This is contrary to prior art devices with a suspended reactor, a heat exchanger mounted to ground

and a return duct in between.

[0017] Typically each separator is followed by one heat exchanger (with a syphon like seal in between), while the improvement reduces the number of construction parts insofar as at least two, or three, or all (namely n) heat exchangers are combined into one element. This makes the apparatus more compact and more effective. Cooling means (water cooled walls) are designed as common walls between adjacent sections of a combined heat exchanger.

[0018] Optional features are:

- The discrete fluidized bed heat exchangers are arranged in a row (a line) to provide the common fluidized bed heat exchanger, which allows a very compact design.
- The water cooled intermediate walls comprise water-cooled pipes, in particular metal pipes.
- The water cooled intermediate walls comprise water-cooled pipes, wherein adjacent pipes are connected by metal fins. Fins and pipes can be welded.
- The common fluidized bed heat exchanger is suspended from the separator(s). This is an example for an indirect suspension/hanging. The separator may be suspended from a traverse/bar, while the FBHE is suspended from the separator. This hanging construction reduces the installation costs and required space.
- The common fluidized bed heat exchanger is fixedly secured to the circulating fluidized bed reactor, allowing a compact overall design. Again this is an indirect type of suspension. The FBHE is coupled to the CFBR, which itself may be hung to a corresponding frame.
- The common fluidized bed heat exchanger and the circulating fluidized bed reactor have a common wall. Again this makes the installation compact.
- The common wall is water-cooled.
- The common wall has one or more openings fulfilling the function of the return means (outlet port). Space for a separate return duct or the like can thus be avoided
- The fluidized bed heat exchanger has outer chamber walls being at least partially water-cooled.
- The FBHE is designed without any structural means urging the solid particles to meander within the fluidized bed heat exchanger. Contrary to common designs the FBHE does not provide any separate entrance chamber and/or return chamber through which the solid particles must pass after entering the FBHE and/or before leaving it. No pre-homogenization of the solid particles being necessary any more. The solid particle stream enters the FBHE and is immediately directed through/along the heat exchangers.
- The circulating fluidized bed reactor, the separator(s) and the common fluidized bed heat exchanger are suspended from a supporting structure, which

may be a common supporting structure, for example a tripod like or a gateway-like structure, a frame etc.. The suspended mounting may be realized directly or indirectly.

- The return means are designed as a coupling without transferring mechanical forces or moments from said fluidized bed reactor into said fluidized bed heat exchanger or vice versa. This embodiment in-situ provides a suspended connection between the two construction parts and avoids any mechanical stresses.
- The fluidized bed heat exchanger has no refractory lining. This makes it lighter and thus easier to hang.

[0019] The heat transfer means can be designed in a wall-like pattern and extending substantially parallel to the main flow direction of the solid particles on their way to and through the outlet port.

[0020] The wall like structure (a flat and compact design of an individual heat transfer means) in combination with its orientation are the main features, allowing to arrange a group (set) of multiple heat transfer means at a distance to each other with channels like "cavities/gaps" in between, extending as well in the flow/transport direction of the solid particles towards the outlet area of the chamber.

[0021] Insofar the term "wall like" does not refer to a cubic design with flat surfaces but the overall volume which the respective heat transfer means. A tube, meandering (zig-zag) such that the central longitudinal axis of the tube lies in one imaginary plane is an example for a wall-like pattern. Tube sections may extend in different directions along two axis of the coordinate system.

[0022] This design allows the solid particles within the fluidized bed to flow between said individual heat transfer means, namely within said spaces (channels) formed between adjacent heat transfer means, without any obstacles (baffles) but including the option to flow from one of said channels/spaces/gaps into an adjacent one.

[0023] This is true especially if the discrete heat transfer means are provided by bended tubes/pipes, for example according to one of the following optional features:

- The wall like pattern comprises a grid-like structure. This allows the solid particles to flow in all directions of the coordinate system but keeps the barrier free main transport direction towards the outlet port.
- The heat transfer means is designed as a heat exchange tube for conveying a heat transfer medium and arranged in a meandering fashion, thereby providing a vertically oriented wall-like pattern.
- Multiple heat transfer means are arranged at a distance to each other, forming a set/group of heat transfer means. This gives a package/set of heat transfer means, extending over more than 50% of the chamber volume.
- Heat transfer means extend about more than 60% of the chamber height.
- Heat transfer means extend about more than 70%

of the chamber height.

- Heat transfer means extend from shortly above the bottom upwardly to shortly below the ceiling of said chamber. The larger the heat transfer means are the more efficient is the total heat exchange.
- Horizontally extending sections of the meandering heat exchange tube are at least 3 times longer than vertically extending sections of the heat exchange tube. This underlies the main transport direction of the solid particles.
- Adjacent sections of the same heat exchange tube extend at a distance to each other being 0,5 to 2 of the heat exchange tube diameter.
- Chamber walls being at least partially water-cooled.
- No structural means urging the solid particles to meander within the chamber. They may pass the FBHE in a main direction parallel to the wall-like heat exchangers.
- The FBHE may have a common wall with an adjacent circulating fluidized bed reactor (CFBR) and return means for the solid particles may extend at least partially within said common wall to make the installation more compact.

[0024] According to an embodiment the fluidized bed heat exchanger comprises at least two heat transfer means within one chamber, each being provided with a heat transfer medium inlet port and a heat transfer medium outlet port, wherein a first heat transfer means is designed as a reheater and second heat transfer means is designed as a superheater to achieve a heat transfer medium pressure above that of the reheater.

[0025] This design is best realized with at least two distinct groups/sets of heat transfer means to provide different thermodynamic features within the FBHE and to allow to optimize the heat transfer and efficiency of the FBHE.

[0026] All heat transfer means (for example distinct steam tubes) of one group may be linked to one central steam feeding line and steam outlet line respectively. Insofar the extra work for installation is reduced to one further feeding and extracting line, in case of two groups of heat exchangers, while allowing to achieve different thermodynamic conditions within the chamber.

[0027] This can be complete by one or more of the following features:

- The reheater is constructed to allow a heat transfer medium temperature of up to 600°C (while the inlet temperature of the heat transfer medium, for example steam, is typically about 450-550°C).
- The reheater is constructed to allow a heat transfer medium pressure of up to 50bar (typically in the range of 30-40bar).
- The superheater is constructed to allow a heat transfer medium temperature of up to 600°C (typically with inlet temperatures between 500 and 580°C).
- The superheater is constructed to allow a heat trans-

fer medium pressure of up to 190bar (typically between 160 and 180 bar).

- The fluid pressure in the superheater tubes is typically more than 3, or more than 4 or even more than 5 times the pressure in the reheater tubes.
- The reheater and/or the superheater each are made of a multiplicity of heat transfer tubes, each arranged in a meandering fashion and with a distance to each other. Accordingly the reheater and the superheater each have a 3-dimensional profile similar to a cube. Each tube may provide a wall-like (plate-like) structure with a grate-like pattern according to the meandering tube sections. The solid particles pass through channels between the heat transfer means.
- The chamber walls can be at least partially water-cooled.
- Again this FBHE and an associated circulation fluidized bed reactor CFBR may have a common wall to reduce costs and make the apparatus compact.
- This common wall can be water-cooled.
- Any further return means from the separator and/or a syphon enter the CFBR shortly above its grate, i.e. directly into the denseboard (dense part) of the circulating fluidized bed and below the FBHE return means.

[0028] A further optional embodiment comprises:

At least one heat transfer means, arranged within said chamber, wherein at least one distribution means being arranged in a transition region between said inlet port and said chamber and upstream of said heat transfer means to allow dilution of said solid particles.

[0029] This embodiment relates to feeding of the particulate material into the fluidized bed heat exchanger (FBHE). The FBHE (its inner chamber/space) typically has a cubic or cylindrical shape of high volume.

[0030] If the solid particles, coming from the separator, enter said chamber along a discrete inlet port of limited size, problems may arise in distributing the said particulate material within the chamber and around/between the heat transfer means to achieve the required heat transfer.

[0031] This embodiment allows to distribute the solid particles on their way into the chamber over a much larger area, depending on the shape and size of the distribution means. At the same time the density of the solids within the particle stream is reduced, which further increases the heat transfer efficiency from the hot particles into the heat transfer medium (a brine, steam or the like).

[0032] The term "transition region" includes the end section of the inlet port adjacent to the chamber of the FBHE as well the adjacent section of the chamber and any area in between.

[0033] Possible alternatives and embodiments include a fluidized bed heat exchanger with one or more of the following features:

- The distribution means are provided by construction elements protruding from an inner surface of said inlet port and/or chamber. They may protrude from a wall or ceiling section.
- The distribution means are provided by at least one of the following construction elements: bar, knob, prism, grid, grate, pyramid, spiral, saw tooth, dowel, nib, nozzle.
- The distributions means extend >30, >40 or >50% of the length or width of the chamber to homogenize the stream of the fluidized bed within the chamber to its best.
- The distributions means are arranged shortly downstream of the inlet port, i.e. along the upper part of the chamber.
- The inlet port enters the chamber by its ceiling. This gives the solid particles a transport direction following gravity.
- The inlet port enters the chamber through an upper end of a chamber wall (). Then the flow of the solid particles is substantially horizontal before entering the chamber.

[0034] In case of a common wall between the CFBR and FBHE the following embodiments may apply:

- Said return means are provided within said common wall. This allows to use one wall (section) commonly for 2 independent components of the apparatus and thus to reduce the material and construction costs.
- The integration of the return means allows further reductions in construction work, material costs and increases the efficiency. The material flow from the FBHE into the combustion reactor becomes more reliable and more homogeneous.
- The return means are provided by at least one through hole within said common wall, this is a very simple and effective design.
- The return means are multiple through holes arranged at a distance to each other (for example in a horizontal row) within said common wall.
- The at least one through hole is inclined, with a lower end towards the fluidized bed heat exchanger and a higher end towards the fluidized bed reactor. This reduces the danger of infiltration of particles from the fluidized bed of the CFBR into the FBHE.
- The common wall provides a three-dimensional profile towards the fluidized bed heat exchanger. This allows to partly or fully integrate the sloping outlet port into the common wall area.
- The common wall provides a convexity towards the fluidized bed heat exchanger. Again this allows to integrate the inclined outlet duct/openings into the shared wall and keeps the pressure on said outflowing material low.

[0035] Said means for introducing the fluidizing gas can be provided by a multiplicity of nozzles arranged

along the bottom area of said chamber and different nozzles being charged with different gas pressure.

[0036] In other words:

- 5 The aerated bottom (the air/gas permeable bottom as part of the fluidized bed) is divided into sections/zones/areas, where air is applied under different pressure. This allows to provide a custom-made pressure profile within the FBHE and thus to optimize the heat transfer and particle transport. A multiplicity of air openings, mostly provided by air nozzles, can be linked to a common air feeding duct or funnel.

[0037] Possible embodiments include:

- 15 - A multiplicity of nozzles is split into two or more nozzle sets; each nozzle set comprising a plurality of nozzles, wherein each nozzle sets may be charged with an individual gas pressure, for example with a different gas pressure.
- 20 - The nozzles of one nozzle set are arranged within one common area. This allows to split the overall bottom area into two, three or more larger sections.
- 25 - The gas pressure of a nozzle set is adjustable. This allows to adapt the gas pressure according to local demands.
- Each nozzle set is coupled to a corresponding gas channel or gas distribution space respectively in order to adjust the required pressure in the respective manner with respect to all nozzles of a nozzle set connected thereto.
- 30 - A fluidized bed heat exchanger without any structural means (except distribution means at the entrance area and the heat transfer means) allows the solid particles to pass the chamber without further meandering, to the contrary: their path through the FBHE is mostly influenced by the air pressure along the bottom grate.

40 **[0038]** At least one baffle may extend downwardly from the chamber ceiling of the FBHE, substantially perpendicular to a straight line between inlet port and outlet port, with its lower end at a distance to the heat transfer means.

45 **[0039]** This at least one baffle does not influence the flow of the solid particles within the part of the FBHE equipped with the heat transfer means as it is arranged above said heat transfer means and only serves to redirect the incoming solid particle stream (downwardly) and to equalize the pressure above the fluidized bed and along the horizontal cross section of the chamber, in particular, if provided with opening(s).

50 **[0040]** The baffles have the function of separation walls and avoid short circuits of the solid material flow (directly from the inlet port to the outlet port). They urge the solid particle stream to penetrate into the heat transfer zone between the heat transfer means (the channels mentioned above).

[0041] The following embodiments are optionally in-

cluded:

- At least one baffle extends between opposite walls of the chamber to improve the describe effect.
- At least one baffle has at least one opening to allow pressure adjusting/compensation within the chamber.
- At least one baffle is at least partially water-cooled.
- At least one baffle is designed as a curtain. The curtain defines a baffle with numerous small openings which allow pressure equalization but avoids penetration of the solid particles to great extent.
- Multiple baffles are arranged at a distance to each other along said line between inlet port and outlet port.
- The heat transfer means are designed as a heat exchange tube for conveying a heat transfer medium and arranged in a meandering fashion, thereby providing a vertically oriented wall-like pattern. The individual heat transfer walls extend perpendicular to the baffles.

[0042] The invention is now described with reference to the attached drawing, showing - all in a very schematic way - in

Figure 1

A general concept of a fluidized bed apparatus according to prior art

Figure 2

A cross sectional view of a fluidized bed heat exchanger

Figure 3

A top view on the FBHE 24 of Figure 2 along line 3-3

Figure 4

A cross sectional view of another embodiment of a fluidized bed heat exchanger

Figure 5

A cross sectional view of further embodiment of a fluidized bed heat exchanger A with 2 groups of heat exchangers

Figure 6

A top view on the FBHE of Figure 5 along line 6-6

Figure 7

A top view on a further example for a FBHE 24 with an amended inlet port

Figure 8

A cross sectional view of an FBHE with multiple nozzle sets in the bottom area

Figure 9

An general view of a fluidized bed apparatus mounted in a suspended manner

Figure 10

A compact fluidized bed heat exchanger in a 3-dimensional view

[0043] In the Figures identical an similar acting construction parts are identified by same numerals.

[0044] Figure 1 discloses the general concept of a fluidized bed apparatus and its main components according to the present invention.

[0045] It comprises:

- A circulating fluidized bed reactor (CFBR) 10. Its lower part comprises a grate-like structure 12 through which air (arrow A1) is blown into a reactor chamber 14 via (not shown) nozzles, thus providing a fluidized bed (denseboard - DB -) above said grate 12, wherein said denseboard comprises a particulate material like coal, wood etc. to be burnt.
- The CFBR has two outlet ports 16 at opposite sides of its upper part, allowing a mixture of gas and solid particles exhausted from the CFBR to flow into associated separators 18, namely cyclone separators. The separators serve to separate solid particles from the gas.
- Transfer means 20, designed as ducts, extend from the lower end of each separator 18 downwardly and into an inlet port 22 along the ceiling 24c of a fluidized bed heat exchanger (FBHE) 24.
- A syphon-like tube construction 26 (U-shaped) extends from the lower end of each separator 18 into reactor chamber 14 and enters into chamber 14 shortly above grate 12 of said CFBR.
- The FBHE is equipped with (plate-like) heat transfer means 28 and an outlet port 30 merging into reactor chamber 14 at the same vertical height as tube construction 26.

[0046] This concept belongs to prior art. Insofar details are not further illustrated as known to the skilled person.

[0047] According to Figure 2 the fluidized bed heat exchanger 24 displays an inlet port 22 at its upper end (in Figure 2: top left) and an outlet port 30 at its upper end (in Figure 2: top right), i. e. opposite to each other. Said outlet port 30 provides return means for solid particles transported along transfer duct 20 into said FBHE and is provided within a common wall 14w of chamber 14 and FBHE 24.

[0048] Outlet port 30 comprises multiple flow through openings, arranged in a horizontal row with a distance to each other along a corresponding wall section of said wall 14w.

[0049] Said wall 14w is water-cooled, namely constructed of vertically extending tubes with fins running between adjacent tubes. The tubes are cooled by water fed through said tubes.

[0050] The through holes having the function of discrete outlet ports are shown in Figure 2 in a slightly inclined orientation, with a lower end towards the fluidized bed heat exchanger 24 and a higher end towards the fluidized bed reactor chamber 14.

[0051] This inclined orientation (sloped outlet port 30) can be provided as part of a 3-dimensional profile (for example as a convexity 14w') of said wall 14w towards the inner space/chamber of the fluidized bed heat exchanger 24 as shown in dotted lines in Figure 2 and characterized by numeral 30'.

[0052] Figure 2 further shows the design and construction of heat transfer means 28 within the fluidized bed heat exchanger 24. In the Figure only one of said heat transfer means is shown. Further heat transfer means of equal design are placed at a distance to each other within FBHE 24 (perpendicular to the plane of projection).

[0053] Steam is fed into said means 28 via a central feeding line 42, then flowing through the meandering tube (as shown), providing said means 28, and escaping via a common outlet line 44, allowing to take heat from the particulate material (symbolized by dots P) moving through FBHE 24 between inlet port 22 and outlet port 30.

[0054] It is important that each of said means 28 is designed in a wall-like pattern and extending substantially parallel to the main flow direction of the solid particles on their way to and through the outlet port 30, symbolized in Figure 2 by arrow S.

[0055] All tubes 28 are connected to the same feeding line 42 and outlet line 44.

[0056] The meandering tubes not only give the heat transfer means 28 a wall-like pattern but as well a grid-like structure to allow the particulate material to pass through as well in a horizontal direction.

[0057] The horizontally extending sections of said tubes are about three times longer than the vertically extending sections (Figure 2 is not drawn to scale). Adjacent horizontal sections extent to a distance to each other being about the tube diameter.

[0058] As shown in Figure 2 the heat transfer means 28 extent about more than 60 % of the chamber height, being the distance between a chamber bottom 24b and a chamber sealing 24c. In the embodiment each of said wall-like heat transfer means 28 extends from slightly above bottom 24b to slightly below inlet port 22 and from slightly off wall 14w to slightly off opposite wall 24w.

[0059] This allows to avoid any structural means within FBHE 24 which could otherwise urge the solid particles to meander within FBHE. In particular the new design allows to avoid any entrance chamber and/or return chamber for the particulate material to homogenize.

[0060] In prior art devices a separate entrance chamber EC with a discrete partition wall is constructed between wall 24 w and adjacent part of heat transfer means

28 as well as a separate return chamber RC between wall 14 w and parts 28. These walls and chambers caused the stream of solid particles to flow up and down, which is now avoided with the new design without any partition walls.

[0061] The particulate material may take a direct way from the inlet port 22 to the outlet port 30 (see arrow S) along the channels/gaps C formed between adjacent tubes (heat transfer means), as may be seen in Figure 3.

[0062] Fluidization of the particulate material within FBHE 24 is achieved by air nozzles 46 in the bottom area 24b. The particulate material is circulated by said purging means within FBHE 24 in order to optimize heat transfer from the hot solid particles P onto the steam flowing within tube like heat transfer means 28.

[0063] The embodiment of Figure 4 differs from that of Figures 2,3 insofar as two baffles 50, 52 extent from sealing 24c downwardly, ending shortly above heat transfer means 28. These baffles 50, 52 extend substantially perpendicular to a straight line between inlet port 22 and outlet port 30 (dotted line L).

[0064] Both baffles 50, 52 extend between opposite walls of FBHE 24 (only one, namely 24s is shown), being the walls bridging said walls 14w, 24w. The baffles 50, 52 are arranged at a distance to each other.

[0065] Each of said baffles 50, 52 comprise one opening symbolized by dotted line O to allow pressure adjustment (equalization) within the inner space of FBHE 24.

[0066] The said baffle(s) 50, 52 may as well be designed like a curtain, fulfilling the same function as a continuous board, namely to urge the particulate material to flow through said channels C (Figure 3) between adjacent heat transfer means 28 on their way between inlet port 22 and outlet port 30.

[0067] In Figure 4 outlet port 30 is extended, namely protruding into circulating fluidized bed reactor 10.

[0068] In the embodiment according to Figure 5 the multiplicity of heat transfer means 28 is split into two groups.

[0069] A first group G1 is made of a number of heat transfer means 28 as shown in Figures 2, 3 with the exception that the horizontal extension between walls 24w, 14w is much shorter and ending about half the way between said walls 14w, 24w.

[0070] This group G1 of multiple heat transfer tubes 28 connected to a common feeding line 42 and a common outlet line 44 is characterized by a feeding temperature of 480°C and an outlet temperature of 560°C of the heat transfer medium (steam) and an average steam pressure of 32 bar, thus fulfilling the function of a so called reheater.

[0071] The second group G2 of several heat transfer means 28 is constructed the same way as group G1 but connected so separate inlet lines 42' and outlet lines 44' for said steam and designed to achieve a heat transfer medium temperature of between 510°C (inlet temperature) and 565°C (outlet temperature) as well as an average 170 bar pressure. This allows to use the tubes of group G2 as a so called superheater.

[0072] As shown in Figure 5 tubes of group G2 are arranged closer to the outlet port 30 and adjacent to wall 14w while tubes of group G1 are arranged adjacent to wall 24w with a distance between groups G1 and G2.

[0073] Figure 6 is a top view of Figure 5 along line 6-6 in Figure 5.

[0074] The fluidized bed heat exchanger 24 according to Fig. 7 displays a different design around inlet port 22, which widens towards the inner space of chamber 24, wherein said widened section 22w is further inclined towards the bottom area 24b of FBHE 24 to provide a distributor means allowing the entering stream of solid particles to spread over substantially the full width of said inner space of chamber 24, wherein the width is defined by the distance of side wall 24s.

[0075] This distributor means (section 22s) are arranged in a transition region defined by end section of inlet port 22 and the adjacent section of chamber 24, extending upstream of said heat transfer means 28 and extending over about 2/3 of the chamber width.

[0076] Ribs 22r protrude from the surface of said distributor 22s and are arranged in a star-like pattern.

[0077] Again all walls 14w, 24w and 24s of said FBHE are made of water-cooled tubes with fins between adjacent tubes, symbolized in the right part of Figure 7.

[0078] Figure 8 displays an FBHE 24 characterized by a modified bottom area 24b.

[0079] Numerous air nozzles 46 are mounted within bottom 24b. Each nozzle comprises an outer end 46o, protruding downwardly from the outer surface of bottom 24b and an inner end 46i, protruding into the hollow space of FBHE 24 equipped with groups G1, G2 of heat exchange tubes 28.

[0080] The nozzles 46 are assembled into five nozzle sets N1, N2, N3, N4 and N5, one behind the other in a row between walls 24w and 14w. All nozzles 46 of a nozzle set are commonly connected to a respective common gas channel 48. If air is fed along one of these channels all corresponding nozzles 46 will be activated to allow air to enter into FBHE 24.

[0081] The arrangements of discrete nozzle sets N1...N5 with discrete channels 48 make it possible to set different air pressure in different channels and accordingly to introduce air into the fluidized bed of solid particles within FBHE under different pressure at different areas to optimize homogenisation of the particles within the fluidized bed.

[0082] A similar design may be used to improve the syphon-type seal 26 between separator 18 and FBHE 24 or reactor 10 respectively.

[0083] A mixture of gas and solid particles like ash coming from separator 18

- enters the inlet tube of the U-shaped syphon 26 in a downward direction,
- is then fluidized by a fluidized bed construction in a bottom area 26b of said inlet tube via nozzles 27,
- turns about 90 degrees,

- flows along an intermediate chamber section 26i, where further fluidization takes place,
- then turns up into an outlet tube of the U-shaped syphon 26, where further fluidization by nozzles 27 at the bottom area of said outlet tube may take place, before
- flowing along another U-shaped tube section and entering the CFBR 10 via a corresponding return line.

[0084] Similar to the embodiment of Fig. 8, the multiplicity of air nozzles 27 is split into three nozzles sets SN1, SN2 and SN3, each with a certain number of nozzles 27, and each coupled to a respective air duct D1, D2 and D3, feeding air to the respective nozzles 27 under same or different pressure.

[0085] Similar to Figure 8 the air ducts D1..D3 have a funnel shape at their upper ends.

[0086] Figure 9 represents a fluidized bed apparatus wherein its main components, namely the CFBR 10, the FBHE 24 as well as corresponding separators 18 are mounted in a suspended manner to a central supporting structure, namely a frame 60. The frame 60 has the shape of an inverted U with its legs 601 fixed within ground GR.

[0087] While the CFBR 10 and the separator 18 are each directly suspended from base 60b of frame structure 60 (by posts 62), the FBHE 24 is mounted in a suspended manner from separator 18.

[0088] Mechanical stability of FBHE 24 is further achieved by said common, water-cooled wall 14w with CFBR 10.

[0089] Because of the hanging structure thermal expansion and constriction take place at all components in the same direction and avoids mechanical as well as thermo-mechanical tensions between adjacent construction parts at most.

[0090] To make the construction wear resistant, the fluidized bed heat exchanger has no refractory lining; all walls are water cooled metal walls.

[0091] The hanging structure allows an integration of a syphon 26 with its return duct 26r without transferring mechanical forces or moments between the respective construction parts.

[0092] According to Figure 9 the lowermost point LP1 of outlet port 30 of fluidized bed heat exchanger 24 enters the circulating fluidized bed reactor 10 at a height of $>0,15L$, calculated from the lowermost end of the axial length L of CFBR 10. The lowermost end is defined by grate 12 of the fluidized bed. The minimum distance of $>0,1L$, better $>0,2L$, allows to place the return means 30 out of the so called denseboard DB and avoids the risk of any backflow of solid particles from the fluidized bed within reactor 10 into the associated construction elements like FBHE 24. This feature may be combined with sloped outlet ports 30 as disclosed in Figure 2 or sloped return ducts 26r.

[0093] The lowermost point of return duct 26r of syphon 26 enters the CFBR at a height of the denseboard DB,

close to grate 12 and below outlet port 30.

[0094] This positioning of the two outlet ports/return means 30, 26r to each other is an important combined feature valid for various applications.

[0095] In case of an apparatus comprising more than one separator 18, for example 3 separators, Figure 10 discloses an embodiment with three corresponding fluidized bed heat exchangers 24.1, 24.2, 24.3 which are mechanically connected to provide one common fluidized bed heat exchanger 24 of corresponding, suitable size, with water-cooled intermediate walls 24i. Again: all three wall sections 14w of the common heat exchanger 24 are part of the reactor wall 14, i.e. a common water-cooled wall with integrated outlet openings 30.

[0096] Walls 14i, 14w are made of metal tubes, welded to each other and connected with a fluid source to feed cooling water through said tubes.

Claims

1. Fluidized bed apparatus, comprising a circulating fluidized bed reactor (10) with at least one outlet port (16) at its upper part, wherein said outlet port (16) allows a mixture of gas and solid particles exhausted from the fluidized bed reactor (10) to flow into a number (n) of associated separators (18) for separating solid particles from said gas, a number (n) of means (20) to transfer said separated solid particles from said (n) separators (18) into a number (up to n) of discrete fluidized bed heat exchangers (24.1, 24.2, 24.3), and return means to transport at least part of said solid particles back from said discrete fluidized bed heat exchangers (24) into the circulating fluidized bed reactor (10), wherein

each discrete fluidized bed heat exchanger comprises a chamber, comprising at least one solid particles inlet port, at least one solid particles outlet port, arranged at a distance to the at least one inlet port, means for introducing a fluidizing gas from a bottom area of said chamber into said chamber, multiple heat transfer means arranged within said chamber, wherein an individual heat transfer means is designed in a wall-like structure and a set of multiple heat transfer means is arranged at a distance to each other with channels in between, wherein the heat transfer means and the channels extend substantially parallel to the main flow direction of the solid particles on their way to and through the outlet port,

the number (up to n) of discrete fluidized bed heat exchangers (24.1, 24.2, 24.3) are mechanically connected to provide one common fluidized bed heat exchanger (24) with a water cooled intermediate wall (24i) between adjacent discrete fluidized bed heat exchangers (24.1,

24.2, 24.3),

the circulating fluidized bed reactor (10), the said (n) separator(s) (18) and the common fluidized bed heat exchanger (24) are mounted in a suspended manner.

2. Fluidized bed apparatus according to claim 1, wherein the discrete fluidized bed heat exchangers (24.1, 24.2, 24.3) are arranged in a row to provide the common fluidized bed heat exchanger (24).
3. Fluidized bed apparatus according to claim 1, wherein the water cooled intermediate walls (24i) comprise water-cooled pipes.
4. Fluidized bed apparatus according to claim 1, wherein the water cooled intermediate walls (24i) comprise water-cooled pipes, wherein adjacent pipes are connected by metal fins.
5. Fluidized bed apparatus according to claim 1, wherein the common fluidized bed heat exchanger (24) is suspended from the separator(s) (18).
6. Fluidized bed apparatus according to claim 1, wherein the common fluidized bed heat exchanger (24) and the circulating fluidized bed reactor (10) have a common wall (14w).
7. Fluidized bed apparatus according to claim 6, wherein the common wall (14w) is water-cooled.
8. Fluidized bed apparatus according to claim 6, wherein the common wall (14w) has one or more openings (30) fulfilling the function of the return means.
9. Fluidized bed apparatus according to claim 1, wherein the common fluidized bed heat exchanger (24) has chamber walls (14w) being at least partially water-cooled.

Patentansprüche

1. Fließbettapparat mit einem Reaktor (10) mit zirkulierende Wirbelschicht, mit mindestens einem Auslass (16) an seinem oberen Abschnitt (18), wobei der Auslass (16) es ermöglicht, dass eine Mischung aus Gas und festen Bestandteilen aus dem Wirbelschichtreaktor (10) in eine Zahl (n) zugehöriger Trenneinrichtungen (18) fließt, um die festen Teilchen vom Gas zu trennen, einer Zahl (n) von Mitteln (20), um die abgetrennten festen Teilchen von den (n) Trenneinrichtungen (18) in eine Zahl (bis zu n) diskreter Fließbett-Wärmetauscher (24.1, 24.2, 24.3) zu überführen und Rückführmitteln zum Transport wenigstens eines Teils der festen Teilchen zurück von den diskreten Fließbett-Wärmetauschern (24)

in den Reaktor (10) mit zirkulierender Wirbelschicht, wobei

jeder diskrete Fließbett-Wärmetauscher eine Kammer umfasst, die mindestens einen Einlass für feste Teilchen und mindestens einen Auslass für feste Teilchen im Abstand zu dem mindestens einen Einlass aufweist, Mittel zur Zuführung eines Fluidisierungsgases vom Bodenbereich der Kammer in die Kammer, eine Vielzahl von Wärmetauschermitteln in der Kammer, wobei ein einzelnes Wärmetauschermittel in einer wandähnlichen Struktur gestaltet ist und eine Vielzahl von Wärmetauschermitteln in Abstand zueinander mit Kanälen dazwischen angeordnet ist, wobei die Wärmeübertragungsmittel und die Kanäle sich im Wesentlichen parallel zur Hauptfließrichtung der festen Teilchen auf ihrem Weg zu und durch den Auslass erstrecken, die Zahl (bis zu n) diskreter Fließbett-Wärmetauscher (24.1, 24.2, 24.3) mechanisch verbunden ist, um einen gemeinsamen Fließbett-Wärmetauscher (24) zu bilden, mit einer wassergekühlten Zwischenwand (24i) zwischen benachbarten diskreten Fließbettwärmetauschern (24.1, 24.2, 24.3), wobei der Reaktor (10) mit zirkulierender Wirbelschicht, die (n) Trenneinrichtung(en) (18) und der gemeinsame Fließbett-Wärmetauscher (24) hängend befestigt sind.

2. Fließbettapparat nach Anspruch 1, wobei die diskreten Fließbett-Wärmetauscher (24.1, 24.2, 24.3) in einer Reihe arrangiert sind, um den gemeinsamen Fließbett-Wärmetauscher (24) zu bilden.

3. Fließbettapparat nach Anspruch 1, wobei die wassergekühlten Zwischenwände (24i) wassergekühlte Rohre umfassen.

4. Fließbettapparat nach Anspruch 1, wobei die wassergekühlten Zwischenwände (24i) wassergekühlte Rohre aufweisen, wobei benachbarte Rohre durch metallische Stege verbunden sind.

5. Fließbett nach Anspruch 1, wobei der gemeinsame Fließbett-Wärmetauscher (24) an der/den Trenneinrichtung(en) (18) hängt.

6. Fließbettapparat mit einem zirkulierenden Wirbelschichtreaktor (10) nach Anspruch 1, wobei der gemeinsame Fließbett-Wärmetauscher (24) und der Reaktor (10) mit zirkulierender Wirbelschicht eine gemeinsame Wand (14w) aufweisen.

7. Fließbettapparat nach Anspruch 6, wobei die gemeinsame Wand (14w) wassergekühlt ist.

8. Fließbettapparat nach Anspruch 6, wobei die gemeinsame Wand (14w) eine oder mehrere Öffnungen aufweist, die die Funktion von Rückfuhrmitteln

erfüllen.

9. Fließbettapparat nach Anspruch 1, wobei der gemeinsame Fließbettwärmetauscher (24) Kammerwände (14w) aufweist, die zumindest teilweise wassergekühlt sind.

Revendications

1. Appareil à lit fluidisé comprenant un réacteur à lit fluidisé circulant (10) avec au moins un orifice de sortie (16) au niveau de sa partie supérieure, dans lequel ledit orifice de sortie (16) permet l'écoulement d'un mélange de gaz et de particules solides s'échappant du réacteur à lit fluidisé (10) dans un certain nombre (n) de séparateurs associés (18) pour séparer les particules solides dudit gaz, un certain nombre (n) de moyens (20) pour transférer lesdites particules solides séparées provenant desdits (n) séparateurs (18) dans un certain nombre (jusqu'à n) d'échangeurs thermiques à lit fluidisé (24.1, 24.2, 24.3) discrets et des moyens de retour pour transporter au moins une partie desdites particules solides de nouveau desdits échangeurs thermiques à lit fluidisé (24) discrets dans le réacteur à lit fluidisé circulant (10), dans lequel

chaque échangeur thermique à lit fluidisé discret. comprend une chambre, comprenant au moins un orifice d'entrée de particules solides, au moins un orifice de sortie de particules solides, agencés à une certaine distance de l'au moins un orifice d'entrée, un moyen d'introduction d'un gaz de fluidisation provenant d'une zone de fond de ladite chambre dans ladite chambre, des moyens de transfert thermique multiples agencés dans ladite chambre, dans lequel un moyen de transfert thermique individuel est conçu sous forme de structure de type paroi et un ensemble de moyens de transfert thermique multiples qui sont agencés à une certaine distance les uns des autres avec des canaux entre, dans lequel les moyens de transfert thermique et les canaux se prolongent sensiblement parallèlement au sens d'écoulement principal des particules solides sur leur chemin vers et à travers l'orifice de sortie, les échangeurs thermiques à lit fluidisé (24.1, 24.2, 24.3) discrets présents en un nombre (jusqu'à n) sont mécaniquement reliés pour fournir un échangeur thermique à lit fluidisé (24) commun avec une paroi intermédiaire refroidie avec de l'eau (24i) entre les échangeurs thermiques adjacentes à lit fluidisé (24.1, 24.2, 24.3) discrets,

le réacteur à lit fluidisé circulant (10), ledit ou lesdits (n) séparateurs (18) et l'échangeur ther-

mique à lit fluidisé (24) commun sont montés d'une manière suspendue.

2. Appareil à lit fluidisé selon la revendication 1, dans lequel les échangeurs thermiques à lit fluidisé (24.1, 24.2, 24.3) discrets sont agencés sous forme de rangée pour fournir l'échangeur thermique à lit fluidisé (24) commun. 5
3. Appareil à lit fluidisé selon la revendication 1, dans lequel les parois intermédiaires refroidies avec de l'eau (24i) comprennent des conduites refroidies avec de l'eau. 10
4. Appareil à lit fluidité selon la revendication 1, dans lequel les parois intermédiaires refroidies avec de l'eau (24i) comprennent des conduites refroidies avec de l'eau, les conduites adjacentes étant reliées par des ailettes métalliques. 15
20
5. Appareil à lit fluidisé selon la revendication 1, dans lequel l'échangeur thermique à lit fluidisé (24) commun est suspendu depuis le ou les séparateurs (18).
6. Appareil à lit fluidisé selon la revendication 1, dans lequel l'échangeur thermique à lit fluidisé (24) commun et le réacteur à lit fluidisé circulant (10) ont une paroi (14w) commune. 25
7. Appareil à lit fluidisé selon la revendication 6, dans lequel la paroi (14w) commune est refroidie avec de l'eau. 30
8. Appareil à lit fluidisé selon la revendication 6, dans lequel la paroi (14w) commune a une ou plusieurs ouvertures (30) remplissant la fonction de moyens de retour. 35
9. Appareil à lit fluidisé selon la revendication 1, dans lequel l'échangeur thermique à lit fluidisé (24) commun a des parois (14w) de chambre qui sont au moins partiellement refroidies avec de l'eau. 40

45

50

55

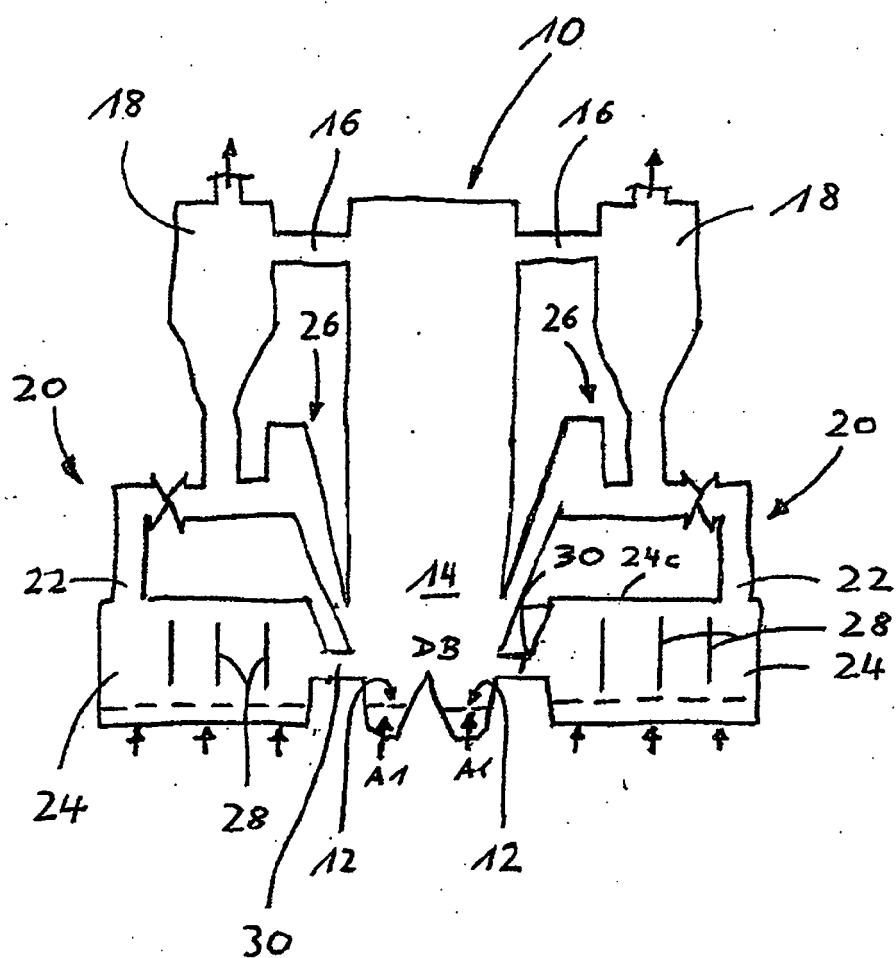
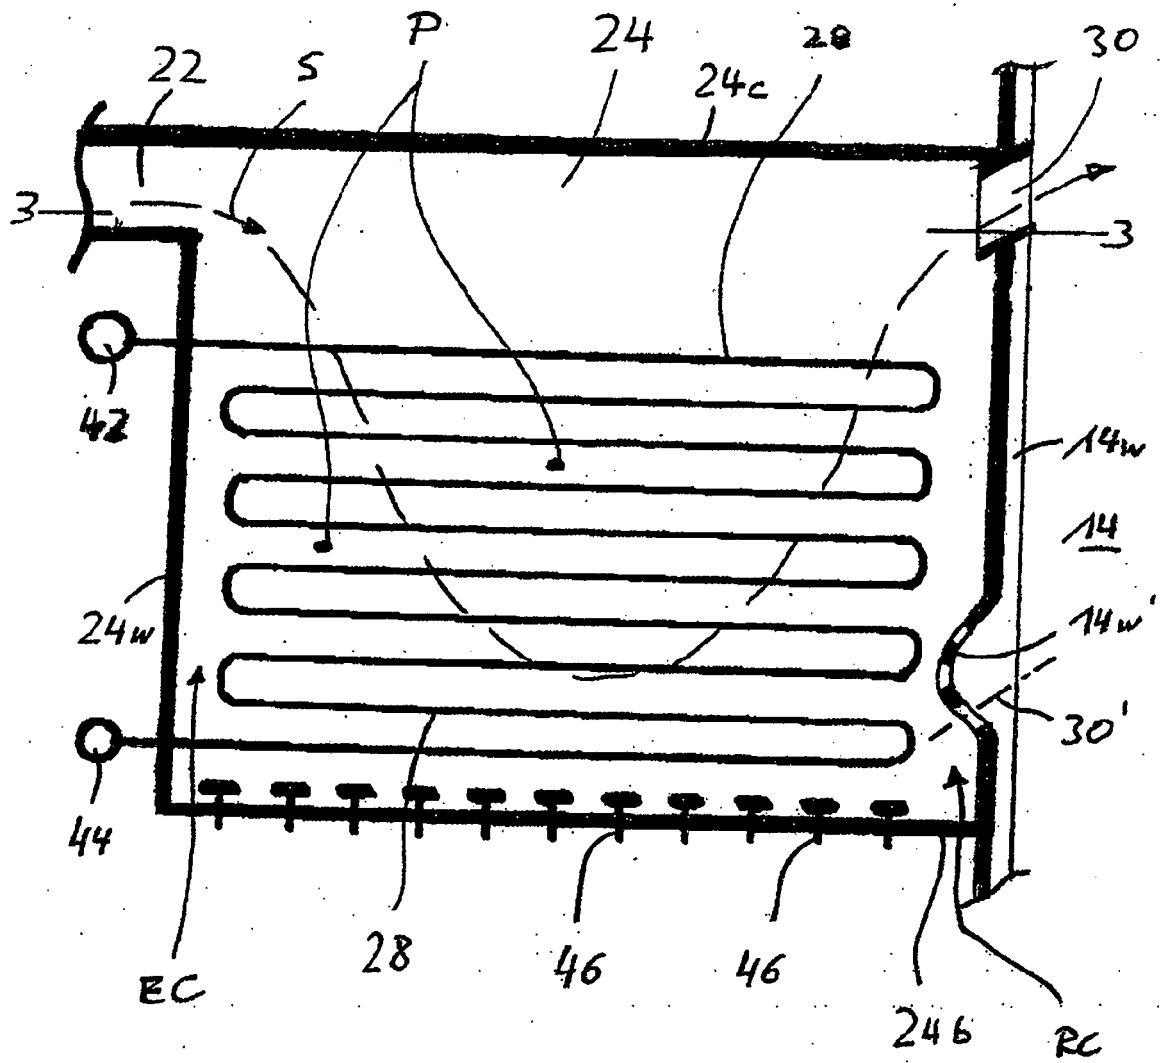


Fig. 1

Fig. 2



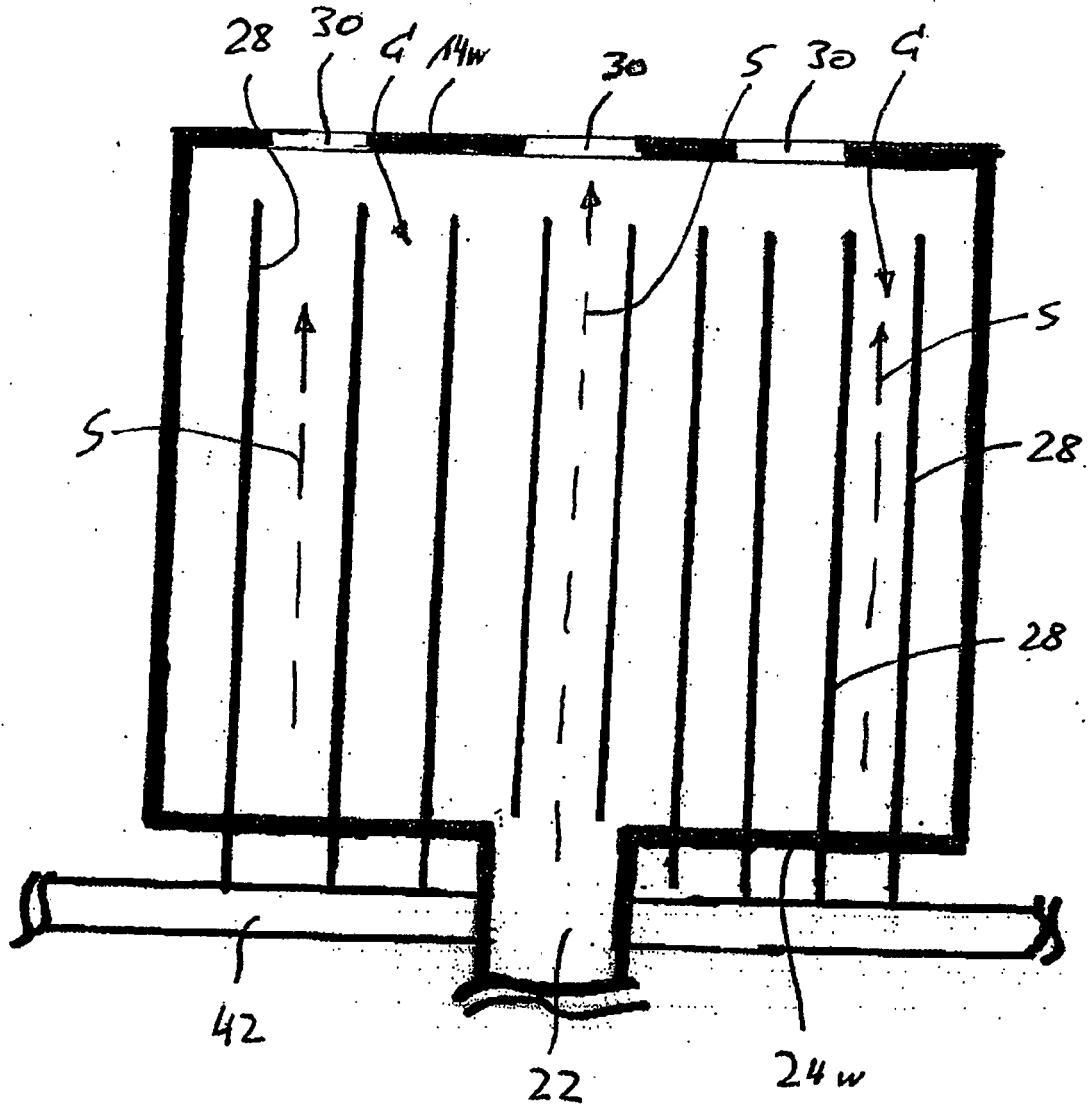


Fig.3

Fig. 4

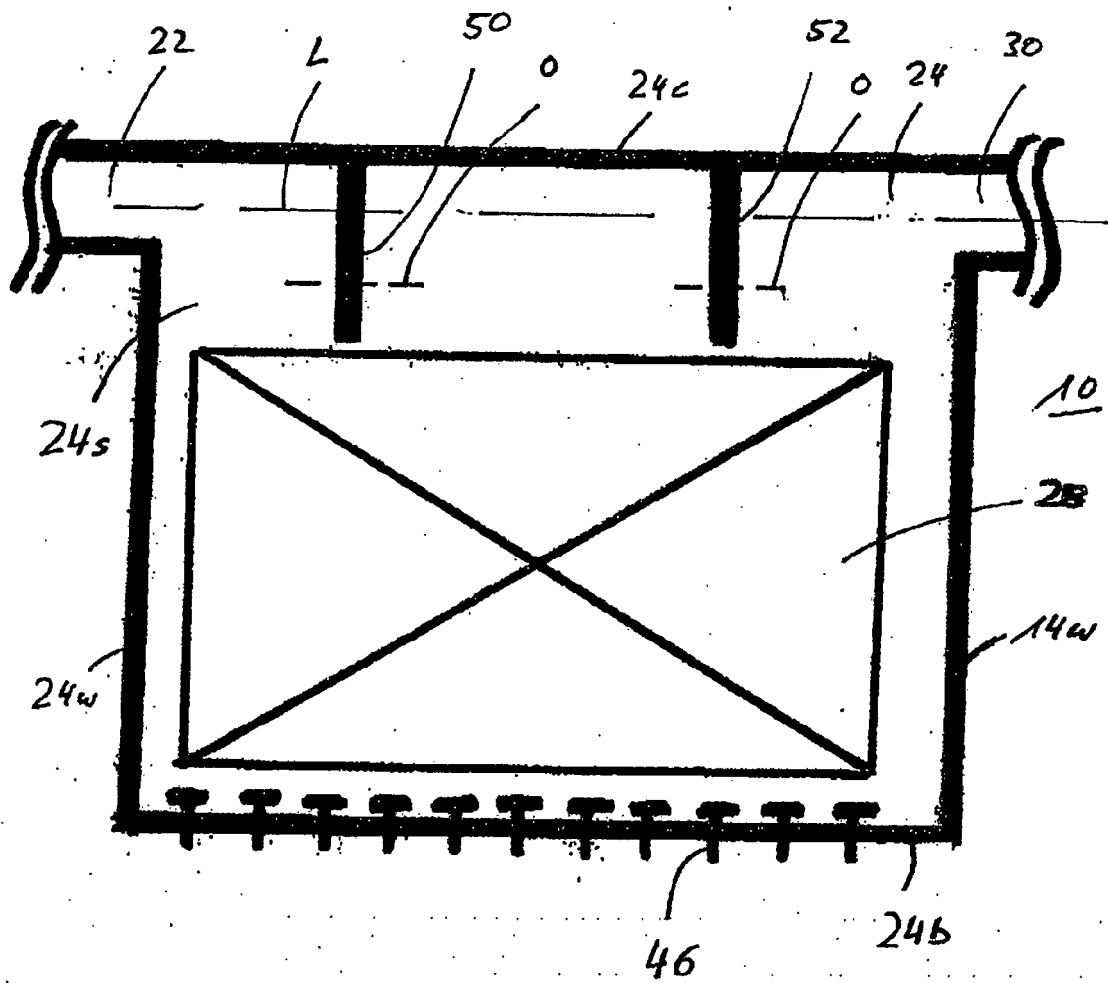
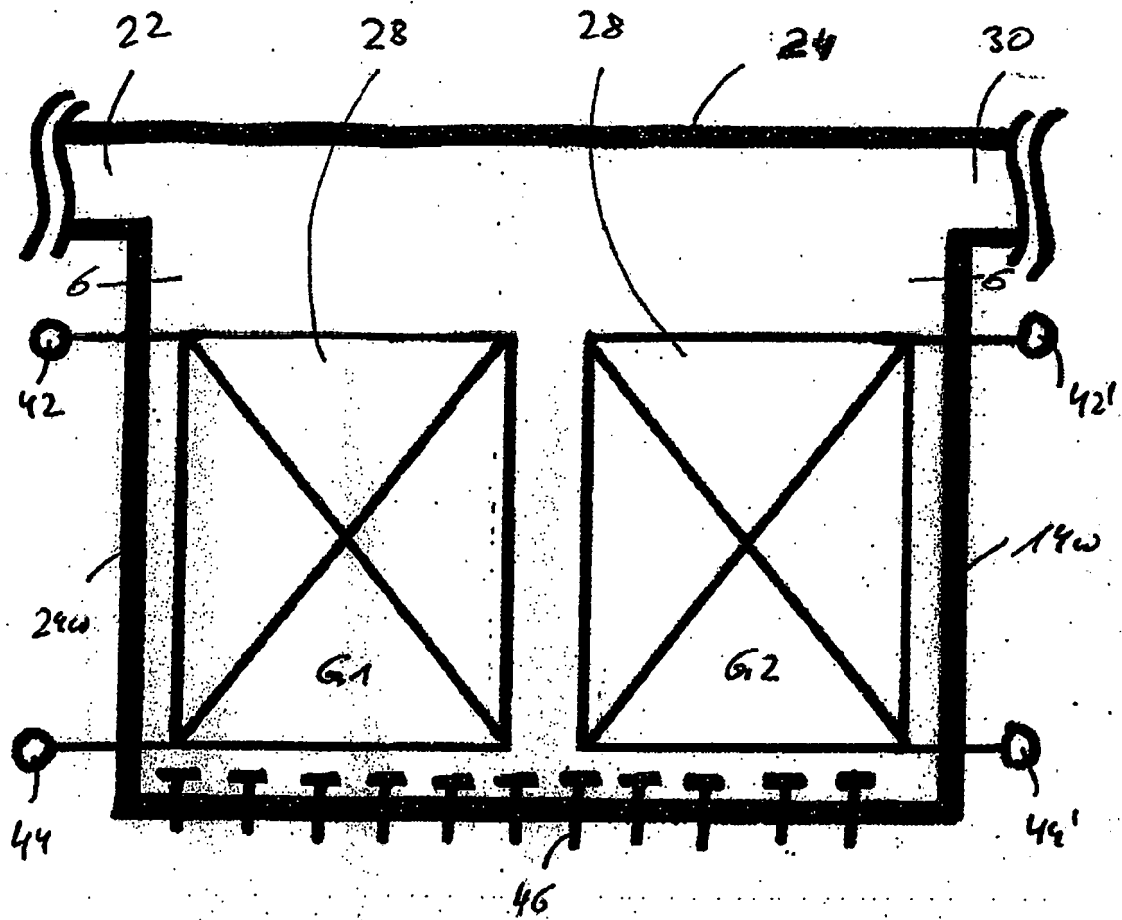


Fig. 5



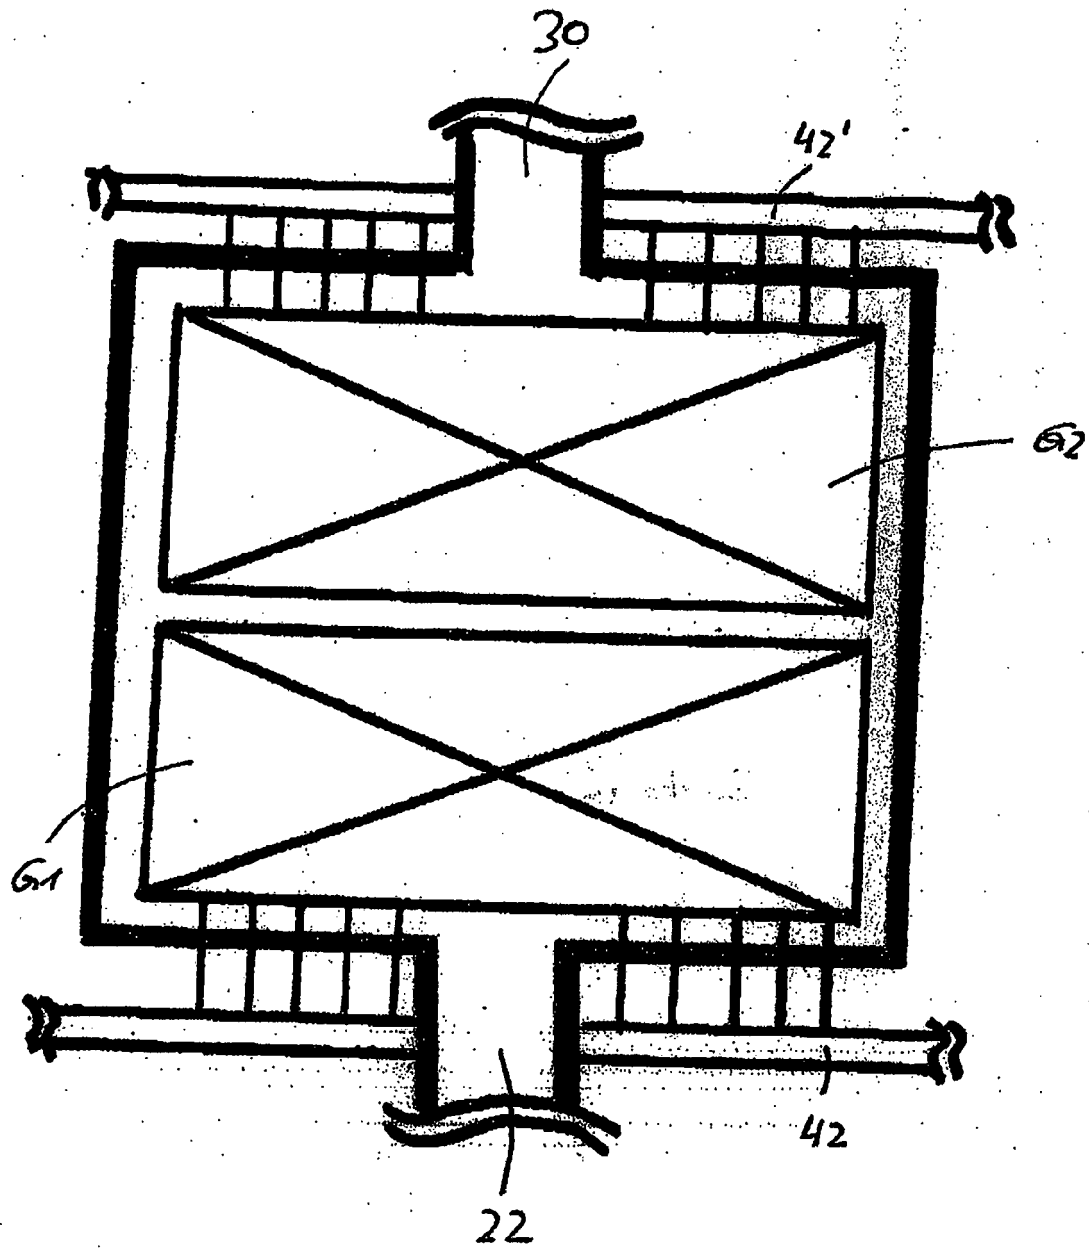


Fig. 6




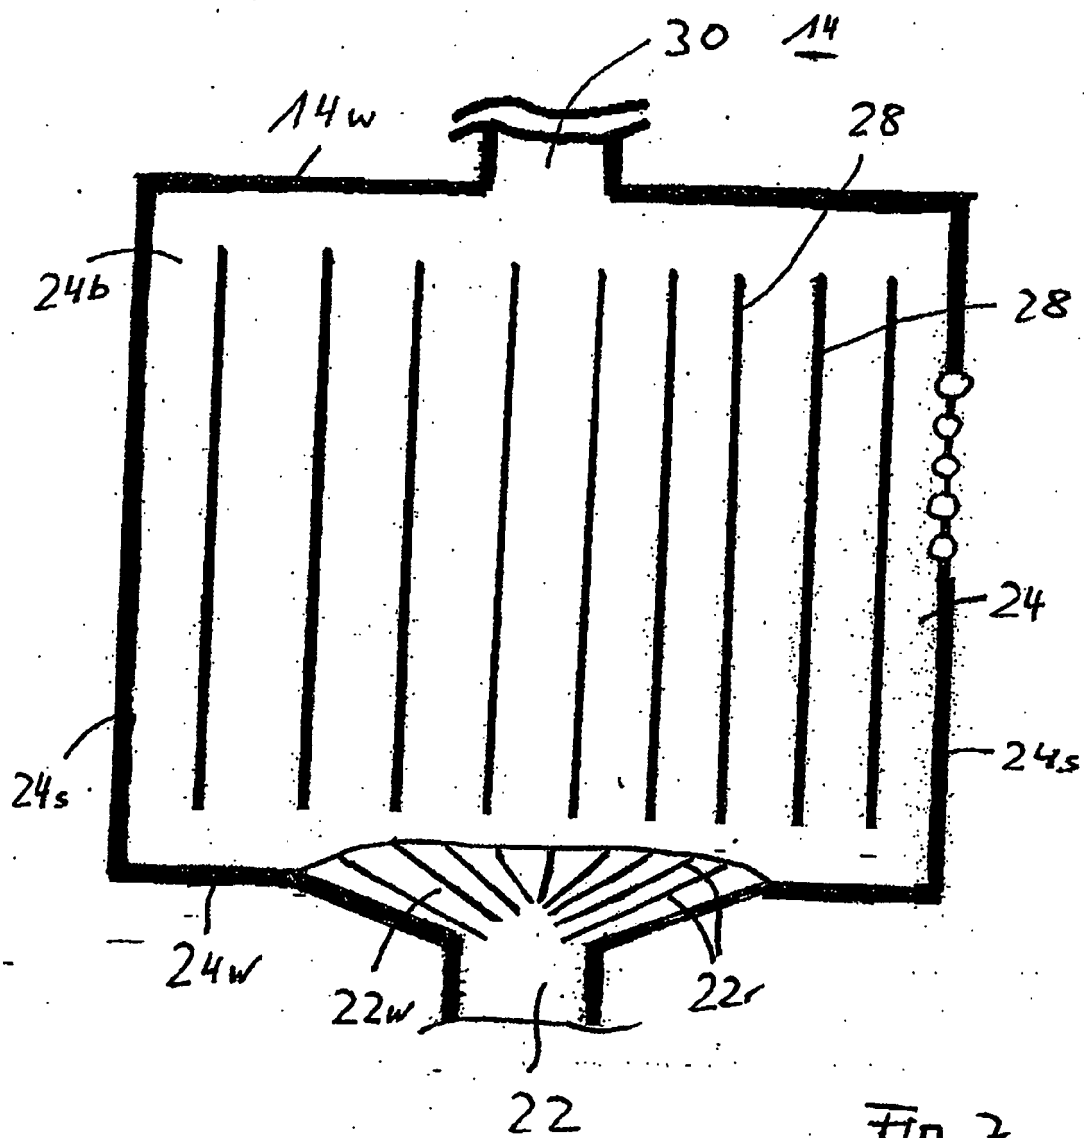


Fig. 7

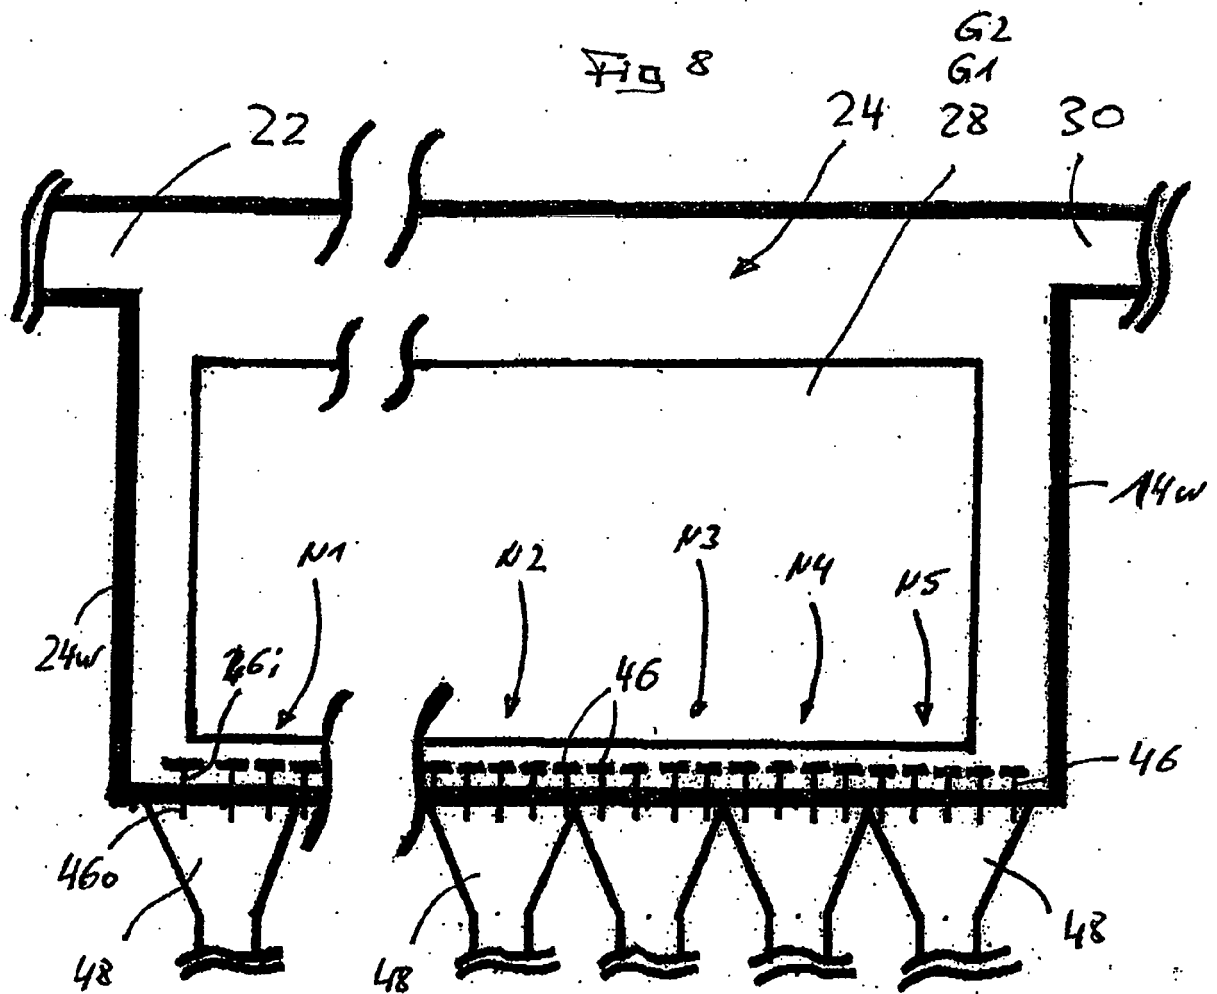

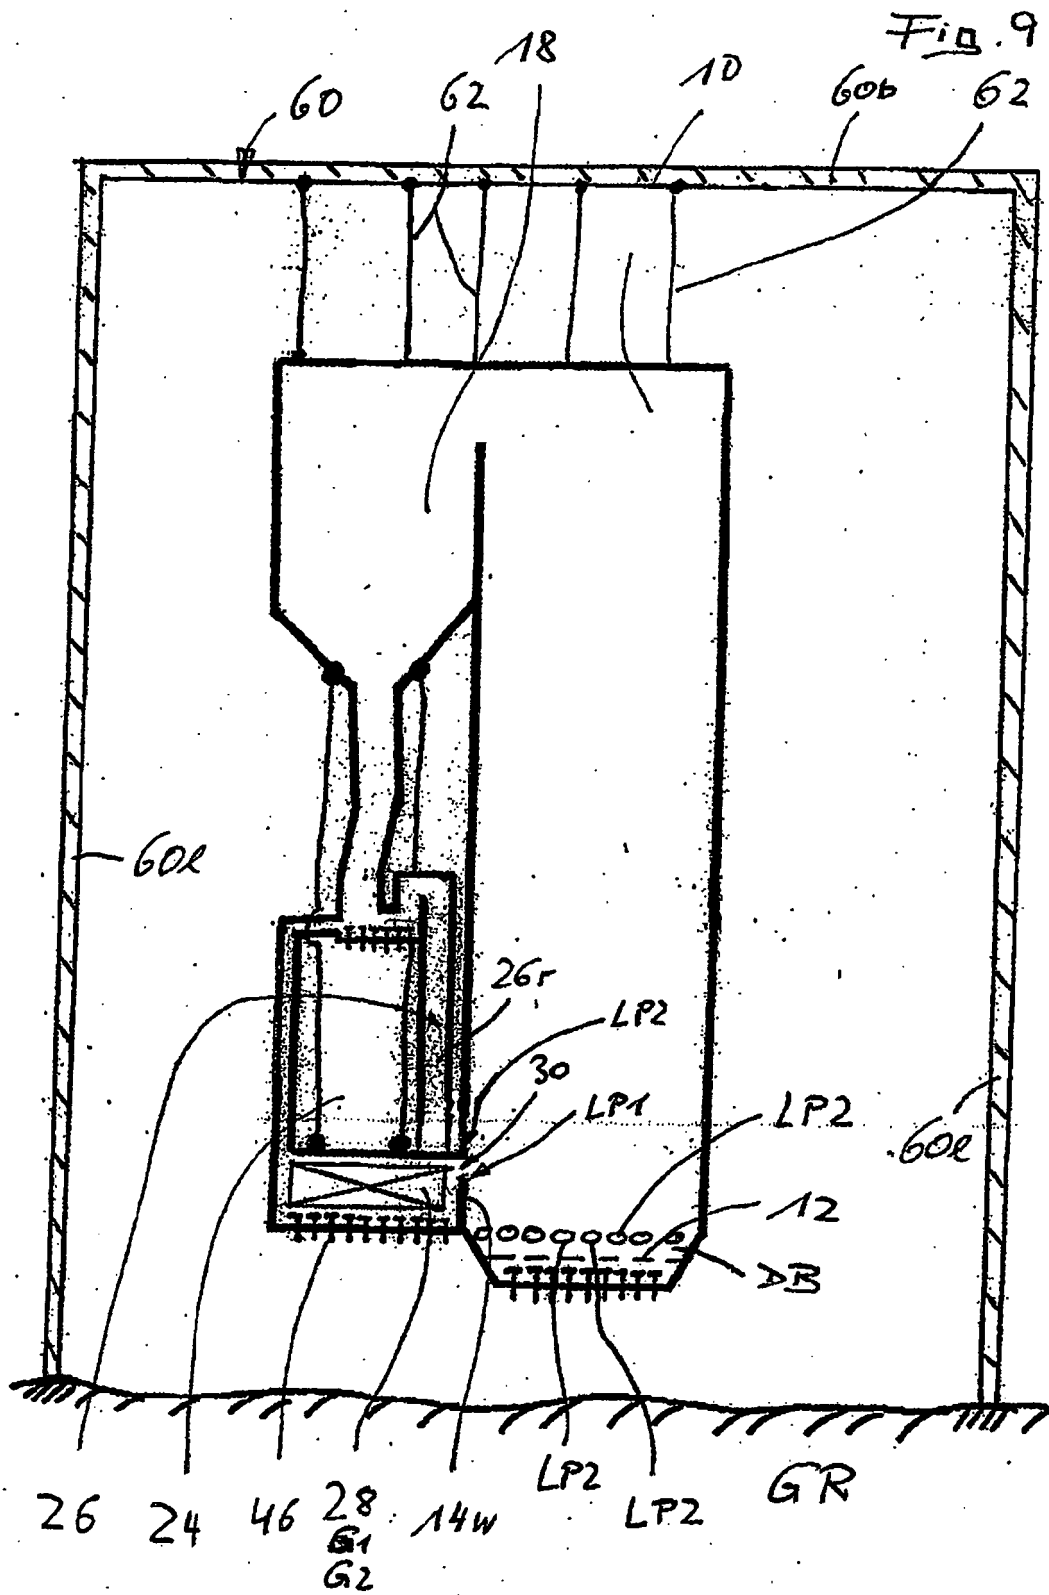

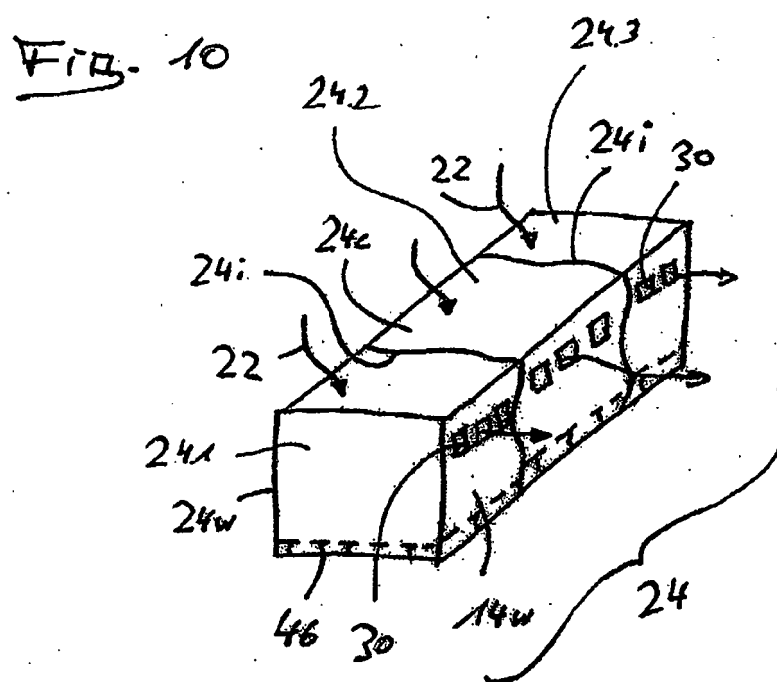

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6802890 B2 [0001]
- US 4615715 A [0006]
- US 7520249 B2 [0009]
- US 5299532 A [0010]