



(43) International Publication Date
27 August 2015 (27.08.2015)

- (51) **International Patent Classification:**
H05K 1/14 (2006.01) *H05K 1/11* (2006.01)
H01R 13/00 (2006.01)
- (21) **International Application Number:**
PCT/EP2015/053446
- (22) **International Filing Date:**
18 February 2015 (18.02.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
14290041.4 19 February 2014 (19.02.2014) EP
- (71) **Applicant:** AT&S AUSTRIA TECHNOLOGIE & SYSTEMTECHNIK AKTIENGESELLSCHAFT [AT/AT]; Fabriksgasse 13, A-8700 Leoben (AT).
- (72) **Inventors:** FISCHENEDER, Martin; Karmarschgasse 32/4/17, A-1100 Wien (AT). KASTELIC, Markus; Fleischergasse 3/9, A-8740 Zeltweg (AT). LEITGEB, Markus; Robert-Postmannstr. 7B, A-8793 Trofaiach (AT). RENAUD-BEZOT, Nick; Knappengasse 1/8, A-8700 Leoben (AT).
- (74) **Agent:** DILG, Andreas; Dilg, Haeusler, Schindelmann, Patentanwaltsgesellschaft mbH, Leonrodstr. 58, 80636 München (DE).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** PCB-BASED CONNECTOR DEVICE

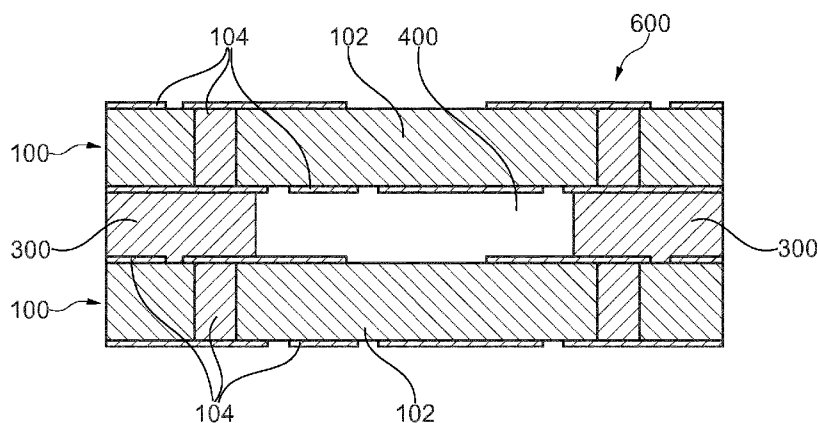


Fig. 6

(57) **Abstract:** A connector device (600) for connection with a counter piece (1500) for establishing a mechanical and electric connection, wherein the connector device (600) comprises at least two printed circuit board elements (100) each comprising an electrically insulating core (102) and at least one comprising an electrically conductive structure (104) at least partially on the respective electrically insulating core (102), and at least one embedded component (106) embedded within the respective electrically insulating core (102) and electrically coupled to the respective electrically conductive structure (104), wherein the at least one electrically conductive structure (104) is arranged at least partially on an exposed surface of the connector device (600) and is configured for establishing the electric connection with the counter piece (1500) upon establishing the mechanical connection with the counter piece (1500).



PCB-based connector device

The invention relates to a connector device for connection with a
5 counter piece for establishing a mechanical and electric connection.

Moreover, the invention relates to a connection arrangement.

Beyond this, the invention relates to a method of manufacturing a
connector device.

10 Standard connectors generally constitute of metal inserts (i.e.
contacts) surrounded by a polymer. Such an assembly is often created
during a moulding process (such as injection moulding, transfer
moulding, etc.). This method allows the creation of complex mechanical
15 shapes, with a variety of physical properties depending on the selected
material combination.

US 5,374,196 and US 5,515,604 disclose laminated connectors
which comprise a plurality of layers of rigid dielectric material which are
laminated together. The dielectric contains traces which are joined to
contact pads, connecting the traces to adjacent circuit boards.

20 Alternatively, the rigid dielectric layers contain recesses where the
contact pads are placed. Cross-traces can be placed on each individual
layer of dielectric or vias made through the dielectric layers, to
interconnect traces.

However, there is still a need for a connector device which can be
25 manufactured in a simple way and connected in a reliable way while
offering the flexibility to implement a wide range of electric functions
within the connector device.

It is an object of the invention to provide a simply manufacturable
30 and reliably connectable connector device offering a high flexibility in
terms of implementable functions.

In order to achieve the object defined above, a connector device
for connection with a counter piece for establishing a mechanical and

- 2 -

electric connection, a connection arrangement, and a method of manufacturing a connector device according to the independent claims are provided.

According to an exemplary embodiment of the invention, a
5 connector device for connection with a counter piece for establishing a mechanical and electric connection is provided, wherein the connector device comprises at least two printed circuit board (PCB) elements or sections each comprising an electrically insulating core and at least one comprising an electrically conductive structure at least partially on the
10 respective electrically insulating core, wherein the at least one electrically conductive structure is arranged at least partially on an exposed surface of the connector device and is configured for establishing the electric connection with the counter piece upon establishing the mechanical connection with the counter piece.

15 According to another exemplary embodiment of the invention, a connection arrangement is provided, wherein the connection arrangement comprises a connector device having the above mentioned features for connection with a counter piece, and the counter piece being configured for being mechanically and electrically connected with the
20 connector device upon plugging the counter piece and the connector device together.

According to still another exemplary embodiment of the invention, a method of manufacturing a connector device for connection with a counter piece for establishing a mechanical and electric connection is
25 provided, wherein the method comprises forming at least one printed circuit board (PCB) element as a subsection of a printed circuit board (PCB) and comprising an electrically insulating core and an electrically conductive structure at least partially on the electrically insulating core, arranging at least part of the electrically conductive structure on an
30 exposed surface (of the connector device to be manufactured), and configuring the electrically conductive structure for establishing the

- 3 -

electric connection with the counter piece upon establishing the mechanical connection between the connector device and the counter piece.

In the context of the present application, a "printed circuit board" (PCB) may denote a board of an electrically insulating core covered with electrically conductive material and conventionally serving for mounting thereon electronic members (such as packaged electronic chips, sockets, etc.) to be electrically coupled by the electrically conductive material. More specifically, a PCB may mechanically support and electrically connect electronic components using conductive tracks, pads and other features etched from copper sheets laminated onto an electrically non-conductive substrate. PCBs can be single sided (one copper layer), double sided (two copper layers) or of multi-layer type. Conductors on different layers may be connected with plated-through holes called vias. Advanced PCBs may contain components, such as capacitors, resistors or active devices, embedded in the substrate. The term "printed circuit board" may in particular encompass rigid PCBs, flexible PCBs, semiflexible PCBs and/or rigid-flex PCBs.

In the context of the present application, a "printed circuit board element" may particularly denote a subsection of a PCB, for instance obtained by a singulation of a PCB into multiple printed circuit board elements.

According to an exemplary embodiment, one or more PCB elements, in particular subsections of a printed circuit board (PCB), are used as main components (or only components) of a connector device. Upon connecting the connector device with a counter piece mechanically by a mutual engagement, an electric connection may be automatically established between electrically conductive structures of the connector device and electrically conductive structures of the counter piece without taking any further action. In other words, the electrically conductive structures of connector device and of the counter piece are automatically

- 4 -

aligned in the correct manner by completing the mechanical connection. Forming connector devices based on PCB technology does not only allow to manufacture the connector device with a very simple manufacturing procedure, but also shows a high quality electric coupling safety.

5

In the following, further exemplary embodiments of the connector device, the connection arrangement, and the method will be explained.

In an embodiment, the printed circuit board element is embodied as a section of a printed circuit board. A printed circuit board may hence
10 be separated, for instance by cutting or sawing, into a plurality of sections (for instance at least ten, in particular at least one hundred sections) each constituting a printed circuit board element. Each printed circuit board element may have a rectangular shape. This allows to use a standard material, i.e. PCB, as a basis for the formation of the connector
15 device. Furthermore, standard procedures of PCB technology may be advantageously used.

In an embodiment, the length dimension and/or the width dimension of the printed circuit board element may be at least three times, in particular at least five times, of a thickness of the printed circuit
20 board element. Thus, a flat and hence very compact connector device may be obtained. The thickness of a printed circuit board element may for instance be in a range between 30 μm and 3 mm, in particular in a range between 1 mm and 2 mm. The length and/or the width of a printed circuit board element may for instance be in a range between 3 mm and
25 10 cm, in particular in a range between 8 mm and 5 cm.

In an embodiment, the electrically insulating core comprises or consists of resin. This resin may for instance be an epoxy-based resin or low-CTE (coefficient of thermal expansion) resin, or high-T_g (glass transition temperature) resin.

30 In an embodiment, the electrically insulating core may be a planar sheet or plate. For instance, the electrically insulating core may have a

- 5 -

thickness in a range between 30µm and 10 cm. A planar shape of the electrically insulating core and of the printed circuit board element may simplify stacking of the printed circuit board element with at least one further printed circuit board element and/or a spacer structure (the latter
5 may comprise one or more plug recesses, as described below).

In an embodiment, the respective electrically conductive structure comprises at least one patterned electrically conductive layer formed on one at least one of two opposing main surfaces of the electrically
10 insulating core. Such an electrically conductive structure may be made of copper. The electrically conductive material may be deposited on the electrically insulating core, and may be subsequently patterned by a lithography and etching procedure.

In an embodiment, the electrically conductive structure comprises at least one via extending vertically through the electrically insulating
15 core for electrically connecting the two opposing main surfaces of the electrically insulating core. Each via may be a through hole filled with electrically conductive material such as copper and may be electrically coupled with planar portions of the electrically conductive structure on at least one of the main surfaces of the electrically insulating core.

20 In an embodiment, the device comprises at least one embedded component (such as an electronic chip) embedded within the electrically insulating core and electrically coupled to the electrically conductive structure. In other words, at least one electric component may be integrated within the electrically insulating core of the printed circuit
25 board element. This may allow to implement even complex electronic functionalities in a compact connector device. In other words, the connector device may either simply provide an electric connecting function electrically coupling the connector device to the counter piece, or may alternatively provide additional electronic functions.

30 Examples of the embedded components are a data storage memory such as a DRAM (or any other memory), a filter (which may for

- 6 -

instance be configured as a high pass filter, a low pass filter or a bandpass filter, and which may for instance serve for frequency filtering), an integrated circuit (such as a logic IC), a signal processing component (such as a microprocessor), a power management component, an optical
5 electrically interfacing member (for instance an optoelectronic member), a voltage converter (such as a DC/DC converter or an AC/DC converter), a cryptographic component, a capacitor, an inductance, a switch (for instance a transistor-based switch) and a combination of these and other functional electronic members.

10 In an embodiment, at least two printed circuit board elements are vertically stacked so that main surfaces of the at least two printed circuit board elements are arranged in parallel to one another. Thus, the connector architecture according to an exemplary embodiment is compatible with a three-dimensional integration, thereby allowing to
15 implement a large number of electronic functions in a small volume.

In an embodiment, the device further comprises at least one plug recess (which may be a blind hole or a through hole in the device and may be externally accessible) for establishing the mechanical connection with the counter piece. In the context of the present application, a "plug
20 recess" may particularly denote a blind hole or an indentation in the connector device which is externally accessible to serve as a female connector recess configured for receiving a male connector protrusion of the counter piece. For connecting such a connector device mechanically and electrically to the counter piece (such as another connector device)
25 one or more plug recesses may be formed in the PCB element-based connector device mating with correspondingly/inverse shaped protrusions of the counter piece. Hence, the provision of one or more plug recesses renders the connection action performed by a user intuitive, simple, and failure-robust by allowing for a connection only upon connecting mating
30 pairs of connector device and counter piece in terms of size, type and orientation.

- 7 -

In an embodiment, at least one plug recess is formed exclusively within one of the at least one printed circuit board element. Thus, a single printed circuit board element may be converted into a connector device merely by forming a recess within a single circuit board element to
5 provide for a form closure connection with a counter piece. This results in an extremely compact and simple geometry.

In an embodiment, at least one plug recess is formed at an interface between two adjacent printed circuit board elements. Such a connector device may be formed by removing material from a first
10 printed circuit board element and by attaching the so processed first printed circuit element to a second printed circuit board element. Consequently, the plug recess is formed directly at an interface between the two printed circuit board elements and is circumferentially delimited by both of them.

15 In another embodiment, the device comprises at least two printed circuit board elements and a spacer structure (spacing the printed circuit board elements) is arranged between the at least two printed circuit board elements, wherein at least one plug recess is formed in the spacer structure. In this embodiment, two conventional printed circuit board
20 elements may be taken as such, and a spacer structure may be sandwiched between them for forming the connector device. When forming a recess in the spacer structure, the attachment of the spacer structure between the two printed circuit board elements forms the plug recess circumferentially delimited by one or both printed circuit board
25 elements and the spacer structure. Alternatively, the recess may be formed in an interior of the spacer structure so that the spacer structure alone forms the plug recess.

For example, the spacer structure may be made of no-flow prepreg material so that fixing the spacer structure between the two printed
30 circuit board elements by pressure and/or thermal energy will start polymerization of the prepreg material without loss of its shape, thereby

- 8 -

maintaining a plug recess with a well-defined shape and position within the connector device but exposed to the environment. More generally, the spacer structure may be made of a material which is configured to remain dimensionally stable when fixing the spacer structure between the two printed circuit board elements, in particular by heating and/or applying pressure.

In an embodiment, the device comprises (additionally or alternatively to the provision of a plug recess) at least one plug protrusion contributing to establishing the mechanical connection with the counter piece. The plug protrusion can be considered as the inverse of a plug recess and can represent a male portion of the connector device cooperating with a correspondingly shaped plug recess of the counter piece.

In an embodiment, the device comprises at least two printed circuit board elements connected to one another directly, or indirectly via the spacer structure. By forming the connector device from a plurality of printed circuit board elements stacked vertically on top of one another, a three-dimensional integration to fulfil complex connection tasks and also advanced electronic functional tasks may be achieved.

In an embodiment, at least part of the electrically conductive structure is arranged on an exposed surface of the at least one printed circuit board element. Since printed circuit board elements may already comprise electrically conductive structures such as traces of copper, they can be used in the PCB-based connector device for providing the electronic connection tasks.

In an embodiment, at least part of the electrically conductive structure is arranged on at least one of two opposing main surfaces of the at least one printed circuit board element. In another embodiment, at least part of the electrically conductive structure is arranged on at least one of side walls perpendicular to two opposing main surfaces of the at least one printed circuit board element. In still another embodiment, at

- 9 -

least part of the electrically conductive structure is arranged on an exposed surface of the plug recess, in particular parallel and/or perpendicular to two opposing main surfaces of the printed circuit board element(s). Therefore, the PCB based architecture of forming connector
5 devices is compatible with very different orientations of the electrically conductive structure in a horizontal and/or vertical direction. The electrically conductive structure may be arranged at one, two, three, four or even more exposed surfaces of the device, depending on the electric contacting tasks required for a specific application.

10 In an embodiment, each of the at least two printed circuit board elements is formed as a subsection of a printed circuit board. In particular, a printed circuit board may be used as a semifinished product and may be singularized into a large number of printed circuit board elements, and the latter may in turn be used for manufacturing the
15 connector device.

In an embodiment, the device is configured as one of the group consisting of a Lightning® connector (i.e. a connector having eight pins), a MIPI (Mobile Industry Processor Interface) connector, a USB (Universal Serial Bus) connector, a HDMI (High Definition Multimedia Interface), and
20 a ZIF (Zero Insertion Force) connector. Connector devices according to these and many other connector standards can be formed on the basis of PCB elements.

In an embodiment, the counter piece is configured as a connector device having the above mentioned features. Hence, in such an
25 embodiment, both connector pieces of the connection arrangement can be constructed based on PCB technology. This results in a very compact design and allows to be manufactured with low cost.

In an embodiment, the plug recess is formed by mechanically removing material of the at least one printed circuit board element
30 and/or a spacer structure arranged between two printed circuit board elements, in particular by one of the group consisting of milling, laser

- 10 -

processing, cutting, and punching. Such a mechanical procedure is simpler, faster and cheaper than for instance a chemical removal procedure (which may be implemented according to other embodiments as well). Furthermore, a mechanical removal of material involves less waste and pollution.

5 In an embodiment, the spacer structure having one or more plug recesses is connected between the two printed circuit board elements by adhering and/or pressing. For instance, an adhesive may be used which starts adhering upon application of thermal energy. Alternatively, an
10 adhesive may be used which starts adhering upon applying pressure. The adhesive material may be separate from the printed circuit board element(s) and/or the spacer structure. Alternatively, the adhesive material may form part of the printed circuit board element(s) and/or the spacer structure. The latter alternative is particularly advantageous since
15 it keeps the number of components used for the manufacturing procedure small and hence the manufacturing procedure simple.

In an embodiment, the method comprises providing at least one printed circuit board (in particular a full PCB), optionally patterning electrically conductive material on at least one main surface of the at
20 least one printed circuit board, and singularising the at least one printed circuit board with its electrically conductive material (and optionally plug recesses) into a plurality of sections, each section constituting a connector device according to an exemplary embodiment. Therefore, at least a part of the manufacture of the connector device may be formed in
25 a batch process, i.e. for a plurality of connector devices simultaneously, based on the processing of one or more boards which is/are then singularized, for instance by sawing, laser cutting, or etching. This allows to manufacture the connector devices in a fast time and with low cost.

In an embodiment, the method further comprises forming a
30 plurality of plug recesses (in at least one printed circuit board and/or a spacer structure) before the singularising. Thus, also the formation of the

- 11 -

plug recesses may be performed on board level, i.e. during a batch process.

In an embodiment, the method further comprises stacking at least two printed circuit boards before singularizing the stack into the plurality
5 of sections (constituting connector devices). Therefore, the concept of forming connector devices on the basis of PCB technologies allows a three-dimensional integration.

In an embodiment, the method comprises arranging a spacer board (such as an electrically insulating sheet) between the at least two
10 stacked printed circuit boards before singularizing the stack into the plurality of sections each of which comprising a portion of the spacer board constituting a spacer structure. Thus, also the provision of a spacer board having a plurality of plug recesses can be integrated in the batch process of manufacturing multiple connector devices simultaneously.

15 In one embodiment, the connector device may be a standalone device. Thus, the connector device may be a body which may be handled separately from other apparatuses and may be selectively plugged onto or into another apparatus. For example, such a connector device may be a portable memory stick.

20 In another embodiment, the connector device may form part of a large apparatus. For instance, it may be connected via a cable or directly to an apparatus such as a computer for connecting the apparatus to a partner device or counter piece.

The aspects defined above and further aspects of the invention are
25 apparent from the examples of embodiment to be described hereinafter and are explained with reference to these examples of embodiment.

The invention will be described in more detail hereinafter with reference to examples of embodiment but to which the invention is not
30 limited.

Figure 1 and Figure 2 illustrate cross sections of printed circuit

- 12 -

board elements used as a basis for manufacturing a connector device according to an exemplary embodiment of the invention.

Figure 3 illustrates a side view and a plan view of a spacer structure used as a basis for manufacturing a connector device according to an exemplary embodiment of the invention in connection with the printed circuit board elements of Figure 1 and/or Figure 2.

Figure 4 illustrates a plan view of the spacer structure of Figure 3 after having formed a plug recess in the spacer structure by a purely mechanical material removal procedure.

Figure 5 illustrates a structure obtained during carrying out a procedure of assembling two printed circuit board elements as shown in Figure 2 with a plug recess comprising spacer structure as shown in Figure 4 for manufacturing a connector device according to an exemplary embodiment of the invention.

Figure 6 shows a cross-sectional view of a connector device according to an exemplary embodiment of the invention manufactured according to the procedure of Figure 2 to Figure 5.

Figure 7 illustrates a structure obtained during carrying out a procedure of assembling two printed circuit board elements as shown in Figure 1 and Figure 2 with a plug recess comprising spacer structure as shown in Figure 4 for manufacturing a connector device according to another exemplary embodiment of the invention.

Figure 8 shows a cross-sectional view of a connector device according to an exemplary embodiment of the invention manufactured according to the procedure of Figure 1 to Figure 4 and Figure 7.

Figure 9 illustrates a structure obtained during carrying out a procedure of assembling two printed circuit board elements as shown in Figure 1 with a plug recess comprising spacer structure as shown in Figure 4 for manufacturing a connector device according to still another exemplary embodiment of the invention.

Figure 10 shows a cross-sectional view of a connector device

- 13 -

according to an exemplary embodiment of the invention manufactured according to the procedure of Figure 1, Figure 3 to Figure 4 and Figure 9.

Figure 11 and Figure 12 show three-dimensional views of connector devices according to exemplary embodiments of the invention.

5 Figure 13 shows a cross-sectional view of a connector device according to an exemplary embodiment of the invention manufactured by directly connecting two printed circuit board elements to one another, one of which comprising a plug recess.

10 Figure 14 shows a cross-sectional view of a connector device according to an exemplary embodiment of the invention manufactured on the basis of a single printed circuit board element comprising a plug recess in its interior.

15 Figure 15 shows a connection arrangement formed by two correspondingly configured connector devices to be connected electrically and mechanically according to an exemplary embodiment of the invention.

20 Figure 16 to Figure 18 show cross-sectional views of structures obtained during carrying out a method of manufacturing a plurality of connector devices in a batch procedure according to an exemplary embodiment of the invention.

The illustrations in the drawings are schematical. In different drawings, similar or identical elements are provided with the same reference signs.

25 Before, referring to the drawings, exemplary embodiments will be described in further detail, some basic considerations will be summarized based on which exemplary embodiments of the invention have been developed.

30 An embodiment of the invention provides a PCB-based connector device. Exemplary embodiments may have a simple mechanical shape (such as rectangles/squares and combinations thereof) and

- 14 -

interconnection patterns. Advantages of such a connector architecture are, inter alia, the following:

- No need for tooling, thus very-low set-up cost and time,
- Capability for large-scale manufacturing thanks to panel-level/board level or batch processing,
- Capability for very-complex routing thanks to the opportunity to implement a multi-layer architecture,
- Capability for very-fine contact surfaces thanks to the possibility of fine-line structuring,
- Capability for integrated functions thanks to an optional embedding of embedded components (such as discrete components or integrated layers).

In an embodiment of the manufacturing procedure, contacts may be created through standard structuring (such as tracks, edge-plating and/or plated through holes depending on the end-orientation). After that, panels may be stacked and bonded to achieve the desired architecture. Solder paste can then be placed in specific areas to improve soldering behaviour. To finish the product, the connector devices may be singulated from the panel.

One task which may be solved by exemplary embodiments of the invention is to create the conducting surface(s) in one or multiple directions, in order to meet integration demands. Three exemplary possible solutions are:

- Standard PCB tracks
- Vertical plating
- Plated through holes (optionally sawn)

By applying one or more of these three processes, contact surfaces and soldering surfaces can be created at desired angles (such as 90°/180°) of each other. One such combination, involves "Standard PCB Tracks" and "Sawn plated through holes".

- 15 -

Exemplary embodiments allow the creation of complex geometrical shapes, the separation of the connector device from the PCB for increased placement flexibility and the addition of functions through embedding. This may be achieved by increasing the mechanical
5 complexity and the functionalities. Those functions can include:

- Signal processing,
- Power management,
- DRM,
- Opto-electrical interfacing.

10 Due to the flexibility of PCB manufacturing processes, shapes can be repeatedly stacked, thereby dramatically increasing the number of contact surfaces (for instance four contact surfaces, or even significantly more contact surfaces).

Figure 1 and **Figure 2** illustrate cross sections of printed circuit
15 board elements 100 (which may be subsections of larger printed circuit boards/panels, compare for instance Figure 16) used as a basis for manufacturing a connector device 600 (compare for instance Figure 6) according to an exemplary embodiment of the invention.

The printed circuit board elements 100 of Figure 1 comprise an
20 electrically insulating core 102 which is made of a (for instance) reinforced epoxy-based resin (or prepreg) material and is shaped as a plate or sheet. Both opposing main surfaces of the electrically insulating core 102 are covered with planar sections of an electrically conductive structure 104 embodied as respectively patterned electrically conductive
25 layers formed on each of two opposing main surfaces of the electrically insulating core 102 in a horizontal direction according to Figure 1. The electrically conductive structure 104 furthermore comprises vias extending, according to Figure 1 vertically, through the electrically insulating core 102 for electrically connecting the two opposing main
30 surfaces of the electrically insulating core 102. Therefore, the portions of the electrically conductive structure 104 on the two opposing main

- 16 -

surfaces of the electrically insulating core 102 are electrically coupled by a short path by via the vias. In view of the foregoing, the electrically conductive structure 104 is partially arranged on an exposed surface of the printed circuit board element 100, and is partly arranged in an interior of the printed circuit board element 100. Thus, the available volume can be very efficiently used to provide a complex circuitry.

An embedded component 106 is integrated or embedded within the electrically insulating core 102 and is electrically coupled to the planar portions of the electrically conductive structure 104 on the two opposing main surfaces of the electrically insulating core 102 by means of part of the vias.

The embedded component 106 may be any desired type of active electric component or passive electric component. In the shown embodiment, the embedded component 106 may be embodied as a semiconductor memory such as a DRAM in order to extend the electric connection functionality of the connector device 600 to be manufactured by providing a data storage function. Hence, an intelligent connector device 600 with extended electronic functionality may be formed when implementing the embedded component 106 into the printed circuit board element 100.

Although not shown in Figure 1, it is also possible in this and other embodiments described herein that, additionally or alternatively, one or more lateral side surfaces (i.e. vertical surface portions according to Figure 1) of the printed circuit board element 100 is/are covered with electrically conductive material such as copper to form the electrically conductive structure 104.

The printed circuit board element 100 shown in Figure 2, which may form the basis of connector devices 600 manufactured according to other exemplary embodiments differs from the printed circuit board element 100 shown in Figure 1 in that the embedded component 106 and vias connecting the embedded component 106 and forming part of the

- 17 -

electrically conductive structure 104 are omitted. Thus, the functionality of a connector device 600 according to an embodiment using only printed circuit board elements 100 of Figure 2 as a basis may exclusively provide a desired electric coupling scheme between individual ones of pads of the electrically conductive structure 104 and other pads of the corresponding counter piece physically contacting the pads of the electrically conductive structure 104.

Figure 3 illustrates a side view and a plan view of a sheet-like spacer structure 300 used as a basis for manufacturing connector devices 600 according to exemplary embodiments of the invention in connection with the printed circuit board elements 100 of Figure 1 and/or Figure 2.

The spacer structure 300 can also be formed of a glass fiber reinforced epoxy-based resin (or prepreg) material and is shaped as a plate or sheet. It is preferable that the spacer structure 300 is made of a material which does not change its shape (for instance does not start to flow) upon applying thermal energy and/or pressure for adhering the spacer structure 300 between two printed circuit board elements 100, as shown in Figure 1 or Figure 2, because this ensures the maintenance of the correct orientation of the material of the spacer structure 300 (and therefore the task of spacing two printed circuit board elements 100) when forming a connector device 600. For example, this may be guaranteed by embodying the spacer structure 300 from a no flow prepreg material.

Figure 4 illustrates a plan view of the spacer structure 300 of Figure 3 after having formed a plug recess 400 in the spacer structure 300 by a purely mechanical material removal procedure.

Although a chemical material removal procedure (such as etching) is generally possible as well, it is nevertheless preferred to apply a mechanical removal procedure (such as milling, cutting or punching) or laser removal process because this allows the formation of a precisely shaped and dimensioned plug recess 400 in a very simple way. As can be

- 18 -

taken from Figure 4, the spacer structure 300 remains a continuous body after formation of the plug recess 400 which therefore does not separate the spacer structure 300 into isolated islands. This allows to simplify the handling of the recessed spacer structure 300 for manufacturing a
5 connector device 600, because, when taking this measure, only one piece has to be handled and sandwiched between two printed circuit board elements 100. After formation of the plug recess 400, the spacer structure 300 shown in Figure 4 is basically U-shaped, and the plug recess 400 has a rectangular cross-section.

10 **Figure 5** illustrates a structure obtained during carrying out a procedure of assembling two printed circuit board elements 100 as shown in Figure 2 with a plug recess 400 comprising spacer structure 300 as shown in Figure 4 for manufacturing a connector device 600 according to an exemplary embodiment of the invention. As shown in Figure 5, one
15 printed circuit board element 100, one spacer structure 300 and another printed circuit board element 100 are aligned on top of each other to form a vertical stack of planar bodies. The side edges of the stacked bodies coincide or match to one another and are in alignment (with the exception of the plug recess 400). Thus, a compact connector device 600
20 may be obtained.

After having aligned the printed circuit board elements 100 and the spacer structure 300 as shown in Figure 5, they are connected to one another by the application of pressure and/or thermal energy (i.e. by an increase of the temperature). For instance, prepreg material of the
25 spacer structure 300 and/or the electrically insulating core 102 of the printed circuit board elements 100 may become soft or may start melting at a certain temperature of for instance 90°C, so that polymerization starts and curing or hardening of the material begins. Therefore, the printed circuit board elements 100 with the sandwiched spacer structure
30 360 are laminated together, wherein this procedure maintains the physical dimensions of the spacer structure 300 including its plug recess

- 19 -

400 unchanged. Hence, a robust connector device 600 with precisely definable dimensions is obtained. This is of upmost advantage, because the connector device 600 and its counter piece can only be brought in mechanical and electrical connection by plugging them together when the
5 mechanical connection elements (i.e. the plug recess 400 of the connector device 600 and an inversely shaped protrusion of the counter piece, not shown) are configured to match with form closure and when the electrical connection elements (i.e. the pads constituted by the exposed sections of the electrically conductive structure 104 and
10 corresponding pads of the counter piece, not shown) remain located at accurately definable positions.

Figure 6 shows a cross-sectional view of the connector device 600 in a PCB-only-combination (i.e. without embedded component 106) according to an exemplary embodiment of the invention manufactured
15 according to the procedure of Figure 2 to Figure 5.

The PCB-based connector device 600 is configured for being electrically coupled with a counter piece (not shown in Figure 6) for establishing a defined mechanical and electric connection. The connector device 600 comprises the two printed circuit board elements 100 with
20 their insulating cores 102 and electrically conductive structures 104 partially on and partially in the electrically insulating core 102. Vertically stacked between the two printed circuit board elements 100 is the spacer structure 300 with its plug recess 400 for establishing the mechanical connection with the counter piece 1500. As can be taken from Figure 6,
25 various sections or pads of the electrically conductive structures 104 are arranged on exposed surfaces of the connector device 600 and are configured for establishing the electric connection with the counter piece upon establishing the mechanical connection with the counter piece.

Various exposed sections of the electrically conductive structure
30 104 are arranged on an exposed surface of the plug recess 400, according to Figure 6 all parallel to the two opposing main surfaces of the

- 20 -

printed circuit board elements 100 and the spacer structure 300. With a corresponding dimensioning, adaptation of the shape of the plug recess 400 and the arrangement of the pads realized by the electrically conductive structures 104, the device 600 may be configured as a
5 specific type of connector (for instance a MIPI connector).

Figure 7 illustrates a structure obtained during carrying out a procedure of assembling two printed circuit board elements 100 as shown in Figure 1 and Figure 2 with a plug recess 400 comprising spacer structure 300 as shown in Figure 4 for manufacturing a connector device
10 600 according to another exemplary embodiment of the invention.

The arrangement shown in Figure 7 differs from the arrangement shown in Figure 5 in that the lower printed circuit board element 100 now comprises an embedded component 106, i.e. is configured as a printed circuit board element 100 shown in Figure 1. By applying a connection
15 procedure as described above referring to Figure 6, the arrangement shown in Figure 7 can be transformed into the connector device 600 shown in Figure 8.

Figure 8 shows a cross-sectional view of the PCB-embedded-combination connector device 600 according to an exemplary
20 embodiment of the invention manufactured according to the procedure of Figure 1 to Figure 4 and Figure 7.

When the embedded component 106 is configured as a semiconductor memory such as a DRAM, the connector device 600 of Figure 8 can serve as a portable memory-connector-arrangement, such
25 as a PCB-based USB stick. For example, with a corresponding dimensioning, adaptation of the shape of the plug recess 400 and the arrangement of the pads realized by the electrically conductive structures 104, the smart connector device 600 may be configured as a connector of a specific type (for instance a USB connector) with data storage
30 function.

Figure 9 illustrates a structure obtained during carrying out a

- 21 -

procedure of assembling two printed circuit board elements 100 as shown in Figure 1 with a plug recess 400 comprising spacer structure 300 as shown in Figure 4 for manufacturing a connector device 600 according to still another exemplary embodiment of the invention.

5 The arrangement shown in Figure 9 differs from the arrangement shown in Figure 7 in that now also the upper printed circuit board element 100 comprises an embedded component 106, i.e. is configured as a printed circuit board element 100 shown in Figure 1. By applying a connection procedure as described above referring to Figure 6, the
10 arrangement shown in Figure 9 can be transformed into the connector device 600 shown in Figure 10.

Figure 10 shows a cross-sectional view of a connector device 600 according to an exemplary embodiment of the invention manufactured according to the procedure of Figure 1, Figure 3 to Figure 4 and Figure 9.

15 The function of the connector device 600 shown in Figure 10 depends on the configuration of the embedded components 106. For instance, one of the embedded components 106 may provide an encryption function, the other one a voltage converter function, etc. Thus, basically any desired electrical function and functional combination
20 may be integrated in the compact connector device 600.

Figure 11 and **Figure 12** show three-dimensional views of connector devices 600 according to exemplary embodiments of the invention.

 According to the connector device 600 shown in Figure 11 (which
25 may be formed based on one or more printed circuit board elements 100), part of the electrically conductive structure 104 is arranged on vertical side walls within the plug recess 400 perpendicular to two horizontal opposing main surfaces of the printed circuit board element 100, and another part of the electrically conductive structure 104 is
30 arranged horizontally on and parallel to horizontal opposing main surfaces of the printed circuit board element 100.

- 22 -

According to the connector device 600 shown in Figure 12, all sections of the electrically conductive structure 104 are arranged on vertical side walls within the plug recess 400 and outside of the plug recess 400 perpendicular to two horizontal opposing main surfaces of the printed circuit board element(s) 100.

Figure 13 shows a cross-sectional view of a connector device 600 according to an exemplary embodiment of the invention manufactured by connecting two printed circuit board elements 100 to one another, one of which comprising a plug recess 400.

According to the connector device 600 shown in Figure 13, the plug recess 400 is formed at an interface between two adjacent printed circuit board elements 100. The device 600 hence comprises two printed circuit board elements 100 connected to one another directly. In this embodiment, the plug recess 400 is formed by removing material from one of the printed circuit board elements 100 rather than providing a separate spacer structure 300. Hence, a spacer structure 300 is omitted according to Figure 13, and the entire connection device 600 is formed exclusively from two printed circuit board elements 100.

Figure 14 shows a cross-sectional view of a connector device 600 according to an exemplary embodiment of the invention manufactured on the basis of a single printed circuit board element 100 comprising a plug recess 400 in its interior.

According to Figure 14, the plug recess 400 is formed exclusively within exactly one printed circuit board element 100. In other words, the plug recess 400 is formed by removing material from the single printed circuit board element 100. Hence, a spacer structure 300 as well as further printed circuit board elements 100 are omitted according to Figure 13, and the entire connection device 600 is formed exclusively from one printed circuit board element 100.

Figure 15 shows a connection arrangement 1550 formed by two correspondingly configured connector devices 600 to be connected

- 23 -

electrically and mechanically according to an exemplary embodiment of the invention.

The connection arrangement 1550 comprises a connector device 600 of the type described above for connection with the counter piece 1500. The counter piece 1500 is configured for being mechanically and electrically connected with the connector device 600 upon plugging the counter piece 1500 in the plug recess 400. The counter piece 1500 is also configured as a PCB-based connector device of the type described above (but may, in other embodiments, be manufactured in other way, for instance according to another connector technology or as a corresponding part, such as a plug or a socket, of an electronic apparatus, such as a computer).

Along a vertical direction of Figure 15, both the connector device 600 and the counter piece 1500 comprise alternating sequences of plug recesses 400 and plug protrusions 1502. These sequences are adapted to match and align to one another so that the connector device 600 and the counter piece 1500 may be plugged together by approaching them along a horizontal direction of Figure 15 for an engagement thereof. By this engagement, both a mechanical and electrical connection is established, since the respective sections of the electrically conductive structures 104 are then brought in direct physical contact with one another.

Figure 16, Figure 17 and Figure 18 show cross-sectional views of structures obtained during carrying out a method of manufacturing a plurality of connector devices 600 in a batch procedure based on panels which are fixed to one another and then separated into sections according to an exemplary embodiment of the invention.

In the framework of this manufacturing method, two printed circuit boards 1600 (such as PCB panels) are provided, one of which being shown in Figure 16. A plurality of connector devices 600 are then manufactured in a simultaneous rather than sequential procedure based on these printed circuit boards 1600. Electrically conductive layers

- 24 -

deposited on both opposing main surfaces of the printed circuit boards 1600 may be patterned, if desired or required, so as to form individual electrically conductive islands or sections constituting electrically conductive structures 104 of the connector devices 600 to be
5 manufactured.

As can be taken from Figure 17, a plurality of plug recesses 400 are formed in a spacer board 1700 or panel. The spacer board 1700 can be a sheet of electrically insulating material, for instance prepreg, which can be punched or laser processed or milled, etc. in a batch procedure to
10 form the plug recesses 400.

As can be taken from Figure 18, the spacer board 1700 is arranged between the two printed circuit boards 1600 for forming a board stack. These three boards of the board stack are then fixed to one another, for example by adhering them together.

15 As indicated schematically by vertical dotted lines in Figure 18, it is then possible to singularize the integral board stack into a plurality of sections, each section constituting a connector device 600.

By manufacturing the connector devices 600 according to a batch procedure as illustrated in Figure 16 to Figure 18, rapid and cheap mass
20 manufacture of connector devices 600 is possible on an industrial scale. If desired, embedded components 106 may be foreseen in one or both of the electrically insulating cores 102 of the printed circuit boards 1600 shown in Figure 16 to extend the electronic functionality of the manufactured connector devices 600.

25 Referring to the embodiments described above, it should of course be mentioned that any desired number of plug recesses 400 (i.e. no, one, two or more plug recesses 400) and/or any desired number of embedded components 106 (i.e. no, one, two or more embedded components 106) may be implemented. Also, the number of used printed circuit board
30 elements 100 is variable, i.e. may be one, two or more. Beyond this, the number of used spacer structure 300 is variable, i.e. may be zero, one,

- 25 -

two or more. In particular, any particular stacking of the mentioned or other components is possible. In other words, the PCB-based connector device architecture according to exemplary embodiments is highly appropriate for a three-dimensional integration. The connector devices
5 600 may be embodied as male connector pieces, or female connector pieces.

It should be noted that the term "comprising" does not exclude other elements or steps and the "a" or "an" does not exclude a plurality. Also elements described in association with different embodiments may
10 be combined.

It should also be noted that reference signs in the claims shall not be construed as limiting the scope of the claims.

Implementation of the invention is not limited to the preferred embodiments shown in the figures and described above. Instead, a
15 multiplicity of variants are possible which use the solutions shown and the principle according to the invention even in the case of fundamentally different embodiments.

- 26 -

Claims:

1. A connector device (600) for connection with a counter piece (1500)
for establishing a mechanical and electric connection, wherein the
5 connector device (600) comprises:
 - at least two printed circuit board elements (100) each comprising
an electrically insulating core (102) and at least one comprising an
electrically conductive structure (104) at least partially on the respective
electrically insulating core (102);
 - 10 at least one embedded component (106) embedded within the
respective electrically insulating core (102) and electrically coupled to the
respective electrically conductive structure (104);
 - wherein the at least one electrically conductive structure (104) is
arranged at least partially on an exposed surface of the connector device
15 (600) and is configured for establishing the electric connection with the
counter piece (1500) upon establishing the mechanical connection with
the counter piece (1500).
2. The device (600) of claim 1, comprising at least one of the following
20 features:
 - at least one of the electrically insulating cores (102) comprises or
consists of resin, in particular an epoxy-based resin;
 - at least one of the electrically insulating cores (102) is configured
as a plate;
 - 25 the at least one electrically conductive structure (104) comprises
at least one patterned electrically conductive layer formed on one at least
one of two opposing main surfaces of the respective electrically insulating
core (102);
 - the at least one electrically conductive structure (104) comprises
30 at least one via extending through the respective electrically insulating
core (102) for electrically connecting the two opposing main surfaces of

- 27 -

the respective electrically insulating core (102);

the at least two printed circuit board elements (100) are vertically stacked so that main surfaces of the at least two printed circuit board elements (100) are arranged in parallel to one another;

5 the device (600) comprises at least one plug protrusion contributing to establishing the mechanical connection with the counter piece (1500);

the at least two printed circuit board elements (100) are connected to one another directly or via the spacer structure (300) indirectly;

10 at least part of the electrically conductive structure (104) is arranged on at least one of two opposing main surfaces of at least one of the printed circuit board elements (100);

at least part of the electrically conductive structure (104) is arranged on at least one of side walls perpendicular to two opposing main
15 surfaces of at least one of the printed circuit board elements (100);

each of the at least two printed circuit board elements (100) is formed as a subsection of a printed circuit board (1600);

the device (600) is configured as one of the group consisting of a Lightning connector, a MIPI connector, a USB connector, a HDMI
20 connector, and a ZIF connector.

3. The device (600) of claim 1 or 2, comprising a plurality of embedded components (106) embedded within the respective electrically insulating core (102) and electrically coupled to the respective electrically
25 conductive structure (104).

4. The device (600) of any of claims 1 to 3, wherein the at least one embedded component (106) comprises at least one of the group consisting of an active electric component, and a passive electric
30 component, in particular at least one of the group consisting of a data storage memory, a filter, an integrated circuit, a signal processing

- 28 -

component, a power management component, a voltage converter, a cryptographic component, a capacitor, an inductance, and an optical electrically interfacing member.

5 5. The device (600) of any one of claims 1 to 4, further comprising at least one plug recess (400) for establishing the mechanical connection with the counter piece (1500).

10 6. The device (600) of claim 5, comprising at least one of the following features:

 at least one plug recess (400) is formed exclusively within one of the at least two printed circuit board elements (100);

 at least one plug recess (400) is formed at an interface between two adjacent ones of the printed circuit board elements (100);

15 the device (600) comprises a spacer structure (300) arranged between the at least two printed circuit board elements (100), wherein at least one plug recess (400) is formed in the spacer structure (300);

 at least part of the electrically conductive structure (104) is arranged on an exposed surface of the plug recess (400), in particular
20 parallel and/or perpendicular to two opposing main surfaces of at least one of the printed circuit board elements (100).

7. A connection arrangement (1550), wherein the connection arrangement (1550) comprises:

25 a connector device (600) of any one of claims 1 to 6 for connection with a counter piece (1500); and

 the counter piece (1500) being configured for being mechanically and electrically connected with the connector device (600) upon plugging the counter piece (1500) and the connector device (600) together.

30

- 29 -

8. A method of manufacturing a connector device (600) for connection with a counter piece (1500) for establishing a mechanical and electric connection, wherein the method comprises:

forming at least one printed circuit board element (100) as a subsection of a printed circuit board (1600) and comprising an electrically insulating core (102) and an electrically conductive structure (104) at least partially on the electrically insulating core (102);

arranging at least part of the electrically conductive structure (104) on an exposed surface and configuring the electrically conductive structure (104) for establishing the electric connection with the counter piece (1500) upon establishing the mechanical connection between the connector device (600) and the counter piece (1500);

embedding at least one component (106) within the electrically insulating core (102) and electrically coupling the at least one embedded component (106) to the electrically conductive structure (104).

9. The method of claim 8, wherein the method further comprises forming at least one plug recess (400) for establishing the mechanical connection with the counter piece (1500).

10. The method of claim 9, wherein the at least one plug recess (400) is formed by mechanically removing material of the at least one printed circuit board element (100) and/or a spacer structure (300) arranged between two printed circuit board elements (100), in particular by one of the group consisting of milling, laser processing, cutting, and punching.

11. The method of claim 9 or 10, wherein a spacer structure (300) having the at least one plug recess (400) is connected between two printed circuit board elements (100) by adhering and/or applying pressure.

- 30 -

12. The method of any one of claims 8 to 11, wherein the method comprises:

providing at least one printed circuit board (1600);

5 patterning electrically conductive material on at least one main surface of the at least one printed circuit board (1600);

singulating the at least one printed circuit board (1600) with the patterned electrically conductive material into a plurality of sections, each section constituting a connector device (600).

10 13. The method of claim 12, wherein the method further comprises forming a plurality of plug recesses (400) before the singulation.

14. The method of claim 12 or 13, wherein the method further comprises stacking at least two printed circuit boards (1600) before singulating the
15 stack into the plurality of sections.

15. The method of claim 14, further comprising arranging a spacer board (1700) between the at least two stacked printed circuit boards (1600) before singulating the stack into the plurality of sections each of which
20 comprising a portion of the spacer board (1700) constituting a spacer structure (300).

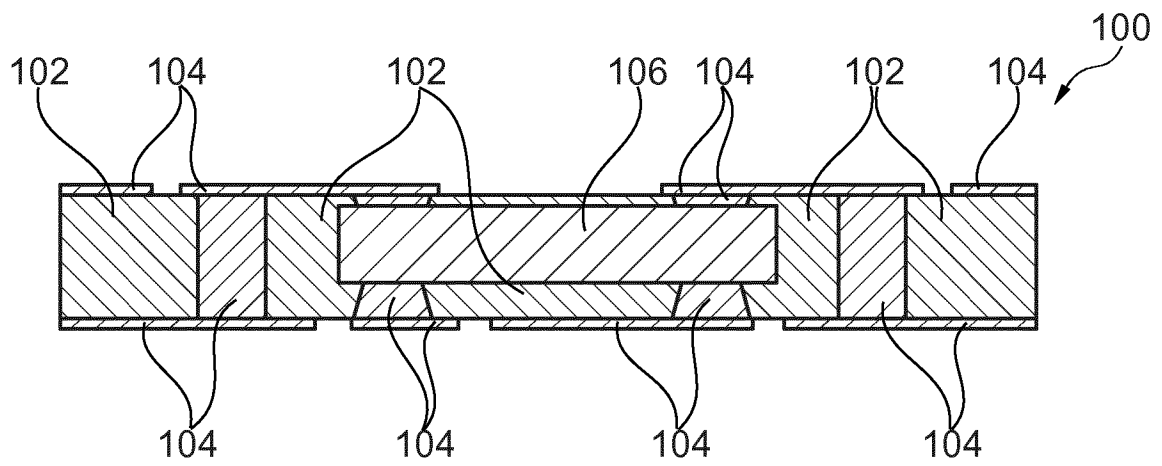


Fig. 1

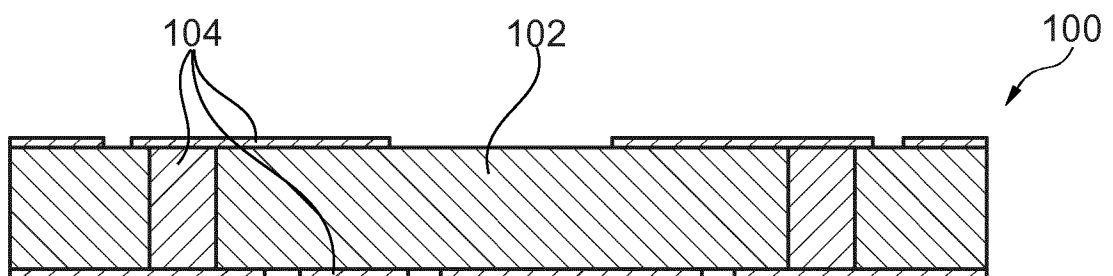


Fig. 2

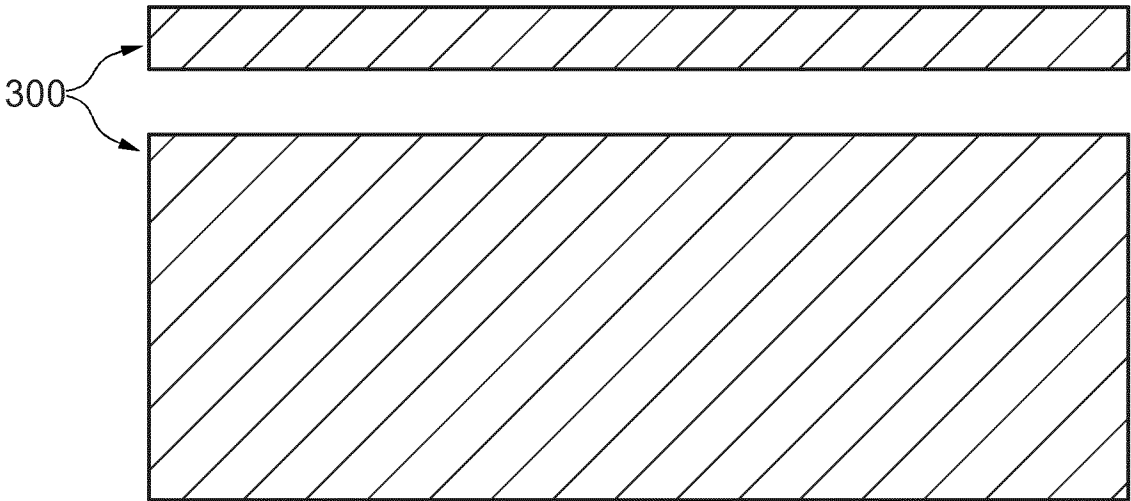


Fig. 3

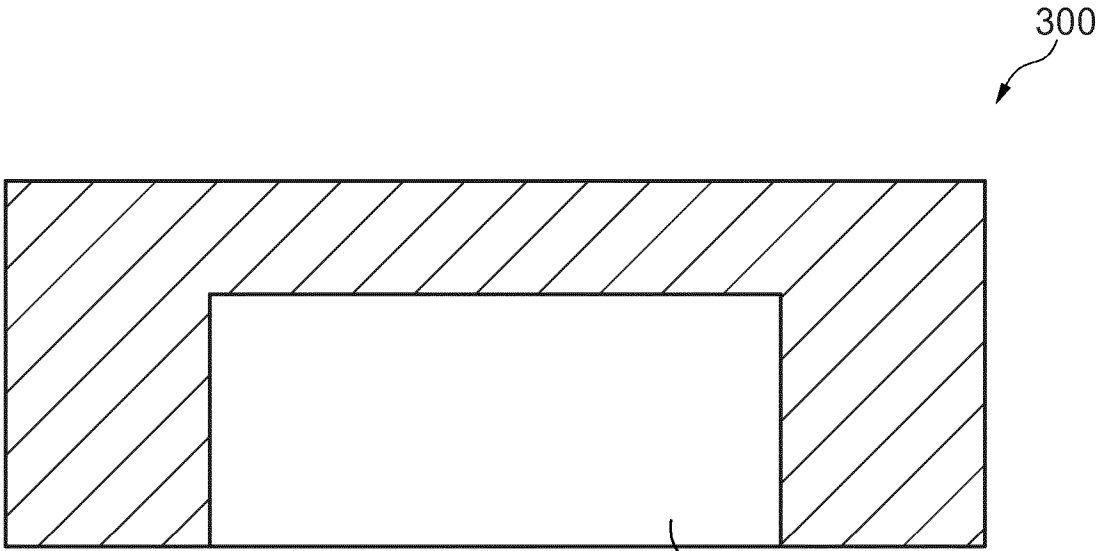


Fig. 4

400

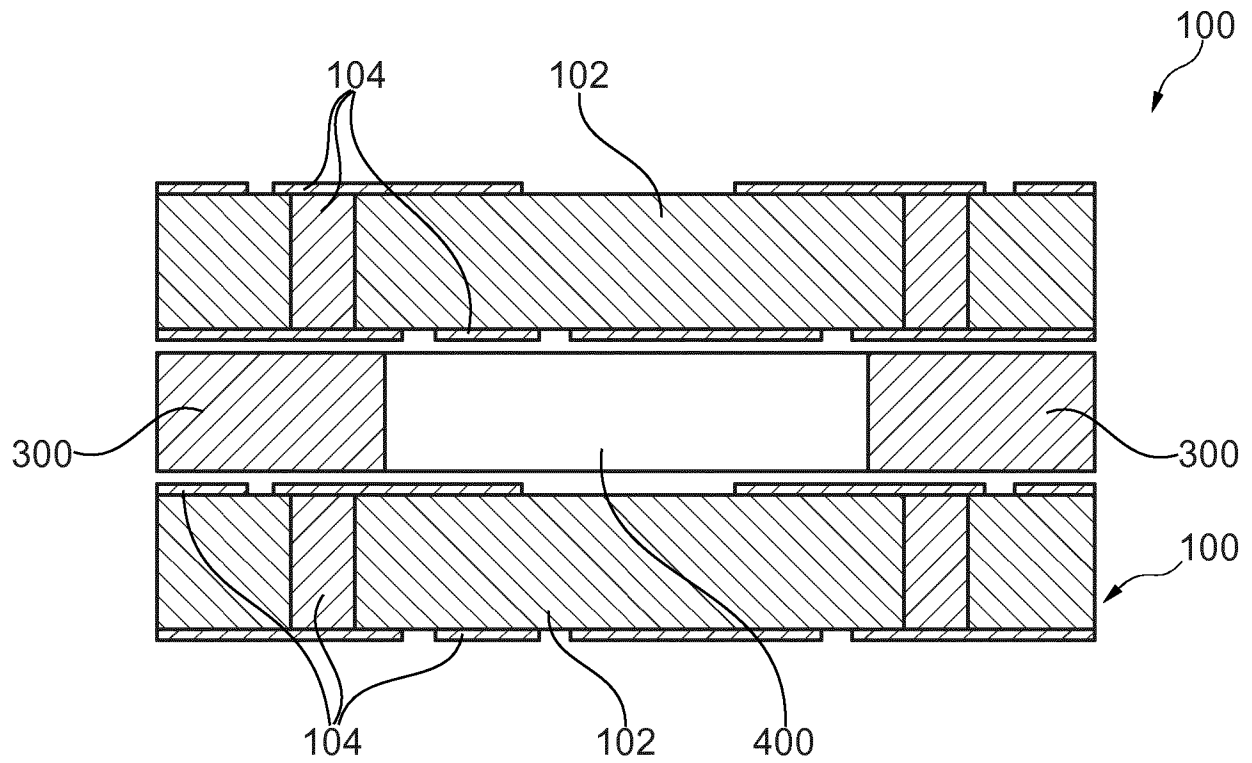


Fig. 5

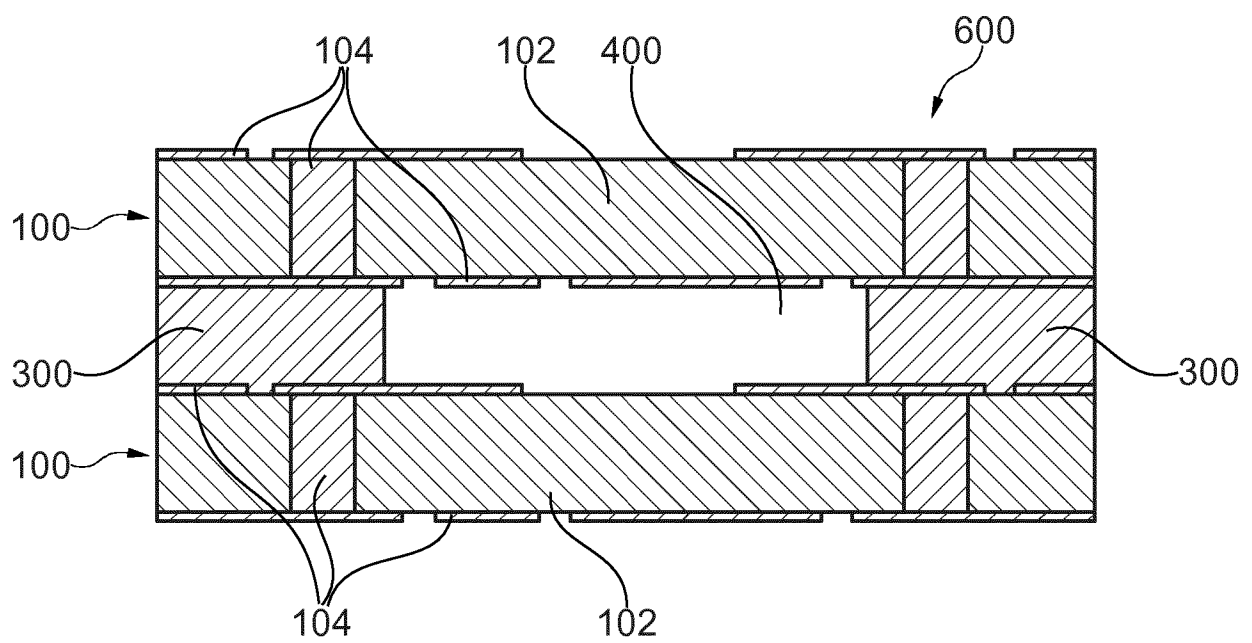


Fig. 6

4/8

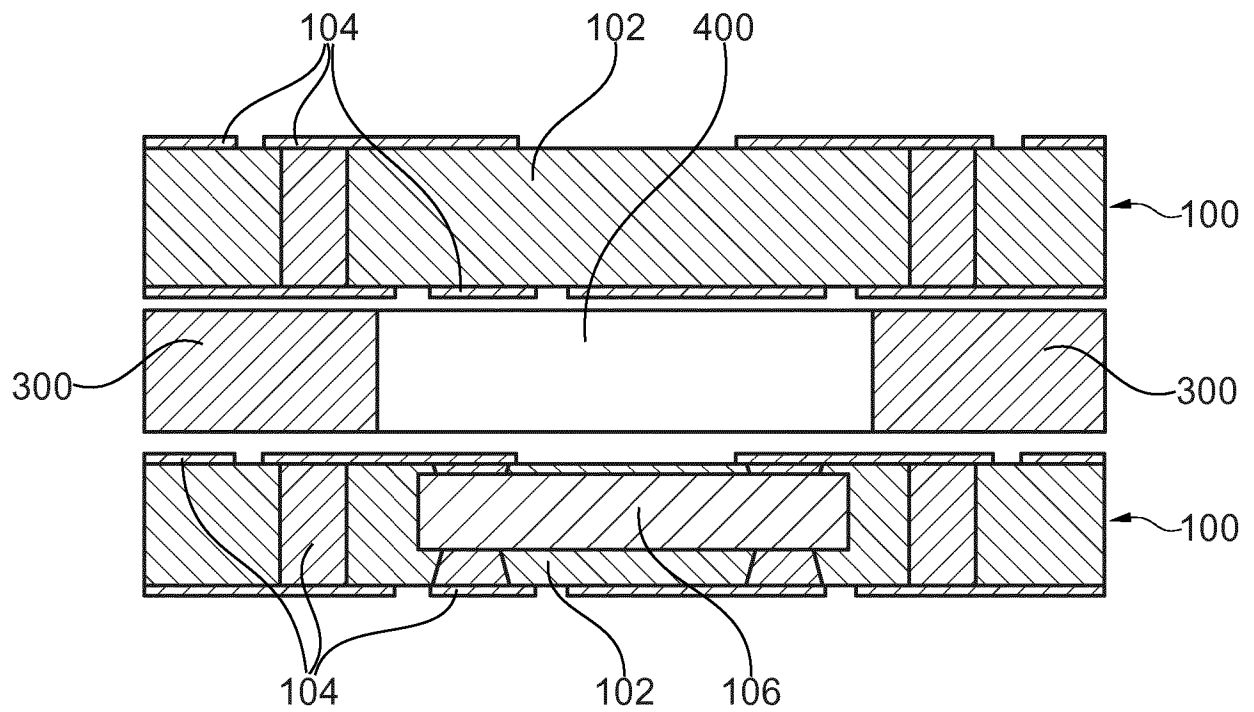


Fig. 7

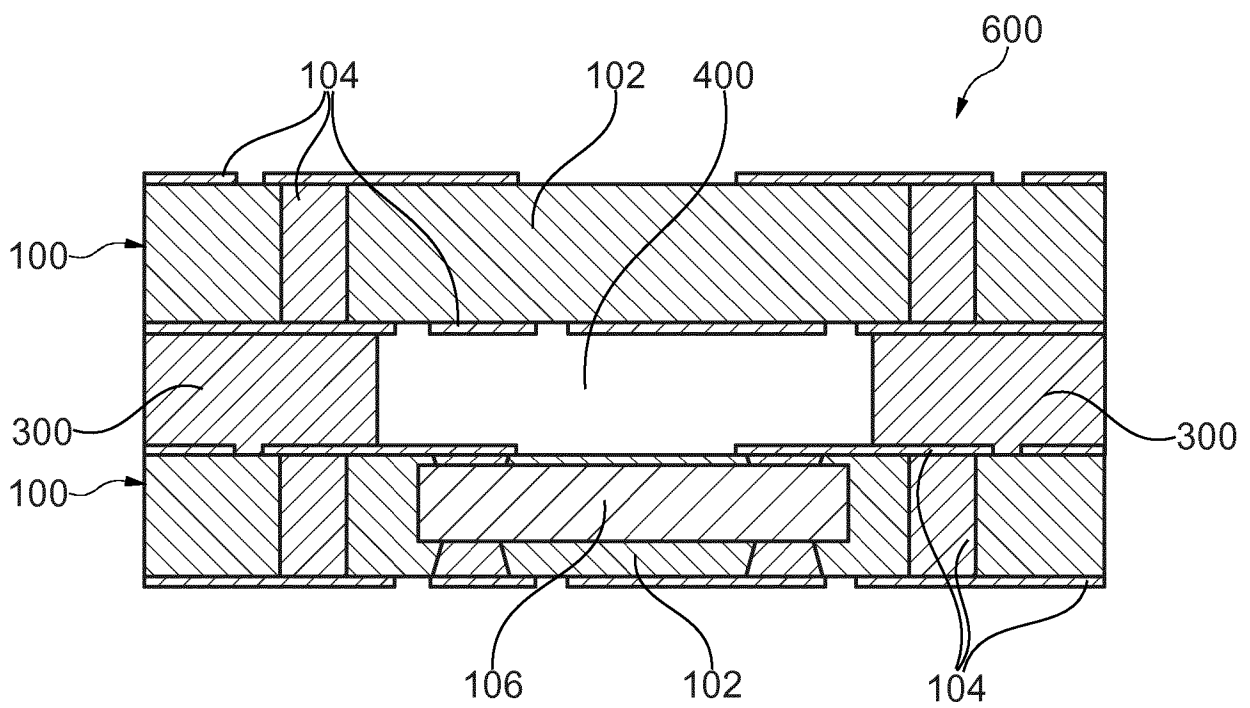


Fig. 8

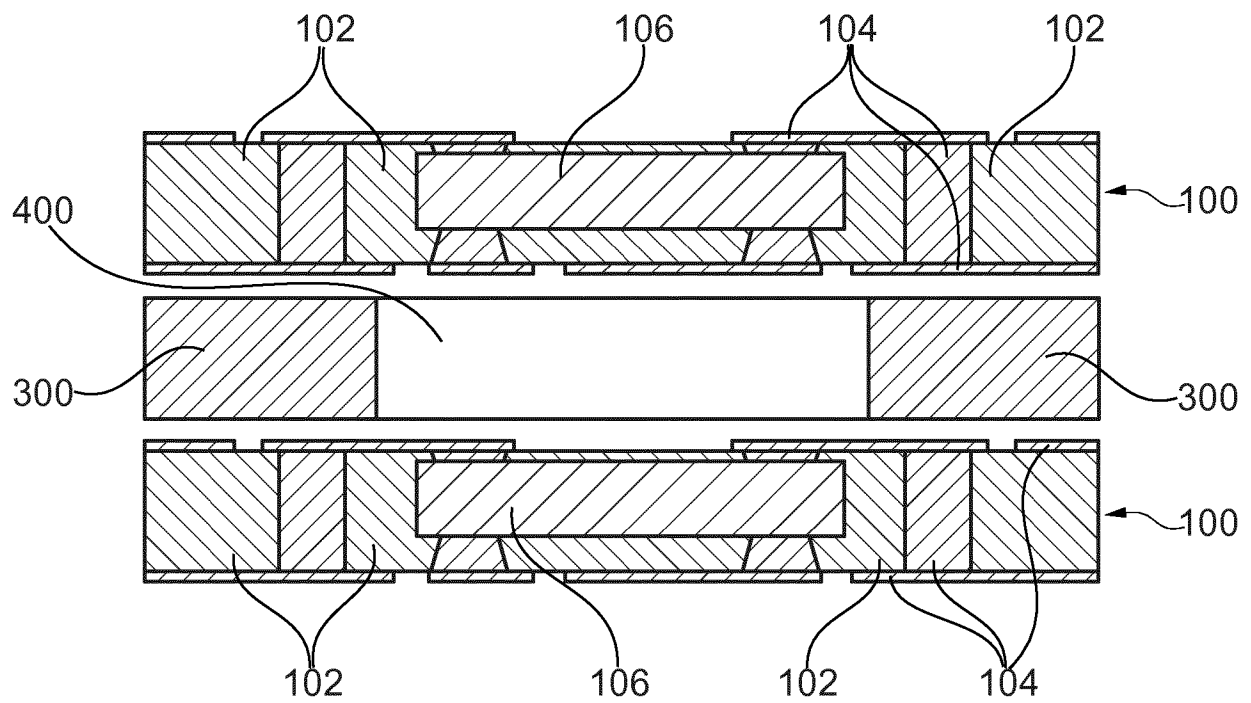


Fig. 9

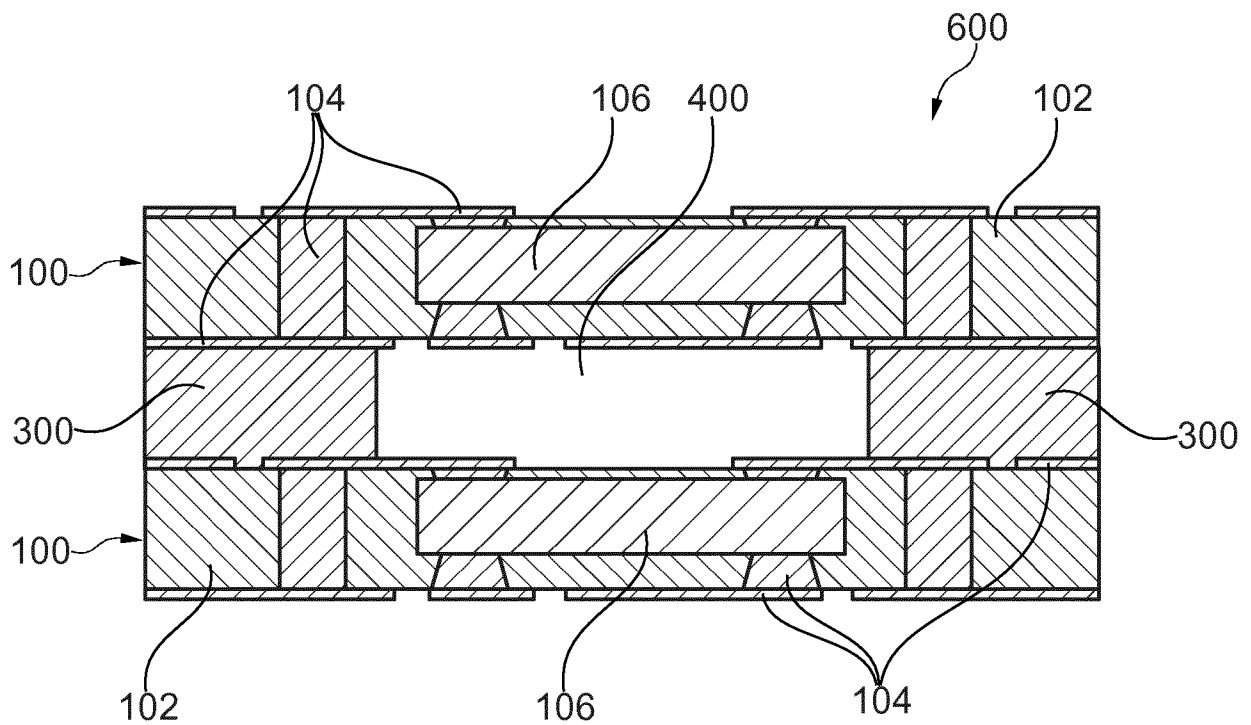


Fig. 10

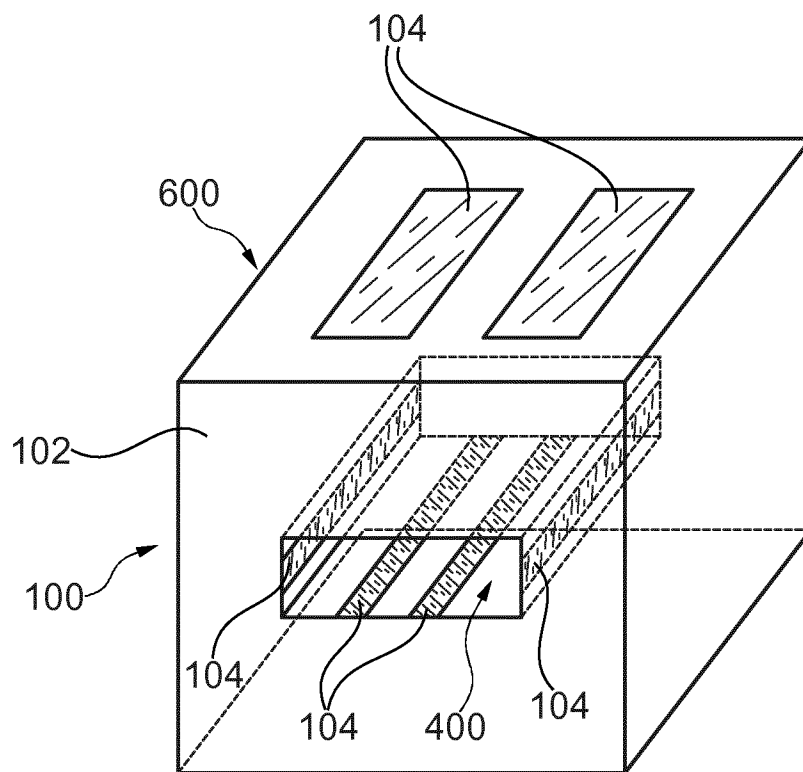


Fig. 11

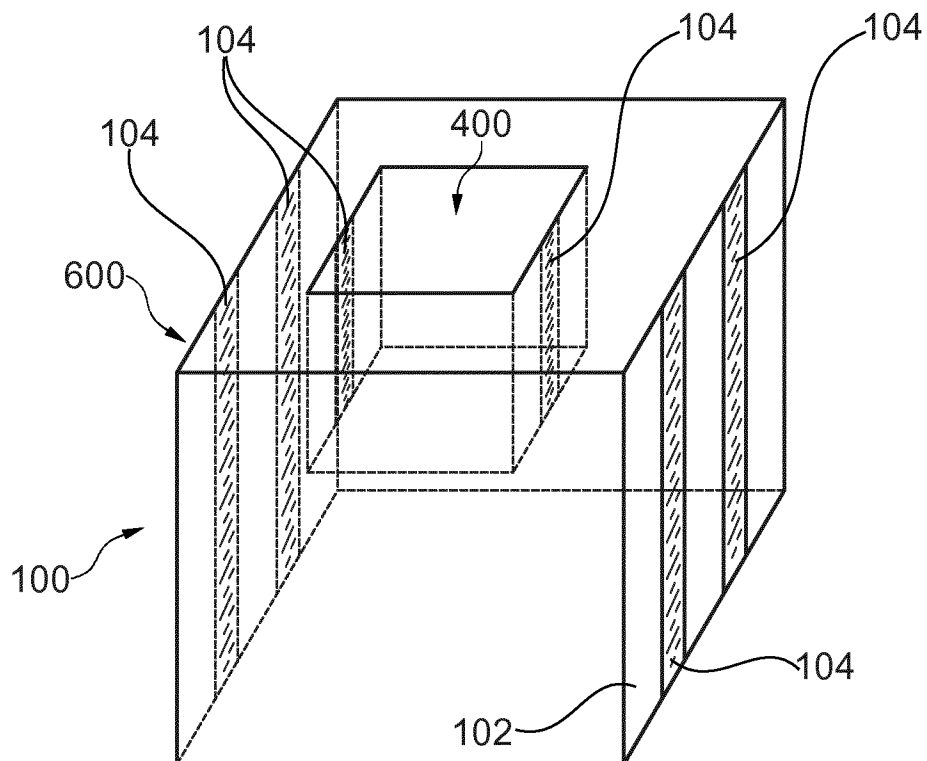


Fig. 12

7/8

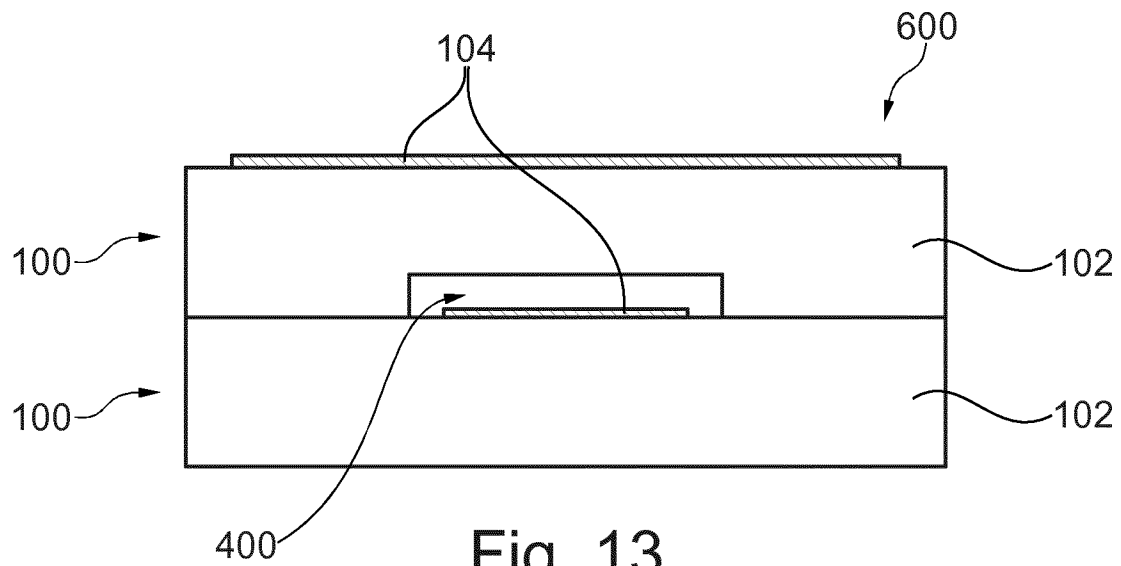


Fig. 13

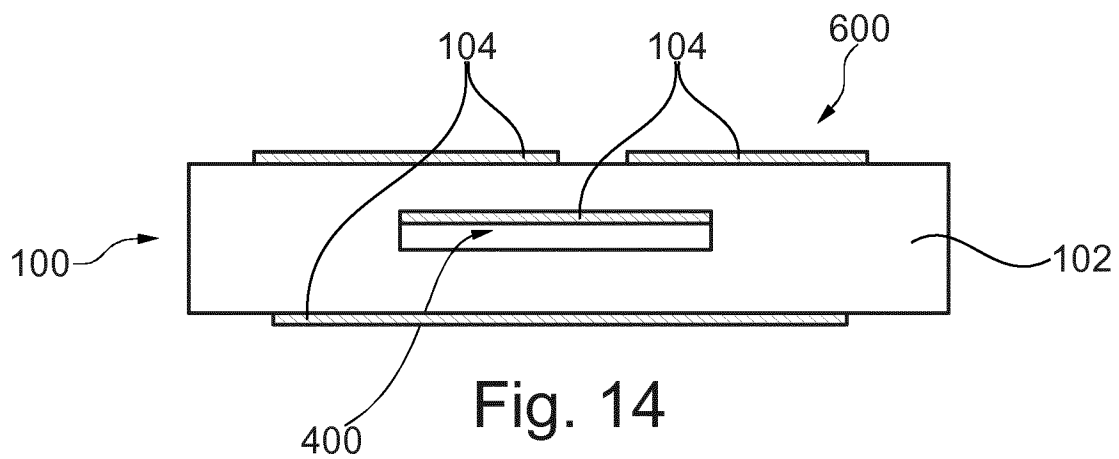


Fig. 14

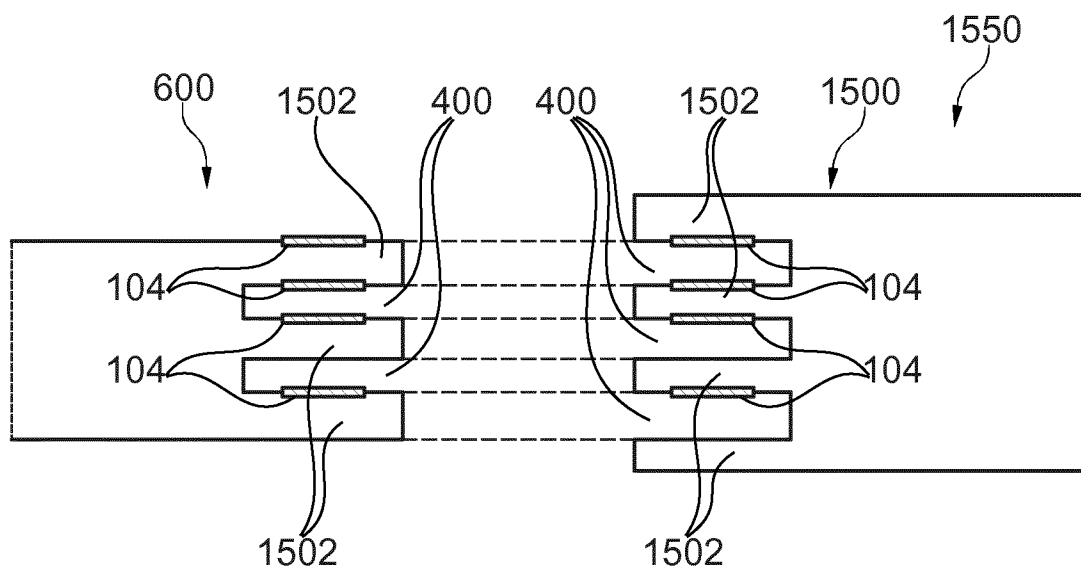


Fig. 15

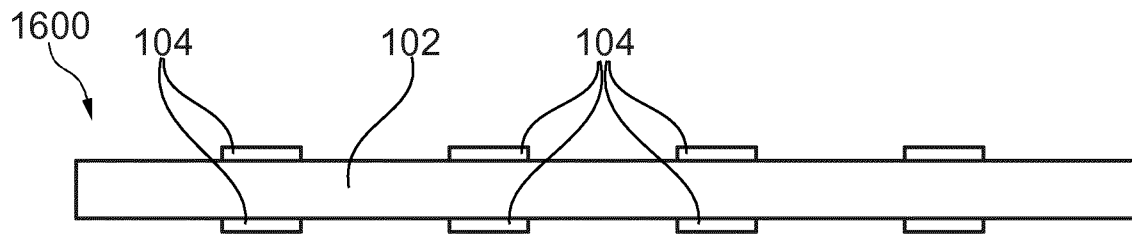


Fig. 16

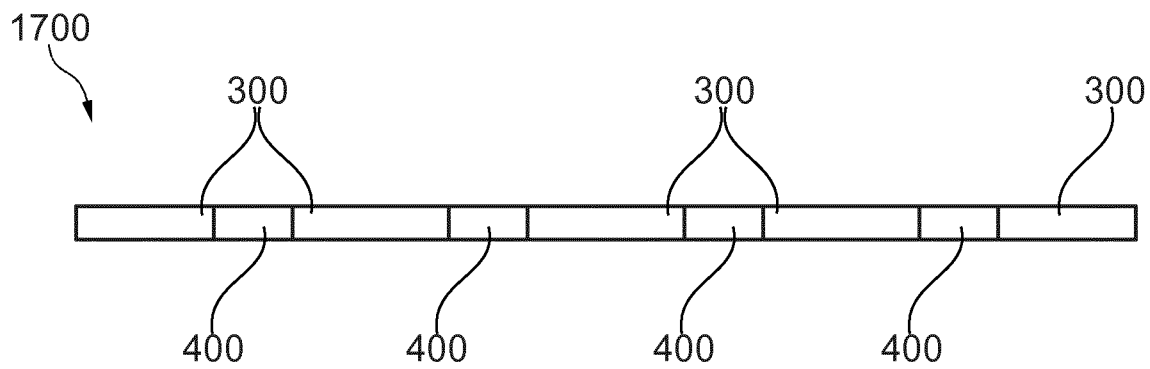


Fig. 17

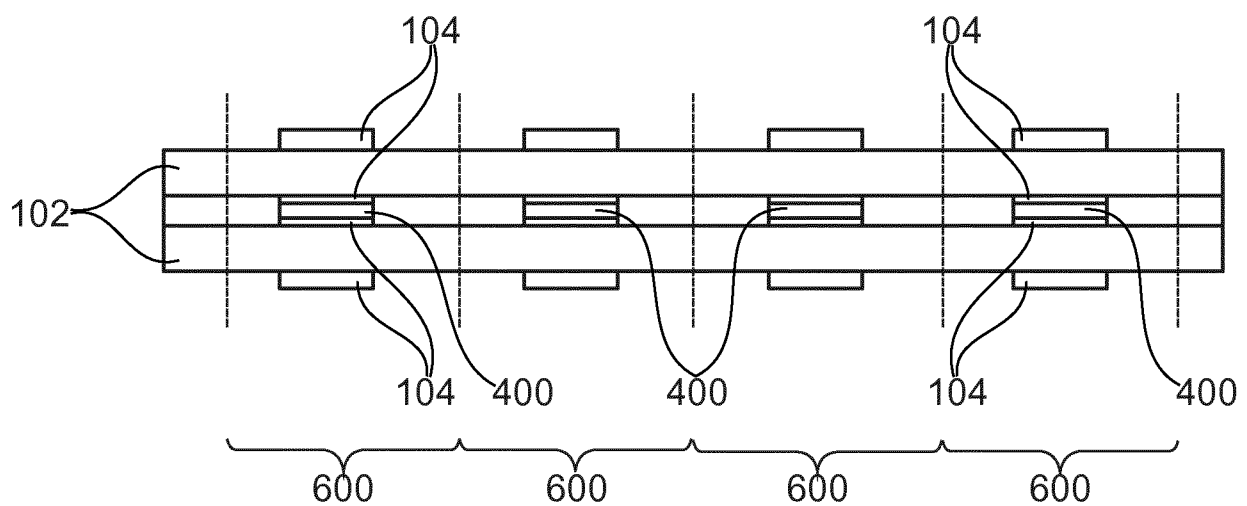


Fig. 18

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2015/053446

A. CLASSIFICATION OF SUBJECT MATTER

INV. H05K1/14 H01R13/00
 ADD. H05K1/11

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H05K H01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2007/176613 A1 (OGAWA MINORU [JP] ET AL) 2 August 2007 (2007-08-02) the whole document	1-15
X	US 2014/017940 A1 (CHEN BICHENG [US] ET AL) 16 January 2014 (2014-01-16) the whole document	1-15
X	GB 357 171 A (PARAGON RUBBER MFG COMPANY LTD; GEORGE WILLIAM CROOT) 10 September 1931 (1931-09-10) page 2, line 97 - page 4, line 84; figures 4-6	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 April 2015

Date of mailing of the international search report

06/05/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Zimmer, René

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2015/053446

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2007176613	A1	02-08-2007	CN 101022698 A	22-08-2007
			KR 20070078986 A	03-08-2007
			TW 200810654 A	16-02-2008
			US 2007176613 A1	02-08-2007

US 2014017940	A1	16-01-2014	NONE	

GB 357171	A	10-09-1931	NONE	
