

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 March 2006 (02.03.2006)

PCT

(10) International Publication Number
WO 2006/022541 A1

(51) International Patent Classification⁷: **F25B 47/02**, 9/00

(74) Agent: **WINCKELS, J.H.F.**; Johan de Wittlaan 7,
NL-2517 JR Den Haag (NL).

(21) International Application Number:
PCT/NL2005/000610

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 23 August 2005 (23.08.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
04077391.3 24 August 2004 (24.08.2004) EP

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **NED-ERLANDSE ORGANISATIE VOOR TOEGEPAST-NATUURWETENSCHAPPELIJK ONDERZOEK TNO** [NL/NL]; Schoemakerstraat 97, NL-2628 VK Delft (NL).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **VAN DER STOEL, Johannes Pieter** [NL/NL]; Swiftstraat 16, NL-7312 VS Apeldoorn (NL). **VERMEEREN, Ronald Jacobus Franciscus** [NL/NL]; Schout van Doernestraat 42, NL-5237 WH 's Hertogenbosch (NL).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A METHOD AND A COOLING SYSTEM IN WHICH A REFRIGERANT IS USED AS A COOLING AGENT AND AS A DEFROSTING AGENT

(57) Abstract: The invention provides a method for cooling a medium and defrosting a secondary side of a cooler (7), in which a refrigerant is used as a cooling agent and as a defrosting agent, wherein the cooling of the medium is established by passing the refrigerant at a high pressure through a primary side of the cooler (7), whereby the medium to be cooled is passed through the secondary side of the cooler, and wherein the defrosting of the cooler is established by decreasing the gas pressure of the refrigerant in the primary side of the cooler to such an extent that ice which is adhered to the secondary side of the cooler is released. The invention further comprises a cooling system for carrying out said method.



WO 2006/022541 A1

Title: A method and a cooling system in which a refrigerant is used as a cooling agent and as a defrosting agent

The present invention relates to a method in which a refrigerant is used as a cooling agent and as a defrosting agent, and a cooling system for carrying out said method.

Coolers that are industrially applied are defrosted periodically to
5 remove ice from the cooler, which ice is formed inside the coolers as a result of moisture present in the air to be cooled. Such periodical defrosting is needed to ensure that the coolers continue to perform at an appropriate level.

A variety of defrosting methods are known in the art. It is, for instance, known that coolers, in which NH_3 is used as the cooling agent, can be defrosted
10 by leading hot NH_3 gas from the compressor into the cooler to be defrosted. However, such a defrosting method is relatively time-consuming making its application less attractive.

Another way to defrost a cooler is to provide the cooler with a separate circuit through which heated glycol can be recirculated. It will be understood
15 that such a method is expensive since it requires a separate circuit to be arranged in the cooler.

It is further possible to defrost coolers electrically by using electric elements arranged on the secondary side of a cooler through which the air passes. Such system has the drawback that much energy is required to bring
20 about an effective removal of ice, whereas in addition hot spots may be created which could weaken the cooler.

Yet another alternative approach is based on sprinkling the cooler with hot water or glycol. However, this approach has the disadvantage that products may be damaged by way of pollution or ice adherence.

25 Object of the present invention is to provide a method in which in an effective and relatively simple manner a refrigerant can be used as a cooling agent and as a defrosting agent.

Surprisingly, it has been found that this object can be realised by passing the refrigerant during cooling at a high pressure through the cooler and reducing the pressure of the refrigerant during defrosting of the cooler.

Accordingly, the present invention relates to a method for cooling a
5 medium and defrosting a second ary side of a cooler, in which a refrigerant is used as a cooling agent and as a defrosting agent, wherein the cooling of the medium is established by passing the refrigerant at a high pressure through a primary side of the cooler, whereby the medium to be cooled is passed through the secondary side of the cooler, and wherein the defrosting of the cooler is
10 established by decreasing the gas pressure of the refrigerant in the primary side of the cooler to such an extent that ice which is adhered to the secondary side of the cooler is released.

A major advantage of the present invention is the fact that the energy which is needed to decrease the gas pressure of the refrigerant brings about
15 the production of cold, which is attractive from energy-consumption perspective, and which clearly is not the case in the known defrosting processes.

Suitably, the gas pressure of the refrigerant in the primary side of the cooler is decreased by means of a compressor which is arranged downstream
20 the cooler.

In a preferred embodiment of the present invention, the flow of refrigerant to the cooler is reduced during defrosting when compared to the flow of refrigerant as applied during cooling. This can, for instance, be realised by at least partly closing expansion means that are located upstream the
25 cooler.

Preferably, the gas pressure of the refrigerant in the primary side of the cooler is in such a range that the equivalent boiling temperature of the refrigerant is lower than -50°C . More preferably, the gas pressure of the

refrigerant in the primary side of the cooler is in such a range that the equivalent boiling temperature of the refrigerant is lower than -60°C .

In the method according to the present invention, the refrigerant circulation rate is preferably in the range of from 1-10, and more preferably in the range of from 3-5. In the context of the present invention the refrigerant circulation rate is defined as the ratio of the amount of refrigerant mass which is led into the cooler and the amount of refrigerant vapour mass which comes out of the cooler.

In accordance with the present invention a refrigerant can be used which enables the ice to be removed from the secondary side of the cooler.

Suitable refrigerants that can be used include for instance liquid nitrogen, refrigerants like R14, R23, R32, R50, R170, R1150 and R410A, and CO_2 .

Preferably, the refrigerant to be used in accordance with the present invention comprises CO_2 .

Preferably, use is made of one type of refrigerant.

When use is made of CO_2 as refrigerant, the gas pressure of CO_2 present in the primary side of the cooler is reduced to such extent that dry ice is obtained in the primary side of the cooler, which is accompanied with such a low temperature that ice adhered to the secondary side of the cooler is released.

In the method according to the present invention, the refrigerant can alternately or simultaneously be used as a cooling agent and as a defrosting agent. The refrigerant can alternately be used as a cooling agent and as a defrosting agent when use is made of a two-stage process, wherein in a first stage the cooling takes place, and in a second stage the defrosting of the cooler takes place. However, it can also be the case to carry out the method as one-stage process wherein cooling and defrosting is established simultaneously by using a decreased gas pressure of the refrigerant. In accordance with the

present invention the refrigerant is preferably simultaneously used as a cooling agent and as a defrosting agent.

Various types of coolers can be used in accordance with the present invention. Suitable coolers include finned tubes, shell and tube heat
5 exchangers, and contact freezers which comprise a number of elements in between which the material to be cooled can be arranged.

When the cooler used in accordance with the present invention is a contact freezer, the present method is suitably integrated with a method for cooling a material located between the elements of the contact freezer.

10 In another preferred embodiment of the present invention, the cooler is connected to two compressors which are connected in parallel at cooling conditions so as to form a two stage refrigeration system, and wherein the compressors are connected in series at defrost conditions so as to form a three stage refrigeration system.

15 The present invention further relates to a cooling system for carrying out the method according to the present invention, which system comprises a cooler which is provided with means to allow refrigerant to pass through the primary side of the cooler, means to allow the medium to be cooled to pass through the secondary side of the cooler, which cooler is connected to two or
20 more compressors for decreasing the pressure of the refrigerant in the primary side of the cooler, whereby the suction sides of the compressors can alternately be connected in parallel and in series to the cooler or in parallel and in a combination of in parallel and in series to the cooler, means for connecting the compressors alternately in parallel and in series to the cooler or
25 means for connecting the compressors alternately in parallel and in a combination of in parallel and in series to the cooler, and a heat exchanger to which the high pressure sides of the compressors can alternately be connected in parallel and in series or in parallel and in a combination of in parallel and in series, which heat exchanger is connected to a circuit for feeding the
30 refrigerant into the cooler.

Preferably, the heat exchanger is connected to an expansion device, which expansion device is connected to the cooler.

In a preferred embodiment of the present invention, the cooling system
5 comprises a plurality of coolers which are connected to the compressor and the circuit, whereby the coolers are arranged in parallel. The cooling system can for instance comprise a contact freezer or a plurality of contact freezers.

Cooling systems usually consist of one or more compressors, one or
10 more evaporators, one or more condensers and one or more expansion devices. CO₂ cooling systems are usually two-stage installations in which CO₂ is the refrigerant for the low-temperature stage. An example of the low-temperature stage of a CO₂ cooling system in accordance with the present invention is depicted in Figure 1. Figure 1 also shows a defrost compressor [11] with ducts,
15 a liquid-vapour separator [10] and valves [9].

During normal operation of the cooling system, the valves [9] of the defrost circuit are closed and the evaporators [7] supply cold to the air or the product to be cooled. To this purpose liquid refrigerant (CO₂) is pumped from the vessel [4] by means of the pump [5], through the expansion devices [6] into
20 the evaporators [7]. The heat from the product and/or the air to be cooled causes a (partial) evaporation of the refrigerant. The two-phase mixture flows through the one-way valves [8] to the vessel [4], where liquid and vapour are separated. The vapour is extracted from the vessel by suction using a compressor [1]. In the compressor [1] the refrigerant vapour is compressed to a
25 higher pressure, temperature and boiling point. In the cascade condenser [2] the vapour then condenses. Subsequently, the liquid flows through expansion device [3] into the vessel [4].

Condensation of refrigerant takes place in the cascade condenser [2]. The condensation heat causes the evaporation of refrigerant in the high-

temperature stage of the cooling system. By way of a (not depicted) high-temperature stage compressor, this refrigerant vapour is brought to a temperature and boiling point which is higher than the temperature of the environment. The refrigerant concerned condenses against the environment
5 and the liquid flows through an expansion device into the cascade condenser [2].

As soon as an evaporator has to be defrosted, the expansion device [6] which is located upstream the evaporator will be closed or in any case throttled as far as necessary so that less refrigerant flows into the evaporator. In case a
10 fixed restriction is used as expansion device, a control valve will take over this function. Consequently, the valve [9] downstream the evaporator [7] will be opened and the defrost compressor [11] will be started. The capacity of this compressor [11] should be large enough to extract more vapour than the amount of vapour that is formed due to the heat load on the evaporator [7]. In
15 this way, a decrease of refrigerant pressure will be realised, resulting in a decrease of temperature and boiling point. An illustration of this process is shown in Figure 2 wherein CO₂ is used as refrigerant. The flat part of the curve refers to the transition from liquid to solid CO₂ (dry ice). As the density of dry ice is higher than that of liquid CO₂, the transition to solid CO₂, does not
20 damage the evaporator due to expansion. By decreasing the pressure and consequently the temperature in the evaporator [7], the adhesion forces of the ice at the secondary side of the evaporator [7] will decrease far enough to cause the ice to be removed from the secondary side. A one-way valve [8] between the vessel [4] and the evaporator [7] prevents the vapour flowing from the vessel
25 [4] to the evaporator [7] during defrosting.

The discharge vapour of the defrost compressor [11] is led to the vessel [4]. As soon as the ice is removed from the evaporator [7], the defrost compressor [11] will be switched off and the expansion device [6] will be opened again.

This method of ice removal is very energy efficient. No heat will be brought in into the product or the coldstore. The energy that is used for defrosting also leads to a further cooling of the product and the evaporator [7].

The defrost compressor [11] can also be used as refrigeration
5 compressor for useful cold supply. Figure 3 illustrates how the addition of only a few ducts [12, 13] and valves [14, 15, 16] enables the defrost compressor to be used as refrigeration compressor. During normal operation valve [14] is opened and the defrost compressor extracts refrigerant vapour from vessel [4] through duct [12]. The discharge vapour flows through valve [16] and duct [13] to the
10 cascade condensor. Valve [15] is closed. In the defrost mode valves [14] and [16] are closed and valve [15] is opened, which gives the same result as in figure 1.

Claims

1. A method for cooling a medium and defrosting a secondary side of a cooler, in which a refrigerant is used as a cooling agent and as a defrosting agent, wherein the cooling of the medium is established by passing the refrigerant at a high pressure through a primary side of the cooler, whereby
5 the medium to be cooled is passed through the secondary side of the cooler, and wherein the defrosting of the cooler is established by decreasing the gas pressure of the refrigerant in the primary side of the cooler to such an extent that ice which is adhered to the secondary side of the cooler is released.
- 10 2. A method according to claim 1, wherein the gas pressure of the refrigerant is decreased by means of a compressor which is arranged downstream the cooler.
3. A method according to claim 1 or 2, wherein the flow of refrigerant to
15 the cooler is reduced during defrosting when compared to the flow of refrigerant as applied during cooling.
4. A method according to any one of claims 1-3, wherein the gas pressure of the refrigerant in the first part of the cooler is in such a range that the
20 equivalent boiling temperature is lower than -50°C .
5. A method according to claim 4, wherein the gas pressure of the refrigerant is in such a range that the equivalent boiling temperature is lower than -60°C .
25
6. A method according to any one of claims 1-5, wherein the refrigerant circulation rate is in the range of from 1-10.

7. A method according to any one of claims 1-6, wherein the refrigerant comprises CO₂.

5 8. A method according to any one of claims 1-7, wherein the cooler comprises a contact freezer, and the method is integrated with a method for cooling a material located between the elements of the contact freezer.

9. A method according to any one of claims 1-8, wherein the cooler is
10 connected to two compressors which are connected in parallel at cooling conditions so as to form a two stage refrigeration system, and wherein the compressors are connected in series at defrost conditions so as to form a three stage refrigeration system.

15 10. A cooling system for carrying out the method according to any one of claims 1-9, which system comprises a cooler which is provided with means to allow refrigerant to pass through the primary side of the cooler, means to allow the medium to be cooled to pass through the secondary side of the cooler, which cooler is connected to two or more compressors for decreasing the
20 pressure of the refrigerant in the primary side of the cooler, whereby the suction sides of the compressors can alternately be connected in parallel and in series to the cooler or in parallel and in a combination of in parallel and in series to the cooler, means for connecting the compressors alternately in parallel or in series to the cooler or means for connecting the compressors
25 alternately in parallel and in a combination of in parallel and in series to the cooler, and a heat exchanger to which the high pressure sides of the compressors can alternately be connected in parallel and in series or in parallel and in a combination of in parallel and in series, which heat exchanger is connected to a circuit for feeding the refrigerant into the cooler.

11. A cooling system according to claim 10, wherein the heat exchanger is connected to an expansion device, which expansion device is connected to the cooler.
- 5 12. A cooling system according to claim 10 or 11, wherein the cooling system comprises a contact freezer or a plurality of contact freezers.

Figure 1



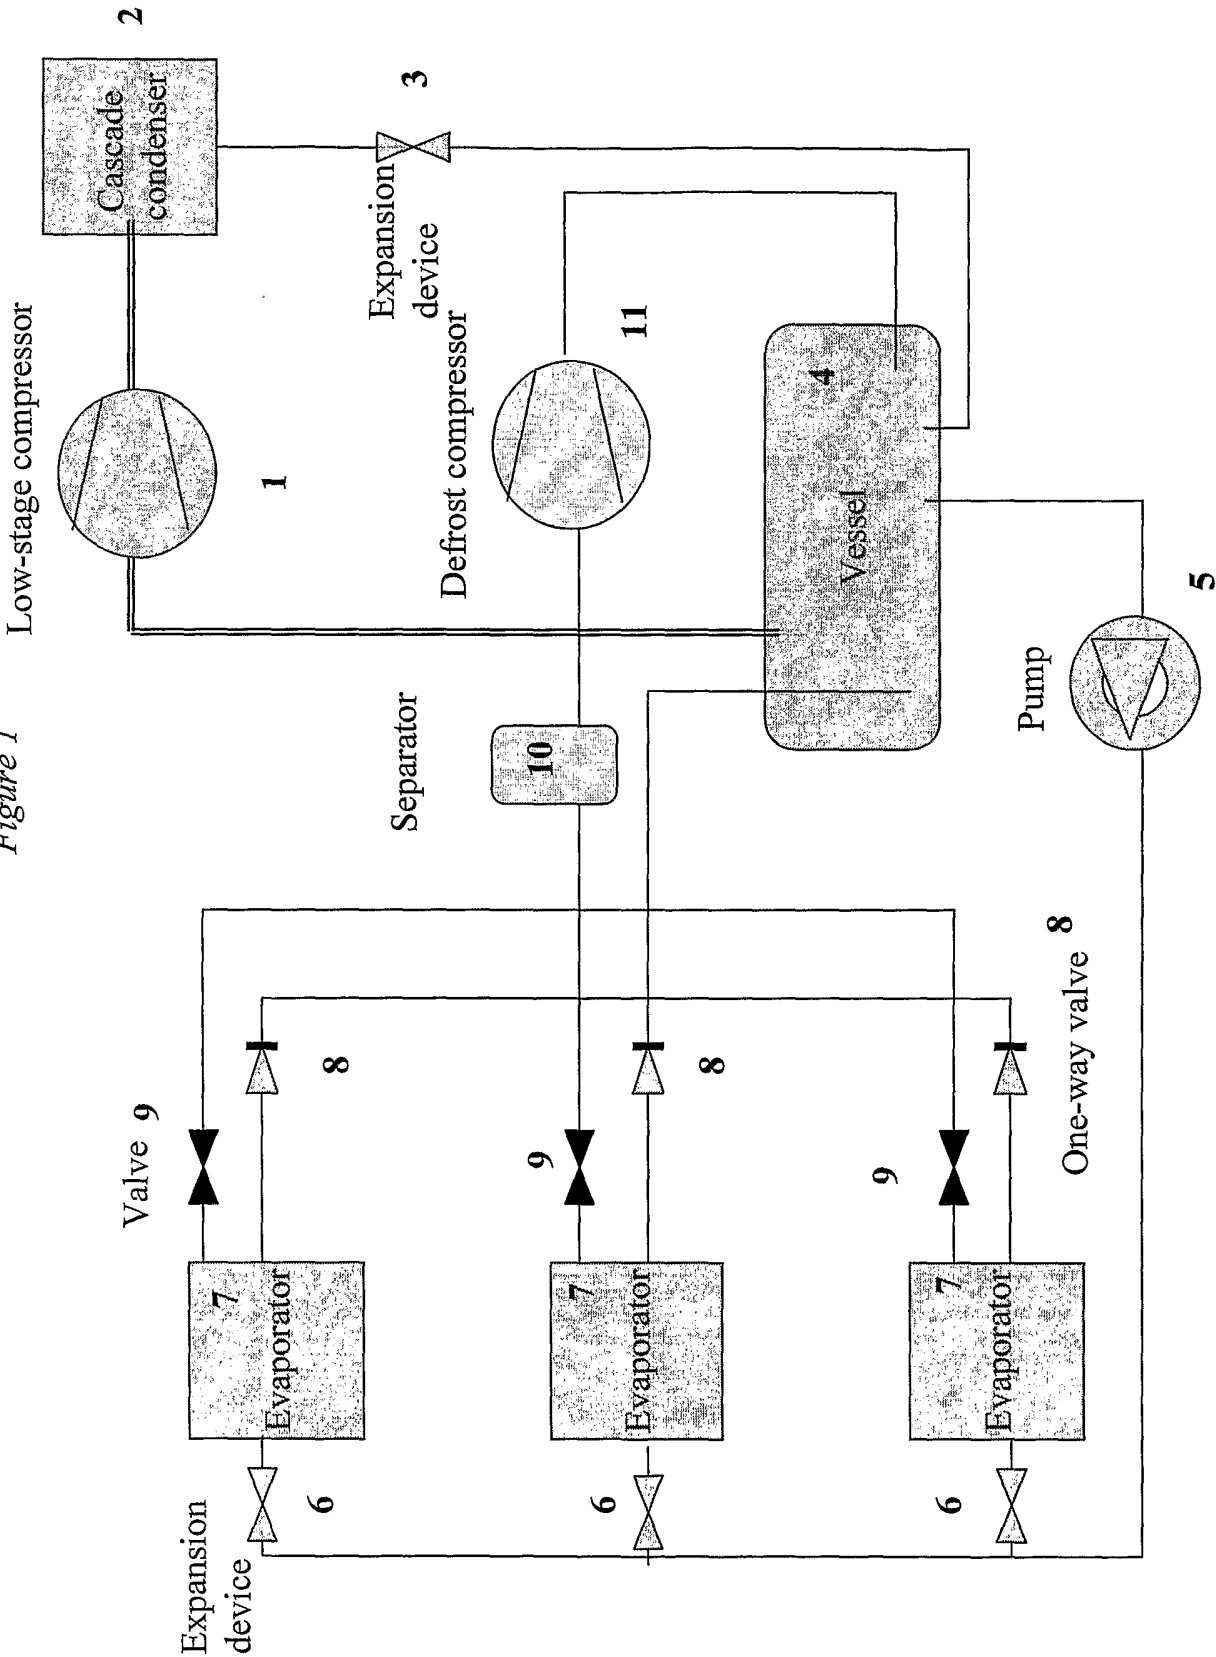


Figure 2

Cooler defrosting
 $T_0 = -45^{\circ}\text{C}$, $x_0 = 25\%$, $V_{\text{evaporator}} = 80 \text{ liter}$; $V_{\text{compressor}} = 5 \text{ l/s}$

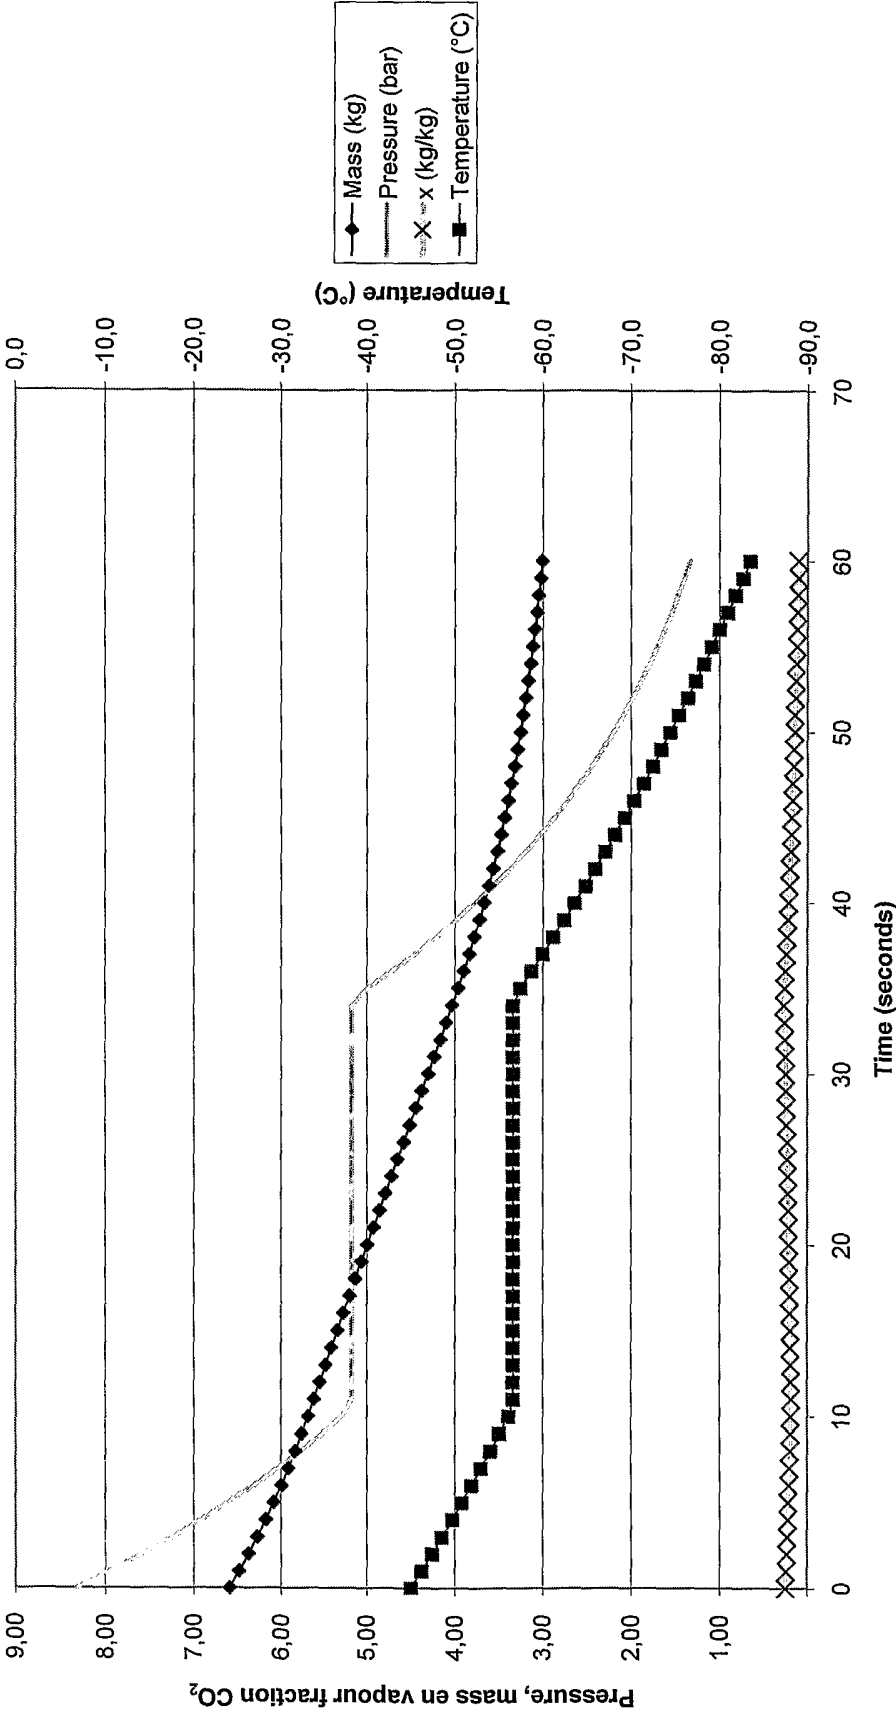

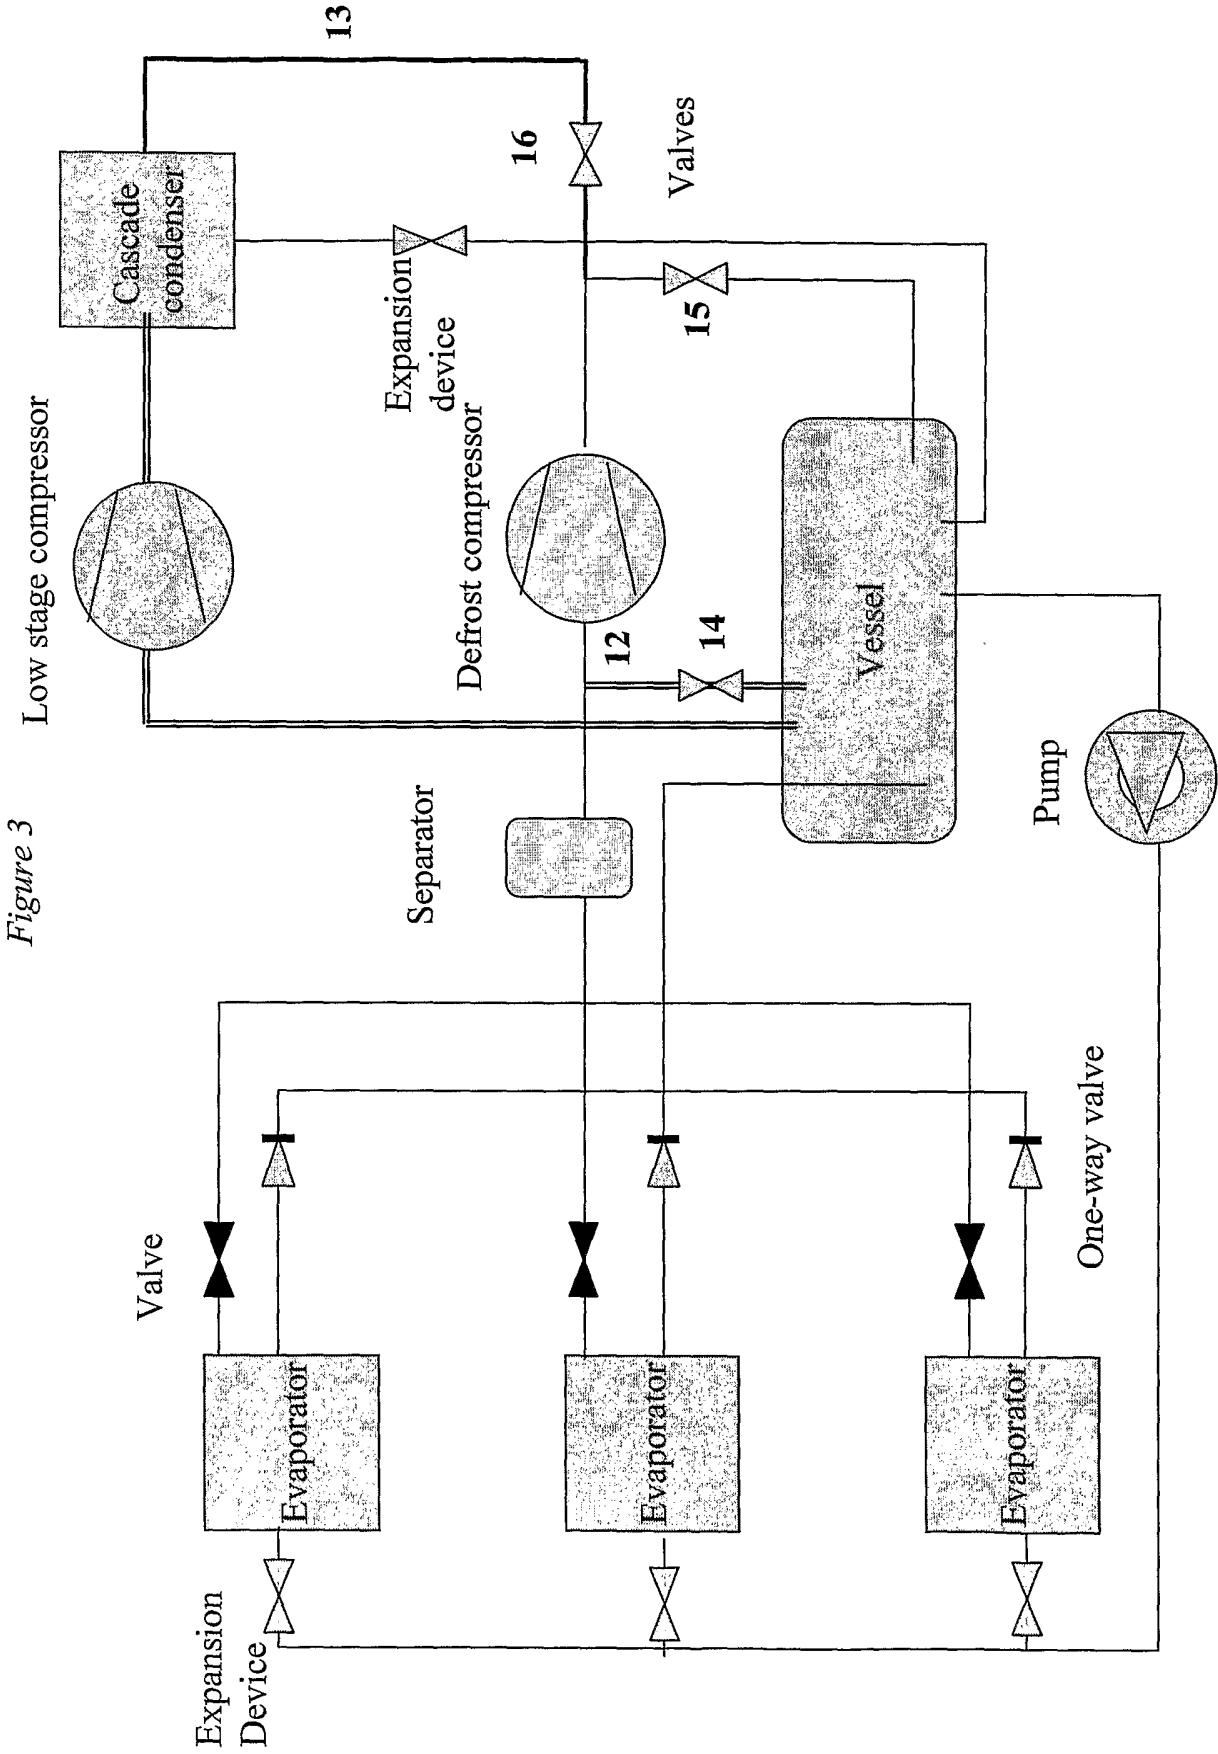

INTERNATIONAL SEARCH REPORT

International Application No
PCT/NL2005/000610

A. CLASSIFICATION OF SUBJECT MATTER
F25B47/02 F25B9/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F25B F25D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 715 702 A (STRONG ET AL) 10 February 1998 (1998-02-10)	1, 2, 4, 5, 7
Y	column 1, line 11 - line 23 column 2, line 19 - line 23; figure 1	9-12
Y	PATENT ABSTRACTS OF JAPAN vol. 003, no. 108 (M-072), 11 September 1979 (1979-09-11) & JP 54 085455 A (MITSUBISHI ELECTRIC CORP), 7 July 1979 (1979-07-07) the whole document	9-12
Y	US 5 042 262 A (GYGER ET AL) 27 August 1991 (1991-08-27) column 3, line 34 - column 4, line 37; figure 4	1
	----- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

2 December 2005

Date of mailing of the international search report

12/12/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

De Graaf, J.D.

INTERNATIONAL SEARCH REPORT

International Application No

PC T, nL2005/000610

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	KENNEDY C: "THE FUTURE OF FROZEN FOODS" FOOD, SCIENCE AND TECHNOLOGY, MARCEL DEKKER, NEW YORK, NY, US, vol. 14, no. 4, 2000, pages 195-197, XP008056189 ISSN: 0891-8961 page 195, line 33 - line 40 -----	1
A	S. ESTRADA-FLORES: "Novel cryogenic technologies for the freezing of food products" THE OFFICIAL JOURNAL OF AIRAH, July 2002 (2002-07), pages 16-21, XP008056214 Australia page 18, paragraph 3.1.3 -----	1
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 14, 5 March 2001 (2001-03-05) -& JP 2000 314566 A (DAIKIN IND LTD), 14 November 2000 (2000-11-14) the whole document -----	9,10
A	US 5 013 217 A (HITOSUGI ET AL) 7 May 1991 (1991-05-07) the whole document -----	9,10
A	PATENT ABSTRACTS OF JAPAN vol. 016, no. 293 (M-1273), 29 June 1992 (1992-06-29) -& JP 04 080545 A (MATSUSHITA ELECTRIC IND CO LTD), 13 March 1992 (1992-03-13) the whole document -----	9,10
A	US 5 570 585 A (VAYNBERG ET AL) 5 November 1996 (1996-11-05) the whole document -----	9,10
A	DE 30 04 114 A1 (LIQUID CARBONIC DE ESPANA,S.A) 6 November 1980 (1980-11-06) -----	
A	US 4 224 801 A (TYREE, JR. ET AL) 30 September 1980 (1980-09-30) -----	
A	US 5 400 615 A (PEARSON ET AL) 28 March 1995 (1995-03-28) -----	
A	PATENT ABSTRACTS OF JAPAN vol. 2002, no. 12, 12 December 2002 (2002-12-12) -& JP 2002 243350 A (SANDEN CORP; KYORITSU REINETSU KK), 28 August 2002 (2002-08-28) abstract -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT, NL2005/000610

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5715702	A	10-02-1998	AU 723840 B2	07-09-2000
			AU 5076198 A	10-06-1998
			CA 2271934 A1	28-05-1998
			CN 1238036 A	08-12-1999
			DE 69728790 D1	27-05-2004
			DE 69728790 T2	07-10-2004
			EP 0948727 A1	13-10-1999
			JP 2001504933 T	10-04-2001
			WO 9822764 A1	28-05-1998
JP 54085455	A	07-07-1979	JP 1338357 C	29-09-1986
			JP 61001658 B	18-01-1986
US 5042262	A	27-08-1991	AU 7795291 A	27-11-1991
			CA 2080588 A1	09-11-1991
			EP 0527856 A1	24-02-1993
			JP 5503764 T	17-06-1993
			WO 9117400 A1	14-11-1991
JP 2000314566	A	14-11-2000	NONE	
US 5013217	A	07-05-1991	GB 2214572 A	06-09-1989
			IT 1228274 B	06-06-1991
			JP 1193089 A	03-08-1989
			KR 9309732 B1	09-10-1993
JP 04080545	A	13-03-1992	JP 2716248 B2	18-02-1998
US 5570585	A	05-11-1996	NONE	
DE 3004114	A1	06-11-1980	ES 479676 A1	01-01-1980
US 4224801	A	30-09-1980	AR 222504 A1	29-05-1981
			AU 531260 B2	18-08-1983
			AU 5115879 A	22-05-1980
			BR 7907099 A	08-07-1980
			CA 1110861 A1	20-10-1981
			DE 2945791 A1	22-05-1980
			ES 485137 A1	16-05-1980
			FR 2441137 A1	06-06-1980
			GB 2036278 A	25-06-1980
			JP 1669002 C	29-05-1992
			JP 3021823 B	25-03-1991
			JP 55068565 A	23-05-1980
			KR 8400358 B1	26-03-1984
			MX 149031 A	09-08-1983
			PH 18710 A	05-09-1985
US 5400615	A	28-03-1995	DE 4224896 A1	04-02-1993
			FR 2679985 A1	05-02-1993
			GB 2258298 A	03-02-1993
JP 2002243350	A	28-08-2002	NONE	