

(19)



(11)

EP 3 573 198 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
23.06.2021 Bulletin 2021/25

(51) Int Cl.:
H01R 35/04 ^(2006.01) **H01R 4/58** ^(2006.01)
H01R 13/514 ^(2006.01)

(21) Application number: **18174170.3**

(22) Date of filing: **24.05.2018**

(54) **CONDUCTIVE LINK**

LEITFÄHIGE VERBINDUNG

LIAISON CONDUCTRICE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
27.11.2019 Bulletin 2019/48

(73) Proprietor: **Bhavya Jumps GmbH**
33602 Bielefeld (DE)

(72) Inventor: **MALHOTRA, Sanjay**
33602 Bielefeld (DE)

(74) Representative: **Prüfer & Partner mbB**
Patentanwälte · Rechtsanwälte
Sohnckestraße 12
81479 München (DE)

(56) References cited:
CH-A5- 652 535 DE-A1-102012 204 543
US-A1- 2015 093 917

EP 3 573 198 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention refers to a conductive link and to a conductive chain formed by conductive links. Such a conductive chain formed by conductive links may be used, for example, as a modular flexible bus bar.

[0002] In electric vehicles, different ways are known for establishing an electrical connection between the battery and electrical loads such as the electrical motor. In a prior art example, braided wires are used which are composed of a number of small strands of wire braided together so that the resulting cable is flexible. For the purpose of achieving this flexibility, however, the cross section of the cable is limited so that a current loss occurs during the transmission of electric power from the battery to the motor. Other prior art solutions include a solid copper bus bar which is arranged within a cable conduit made of plastic.

[0003] When an accident of the vehicle such as a severe impact occurs, the insulation of the braided wires cable or the plastic cable conduit may be damaged so that current may flow into the metal parts of the vehicle. Further, the motor may continue to run after the accident since there is no breakage in the current flow. This may result in an injury of the passengers, further damage of the vehicle, and even fire.

[0004] DE 10 2012 204 543 A1 and CH 652 535 A5 describe chains formed by links which are held together by a connection element or by a screw-nut connection. US 2015/0093917 A1 discloses a conductive link according to the preamble of claim 1 and a chain formed by links each having a ball, a socket and a connector connecting the ball and the socket. In forming the chain, the ball of a link is accommodated by the socket of an adjacent link.

[0005] The object of the present invention therefore is to provide an electrical connection which has less current loss during a normal operation and increases safety in the case of an accident. The object is achieved by a conductive link according to claim 1.

[0006] Further developments of the invention are specified in the dependent claims, respectively.

[0007] The conductive link according to the invention is made of an electrically conductive material and comprises a first end portion and a second end portion. The first end portion and the second end portion are configured so that the first end portion is able to accommodate and hold a second end portion of another conductive link of the conductive chain. The conductive link formed in this way makes it possible, for example, to connect a plurality of conductive links together to form a conductive chain by which an electrical connection may be established, for example between the battery and electrical loads such as the electrical motor of an electrical vehicle. Establishing an electrical connection in this way makes it possible, for example to reduce a current loss during a normal operation and to increase safety in the case of an accident.

[0008] Preferably, the conductive link further comprises

an intermediate portion which is arranged between the first end portion and the second end portion and connects the first end portion and the second end portion to each other. This makes it possible, for example, to increase the length of a single conductive link.

[0009] Preferably, the first end portion, the second end portion, and the intermediate portion, if present, are made of a metal, preferably copper, and/or the first end portion, the second end portion, and the intermediate portion, if present are formed as a monolithic piece. This makes it possible, for example, to easily manufacture the conductive link and/or to give the conductive link a higher stability.

[0010] Preferably, the first end portion and the second end portion are configured so that the first end portion is able to hold the second end portion of the other conductive link of the conductive chain by form fit and/or by press fit. This makes it possible, for example, to avoid that the first end portion and the second end portion separate from each other by themselves.

[0011] According to the invention, the first end portion has a concavely formed section configured to accommodate and hold a second end portion of another conductive link of the conductive chain. This makes it possible, for example, to realize a specific form how enabling the first end portion to hold the second end portion.

[0012] According to the invention, the second end portion has a convexly formed section configured to be accommodated in and held by the first end portion of another conductive link of the conductive chain. This makes it possible, for example, to realize a specific form how the second end portion is held the first end portion.

[0013] Preferably, the second end portion comprises two or more partial segments which are separated by gaps from each other. This makes it possible, for example, to increase an elasticity of the second end portion.

[0014] Preferably, the two or more partial segments are elastically deformable. This makes it possible, for example, to facilitate the introduction of the second end portion in to the first end portion.

Preferably, the first end portion and the second end portion are configured so that the first end portion is able to accommodate and hold the second end portion of the other conductive link of the conductive chain in a way that the conductive link and the other conductive link may be pivoted or articulated with regard to each other. This makes it possible, for example, to achieve a flexible chain when a plurality of conductive links are connected together.

[0015] Preferably, the first end portion and the second end portion are configured so that the first end portion is able to accommodate and hold the second end portion of the other conductive link of the conductive chain in a way that the connection between the conductive link and the other conductive link is disengaged at a predetermined force. This makes it possible, for example, to break an electrical interconnection formed by a conductive chain comprising a plurality of conductive links connected

to each other, for example between the battery and electrical loads such as the electrical motor of an electrical vehicle, in the state on an accident of the vehicle. This makes it possible, for example, to automatically interrupt a current flow from the battery to the motor, thus increasing safety in the case of an accident.

[0016] According to the invention, the first end portion is covered with an electrically insulating material, preferably a plastic, and a bowl of an electrically insulating material, preferably a plastic, is formed at the second end portion. The bowl is formed to protrude further in the longitudinal direction L than the free end of the second end portion. The bowl is further formed to be able to accommodate the first end portion of another conductive link of the conductive chain which is connected to the second end portion. This makes it possible, for example, to insulate a conductive chain comprising a plurality of conductive links connected to each other to the outside, wherein the insulation is also maintained if the chain is broken. This makes it possible, for example, to avoid that the conductive core of the broken chain comes into contact, for example, with metallic parts of a vehicle, thus increasing safety in the case of an accident.

[0017] Preferably, the conductive link has a rotationally symmetric shape. This makes it possible, for example, to easily manufacture the conductive link.

[0018] Preferably, the conductive link comprises two or more first end portions, each configured to be able to accommodate and hold a second end portion of another conductive link, and/or two or more second end portion, each configured to be able to be accommodated in and held by a first end portion of another conductive link. This makes it possible, for example, to realize a cable fan-out in a conductive chain comprising a plurality of conductive links connected to each other.

[0019] An assembly is also provided, according to this invention, comprising a conductive link, as described above, and a terminal link, which comprises a connection portion and a terminal portion. The connection portion is configured to accommodate and hold a second end portion of a conductive link. Alternatively, the connection portion is configured to be accommodated in and held by the first end portion of a conductive link. The terminal portion is configured to establish an electrical connection to an external device. Such a terminal link makes it possible, for example, to connect a conductive chain formed by a plurality of conductive links for example to the battery and electrical loads such as the electrical motor of an electrical vehicle. Establishing an electrical connection in this way makes it possible, for example to reduce a current loss during a normal operation and to increase safety in the case of an accident.

[0020] The conductive chain according to the invention comprises a plurality of conductive links connected to each other, and preferably at least one terminal link connected to the first one and/or the last one of the conductive links forming the chain. Such a chain makes it possible, for example, to establish an electrical connection,

for example between the battery and electrical loads such as the electrical motor of an electrical vehicle. Establishing an electrical connection in this way makes it possible, for example to reduce a current loss during a normal operation and to increase safety in the case of an accident.

[0021] Further features and advantages of the invention will arise from the description of embodiments with reference to the enclosed figures.

10 Fig. 1 shows a sectional view of two conductive links according to an embodiment of the present invention in a state in which they are separated from each other.

15 Fig. 2 shows a sectional view of the two conductive links shown in Fig. 1 in a state in which they are connected to each other.

Fig. 3 shows a lateral view of a first end portion of a conductive link shown in Fig. 1.

Fig. 4 shows a lateral view of a second end portion of a conductive link shown in Fig. 1.

25 Fig. 5 shows a lateral view of a terminal link according to an embodiment of the present invention connected to a conductive link.

Fig. 6 shows a sectional view of the terminal link shown in Fig. 5 connected to the conductive link.

Fig. 7 shows a lateral view of another terminal link according to an embodiment of the present invention connected to a conductive link shown in Fig. 1.

Fig. 8 shows a sectional view of the second terminal link shown in Fig. 7 connected to the conductive link.

Fig. 9 shows a lateral view of a conductive chain.

[0022] According to the present invention, an electrical connection between the battery and electrical loads such as the electrical motor is made by a conductor having a modular design. The conductor is realized as a conductive chain comprising a plurality of conductive links.

[0023] An embodiment of such a conductive chain comprising a plurality of conductive links is described below with reference to Figs. 1 to 10.

[0024] Fig. 1 shows a sectional view of two conductive links in a state in which they are separated from each other.

[0025] The two conductive links 10a, 10b have the same construction. Each conductive link comprises a first end portion 11 and a second end portion 12 arranged opposite to each other in a longitudinal direction L, and

an intermediate portion 13 arranged between the first end portion 11 and the second end portion 12 and connecting the first end portion 11 and the second end portion 12 to each other.

[0026] The first end portion 11, the second end portion 12 and the intermediate portion 13 are made of an electrically conductive material. The conductive material may be a metal, preferably copper. Preferably, the copper has a high purity of at least 99.9 %. The first end portion 11, the second end portion 12 and the intermediate portion 13 are formed as a monolithic piece of material.

[0027] The first end portion 11 has a concavely formed section 15. In the present example, the concave section 15 has an inner surface in the shape of a spherical segment. The segment extends over more than a half-sphere so that the maximum diameter is not at the outer end 11a (left end in Fig. 1) of the first end portion 11. In other words, the maximum diameter is at a distance from the outer end 11a of the

The second end portion 12 has a convexly formed section 16. In the present example, the convex section 16 has an outer surface in the shape of a spherical segment. Also here, the maximum diameter is not at the outer end (right end in Fig. 1) of the second end portion 12. The function of a gap 17 shown in the second end portion 12 is described later with reference to Fig. 4

[0028] The intermediate portion 13 has a cylindrical shape.

[0029] The first end portion 11 and the intermediate portion 13 are covered with an electrically insulating material 18, preferably a plastic. The insulating material 18 also covers at least an outer portion of the exposed free end 11a of the first end portion 11. A bowl 19 of the electrically insulating material is formed in the shape of a spherical shell segment at the second end portion 12 so that it protrudes further in the longitudinal direction L than the second end portion 12. The insulating cover 18 and the insulating bowl 19 are formed as a monolithic piece of material.

[0030] Fig. 2 shows a sectional view of the two conductive links in a state in which they are connected to each other.

[0031] In this state, the convex section 16 of the second end portion 12 of the conductive link 10a (left in Fig. 2) is accommodated in the concave section 15 of the first end portion 11 of the conductive link 10b (right in Fig. 2). The diameters of the spherical segments of the inner surface of the concave section 15 and the outer surface of the convex section 16 are approximately equal so that a low electrical transition resistance is achieved between the conductive links 10a, 10b in the connected state.

[0032] The bowl 19 surrounding the second end portion 12 of the conductive link 10a is formed large enough so that it can accommodate the first end portion 11 of the conductive link 10b.

[0033] Due to the fact that the maximum diameter of the first end portion 11 is not at the outer end, some force is required to push the second end portion 12 of the con-

ductive link 10a into the first end portion 11 of the conductive link 10b. Due to the same reason, the second end portion 12 cannot easily free itself from the first end portion 11, but engages in the concave section 15 and thus is held by the first end portion 11 in the connected state. In order to disengage the connection, some force is required, too.

[0034] The first end portion 11 and the second end portion 12 thus are held together by form fit or positive fit. Depending on the dimensions used, they may also be held together by press fit or friction fit.

[0035] Since the inner surface of the concave section 15 and the outer surface of the convex section 16 are formed as spherical segments, they together form a spheroid joint or ball and socket joint. It is therefore possible to move the second end portion 12 of the conductive link 10a within the first end portion 11 of the conductive link 10b in a way that an angle between the longitudinal direction L of the conductive link 10b and the longitudinal direction L of the conductive link 10a can be changed to a certain amount, i.e. the two conductive links may be pivoted or articulated with regard to each other, while the two conductive links 10a, 10b remain in the connected state.

[0036] Fig. 3 shows a lateral view of the first end portion 11 of the conductive link 10. In the present example, the first end portion 11 has a rotationally symmetric shape so that the lateral view shows all the elements as circles. In this view, the free end 11a of the first end portion 11 is shown, surrounded and partly covered by the insulating cover 18. In the interior, the concave section 15 can be seen. In the background, the rear of the insulating bowl 19 surrounding the second end portion (not visible in the figure) is shown.

[0037] Fig. 4 shows a lateral view of the second end portion 12 of the conductive link 10. Also the second end portion 12 generally has a rotationally symmetric shape so that its elements are shown as circles, or at least as circle segment. In the present example, the second end portion 12 comprises four partial segments 41-44 which extend in the longitudinal direction of the conductive link 10 and are separated from each other by gaps 46-49. The gap 17 shown in Figs. 1 and 2 corresponds to one of those gaps 46-49.

[0038] Since each of the partial segments 41-44 has a smaller cross-section than the entire second end portion 12 and are separated from each other, they are elastically deformable to a higher degree than a massive or solid second end portion 12 would be. This facilitates the introduction of the convex section 16 of the second end portion 12 into the concave 15 of the first end portion 11.

[0039] Fig. 5 shows a lateral view of a terminal link 50 connected to a conductive link 10, and Fig. 6 shows a sectional view of the terminal link 50 connected to the conductive link 10.

[0040] The terminal link 50 comprises a connection portion 51 and a terminal portion 52 arranged opposite to each other, and an intermediate portion 53 arranged

between the connection portion 51 and the terminal portion 52 and connecting the connection portion 51 and the terminal portion 52 to each other.

[0041] The connection portion 51, the terminal portion 52 and the intermediate portion 53 are made of an electrically conductive material. The conductive material may be a metal, preferably copper. Preferably, the copper has a high purity of at least 99.9 %. The connection portion 51, the terminal portion 52 and the intermediate portion 53 are formed as a monolithic piece of material.

[0042] The connection portion 51 is formed in a similar way as the second end portion 12 of a conductive link 10 so that it can be accommodated in and held by the first end portion 11 of a conductive link 10 by form fit and/or friction fit. In the present example, the connection portion 51 is formed without gaps. The terminal portion 52 is formed in a way to permit establishing an electrical connection to an electrical device such as the battery or motor of the electric vehicle. In the present example, the terminal portion 52 is formed as a plate having a through-hole 55 through which the plate may be screwed to an electrical terminal of the electrical device.

[0043] Fig. 7 shows a lateral view of another terminal link 70 connected to a conductive link 10, and Fig. 8 shows a sectional view of the other terminal link 70 connected to the conductive link 10.

[0044] The terminal link 70 comprises a connection portion 71 and a terminal portion 72 arranged opposite to each other, and an intermediate portion 73 arranged between the connection portion 71 and the terminal portion 72 and connecting the connection portion 71 and the terminal portion 72 to each other.

[0045] The connection portion 71, the terminal portion 72 and the intermediate portion 73 are made of an electrically conductive material. The conductive material may be a metal, preferably copper. Preferably, the copper has a high purity of at least 99.9 %. The connection portion 71, the terminal portion 72 and the intermediate portion 73 are formed as a monolithic piece of material.

[0046] The connection portion 71 is formed in a similar way as the first end portion 11 of a conductive link 10 so that it can accommodate and hold the second end portion 12 of a conductive link 10 by form fit and/or friction fit. The terminal portion 72 is formed in a way to permit establishing an electrical connection to an electrical device such as the battery or motor of the electric vehicle. In the present example, the terminal portion 72 is formed as a plate having a through-hole 75 through which the plate may be screwed to an electrical terminal of the electrical device.

[0047] Fig. 9 shows a lateral view of a conductive chain.

[0048] The conductive chain 90 comprises a plurality of conductive links 10 connected to each other, and two terminal links 50, 70 connected to the first one and the last one of the conductive links 10, respectively.

[0049] In the state in which the conductive links 10 are connected to form a chain, no metal part is accessible from the outside with the exception of the terminal por-

tions 52, 72 of the terminal links 50, 70. The conductive cores of the conductive links 10 are electrically insulated to the outside by the insulating covers 18 and bowls 19 of the conductive links 10. Also the connection portions 51, 71 the terminal links 50, 70 are electrically insulated to the outside by the insulating cover 18 and bowl 19 of the adjacent conductive links 10.

[0050] An electrical connection can be established by connecting the terminal portions 52, 72 of the terminal links 50, 70 to the elements between which an electrical connection is desired. Since the conductive chain 90 is electrically insulated to the outside, no further insulation such as cable housings or cable conduits are required.

[0051] Due to the degree of freedom in the movement between the conductive links 10 forming the conductive chain 90, this connection has a certain flexibility so that the chain may for example be bent to a certain amount. Since the conductive links 10 are made from a solid conductive material, a better conductivity can be achieved than in the case of using braided wire, resulting in less current loss.

[0052] As described above, a certain amount of force is required in order to disengage the connection between adjacent conductive links 10. This force may be predetermined in a way that the conductive chain 90 is broken at a force as it typically occurs during a severe impact of the vehicle. For this purpose, the form of the first end portion 11 and the second end portion 12 and/or the amount of the form fit and/or by press fit between them is selected so that the first end portion 11 and the second end portion 12 are disengaged from each other at the predetermined force.

[0053] Thereby, the electrical connection between the battery and the motor is automatically interrupted and the motor is prevented from continuing to run after the accident. Further, the electrical insulation by the insulating cover 18 which also covers at least an outer portion of the exposed free end 11a of the first end portion 11 and by the insulating bowl 19 that protrudes further than the second end portion 12 prevents conductive parts of the chain 90 from coming into contact with metal parts of the vehicle. Thus, safety in the case of an accident is increased.

[0054] The chains may be pre-assembled at the factory, or they may individually be assembled at the customer's site in order to match different requirements. The modular design of the chain makes it possible to make the chain shorter or longer in order to achieve any required length of the interconnection.

[0055] The present invention is not restricted to the specific example described above, but can be modified in different ways.

[0056] For example, multiple types of end fittings may be used for the first end portion 11 and the second end portion 12. The second end portion 12 may for example be formed without gaps.

[0057] Further, the two end portions 11, 12 need not have the same longitudinal direction, but may be ar-

ranged in an angle, for example in an L-form. Still further, a conductive link may have two or more first end portions 11 and/or second end portions 12 and be arranged, for example, in a T-form, Y-form, or X-form. Such forms make it possible, for example, to realize a cable fan-out.

[0058] The first end portion 11, the second end portion 12 and the intermediate portion 13 may be formed by separate pieces connected to each other instead of being formed as a monolithic piece of material. Similarly, the connection portion 51, 71, the terminal portion 52, 72 and the intermediate portion 53, 73 may be formed by separate pieces.

[0059] Also the insulating cover 18 and the insulating bowl 19 may be formed by separate pieces.

[0060] The intermediate portions 11, 53, 73 may also be omitted. In this case, the first end portion 11 and the second end portion 12 of a conductive link 10 and/or the connection portion 51, 71 and the terminal portion 52, 72 of a terminal link 50, 70 are directly connected to each other.

[0061] The present invention is not limited to the use of the conductive chain within an electrical vehicle. It may also be used for any other application in which an electrical connection is required. It is specially suited for applications in which braided wire and bus bars are currently used.

Claims

1. A conductive link (10) for a conductive chain, wherein the conductive link (10) is made of an electrically conductive material,
the conductive link (10) comprises a first end portion (11) and a second end portion (12),
the first end portion (11) and the second end portion (12) are configured so that the first end portion (11) is able to accommodate and hold a second end portion (12) of another conductive link (10) of the conductive chain,
the first end portion (11) has a concavely formed section (15) configured to accommodate and hold a second end portion (12) of another conductive link (10a) of the conductive chain,
the second end portion (12) has a convexly formed section (16) configured to be accommodated in and held by the first end portion (11) of another conductive link (10b) of the conductive chain,
the first end portion (11) is covered with an electrically insulating material (18), preferably a plastic,
characterized in that
a bowl (19) of an electrically insulating material, preferably a plastic, is formed at the second end portion (12),
wherein the bowl (19) is formed to protrude further than the second end portion (12), and
the bowl (19) is formed to be able to accommodate the first end portion (11) of another conductive link

(10b) of the conductive chain which is connected to the second end portion (12).

2. The conductive link (10) according to claim 1, wherein the first end portion (11) and the second end portion (12) are made of a metal, preferably copper, and/or the first end portion (11) and the second end portion (12) are formed as a monolithic piece.
3. The conductive link (10) according to claim 1 or 2, further comprising an intermediate portion (13) arranged between the first end portion (11) and the second end portion (12) and connecting the first end portion (11) and the second end portion (12) to each other,
wherein the intermediate portion (13) preferably is made of a metal, preferably copper, and/or wherein the first end portion (11), the second end portion (12), and the intermediate portion (13) preferably are formed as a monolithic piece, and/or wherein the intermediate portion (13) preferably is covered with an electrically insulating material (18), preferably a plastic.
4. The conductive link (10) according to any one of claims 1 to 3, wherein the first end portion (11) and the second end portion (12) are configured so that the first end portion (11) is able to hold the second end portion (12) of the other conductive link (10) of the conductive chain by form fit and/or by press fit.
5. The conductive link (10) according to any one of claims 1 to 4, wherein the second end portion (12) comprises two or more partial segments (41-44) which are separated by gaps (46-49) from each other.
6. The conductive link (10) according to claim 5, wherein the two or more partial segments (41-44) are elastically deformable.
7. The conductive link (10) according to any one of claims 1 to 6, wherein the first end portion (11) and the second end portion (12) are configured so that the first end portion (11) is able to accommodate and hold the second end portion (12) of the other conductive link (10a) of the conductive chain in a way that the conductive link (10) and the other conductive link (10a) may be pivoted or articulated with regard to each other.
8. The conductive link (10) according to any one of claims 1 to 7, wherein the first end portion (11) and the second end portion (12) are configured so that the first end portion (11) is able to accommodate and hold the second end portion (12) of the other con-

ductive link (10a) of the conductive chain in a way that the connection between the conductive link (10b) and the other conductive link (10a) is disengaged at a predetermined force.

9. The conductive link (10) according to any one of claims 1 to 8, having a rotationally symmetric shape.
10. The conductive link (10) according to any one of claims 1 to 9, comprising two or more first end portions (11), each configured to be able to accommodate and hold a second end portion (12) of another conductive link (10), and/or two or more second end portion (12), each configured to be able to be accommodated in and held by a first end portion (11) of another conductive link (10).
11. An assembly comprising the conductive link (10) according to any one of claims 1 to 10 and a terminal link (50, 70) for a conductive chain, the terminal link comprising a connection portion (51, 71) and a terminal portion (52, 72), wherein the connection portion (51, 71) is configured to accommodate and hold the second end portion (12) of the conductive link (10) or to be accommodated in and held by the first end portion (11) of the conductive link (10), and the terminal portion (52, 72) is configured to establish an electrical connection to an external device.
12. A conductive chain (90), comprising a plurality of conductive links (10) according to any of claims 1 to 10 connected to each other.
13. The conductive chain (90) according to claim 12, further comprising at least one terminal link (50, 70) connected to the first one and/or the last one of the conductive links (10) forming the chain (90), wherein the at least one terminal link (50, 70) comprises a connection portion (51, 71) and a terminal portion (52, 72), the connection portion (51, 71) is configured to accommodate and hold the second end portion (12) of a conductive link (10), or to be accommodated in and held by the first end portion (11) of a conductive link (10), and the terminal portion (52, 72) is configured to establish an electrical connection between an external device and the first one and/or the last one of the conductive links (10) forming the chain (90).

Patentansprüche

1. Ein leitfähiges Glied (10) für eine leitfähige Kette, wobei das leitfähige Glied (10) aus einem elektrisch leitfähigen Material besteht,

das leitfähige Glied (10) einen ersten Endabschnitt (11) und einen zweiten Endabschnitt (12) aufweist, der erste Endabschnitt (11) und der zweite Endabschnitt (12) so konfiguriert sind, dass der erste Endabschnitt (11) in der Lage ist, einen zweiten Endabschnitt (12) eines weiteren leitfähigen Gliedes (10a) der leitfähigen Kette aufzunehmen und zu halten, der erste Endabschnitt (11) einen konkav ausgebildeten Abschnitt (15) aufweist, der so konfiguriert ist, dass er einen zweiten Endabschnitt (12) eines weiteren leitfähigen Gliedes (10a) der leitfähigen Kette aufnehmen und halten kann, der zweite Endabschnitt (12) einen konvex geformten Abschnitt (16) aufweist, der so konfiguriert ist, dass er in dem ersten Endabschnitt (11) eines weiteren leitfähigen Gliedes (10b) der leitfähigen Kette aufgenommen und von diesem gehalten werden kann, der erste Endabschnitt (11) mit einem elektrisch isolierenden Material (18), vorzugsweise einem Kunststoff, bedeckt ist, **dadurch gekennzeichnet, dass** eine Schale (19) aus einem elektrisch isolierenden Material, vorzugsweise einem Kunststoff, an dem zweiten Endabschnitt (12) gebildet ist, wobei die Schale (19) so ausgebildet ist, dass sie weiter als der zweite Endabschnitt (12) hervorsteht, und die Schale (19) so ausgebildet ist, dass sie den ersten Endabschnitt (11) eines weiteren leitfähigen Gliedes (10b) der leitfähigen Kette, das an den zweiten Endabschnitt (12) angeschlossen ist, aufnehmen kann.

2. Das leitfähige Glied (10) nach Anspruch 1, wobei der erste Endabschnitt (11) und der zweite Endabschnitt (12) aus einem Metall, vorzugsweise Kupfer, gebildet sind, und/oder der erste Endabschnitt (11) und der zweite Endabschnitt (12) als ein einstückiges Teil ausgebildet sind.
3. Das leitfähige Glied (10) nach Anspruch 1 oder 2, ferner enthaltend einen Zwischenabschnitt (13), der zwischen dem ersten Endabschnitt (11) und dem zweiten Endabschnitt (12) angeordnet ist und den ersten Endabschnitt (11) und den zweiten Endabschnitt (12) miteinander verbindet, wobei der Zwischenabschnitt (13) vorzugsweise aus einem Metall, vorzugsweise Kupfer, gebildet ist, und/oder wobei der erste Endabschnitt (11), der zweite Endabschnitt (12) und der Zwischenabschnitt (13) vorzugsweise als ein einstückiges Teil ausgebildet sind, und/oder wobei der Zwischenabschnitt (13) vorzugsweise mit einem elektrisch isolierenden Material (18), vorzugs-

weise einem Kunststoff, bedeckt ist.

4. Das leitfähige Glied (10) nach einem der Ansprüche 1 bis 3, wobei
der erste Endabschnitt (11) und der zweite Endabschnitt (12) so konfiguriert sind, dass der erste Endabschnitt (11) in der Lage ist, den zweiten Endabschnitt (12) des weiteren leitfähigen Gliedes (10) der leitfähigen Kette durch Formpassung und/oder durch Presspassung zu halten.
5. Das leitfähige Glied (10) nach einem der Ansprüche 1 bis 4, wobei der zweite Endabschnitt (12) zwei oder mehr Teilsegmente (41-44) enthält, die durch Lücken (46-49) voneinander getrennt sind.
6. Das leitfähige Glied (10) nach Anspruch 5, wobei die zwei oder mehr Teilsegmente (41-44) elastisch verformbar sind.
7. Das leitfähige Glied (10) nach einem der Ansprüche 1 bis 6, wobei der erste Endabschnitt (11) und der zweite Endabschnitt (12) so konfiguriert sind, dass der erste Endabschnitt (11) in der Lage ist, den zweiten Endabschnitt (12) des weiteren leitfähigen Gliedes (10a) der leitfähigen Kette so aufzunehmen und zu halten, dass das leitfähige Glied (10) und das weitere leitfähige Glied (10a) gegeneinander verschwenkbar oder gelenkig sind.
8. Das leitfähige Glied (10) nach einem der Ansprüche 1 bis 7, wobei der erste Endabschnitt (11) und der zweite Endabschnitt (12) so konfiguriert sind, dass der erste Endabschnitt (11) in der Lage ist, den zweiten Endabschnitt (12) des weiteren leitfähigen Gliedes (10a) der leitfähigen Kette so aufzunehmen und zu halten, dass die Verbindung zwischen dem leitfähigen Glied (10b) und dem weiteren leitfähigen Glied (10a) bei einer vorbestimmten Kraft gelöst wird.
9. Das leitfähige Glied (10) nach einem der Ansprüche 1 bis 8, das eine rotationssymmetrische Form aufweist.
10. Das leitfähige Glied (10) nach einem der Ansprüche 1 bis 9, enthaltend
zwei oder mehr erste Endabschnitte (11), von denen jeder so konfiguriert ist, dass er einen zweiten Endabschnitt (12) eines weiteren leitfähigen Gliedes (10) aufnehmen und halten kann, und/oder
zwei oder mehr zweite Endabschnitte (12), von denen jeder so konfiguriert ist, dass er in einem ersten Endabschnitt (11) eines weiteren leitfähigen Gliedes (10) aufgenommen und von diesem gehalten werden kann.
11. Anordnung, umfassend das leitfähige Glied (10)

nach einem der Ansprüche 1 bis 10 und ein Endglied (50, 70) für eine leitfähige Kette, wobei das Endglied einen Verbindungsabschnitt (51, 71) und einen Endabschnitt (52, 72) enthält,

wobei der Verbindungsabschnitt (51, 71) so konfiguriert ist, dass er den zweiten Endabschnitt (12) des leitfähigen Gliedes (10) aufnehmen und halten kann oder dass er in dem ersten Endabschnitt (11) des leitfähigen Gliedes (10) aufgenommen und von diesem gehalten werden kann, und
der Endabschnitt (52, 72) so konfiguriert ist, dass er eine elektrische Verbindung mit einer externen Vorrichtung herstellen kann.

12. Leitfähige Kette (90), enthaltend eine Mehrzahl von leitfähigen Gliedern (10) nach einem der Ansprüche 1 bis 10, die miteinander verbunden sind.
13. Leitfähige Kette (90) nach Anspruch 12, ferner enthaltend mindestens ein Endglied (50, 70), das an das erste und/oder das letzte der leitfähigen Glieder (10), die die Kette (90) bilden, angeschlossen ist, wobei das mindestens eine Endglied (50, 70) einen Verbindungsabschnitt (51, 71) und einen Endabschnitt (52, 72) enthält,
der Verbindungsabschnitt (51, 71) so konfiguriert ist, dass er zweiten Endabschnitt (12) eines leitfähigen Gliedes (10) aufnehmen und halten kann oder dass er in dem ersten Endabschnitt (11) eines leitfähigen Gliedes (10) aufgenommen und von diesem gehalten werden kann, und
der Endabschnitt (52, 72) konfiguriert ist, dass er eine elektrische Verbindung zwischen einer externen Vorrichtung und dem ersten und/oder dem letzten der leitfähigen Glieder (10), die die Kette (90) bilden, herstellen kann.

Revendications

1. Un maillon conducteur (10) pour une chaîne conductive, dans lequel
le maillon conducteur (10) est fait d'un matériau électriquement conducteur,
le maillon conducteur (10) comprend une première partie d'extrémité (11) et une seconde partie d'extrémité (12),
la première partie d'extrémité (11) et la seconde partie d'extrémité (12) sont configurées de sorte que la première partie d'extrémité (11) est capable de recevoir et de maintenir une seconde partie d'extrémité (12) d'un autre maillon conducteur (10) de la chaîne conductive,
la première partie d'extrémité (11) a une section de forme concave (15) configurée pour recevoir et maintenir une seconde partie d'extrémité (12) d'un autre maillon conducteur (10a) de la chaîne conductrice,

la seconde partie d'extrémité (12) a une section de forme convexe (16) configurée pour être reçue dans et maintenu par la première partie d'extrémité (11) d'un autre maillon conducteur (10b) de la chaîne conductrice,

la première partie d'extrémité (11) est recouverte d'un matériau électriquement isolant (18), de préférence un plastique,

caractérisé en ce que

un bol (19) d'un matériau électriquement isolant, de préférence un plastique, est formé à la seconde partie d'extrémité (12),

dans lequel le bol (19) est formé pour faire saillie plus loin que la deuxième partie d'extrémité (12), et le bol (19) est formé pour pouvoir recevoir la première partie d'extrémité (11) d'un autre maillon conducteur (10b) de la chaîne conductrice qui est connecté à la seconde partie d'extrémité (12).

2. Le maillon conducteur (10) selon la revendication 1, dans lequel
la première partie d'extrémité (11) et la deuxième partie d'extrémité (12) sont faites d'un métal, de préférence du cuivre, et/ou
la première partie d'extrémité (11) et la seconde partie d'extrémité (12) sont formées comme une pièce monolithique.
3. Le maillon conducteur (10) selon la revendication 1 ou 2, comprenant en outre une partie intermédiaire (13) disposée entre la première partie d'extrémité (11) et la seconde partie d'extrémité (12) et reliant la première partie d'extrémité (11) et la seconde partie d'extrémité (12) l'une à l'autre, dans lequel la partie intermédiaire (13) est de préférence constituée d'un métal, de préférence du cuivre, et/ou
dans lequel la première partie d'extrémité (11), la seconde partie d'extrémité (12) et la partie intermédiaire (13) sont de préférence formées comme une pièce monolithique, et/ou
dans lequel la partie intermédiaire (13) est de préférence recouverte d'un matériau électriquement isolant (18), de préférence un plastique.
4. Le maillon conducteur (10) selon l'une quelconque des revendications 1 à 3, dans lequel
la première partie d'extrémité (11) et la deuxième partie d'extrémité (12) sont configurées de manière à ce que la première partie d'extrémité (11) est capable de maintenir la deuxième partie d'extrémité (12) de l'autre maillon conducteur (10) de la chaîne conductrice par ajustage de forme et/ou par ajustage serré.
5. Le maillon conducteur (10) selon l'une quelconque des revendications 1 à 4, dans lequel la deuxième partie d'extrémité (12) comprend deux ou plusieurs seg-

ments partiels (41-44) qui sont séparés les uns des autres par des espaces (46-49).

6. Le maillon conducteur (10) selon la revendication 5, dans lequel les deux ou plusieurs segments partiels (41-44) sont élastiquement déformables.
7. Le maillon conducteur (10) selon l'une quelconque des revendications 1 à 6, dans lequel la première partie d'extrémité (11) et la deuxième partie d'extrémité (12) sont configurées de sorte que la première partie d'extrémité (11) est capable de recevoir et de maintenir la deuxième partie d'extrémité (12) de l'autre maillon conducteur (10a) de la chaîne conductrice de sorte que le maillon conducteur (10) et l'autre maillon conducteur (10a) puissent être pivotés ou articulés l'un par rapport à l'autre.
8. Le maillon conducteur (10) selon l'une quelconque des revendications 1 à 7, dans lequel la première partie d'extrémité (11) et la deuxième partie d'extrémité (12) sont configurées de sorte que la première partie d'extrémité (11) est capable de recevoir et de maintenir la deuxième partie d'extrémité (12) de l'autre maillon conducteur (10a) de la chaîne conductrice de sorte que la connexion entre le maillon conducteur (10b) et l'autre maillon conducteur (10a) est désengagée à une force prédéterminée.
9. Le maillon conducteur (10) selon l'une quelconque des revendications 1 à 8, ayant une forme à symétrie de révolution.
10. Le maillon conducteur (10) selon l'une quelconque des revendications 1 à 9, comprenant :

deux ou plusieurs premières parties d'extrémité (11), chacune configurée pour pouvoir recevoir et maintenir une deuxième partie d'extrémité (12) d'un autre maillon conducteur (10), et/ou
deux ou plusieurs secondes parties d'extrémité (12), chacune configurée pour pouvoir être reçue dans et maintenue par une première partie d'extrémité (11) d'un autre maillon conducteur (10).
11. Un ensemble comprenant le maillon conducteur (10) selon l'une quelconque des revendications 1 à 10 et un maillon terminal (50, 70) pour une chaîne conductrice, le maillon terminal comprenant une portion de connexion (51, 71) et une portion terminale (52, 72),
dans lequel la partie de connexion (51, 71) est configurée pour recevoir et maintenir la deuxième partie d'extrémité (12) du maillon conducteur (10) ou pour être logée dans et maintenue par la première partie d'extrémité (11) du maillon conducteur (10), et la partie terminale (52, 72) est configurée pour établir

une connexion électrique avec un dispositif externe.

12. Une chaîne conductive (90), comprenant une pluralité de maillons conductifs (10) selon l'une quelconque des revendications 1 à 10 connectés les uns aux autres. 5
13. La chaîne conductive (90) selon la revendication 12, comprenant en outre au moins un maillon terminal (50, 70) connecté au premier et/ou au dernier des maillons conductifs (10) formant la chaîne (90), dans lequel le au moins un maillon terminal (50, 70) comprend une partie de connexion (51, 71) et une partie terminale (52, 72), 10
- la partie de connexion (51, 71) est configurée pour recevoir et maintenir la seconde partie d'extrémité (12) d'un maillon conductif (10), ou pour être logée dans et maintenue par la première partie d'extrémité (11) d'un maillon conductif (10), et 15
- la partie terminale (52, 72) est configurée pour établir une connexion électrique entre un dispositif externe et le premier et/ou le dernier des maillons conductifs (10) formant la chaîne (90). 20

25

30

35

40

45

50

55

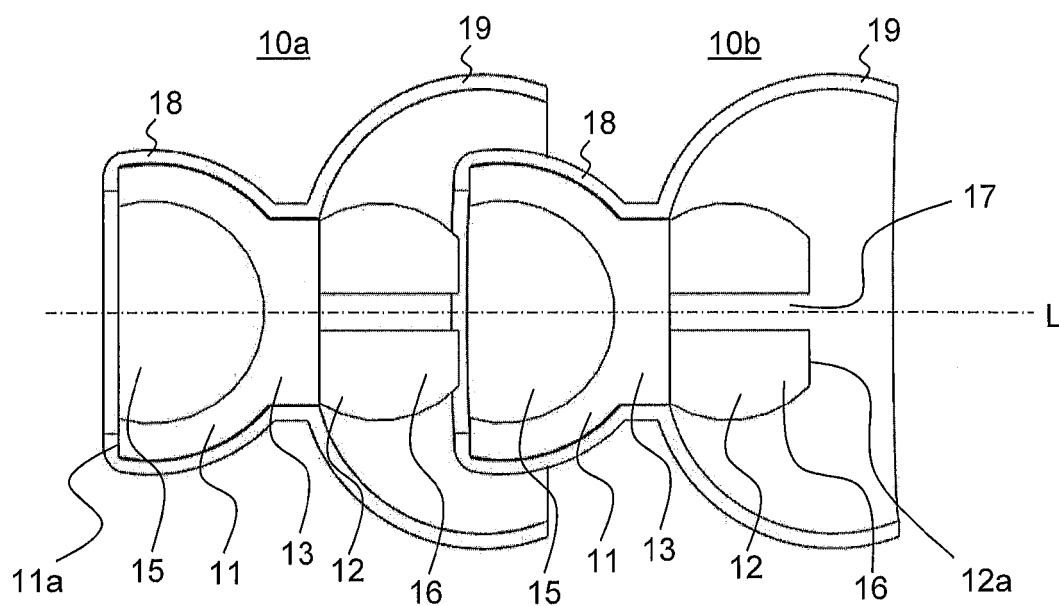


Fig. 1

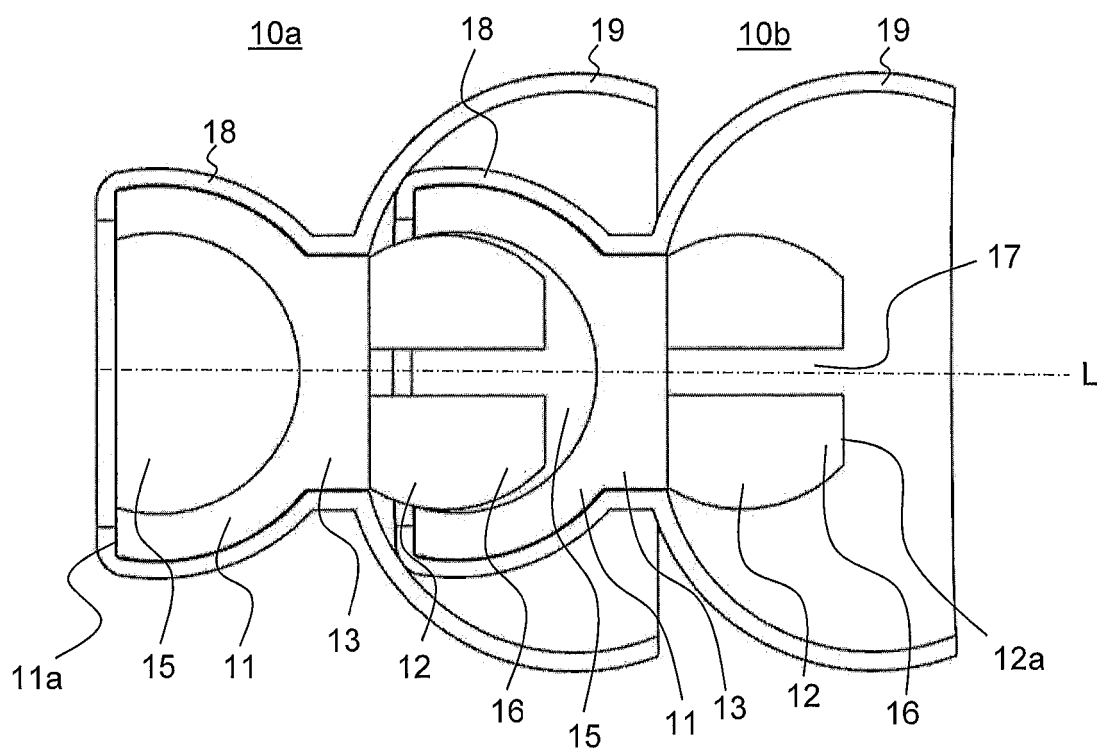


Fig. 2

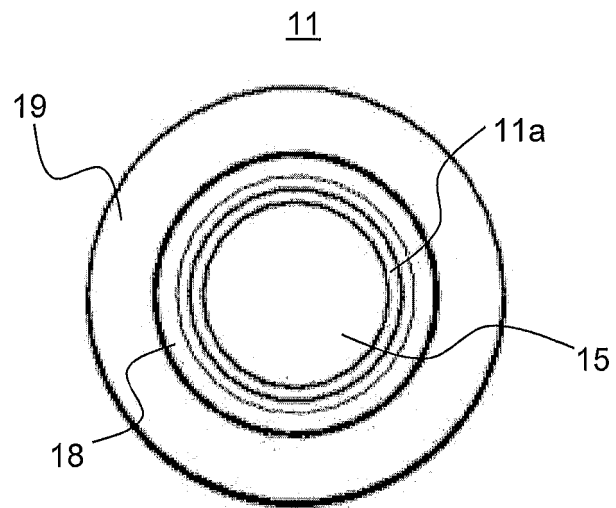


Fig. 3

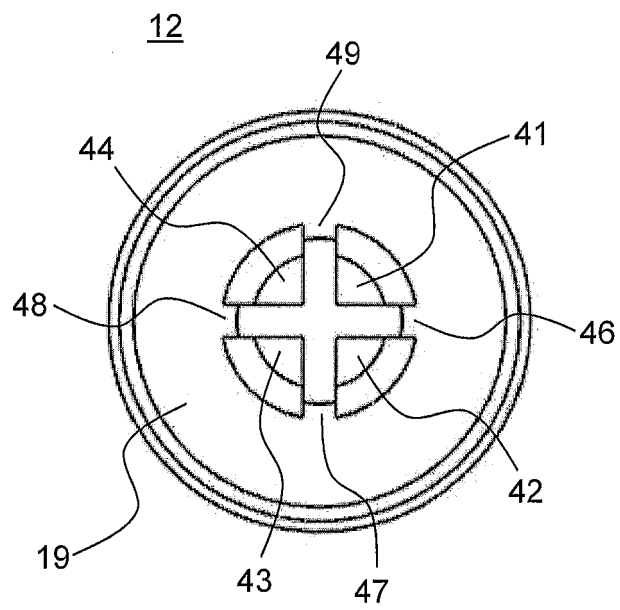


Fig. 4

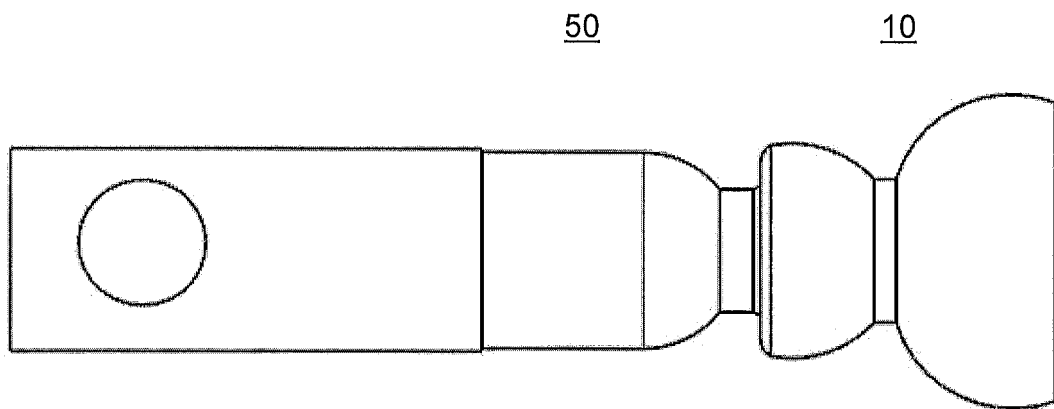


Fig. 5

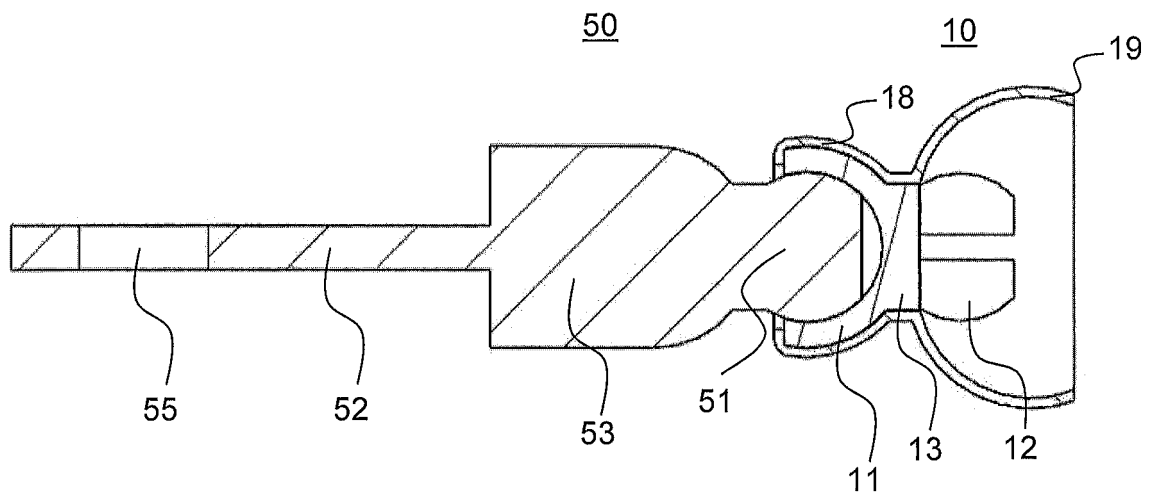


Fig. 6

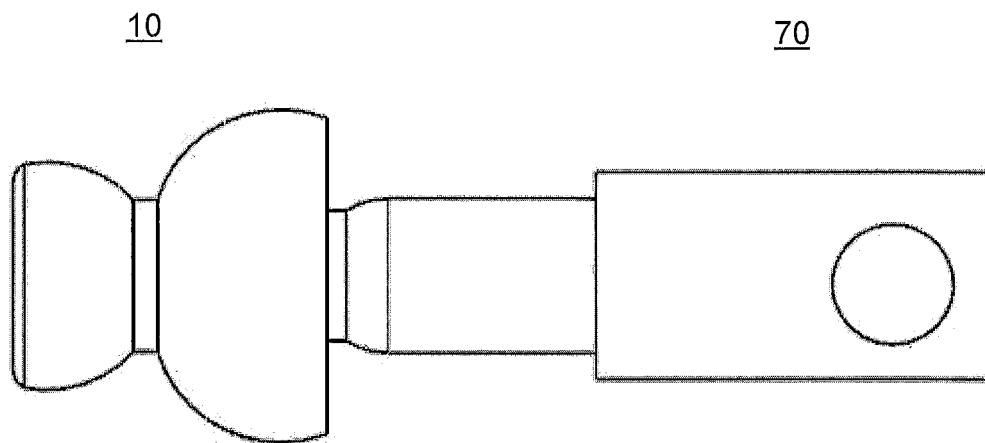


Fig. 7

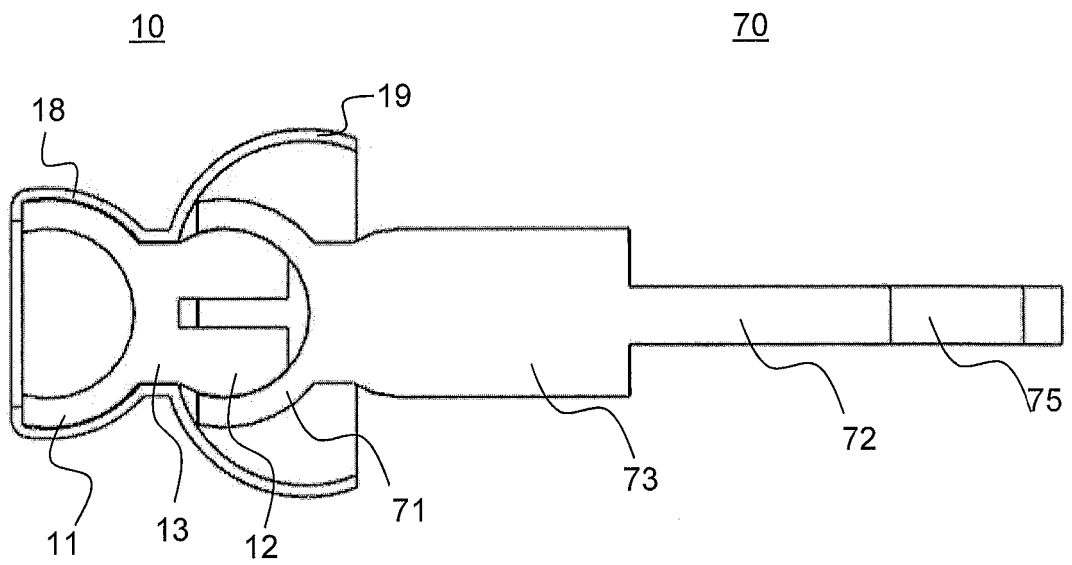


Fig. 8

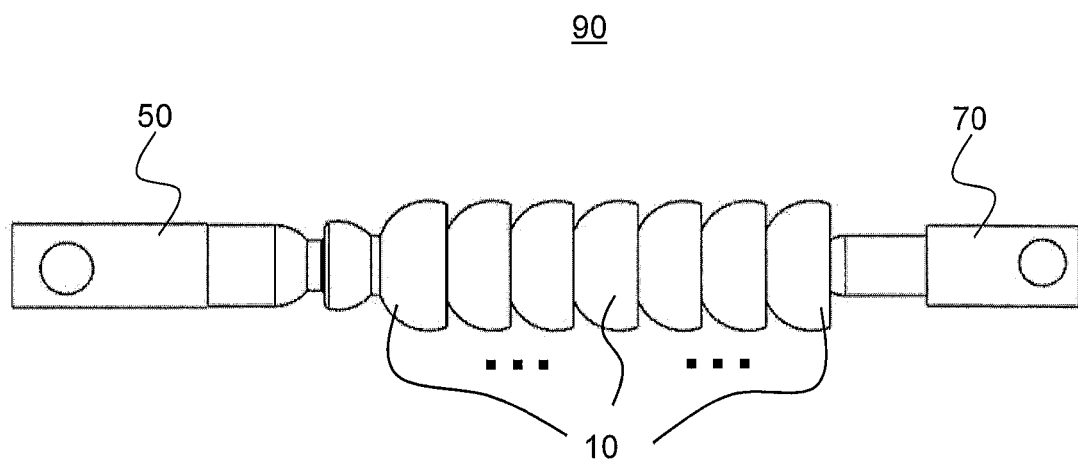


Fig. 9

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 102012204543 A1 [0004]
- CH 652535 A5 [0004]
- US 20150093917 A1 [0004]