

(19)



(11)

EP 3 140 496 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

06.02.2019 Bulletin 2019/06

(51) Int Cl.:

E21B 47/01 ^(2012.01)

(21) Application number: **14891238.9**

(86) International application number:

PCT/US2014/037002

(22) Date of filing: **06.05.2014**

(87) International publication number:

WO 2015/171122 (12.11.2015 Gazette 2015/45)

(54) ORIENTING HANGER ASSEMBLY FOR DEPLOYING MWD TOOLS

ORIENTIERUNG EINER AUFHÄNGERANORDNUNG ZUM EINSATZ VON MWD-WERKZEUGEN

ENSEMBLE DISPOSITIF DE SUSPENSION À ORIENTATION POUR DÉPLOYER DES OUTILS MWD

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(74) Representative: **Lee, Brenda**

GE International Inc.

Global Patent Operation - Europe

The Ark

201 Talgarth Road

Hammersmith

London W6 8BJ (GB)

(43) Date of publication of application:

15.03.2017 Bulletin 2017/11

(73) Proprietor: **Sharewell Energy Services, LLC**
Houston, Texas 77041 (US)

(56) References cited:

EP-A2- 3 140 508

WO-A2-2011/011399

US-A- 3 765 494

US-A1- 2003 056 984

US-A1- 2006 098 532

US-A1- 2007 227 780

US-A1- 2009 301 780

US-A1- 2011 186 284

US-B1- 6 173 793

US-B1- 6 257 339

US-B1- 8 474 548

(72) Inventors:

• **MACDONALD, Craig**

Houston, Texas 77041 (US)

• **MILLER, Mark**

Houston, Texas 77068 (US)

EP 3 140 496 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

RELATED APPLICATIONS

[0001] None.

FIELD OF THE INVENTION

[0002] This disclosure is directed generally to the deployment of measurement-while-drilling tools in subsurface drilling applications, and more specifically to an orienting hanger assembly for improved deployment of such measurement-while-drilling tools in such applications.

BACKGROUND

[0003] Measurement-While-Drilling (MWD) systems are well-known in drilling technology. The term "measurement-while-drilling" encompasses a wide array of different tools and instruments having a corresponding wide array of functions. For purposes of example in this disclosure, however, MWD refers to navigational tools (or "directional tools") that monitor the direction and rate of travel of the tool face during directional drilling operations. Such MWD tools typically include magnetometers and/or accelerometers (colloquially known collectively as a "directional package") for measuring travel and direction of the tool face in relation to vectors of known directional forces such as the Earth's magnetic and gravitational forces. It will be appreciated throughout this disclosure, however, that even though such directional MWD tools are used by way of illustration, this disclosure is not limited to such directional MWD tools in the application of the orienting hanger device also disclosed herein.

[0004] MWD tools typically take the form of a substantially uniform cylinder, including a cylindrical sonde containing the directional package, plus other cylindrical components containing items such as batteries and related electronics. The tools' cylindrical shape generally facilitates deployment in a specially-configured section of drill collar to form a "sub" that may be inserted into a conventional drill string. MWD tools may be retrievable or non-retrievable, as described further on in this background. Where retrievable, their cylindrical shape enhances such retrievable deployment.

[0005] Directional sensitivity is enabled on the MWD tool, at least in part, by identifying a "high side" on the outside of the tool. More precisely, the "high side" is a radial orientation (or radial azimuth) marked on the outside of the tool that the directional sensors deployed on the inside of the tool will recognize as "top dead center" or "zero degrees tool face". Part of the job of "making up" a bottom hole assembly (BHA) prior to directional drilling includes orienting the MWD tool, within its corresponding sub, so that the high side of the tool is directionally aligned with the intended zero degrees on the tool face. Advantageously the high side of the tool is exactly directionally

aligned with zero degrees on the BHA tool face. If not exactly directionally aligned, the misalignment must be precisely known so that appropriate corrections may be made by software in the directional package.

5 [0006] In directional drilling operations using a bent sub, a scribe line on the bent sub will indicate zero degrees tool face. Similarly, in directional drilling operations using a steering tool, the steering tool will have some external physical reference mark indicating its intended zero degrees tool face during use. Conventionally, the scribe line or other reference mark is transferred externally to the collar housing the directional package using, for example, a chalk line, a laser, visual alignment, or similar method. The MWD tool is then oriented within its collar so that its high side aligns with the scribe line or other reference mark as transferred onto the collar.

10 [0007] As noted above, MWD tools come in both retrievable and non-retrievable varieties. "Retrievable" refers to the MWD tool being specially configured to be retrievable from the drill string without tripping the drill string out of the well. The most common retrievable deployment is to locate the MWD tool sub at the very top of the tool string in the BHA, just below the bottom of the drill pipe string, where the top of the MWD tool can be accessed by a wireline run through the hollow drill pipe string from the surface. The end of the wireline provides a hook device which can be attached to a latching device provided on the top of the MWD tool. Once hooked on, the MWD tool can be pulled up and retrieved from inside its collar.

15 [0008] Also as noted above, such a retrievable MWD tool is conventionally cylindrical so that it may be more easily withdrawn from within its collar. Conventionally, external bow springs are provided on the outside of the cylindrical MWD tool, which compress as the MWD tool is inserted into a hole-like receptacle within the collar. The bow springs hold the MWD tool in place in its receptacle, advantageously without rotation with respect to the collar, so to preserve alignment with zero degree tool face of the BHA as described above. External rubber fins on the tool exterior can also be used to position and stabilize an MWD tool (see, e.g., The Pathfinder HDSR). However, if fins are used, a separate internal collar contact is needed to complete the electrical connection of the EM tool. Regardless of the method used, to retrieve conventional tools, the pull on the MWD tool must be sufficient to withdraw the MWD tool longitudinally from its receptacle against the urge of the bow springs.

20 [0009] A primary advantage of retrievable MWD tools is that they are, as noted, retrievable from the drill string without tripping the drill string out of the well. Tripping is a time-consuming process, and to be avoided during drilling operations whenever possible. MWD tools may need to be brought back to the surface before drilling operations are complete for any one of a number of reasons. These reasons include the MWD tool requiring service, or perhaps running out of battery power, or requiring a download of locally-stored data, or even malfunctioning.

All of the above tasks may be accomplished without tripping by using a retrievable MWD tool. Furthermore, in situations where the BHA has become stuck in the borehole, it will be appreciated that retrievable MWD tools may be more easily salvaged.

[0010] Retrievable MWD tools have a number of disadvantages, however, as compared to non-retrievable MWD tools. In order to promote retrievability, retrievable MWD tools are not easily linked to other downhole measurement devices that may also be located in the tool string in the BHA, such as Logging-While-Drilling (LWD) tools or other MWD tools. Thus, telemetry capability as conventionally found on MWD tools may not also be used in conjunction with such other downhole tools. Further, the conventional bow spring deployment of retrievable tools, as described above, causes the MWD tool to be rotationally immobilized with respect to its surrounding collar only by the force reacting to compression of the bow springs. The potential for differential radial movement between MWD tool and the surrounding collar thus exists, potentially brought about by vibrations caused during drilling operations. In particular, the high vibrations caused by air drilling have an increased potential to undermine the alignment of a conventionally-deployed retrievable MWD tool.

[0011] Of course, the disadvantages of conventional retrievable MWD tool deployments as described immediately above may be addressed by deploying a conventional non-retrievable MWD tool. Non-retrievable MWD tools may be mounted more robustly and integratedly in the tool string in the BHA without concern for retrievability.

[0012] US 2007/227780 A1 discloses a drill string system for performing measurement while drilling and logging while drilling operations for oil and gas drilling is provided. The drill string system includes a drill string section having a bore defined by an inner length of surface of a pipe wall which has an outer surface. A tool guide is secured in the drill string section and a support is provided for centering the tool guide in said bore.

[0013] US3,765,494 A relates to a drilling system, in which a subassembly provides a means for seating an instrument housing in the drill string during a drilling operation and for permitting a normal flow of drilling fluids around the instrument housing. The seat also provides means for orienting the instrument housing in a predetermined position relative to a portion of the drill system.

[0014] US 2006/098532 A1 discloses a mud pulse landing assembly which allows for the removal of the mud pulse generator containing the mud pulse orifice, thus creating an unobstructed passageway for any tool or instrumentation that may need to be passed through the drill string. The retainer of the mud pulse landing assembly also provides a universal mount for engaging alternate tools or instrumentation for use in analyzing the borehole geology.

[0015] US 2009/301780 A1 relates to a measurement-while-drilling (MWD) tool having a pressure compensation system and reservoir segregated from fluid integra-

tion with actuator mechanism lubricants. The MWD tool can also be serviced on the rig floor without the need to drain, reseal and charge the compensation system.

[0016] US 2011/186284 A1 relates to a tool string disposed in at least one tubular having upper and lower threaded connections to connect to a drill string. The tool string includes a shock reduction tool, which includes an anchoring tail piece axially and rotationally fixed to the at least one tubular. A universal bore hole orientation (UBHO) muleshoe sub is disposed at an upper end of the shock reduction tool. A downhole electronics package coupled to the UBHO muleshoe sub.

[0017] It will therefore be appreciated from the foregoing background disclosure that there are some drilling applications in which a retrievable MWD tool may be preferable, and other applications in which a non-retrievable MWD may be preferable. From a tool supplier's point of view, it is not always optimal to keep a large inventory of both retrievable and non-retrievable MWD tools. Inventory and manufacturing efficiency can be enhanced when retrievable MWD tools can be optionally converted to non-retrievable MWD tools, thereby enabling use of the same tools in both retrievable and non-retrievable MWD drilling applications.

[0018] Techniques are currently known for converting retrievable MWD tools into non-retrievable MWD tools. However, these current techniques tend to be rather cumbersome and unreliable. The conversion is typically accomplished first by threading and torquing one or more orientation devices to the top and/or bottom of a retrievable MWD tool. The orientation devices are generally cylindrical transition pieces which (1) re-dimension the MWD tool assembly to be suitable for being received into a non-retrievable MWD tool mounting device (such as a suitably-configured length of drill collar), and (2) transfer the orientation reference line on the MWD tool onto a corresponding reference line on the mounting device, which can then be used for alignment with the scribe line on the bent sub during make-up of the tool string in the BHA. Adding the orientation devices(s) and the mounting device to the MWD tool thus requires addition of at least two (2) threaded/torqued connections. It will be appreciated that making these additional connections up is inefficient and cumbersome in many applications. Further, it will be appreciated that loss of torque and loosening of the threaded joints during drilling operations will likely cause a misalignment of the MWD tool's directional sensors with the tool face of the BHA.

[0019] Thus, there is a need in the art for a conversion device that quickly and nimbly converts a retrievable tool (including a retrievable directional MWD tool) into a corresponding non-retrievable MWD tool that may be mounted in a section of drill collar. The section of drill collar may then be placed in any desired position in the tool string in the BHA. The conversion device should avoid threaded/torqued connections that may loosen during drilling operations and possibly cause a misalignment in orientation of a directional MWD tool.

[0020] Advantageously the improved conversion device will accommodate EM MWD tools that include EM telemetry transceivers (and associated architecture and circuitry) on board. In such EM MWD deployments, the conversion device will enable optional mounting of the retrievable EM MWD tool in a gap sub.

SUMMARY AND TECHNICAL ADVANTAGES

[0021] This disclosure describes an orienting hanger assembly that addresses at least some of the needs in the art described above in the Background section. This disclosure describes embodiments of an inventive orienting hanger assembly that may be deployed as, for example, a sub in a conventional drill string, and further discloses methods of its use in such exemplary deployments.

[0022] The described orienting hanger allows a retrievable MWD tool to be easily converted to a top hanging fixed (non-retrievable) MWD tool without reconfiguring the basic components of the MWD tool. This disclosure describes an assembly that can (1) easily be threaded onto the top of an MWD tool, and (2) hold its orientation with respect to the MWD tool even though the threaded connection between tool and assembly is not necessarily tight. The orientation is maintained via a threaded fastener (nominally, a shear bolt) inserted through a window in the assembly and into a threaded hole in the MWD tool (or into a threaded hole in a tool adapter threaded onto the top of the tool). The shear bolt acting through the window holds the alignment between the MWD tool and the orienting hanger assembly, notwithstanding any radial torque applied to MWD tool or orienting hanger assembly.

[0023] Currently preferred embodiments of the orienting hanger assembly further provide an alignment notch that facilitates the hanger (and therefore the MWD tool) to be aligned to reference orientations (such as zero degrees tool face) on the drilling assembly. A key or orientating tool may be engaged in the notch as a physical means for aligning the hanger assembly (and therefore the MWD tool) to the BHA. Once the hanger assembly is rotated with the key to a desired selectable orientation with respect to the BHA, the assembly is locked into such orientation via, for example, external locking screws inserted from the outer diameter of the drill string, or an expandable split ring assembly.

[0024] The disclosed orienting hanger assembly thus advantageously deploys a retrievable MWD tool in a non-retrievable environment, while avoiding some of the disadvantages associated with conventional ones of such deployments. Disclosed features, described in greater detail below, enable the high side of the tool to be transferred quickly, reliably and accurately to a scribe line or other directional reference mark transferred conventionally onto the outer collar of the orienting hanger assembly. Further disclosed features, described in greater detail below, enable the selected tool orientation to be locked

down quickly and reliably with respect to the outer collar, with greater confidence that high vibration during drilling operations will not disturb the selected orientation. Yet further, the MWD tool as deployed in the disclosed orienting hanger is suspended from above during drilling operations and thus "hanging" in space provided below. This "hanging" aspect allows different types of MWD tools of different overall length to be deployed in the orienting hanger assembly without the need for spacers. Data or power connectivity between the MWD tool and other tooling in the BHA is thus further enhanced since there are no spacers causing obstruction.

[0025] In one example, this disclosure describes an orienting hanger assembly comprising a hollow cylindrical outer collar, a hollow cylindrical inner hanger, and a cylindrical MWD tool adapter. The outer collar has first and second ends with a box-end threaded connection at the first end and a pin-end threaded connection at the second end. The outer collar has a substantially constant outer diameter, but there is an annular shoulder on its inner diameter. The internal shoulder separates the inner collar wall into first and second sections, corresponding to the first and second collar ends, in which the second section (pin end) has a smaller diameter than the first section (box end). At least one threaded locking hole extends through the collar wall through to the first inner collar wall section.

[0026] The cylindrical inner hanger is disposed to be inserted into the outer collar so that the longitudinal axes of the collar and hanger are aligned. The inner hanger has first and second hanger ends that correspond generally to the first and second collar ends when the hanger is received into the outer collar. The inner hanger has an external annular shoulder that separates the first and second hanger ends and the corresponding first and second outer hanger wall sections. The first outer hanger wall section has a greater diameter than the second outer hanger wall section. The exterior of the first outer hanger wall section includes an annular knurled portion that is located so that it is visible through each of the at least one locking holes when the inner hanger is fully received inside the outer collar. The external shoulder on the hanger is disposed to abut the internal shoulder on the collar when the inner hanger is fully received inside the outer collar (thus, when the collar and inserted hanger are oriented vertically, with their first ends pointing up, the hanger actually "hangs" on the collar shoulder).

[0027] The first hanger end also includes an alignment notch provided in the inner wall. The notch is located so that it is visible when the hanger is fully received into the outer collar. At least two opposing radial wings extend outward from the exterior of the second hanger end. The wings terminate with a distal wing face and extend from the surface so that when the inner hanger is received into the outer collar, the distal wing faces are located proximate to and substantially flush with an inner surface of the second inner collar wall section. At least one of the radial wings includes an open wing passage from its distal

wing face through to the inner cylindrical surface of the hanger. The alignment notch and the wing providing the wing passage are separated by a predetermined radial offset about the longitudinal hanger axis so that the location of the alignment notch on the circumference of the hanger corresponds (by the predetermined offset) to the location of the wing passage.

[0028] The cylindrical MWD tool adapter has first and second adapter ends that correspond to the first and second ends of the collar and hanger. Threads on the outer surface of the first adapter end are disposed to mate with threads on the inner surface of the second hanger end. The tool adapter also has threads on the inner surface of its second end disposed to mate with the external threads on one end of an MWD tool. Additionally, the tool adapter has a radial threaded tool-orienting hole located so that it is visible through the wing passage on the inner hanger when the tool adapter is threaded into the second hanger end.

[0029] Once a tool is threaded into the tool adapter, an orienting screw is received through a selected wing passage and tightened into the tool-orienting hole so that a portion of the orienting screw prevents relative rotation of the tool adapter and the inner hanger via contact engagement with the selected wing passage. When the tool and hanger are threaded together by the adapter and fully received into the outer collar, one locking screw is received through each locking hole in the collar. The locking screws are tightened so that they frictionally engage the knurled portion of the hanger and secure it into the outer collar.

[0030] In a first embodiment, this disclosure describes an orienting hanger assembly, comprising a generally tubular inner hanger disposed to be received snugly into a generally tubular outer collar and a cylindrical MWD tool adapter. The hanger and collar are configured so that when the inner hanger is fully received into the outer collar (1) the longitudinal axes of the hanger and collar are aligned, (2) an annular internal shoulder provided on the outer collar abuts an annular external shoulder on the inner hanger, and (3) first and second ends of the of the inner hanger generally correspond with first and second ends of the outer collar.

[0031] The cylindrical MWD tool adapter has first and second adapter ends. The first adapter end is disposed to threadably engage the second end of the inner hanger, and the second adapter end is disposed to threadably engage an MWD tool. Further, the tool adapter includes a radial threaded tool-orienting hole.

[0032] The outer collar has a tubular collar wall, and the first end of the outer collar provides at least one threaded locking hole extending through the collar wall. The inner hanger has a tubular hanger wall, and the first end of the inner hanger provides an annular external knurled portion formed on the hanger wall. The knurled portion and the at least one locking hole are located so that a locking screw can be received through each locking hole and frictionally engage the knurled portion when the

inner hanger is fully received into the outer collar. The first end of the inner hanger also includes an interior alignment notch in the inner surface of the hanger wall.

[0033] At least two opposing radial wings extend outward from the second end of the inner hanger. Each radial wing terminates at a distal wing face, and the wings have a common radial length such that when the inner hanger is received into the outer collar, the distal wing faces are located snugly next to an inner surface of the second end of the outer collar. At least one of the radial wings includes an open wing passage from its distal wing face through to an inner surface of the inner hanger at its second end. The alignment notch and the radial wing that provides the wing passage are separated by a predetermined radial offset about the longitudinal axis of the inner hanger.

[0034] Threadably engaging the tool adapter onto the second end of the inner hanger enables an orienting screw to be received through a selected wing passage and into the tool-orienting hole on the adapter so that a portion of the orienting screw prevents relative rotation of the tool adapter and the inner hanger via contact engagement with the selected wing passage. Box and pin connections are provided on corresponding ones of the first and second ends of the outer collar, suitable to threadably insert the outer collar into a drill string.

[0035] In some embodiments of the outer collar, the threaded locking hole in the outer collar may be counter-sunk so that when the locking screws are tightened, they are flush with the outer wall of the collar. Additionally, there may be embodiments of the inner hanger in which the knurled portion is located in an annular recess.

[0036] In other embodiments, the threaded locking hole(s) in the outer collar, the locking screw(s) and the knurled portion, may be substituted as an orientation locking assembly for an expandable split ring assembly.

[0037] Examples of the inner hanger may provide at least one annular recess on the exterior surface of the hanger which is disposed to receive an o-ring configured to prevent fluid flow in the annular spaces between the inner collar wall outer hanger wall.

[0038] Other embodiments of the inner hanger may also provide at least one fluid window through the second hanger wall section to enable fluid flow from inside the inner hanger into the annular space between the hanger and the outer collar when the inner hanger is fully received into the outer collar. These embodiments may further include a surface, on the interior of the inner hanger, shaped to encourage fluid flow from inside the inner hanger through each fluid window.

[0039] Additional embodiments of the tool adapter may provide at least one annular recess disposed to receive an o-ring configured to prevent annular fluid flow between the tool adapter and the inner cylindrical surface of the second hanger end when the tool adapter is fully received into the inner hanger.

[0040] In a second embodiment, this disclosure describes an orienting hanger assembly as previously described, except that instead of providing threaded locking

holes in the collar wall, locking screws, and a knurled portion on the hanger wall, the assembly provides an expandable split ring assembly rigidly affixed to the first end of the inner hanger with opposing C-shaped members disposed to circumferentially engage first inner collar wall section, the split ring assembly configured, when engaged, to prevent relative rotational displacement between the inner hanger and the outer collar when the inner hanger is fully received into the outer collar wherein a threaded mechanism on the split ring assembly being actuated so as to cause the C-shaped members to extend or to retract back together.

[0041] It will therefore be appreciated from the foregoing disclosure that the orienting hanger assembly, in use, gives rise to methods for deploying a retrievable MWD tool in a non-retrievable environment. One exemplary method comprises the steps of: (a) providing an orienting hanger assembly, the orienting hanger assembly including (A) a generally tubular inner hanger disposed to be received snugly into (B) a generally tubular outer collar such that when the inner hanger is fully received into the outer collar (1) a longitudinal axis of the inner hanger coincides with a longitudinal axis of the outer collar, (2) an annular internal shoulder provided on the outer collar abuts an annular external shoulder on the inner hanger, and (3) first and second ends of the of the inner hanger generally correspond with first and second ends of the outer collar, and (C) a cylindrical MWD tool adapter having first and second adapter ends, the tool adapter further including a radial threaded tool-orienting hole; (b) threading and tightening an MWD tool onto the second adapter end of the tool adapter; (c) measuring, if any, a radial offset about a longitudinal MWD tool axis between a high side of the MWD tool and the tool-orienting hole; (d) threading the first adapter end of the tool adapter onto the second end of the inner hanger until the tool-orienting hole is visible through a wing passage in one of at least two opposing radial wings provided on the second end of the inner hanger; (e) receiving an orienting screw through the wing passage; (f) threading and tightening the orienting screw into the tool-orienting hole such that a portion of the orienting screw prevents relative rotation of the tool adapter and the inner hanger via contact engagement with the wing passage; (g) providing an alignment notch in a hanger wall at the first end of the inner hanger such that the wing passage and the alignment notch are separated by a predetermined radial offset about the longitudinal axis of the inner hanger; (h) inserting the outer collar into a bottom hole assembly (BHA) at a pre-desired position therein; (i) transferring a selected degrees tool face orientation of the BHA onto the outer collar; (j) receiving the inner hanger (with the tool adapter and MWD tool attached thereto) into the outer collar such that the MWD tool is suspended from the second end of the inner hanger via abutment and resting of the annular external shoulder on the inner hanger against the annular internal shoulder on the outer collar; (k) rotating the inner hanger with respect to the outer collar such that the align-

ment notch is orientationally aligned with the selected tool face orientation of the BHA as transferred onto the outer collar in step (i); (l) locking the inner hanger to the outer collar so as to prevent further relative rotation thereof; and (m) if required, correcting directional measurements by the MWD tool for any radial misalignment between the high side of the MWD tool and the alignment notch.

[0042] In examples of the disclosed methods, step (1) may be completed by threading one or more locking screw through a corresponding radial threaded locking hole in the outer collar and frictionally engaging each locking screw on the annular external knurled portion formed on the first end of the internal hanger. For example, the illustrations included with this disclosure show the completion of step (1) by threading three locking screws through three corresponding radial threaded locking holes in the outer collar and frictionally engaging each locking screw on the annular external knurled portion formed on the first end of the internal hanger. It should be noted that this disclosure is not limited to the use of locking screws threaded through the outer collar to lock the inner hanger to the outer collar. Further, the scope of this disclosure is not limited to use of three locking screws, and any suitable number may be used as required to obtain serviceable locking. Other examples of the disclosed methods may provide for the completion of step (1) via the use of other locking mechanisms, such as an expandable split ring assembly.

[0043] Other examples of the disclosed methods may include additional variations. For example, the MWD tool may be an EM MWD tool, and in those examples, the outer collar may be an external gap sub. In other cases, the MWD tool may be a retrievable MWD tool. Additionally, in some examples, step (i) may be the transferring zero degrees tool face orientation of the BHA onto the outer collar. Correspondingly, in those examples, step (k) is rotating the inner hanger with respect to the outer collar such that the alignment notch is orientationally aligned with the zero degree tool face orientation of the BHA as transferred onto the outer collar in step (i). Further, in other examples, the predetermined radial offset in step (g) is zero degrees.

[0044] Likewise, in particular examples of the disclosed methods, step (m) may be accomplished by pre-programmed instructions in the MWD tool, which are embodied in the selected tool's software or firmware. Further, an additional step - step (n) - may be performed in some examples of the disclosed methods. Step (n) comprises: connecting the selected MWD tool to at least one other downhole tool, in which the connection enables power communication, data communication, or both, between the selected MWD tool and such other downhole tools.

[0045] It is therefore a technical advantage of the disclosed orienting hanger assembly (and its disclosed methods of use) to quickly and robustly align the high side of a directional MWD tool to zero degrees tool face

on the bottom hole assembly, or to another user-selected tool face orientation. It will be appreciated from the disclosed design that the MWD tool (with tool adapter attached) need not be threaded down tightly to the second end of the inner hanger. Threading needs to be sufficient to secure the MWD tool adapter from "falling off the inner hanger, at which point the orienting screw may be located through the radial wing passage in the inner hanger and screwed tightly into the tool-orienting hole in the tool adapter. At this point the tool adapter is restrained from relative rotation with respect to the inner hanger via contact by the orienting screw against the wing passage. Thus, the tool adapter cannot now become unthreaded from the inner hanger, even though there may be a less-than-tight threaded connection between the tool adapter and the inner hanger. A tightened or torqued threaded connection between the tool adapter and the inner hanger is thus obviated. Further, since the tool adapter is now restrained from relative rotation with respect to the inner hanger (via contact by the orienting screw against the wing passage), the tool adapter, and therefore the high side of the MWD tool, retains its radial orientation with respect to the radial wing through which the orienting screw is located. Moreover, the length of the orienting screw may be selected so that when the inner hanger (with MWD tool and tool adapter attached) is received into the outer collar, the inner surface of the outer collar prevents the orienting screw (as located in the radial wing passage) from becoming completely unthreaded from the tool adapter.

[0046] A first end of the inner hanger is provided with an alignment notch such that the wing passage and the alignment notch share a common radial orientation about the longitudinal axis of the inner hanger. Alternatively, the wing passage and alignment notch may share a known radial orientation misalignment. The scribe line (or other BHA reference point for zero degrees tool face) may then be transferred onto the outer collar via conventional procedure. When inner hanger (with MWD tool and tool adapter attached) is received into the outer collar, a commonly used conventional hand tool may be used to rotate the inner hanger within the outer collar such that the alignment notch becomes rotationally aligned with the scribe line as transferred onto the outer collar. The high side of the MWD tool is thus rotationally aligned with the scribe line via transfer of the MWD tool's rotational alignment through the assembled orienting hanger up to the scribe line, plus or minus any known rotational misalignment between high side and radial wing, between radial wing and alignment notch, and between alignment notch and scribe line.

[0047] It will be appreciated that software or firmware, for example, in the MWD tool may correct the tool's directional measurements for known rotational misalignment in operation of the MWD tool in the orienting hanger assembly as deployed in the BHA. In other words, software or firmware enables the correction of any misalignment between the MWD internal directional sensors and

the alignment notch as aligned to the BHA.

[0048] It should be noted that the scope of this disclosure contemplates that any or all of the radial wings may provide wing passages through which the orienting screw may be located. However, some embodiments of the hanger assembly may provide radial wings in which only one wing includes a wing passage, namely the radial wing (and wing passage) that is separated from the alignment notch by a predetermined radial offset. These embodiments are advantageous to minimize the chance for alignment errors during make-up of the orienting hanger assembly and MWD tool in the drill string. It will be appreciated that when only one wing passage is provided on the hanger assembly, the orienting screw cannot be inserted through the "wrong wing passage" during normal tool alignment operations.

[0049] Once the inner hanger has been rotated within the outer collar so that the alignment notch is rotationally aligned with the scribe line that was transferred onto the outer collar, the locking screws are inserted through the locking holes and torqued against the knurled portion on the inner hanger. The torque applied to the locking screws secures the orientation of the collar, hanger, and tool, relative to each other. Typically, torque may be applied using conventional hand tools (e.g., a standard allen wrench). However, in some embodiments for use in high-vibration operations, relatively high torque is necessary and a powered tool may be required.

[0050] Further, as noted previously, some embodiments of the disclosed orienting hanger assembly may substitute the locking screw arrangement for an expandable split ring assembly as a feature for locking down a desired orientation.

[0051] The above-described summary of alignment of an MWD tool in conjunction with the disclosed orienting hanger assembly improves upon the current art in several regards. Currently, MWD tools are conventionally deployed in a non-retrievable environment via a "landed" approach, rather than a "hanging" approach. Conventionally, a Uniform Bottom Hole Orientation (UBHO) device (also colloquially known as a "mule shoe") receives an MWD tool into a tight-fit receptacle. The MWD tool is oriented within the receptacle so that in normal vertical drilling operations, the tool "drops" vertically all the way into the receptacle. Once received within the receptacle, the high side of the MWD tool may be rotationally aligned with the scribe line transferred onto the UBHO device. Spacer bars are then selected, according to the overall length of the particular MWD tool, to fill up space and hold the "top" end of the tool within the UBHO device. The presence of spacer bars makes it difficult to connect other MWD or LWD tools located elsewhere in the BHA to the MWD tool as deployed in the UBHO device. For EM MWD tools, use of a UBHO device makes the co-location of the tool with internal or external gaps difficult, potentially degrading the quality of EM transmissions.

[0052] A further technical advantage of the disclosed orienting hanger assembly (and its disclosed methods of

use) is thus to enable directional MWD tools to be more reliably deployed in a hanging environment. As noted earlier in this Summary section, the "hanging" aspect allows different types of MWD tools of different overall length to be deployed in the orienting hanger assembly without the need for spacers. Data or power connectivity between the MWD tool and other tooling in the BHA is thus further enhanced since there are no spacers causing obstruction below the tool. Use of the orienting hanger assembly may further obviate threaded/torqued connections associated with use of a conventional UBHO device.

[0053] A further technical advantage of the disclosed orienting hanger assembly (and its disclosed methods of use) arises when an EM MWD tool is used in conjunction with the orienting hanger assembly. It will be understood that improved EM telemetry performance occurs when internal and external gaps are substantially co-located on the BHA. As noted above, such co-location is made difficult by use of a conventional UBHO device. However, in contrast, embodiments of the orienting hanger assembly may provide an external gap on the outer collar. An EM MWD tool having an internal gap on board may be then threaded onto the tool adapter, or a separate internal gap may be concatenated onto the tool adapter with the EM MWD tool. When received into the outer collar, the location of the internal gap thus comes close to co-location with the external gap on the outer collar. However, the orienting hanger assembly can incorporate the gap sub all in one piece or in multiple pieces for easy replacement and service, and this disclosure is not limited in this regard. Further, because of the "hanging" nature of the EM MWD tool inside the outer collar, the actual measured separation between internal and external gaps may be repeatably ordained in sequential deployments of EM MWD tools in the orienting hanger assembly during drilling operations over time.

[0054] A further technical advantage of the orienting hanger is that alignment may be preserved in harsh environments for orientation, such as high vibration drilling environments. As previously noted, in embodiments providing locking screws, torque may typically be applied to the locking screws with conventional hand tools (e.g., via a standard allen wrench). This is advantageous because it enables easy replacement of the locking screws. In embodiments providing an expandable split ring assembly as an alternative to locking screws, it will be understood that such split ring assemblies provide tight, robust locking via conventional, straightforward actuation of threaded mechanisms on the assemblies.

[0055] A further technical advantage of the disclosed orienting hanger assembly (and its disclosed methods of use) is to enable a more flexible and cost-effective MWD tool asset utilization. As noted above, the orienting hanger enables retrievable MWD tools to be used in non-retrievable environments without many of the disadvantages conventionally associated with such deployments. Thus, with the orienting hanger assembly available, a

fleet of retrievable MWD tools has a potentially wider utilization platform, both in conventional retrievable deployments, and further in novel non-retrievable deployments as disclosed herein.

[0056] The foregoing has outlined rather broadly the features and technical advantages of the inventive disclosure of this application, in order that the detailed description of the embodiments that follows may be better understood. It will be appreciated by those skilled in the art that the specific embodiments disclosed may be readily utilized as a basis for modifying or designing other structures for carrying out the same general purposes of the inventive material set forth in this disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0057] For a more complete understanding of the embodiments described in this disclosure, and their advantages, reference is made to the following detailed description taken in conjunction with the accompanying drawings, in which:

FIGURE 1 illustrates, in disassembled form, perspective views of one embodiment of an orienting hanger assembly 100, including an outer collar 105, an inner hanger 120, and a tool adapter 150 for attachment to MWD tool 160 (it being understood that MWD tool 160 is not part of orienting hanger assembly 100);

FIGURE 2 shows, in cutaway view, the orienting hanger assembly 100 of FIGURE 1 in assembled form;

FIGURE 3 is a section view of the orienting hanger assembly 100 as shown on FIGURE 2; and

FIGURE 4 is a flow chart illustrating one example of a method of deploying an MWD tool in an orienting hanger assembly such as orienting hanger assembly 100 illustrated with reference to FIGURES 1-3.

DETAILED DESCRIPTION

[0058] flush with the inner surface of second inner collar wall section 113 when inner hanger 120 is received into outer collar 105. As will be described in greater detail further below, at least one radial wing 131 provides a wing passage 133 through which an orienting screw 171 is situated. While this disclosure is not specific to any specific separation between distal wing faces 132 and the inner surface of second inner collar wall section 113, it will be understood from FIGURE 2 to be close enough so that the inner surface of second inner collar wall section 113 retains orienting screw 171 within wing passage 133 when inner hanger 120 is received into outer collar 105.

[0059] As just noted, and as shown on FIGURES 1 and 2, at least one radial wing 131 includes an open wing passage 133 from its distal wing face 132 through to the inner surface of second hanger portion 128. FIGURES

1 and 2 also show that alignment notch 130 and the radial axis of the radial wing 131 that includes wing passage 133 share a common radial orientation about longitudinal hanger axis 121. In alternative embodiments (not illustrated), alignment notch 130 and the radial axis of the radial wing 131 that includes wing passage 133 may be offset by a pre-determined radial misalignment, which, if present, must be accounted for in aligning the high side of MWD tool 160 to alignment notch 130.

[0060] Tool adapter 150, as shown on FIGURES 1 and 2, is a cylindrical member having first adapter end 151 and second adapter end 152. The outer surface of first adapter end 151 provides threads disposed to mate with threads on the inner surface of second hanger portion 128, as illustrated on FIGURE 2. The inner surface of second adapter end 152 provides threads (not visible on FIGURES 1 and 2) disposed to mate with threads provided on one end of an MWD tool. In preferred embodiments, the MWD tool is a retrievable MWD tool such as, by way of example, one of the Electro-Trac EM system of EM telemetry tools available from GE Oil & Gas (http://www.ge-energy.com/products_and_services/products/drilling_measurements/electro_trac_em_mwd_). For the purposes of the following disclosure, FIGURES 1, 2, and 3 should be viewed together. Any part, item, or feature that is identified by part number on one of FIGURES 1-3 has the same part number when illustrated on another of FIGURES 1-3.

[0061] FIGURE 1 illustrates, in disassembled form, perspective views of one embodiment of an orienting hanger assembly 100. As shown on FIGURE 1, the orienting hanger assembly 100 includes a hollow cylindrical outer collar 105, a hollow cylindrical inner hanger 120, and a cylindrical tool adapter 150. Tool adapter 150 is suitable to receive one end of a threaded MWD tool 160, examples of which are described further on in this disclosure. All of outer collar 105, inner hanger 120, and tool adapter 150 can be made from a material such as stainless steel. However, this disclosure is not limited in this regard.

[0062] Fully assembled, orienting hanger 100 is disposed to be inserted into a conventional drill string. To enable this insertion, outer collar 105, as shown on FIGURE 1, includes a first collar end 108 that provides a threaded box connection 106 and a second collar end 109 that provides a threaded pin connection 107. Consistent with drill string connections known in the art, such conventional pin and box connections enable an assembled orienting hanger 100 to be inserted into a concatenated string of drill collar tubulars. For clarity, threaded pin connection 107 is omitted from outer collar 105 on FIGURE 2.

[0063] Outer collar 105 has a substantially constant outer diameter about a longitudinal collar axis 110. Outer collar 105, as shown on FIGURE 2, includes annular inner collar shoulder 111 that separates the interior of outer collar 105 into a first cylindrical inner collar wall section 112 at first collar end 108 and a second cylindrical inner

collar wall section 113 at second collar end 109. The diameter of the second inner collar wall 113 section is less than that of the first inner collar wall section 112, as illustrated on FIGURE 2. Outer collar 105, as depicted on FIGURES 1 and 2, also provides at least one radial threaded locking hole 114 (and, as illustrated on FIGURE 3, three locking holes 114) extending from the outer wall through to the first inner collar wall section 112.

[0064] Inner hanger 120, as shown on FIGURE 1, comprises a cylindrical member having a unitary longitudinal hanger axis 121. Inner hanger 120 is disposed to be received inside outer collar 105 so that longitudinal collar axis 110 and longitudinal hanger axis 121 become substantially common, as shown on FIGURE 2.

[0065] As illustrated on FIGURE 2, inner hanger 120 includes first hanger end 122 aligned at first collar end 108 and second hanger end 123 aligned at second collar end 109 when inner hanger 120 is received into outer collar 105. Additionally, FIGURE 1 depicts inner hanger 120 including first outer cylindrical hanger wall section 124 at first hanger end 122 and second outer cylindrical hanger wall section 125 at second hanger end 123.

[0066] The diameter of first outer hanger wall section 124 is greater than the diameter of second outer hanger wall section 125 and, as depicted on FIGURES 1 and 2, is separated from second outer hanger wall section 125 by an annular outer hanger shoulder 126. Outer hanger shoulder 126 is disposed to abut inner collar shoulder 111 when inner hanger 120 is fully received inside outer collar 105, as shown on FIGURE 2.

[0067] As shown on FIGURE 1, inner hanger 120 is further divided into first hanger portion 127 and second hanger portion 128, which correspond to first outer hanger wall section 124 and second outer hanger wall section 125, respectively. First outer hanger wall section 124 includes an annular knurled portion 129, shown on FIGURES 1, 2, and 3. As illustrated on FIGURE 2, knurled portion 129 and locking holes 114 (on outer collar 105) are located so that knurled portion 129 is visible through each locking hole 114 when inner hanger 120 is fully received inside outer collar 105.

[0068] Orienting hanger 100 also includes one locking screw 170 disposed to be received through each locking hole 114 and frictionally engage knurled portion 129 when inner hanger 120 is fully received into outer collar 105. As shown on FIGURES 2 and 3, three locking screws 170 are provided, one for each of the three locking holes 114 also provided. This disclosure is not limited, however, to any particular number of locking screws 170 and corresponding locking holes 114. Also, as further described in more detail below, this disclosure is not limited to locking screws 170 as the only manner by which inner hanger 120 may be orientationally locked to outer collar 105. Other embodiments, not illustrated, may instead provide an expandable split ring assembly for orientationally locking inner hanger 120 to outer collar 105.

[0069] As shown on FIGURES 1, 2, and 3, the inner surface of first hanger portion 127 also includes an align-

ment notch 130 at first hanger end 122. Application of a conventional hand tool on alignment notch 130 enables inner hanger 120 to be rotated about longitudinal hanger axis 121 relative to outer collar 105, and thus to be oriented to a selected position relative to outer collar 105 after inner hanger 120 has been fully received into outer collar 105. Any of a number of conventional tools are commercially available to engage alignment notch 130 (e.g., Beefy Alignment Wrench #30-6669B, available from Hunting Specialty Supply of Houston, Texas at: <http://www.hunting-intl.com/hunting-specialty-supply/handling-equipment>).

[0070] While FIGURES 1, 2, and 3 depict a cube-shaped alignment notch 130, nothing in this disclosure is intended to limit the location or geometry of alignment notch 130 so long as it is effective to engage a tool to orient inner hanger 120 within outer collar 105.

[0071] FIGURES 1 and 2 further illustrate inner hanger 120 with a pair of opposing radial wings 131 extending outward from second outer hanger wall section 125 and terminating at a distal wing face 132. Although FIGURES 1 and 2 illustrate two opposing radial wings 131, other embodiments (not illustrated) may provide more than two radial wings 131 in an opposing arrangement around second outer hanger wall section 125. As depicted on FIGURE 2, radial wings 131 advantageously have a common radial wing length such that distal wing faces 132 are located snugly next to an inner surface of the outer collar at the second end thereof. However, it will be appreciated that this disclosure is not limited in this regard and that any suitable MWD or LWD tool may be used.

[0072] Tool adapter 150 also includes a radial threaded tool-orienting hole 155, located on the tool adapter to be visible through wing passage 133 when tool adapter 150 is threaded into second hanger end 123, as shown on FIGURE 2. As noted above, FIGURE 2 also illustrates orienting screw 171 disposed to be received through a selected wing passage 133 and into tool-orienting hole 155. As shown on FIGURE 2, a portion of orienting screw 171, when received into tool-orienting hole 155, prevents relative rotation of tool adapter 150 and inner hanger 120 via contact engagement with selected wing passage 133.

[0073] In preferred embodiments, orienting screw 171 engages selected wing passage 133 such that negligible relative rotation, and in any case no more than one degree of relative rotation, is possible. However, it will be appreciated that this disclosure is not limited in this regard and that any desired range of relative rotation between tool adapter 150 and inner hanger 120 may be achieved by selecting different geometries for wing passage 133 and orienting screw 171.

[0074] The common radial orientation of alignment notch 130 and the radial axis of the radial wing 131 that includes wing passage 133 enables an MWD tool with a known high side to be threaded into orienting hanger assembly 100 via the use of tool adapter 150 and to have its high side oriented to a known reference point on the exterior of orienting hanger assembly 100. To accomplish

this orientation, the MWD tool is threaded into tool adapter 150. The adapter is then threaded into inner hanger and secured with orienting screw 171. The high point of the MWD tool is thereby oriented to alignment notch 130 because wing passage 133 (and therefore the high side of the MWD tool, including any known offset) and alignment notch 130 are radially aligned. Alignment notch 130 can then be aligned (oriented) with the scribe line transferred up from a bent sub or motor steering tool with which orienting hanger 100 is associated. Thus, the high side of the MWD tool may be aligned to the scribe line on the bent sub or motor steering tool. This orientation process is more fully described below with reference to disclosed methods.

[0075] The following paragraphs describe further alternative embodiments of the orienting hanger assembly 100 that are considered within the scope of this disclosure.

[0076] As shown on FIGURES 1, 2, and 3, the locking holes 114 may be countersunk so that locking screws 170 are flush with the outside of outer collar 105, which protects them while the orienting hanger assembly 100 is deployed in drilling operations. Also, as shown on FIGURES 1, 2, and 3, knurled portion 129 may be located in an annular recess 134 in first hanger portion 127.

[0077] As has been noted in several places in this disclosure, the scope of the disclosed orienting hanger assembly is not limited to the use of locking screws 170, locking holes 114 and knurled portion 129 as shown on FIGURES 1-3 as a cooperating structure to lock inner hanger 120 to outer collar 105 when inner hanger 120 is full received into outer collar 105. In one embodiment, a conventional expandable split ring assembly (not illustrated) is used instead of locking screws 170, locking holes 114 and knurled portion 129 to lock inner hanger 120 to outer collar 105. It will be understood that such a split ring assembly is rigidly affixed to first hanger end 122 with opposing C-shaped members disposed to circumferentially engage first inner collar wall section 112. As is known conventionally, a threaded mechanism on the split ring assembly is actuated so as to cause the C-shaped members to extend (i.e. to separate apart) or to retract back together. It will be appreciated that actuation of the threaded mechanism will cause split ring assembly to rotationally lock and unlock inner hanger 120 and outer collar 105 as desired. Thus, when inner hanger 120 has been aligned with outer collar 105 in accordance with this embodiment, actuation of the threaded mechanism on the split ring assembly will cause inner hanger 120 and outer collar 105 to become orientationally locked. It is understood in the applicable art that such split ring locks are tight and robust, even in high vibration environments.

[0078] It should be noted that if used, the split ring assembly should be selected and installed on first hanger end 122 so as not to impede engagement and operation of a suitable hand tool on alignment notch 130.

[0079] Additionally, as illustrated on FIGURES 1 and 2, first hanger portion 127 may include at least one an-

nular recess 135 disposed to receive an o-ring configured to prevent annular fluid flow between first inner collar wall section 112 and first outer hanger wall section 124 when the inner hanger is received into the outer collar. While FIGURES 1 and 2 depict four annular recesses 135 (two above annular recess 134 and two more below it), nothing in this disclosure should be interpreted to limit the number, geometry, or location of any annular recess 134 or 135.

[0080] In some embodiments, orienting hanger assembly 100 may include at least one fluid window 136 cut through second hanger portion 128 to enable fluid flow from inside inner hanger 120 to inside outer collar 105 when inner hanger 120 is fully received into outer collar 105, as shown by arrow F on FIGURE 2. While FIGURES 1 and 2 depict two fluid windows 136, nothing in this disclosure should be interpreted to limit the number, geometry, or location of any fluid window 136.

[0081] Additionally, embodiments of orienting hanger assembly 100 that include a fluid window 136 may also include a flow enhancer 137 on the inner surface of second hanger portion 128. Flow enhancer 137 may be shaped to encourage fluid flow from inside inner hanger 105 through each fluid window 136 when inner hanger 120 is fully received into outer collar 105.

[0082] As shown on FIGURES 1 and 2, flow enhancer 137 is a symmetrical convex surface rising axially toward first hanger end 122. Nonetheless, it should be understood that this disclosure is not limited to the geometry shown on FIGURES 1 and 2 and other corresponding geometries effective to enhance fluid flow F are also within the scope of this disclosure.

[0083] Other embodiments of tool adapter 150 include at least one annular recess 153 disposed to receive an o-ring configured to prevent annular fluid flow between tool adapter 150 and the inner surface of second hanger portion 128 when tool adapter 150 is fully received into inner hanger 120.

[0084] The scope of this disclosure further includes methods for using an orienting hanger assembly in a bottom hole assembly (BHA). Advantageously, the previously described embodiments of the orienting hanger may be used in such methods although the methods disclosed are not limited solely to use of the embodiments of the orienting hanger disclosed in FIGURES 1 - 3 and the associated description. Further, although the disclosed methods contemplate embodiments in which a retrievable MWD tool is deployed in a non-retrievable environment, the methods are again not limited in this regard. FIGURE 4 is a flow chart in which blocks 401 through 410 represent steps of the method in summary form, and as described in greater detail in the written disclosure immediately below.

[0085] The following detailed description refers generally to FIGURE 4 and describes a method of using orienting hanger assembly 100 such as described with reference to FIGURES 1 - 3. In summary, orienting hanger assembly 100 is described above with reference to FIG-

URES 1 - 3 as comprising a generally tubular inner hanger 120, a generally tubular outer collar 105, and a generally cylindrical MWD tool adapter 150. Inner hanger 120 is disposed to be received snugly into outer collar 105 such that when it is fully received into outer collar 105, the longitudinal axes of inner hanger 120 and outer collar 105 coincide. Additionally, an annular external shoulder 126 on inner hanger 120 abuts an annular internal shoulder 111 provided on outer collar 105 so that first hanger end 122 and second end 123 generally correspond with first collar 108 and second collar end 109. Tool adapter 150 has first adapter end 151, second adapter end 152, and radial threaded tool-orienting hole 155 that enables an MWD tool to be attached in a preselected orientation, as described further below.

[0086] Moving on now to a first example of the disclosed methods, and with reference to FIGURE 4, block 401 on FIGURE 4 refers to the step of threading and tightening MWD tool 160 onto tool adapter 150 via threads on the internal surface of second adapter end 152. Generally, MWD tool 160 may be a retrievable EM MWD tool (an example is described above), but this disclosure is not limited in this regard.

[0087] Once MWD tool 160 is tightened onto tool adapter 150, the next step is to measure and record any radial offset about the longitudinal MWD tool axis that exists between the high side of MWD tool 160 and tool-orienting hole 155 on tool adapter 150 (block 402). First adapter end 151 is then threaded onto inner hanger 120 at second hanger end 123 until tool-orienting hole 155 is visible through wing passage 133 in one of at least two opposing radial wings 131 provided on second hanger end 123 (block 403).

[0088] Block 404 on FIGURE 4 refers to the step of threading orienting screw 171 through wing passage 133 and tightening it into tool-orienting hole 155 on tool adapter 150 such that a portion of orienting screw 171 prevents relative rotation of tool adapter 150 and inner hanger 120 via contact engagement with wing passage 133.

[0089] Block 405 refers the step of inserting outer collar 105 into a bottom hole assembly (BHA), via pin end connection 107 on outer collar 105. In some examples, outer collar 105 may be an external electrical isolation gap sub, but this disclosure is not limited in this regard.

[0090] The next step is to transfer a selected tool face orientation of the BHA onto outer collar 105 (block 406). Conventional methodology may be used accomplish this step. The selected orientation may be ordained by the scribe line on a bent sub or by a suitable reference mark on a steering tool. In the example of the disclosed methods illustrated on FIGURE 4, the user-selected tool face orientation transferred onto outer collar 105 is the zero degrees orientation, but this disclosure is not limited in this regard.

[0091] In the next step, inner hanger 120, with tool adapter 150 and MWD tool 160 attached, is received into outer collar 105, through first collar end 108, such that MWD tool 160 is suspended from second hanger end

123 via abutment and resting of outer hanger shoulder 126 against inner collar shoulder 111 (block 407). At this point, it is advantageous to make data or power connections between MWD tool 160 and any additional down-hole tools elsewhere in the BHA, if so desired.

[0092] Block 408 refers to the step of using a conventional hand tool (such as described above) on alignment notch 130 to rotate inner hanger 120 within outer collar 105 such that alignment notch 130 is rotationally aligned with the BHA scribe line as transferred onto outer collar 105 in the step described in block 406. Inner hanger 120 is then rotationally locked to outer collar 105 (block 409) by threading at least one locking screw 170 through a corresponding radial threaded locking hole 114 in outer collar 105 and frictionally engaging each locking screw 170 on annular knurled portion 129 formed on the exterior of first hanger end 122. In the embodiment of orienting hanger assembly 100 depicted on FIGURE 3, this step is accomplished by using three locking screws 170, but this disclosure is not limited in this regard. As described above, in other embodiments, an expandable split ring assembly (not illustrated) may be provided on orienting hanger assembly 100 instead of the functional locking combination of locking screws 170, knurled portion 129 and locking holes 114. The split ring assembly will be understood to be rigidly attached to first hanger end 122 and configured, when engaged, to prevent relative rotational displacement between inner hanger 120 and outer collar 105 when inner hanger 120 is fully received into outer collar 105.

[0093] The next step, as illustrated in block 410, and only if necessary, is to correct the directional measurements made by MWD tool 160 for the radial offset measured in block 402. This may be completed by software or firmware native to MWD tool 160, but again this disclosure is not limited in this regard. Further, although not illustrated on FIGURE 4, this correcting step also includes, if required, correcting for any radial misalignment between the high side of MWD tool 160 and alignment notch 130 (including correcting for any radial misalignment between wing passage 133 and alignment notch 130).

Claims

1. An orienting hanger assembly (100), comprising:

a generally tubular inner hanger (120) disposed to be received snugly into a generally tubular outer collar (105) such that when the inner hanger (120) is fully received into the outer collar (105) a longitudinal axis (121) of the inner hanger (120) coincides with a longitudinal axis (110) of the outer collar (105), an annular internal shoulder (111) provided on the outer collar (105) abuts an annular external shoulder (126) on the inner hanger (120), and first and second ends

of the of the inner hanger (120) generally correspond with first and second ends of the outer collar (105);

a cylindrical MWD tool adapter (150) having first and second adapter ends (151, 152), the first adapter end (151) disposed to threadably engage the second end (123) of the inner hanger (120), and the second adapter end (152) disposed to threadably engage an MWD tool (160), the tool adapter (150) further including a radial threaded tool-orienting hole (155);

the outer collar (105) having a tubular collar wall, the first end of the outer collar (105) including at least one threaded locking hole (114) extending through the collar wall;

the inner hanger (120) having a tubular hanger wall, the first end (122) of the inner hanger (120) including an annular external knurled portion (129) formed on the hanger wall, the knurled portion (129) and the at least one locking hole (114) located so that, when the inner hanger (120) is fully received into the outer collar (105), a locking screw (170) can be received through each locking hole (114) and frictionally engage the knurled portion (129);

the first end of the inner hanger (120) further providing an interior alignment notch (130) in the hanger wall;

the second end (123) of the inner hanger (120) providing at least two opposing radial wings (131) extending outward therefrom, one of the radial wings (131) having a predetermined radial offset about the inner hanger longitudinal axis (121) from the alignment notch (130), each radial wing (131) terminating at a distal wing face (132) and having a common radial wing length such that when the inner hanger (120) is received into the outer collar (105), the distal wing faces (132) are located snugly next to an inner surface of the outer collar (105) at the second end thereof, at least one of the radial wings (131) including an open wing passage (133) from its distal wing face (132) through to an inner surface of the inner hanger (120) at the second end thereof, threadable engagement of the tool adapter (150) onto the second end of the inner hanger (120) enabling an orienting screw (171) to be received through a selected wing passage (133) and into the tool-orienting hole (155) so that a portion of the orienting screw (171) prevents relative rotation of the tool adapter (150) and the inner hanger (120) via contact engagement with the selected wing passage (133); and box and pin connections (106, 107) on corresponding ones of the first and second ends of the outer collar (105), the box and pin connections (106, 107) suitable to threadably insert the outer collar (105) into a drill string.

2. The orienting hanger assembly (100) of claim 1, in which each threaded locking hole (114) is counter-sunk at an outer edge of the collar wall.
3. The orienting hanger assembly (100) of claims 1 or 2, in which the knurled portion (129) is located in an annular recess on the first end of the inner hanger (120).
4. An orienting hanger assembly (100), comprising:
 - a generally tubular inner hanger (120) disposed to be received snugly into a generally tubular outer collar (105) such that when the inner hanger (120) is fully received into the outer collar (105) a longitudinal axis (121) of the inner hanger (120) coincides with a longitudinal axis (110) of the outer collar (105), an annular internal shoulder (111) provided on the outer collar (105) abuts an annular external shoulder (126) on the inner hanger (120), and first and second ends of the of the inner hanger (120) generally correspond with first and second ends of the outer collar (105);
 - a cylindrical MWD tool adapter (150) having first and second adapter ends (151, 152), the first adapter end (151) disposed to threadably engage the second end (123) of the inner hanger (120), and the second adapter end (152) disposed to threadably engage an MWD tool (160), the tool adapter (150) further including a radial threaded tool-orienting hole (155);
 - an expandable split ring assembly rigidly affixed to the first end (122) of the inner hanger (120) with opposing C-shaped members disposed to circumferentially engage first inner collar wall section (112), the split ring assembly configured, when engaged, to prevent relative rotational displacement between the inner hanger (120) and the outer collar (105) when the inner hanger (120) is fully received into the outer collar (105); wherein a threaded mechanism on the split ring assembly being actuated so as to cause the C-shaped members to extend or to retract back together;
 - the outer collar (105) having a tubular collar wall, the inner hanger (120) having a tubular hanger wall, the first end of the inner hanger further providing an interior alignment notch (130) in the hanger wall;
 - the second end (123) of the inner hanger (120) providing at least two opposing radial wings (131) extending outward therefrom, one of the radial wings (131) having a predetermined radial offset about the inner hanger longitudinal axis (121) from the alignment notch (130), each radial wing (131) terminating at a distal wing face (132) and having a common radial wing length

such that when the inner hanger (120) is received into the outer collar (105), the distal wing faces (132) are located snugly next to an inner surface of the outer collar (105) at the second end thereof, at least one of the radial wings (131) including an open wing passage (133) from its distal wing face (132) through to an inner surface of the inner hanger (120) at the second end thereof, threadable engagement of the tool adapter (150) onto the second end of the inner hanger (120) enabling an orienting screw (171) to be received through a selected wing passage (133) and into the tool-orienting hole (155) so that a portion of the orienting screw (171) prevents relative rotation of the tool adapter (150) and the inner hanger (120) via contact engagement with the selected wing passage (133); and box and pin connections (106, 107) on corresponding ones of the first and second ends of the outer collar (105), the box and pin connections (106, 107) suitable to threadably insert the outer collar (105) into a drill string.

5. The orienting hanger assembly (100) of any preceding claim, in which the second end of the inner hanger (120) includes at least one fluid window (136) disposed to enable fluid flow from inside the inner hanger (120) to inside the outer collar (105) when the inner hanger (120) is fully received into the outer collar (105).
6. The orienting hanger assembly (100) of claim 5, in which an inner surface of the second end of the inner hanger (120) is shaped to encourage fluid flow from inside the inner hanger (120) through each fluid window (136).
7. The orienting hanger assembly (100) of any preceding claim, in which the tool adapter (150) includes at least one annular recess (153) disposed to receive an o-ring configured to prevent annular fluid flow inside the inner hanger (120) past the tool adapter (150) when the tool adapter (150) is threadably engaged on the second end of the inner hanger (120).
8. The orienting hanger assembly (100) of any preceding claim, in which the predetermined radial offset is zero degrees.

Patentansprüche

1. Ausrichtungsaufhängeranordnung (100), umfassend:

einen im Allgemeinen röhrenförmigen inneren Aufhänger (120), der angeordnet ist, in einem im Allgemeinen röhrenförmigen Außenkragen

(105) passgenau aufgenommen zu werden, so-
dass, wenn der innere Aufhänger (120) vollstän-
dig im Außenkragen (105) aufgenommen ist, ei-
ne Längsachse (121) des inneren Aufhängers
(120) mit einer Längsachse (110) des Außen-
kragens (105) zusammenfällt, wobei eine ring-
förmige innere Schulter (111), die auf dem Au-
ßenkragen (105) bereitgestellt ist, an einer ring-
förmigen äußeren Schulter (126) am inneren
Aufhänger (120) anliegt, und erste und zweite
Enden des inneren Aufhängers (120) im Allge-
meinen ersten und zweiten Enden des Außen-
kragens (105) entsprechen;
einen zylindrischen MWD-Werkzeugadapter
(150) mit ersten und zweiten Adapterenden
(151, 152), wobei das erste Adapterende (151)
angeordnet ist, mit dem zweiten Ende (123) des
inneren Aufhängers (120) verschraubt zu wer-
den, und das zweite Adapterende (152) ange-
ordnet ist, mit einem MWD-Werkzeug (160) ver-
schraubt zu werden, wobei der Werkzeugadap-
ter (150) weiter ein radiales Werkzeugausrich-
tungsgewindeloch (155) enthält;
wobei der Außenkragen (105) eine röhrenförmige
Kragenwand aufweist, wobei das erste Ende
des Außenkragens (105) zumindest ein Sperr-
gewindeloch (114) enthält, das sich durch die
Kragenwand erstreckt;
wobei der innere Aufhänger (120) eine röhren-
förmige Aufhängerwand aufweist, wobei das
erste Ende (122) des inneren Aufhängers (120)
einen ringförmigen äußeren geriffelten Ab-
schnitt (129) enthält, der auf der Aufhängerwand
gebildet ist, wobei der geriffelte Abschnitt (129)
und das zumindest eine Sperrloch (114) so ge-
legen sind, dass, wenn der innere Aufhänger
(120) vollständig im Außenkragen (105) aufge-
nommen ist, eine Sperrschraube (170) durch je-
des Sperrloch (114) aufgenommen werden
kann und reibschlüssig mit dem geriffelten Ab-
schnitt (129) ineinandergreift;
wobei das erste Ende des inneren Aufhängers
(120) weiter eine Innenausrichtungskerbe (130)
in der Aufhängerwand bereitstellt;
wobei das zweite Ende (123) des inneren Auf-
hängers (120) zumindest zwei gegenüberlie-
gende Radialflügel (131) bereitstellt, die sich da-
von nach außen erstrecken, wobei einer der Ra-
dialflügel (131) einen vorbestimmten radialen
Versatz um die innere Aufhängerlängsachse
(121) von der Ausrichtungskerbe (130) hat, je-
der radiale Flügel (131) an einer fernen Flügel-
fläche (132) endet und eine gemeinsame radiale
Flügelänge hat, sodass, wenn der innere Auf-
hänger (120) im Außenkragen (105) aufgenom-
men ist, die fernen Flügelflächen (132) passge-
nau neben einer Innenfläche des Außenkragens
(105) an dessen zweitem Ende gelegen sind,

wobei zumindest einer der radialen Flügel (131)
einen offenen Flügeldurchlass (133) aufweist,
der von seiner fernen Flügelfläche (132) zu einer
Innenfläche des inneren Aufhängers (120) an
dessen zweitem Ende hindurchgeht, wobei ein
Aufschrauben des Werkzeugadapters (150) auf
das zweite Ende des inneren Aufhängers (120)
ermöglicht, dass eine Ausrichtungsschraube
(171) durch einen ausgewählten Flügeldurch-
lass (133) und im Werkzeugausrichtungsloch
(155) aufgenommen wird, sodass ein Abschnitt
der Ausrichtungsschraube (171) eine relative
Drehung des Werkzeugadapters (150) und des
inneren Aufhängers (120) mittels Kontakteingriff
mit dem ausgewählten Flügeldurchlass (133)
verhindert; und
Gehäuse- und Stiftverbindungen (106, 107) auf
entsprechenden der ersten und zweiten Enden
des Außenkragens (105), wobei die Gehäuse-
und Stiftverbindungen (106, 107) geeignet sind,
den Außenkragen (105) in ein Bohrgestänge
einzuschrauben.

2. Ausrichtungsaufhängeranordnung (100) nach An-
spruch 1, in der jedes Sperrgewindeloch (114) an
einer Außenkante der Kragenwand versenkt ist.
3. Ausrichtungsaufhängeranordnung (100) nach den
Ansprüchen 1 oder 2, in der der geriffelte Abschnitt
(129) in einer ringförmigen Vertiefung am ersten En-
de des inneren Aufhängers (120) gelegen ist.
4. Ausrichtungsaufhängeranordnung (100), umfas-
send:

einen im Allgemeinen röhrenförmigen inneren
Aufhänger (120), der angeordnet ist, in einem
im Allgemeinen röhrenförmigen Außenkragen
(105) passgenau aufgenommen zu werden, so-
dass, wenn der innere Aufhänger (120) vollstän-
dig im Außenkragen (105) aufgenommen ist, ei-
ne Längsachse (121) des inneren Aufhängers
(120) mit einer Längsachse (110) des Außen-
kragens (105) zusammenfällt, wobei eine ring-
förmige innere Schulter (111), die auf dem Au-
ßenkragen (105) bereitgestellt ist, an einer ring-
förmigen äußeren Schulter (126) am inneren
Aufhänger (120) anliegt, und erste und zweite
Enden des inneren Aufhängers (120) im Allge-
meinen ersten und zweiten Enden des Außen-
kragens (105) entsprechen;
einen zylindrischen MWD-Werkzeugadapter
(150) mit ersten und zweiten Adapterenden
(151, 152), wobei das erste Adapterende (151)
angeordnet ist, mit dem zweiten Ende (123) des
inneren Aufhängers (120) verschraubt zu wer-
den, und das zweite Adapterende (152) ange-
ordnet ist, mit einem MWD-Werkzeug (160) ver-

schraubt zu werden, wobei der Werkzeugadapter (150) weiter ein radiales Werkzeugausrichtungsgewindeloch (155) enthält;

eine erweiterbare Spaltringanordnung, die starr am ersten Ende (122) des inneren Aufhängers (120) mit gegenüberliegenden C-förmigen Bauteilen fixiert ist, die angeordnet sind, umlaufend mit einem ersten Innenkragenwandbereich (112) ineinanderzugreifen, wobei die Spaltringanordnung konfiguriert ist, im Eingriff einen relativen Drehversatz zwischen dem inneren Aufhänger (120) und dem Außenkragen (105) zu verhindern, wenn der innere Aufhänger (120) vollständig im Außenkragen (105) aufgenommen ist; wobei ein Gewindemechanismus auf der Spaltringanordnung betätigt wird, um die C-förmigen Bauteile zu veranlassen, sich auszu dehnen oder wieder zusammenzuziehen;

wobei der Außenkragen (105) eine röhrenförmige Kragenwand aufweist, wobei der innere Aufhänger (120) eine röhrenförmige Aufhängerwand hat, wobei das erste Ende des inneren Aufhängers weiter eine Innenausrichtungskerbe (130) in der Aufhängerwand bereitstellt;

wobei das zweite Ende (123) des inneren Aufhängers (120) zumindest zwei gegenüberliegende Radialflügel (131) bereitstellt, die sich davon nach außen erstrecken, wobei einer der Radialflügel (131) einen vorbestimmten radialen Versatz um die innere Aufhängerlängsachse (121) von der Ausrichtungskerbe (130) hat, jeder radiale Flügel (131) an einer fernen Flügel fläche (132) endet und eine gemeinsame radiale Flügellänge hat, sodass, wenn der innere Aufhänger (120) im Außenkragen (105) aufgenommen ist, die fernen Flügelflächen (132) passgenau neben einer Innenfläche des Außenkragens (105) an dessen zweitem Ende gelegen sind, wobei zumindest einer der radialen Flügel (131) einen offenen Flügeldurchlass (133) aufweist, der von seiner fernen Flügelfläche (132) zu einer Innenfläche des inneren Aufhängers (120) an dessen zweitem Ende hindurchgeht, wobei ein Aufschrauben des Werkzeugadapters (150) auf das zweite Ende des inneren Aufhängers (120) ermöglicht, dass eine Ausrichtungsschraube (171) durch einen ausgewählten Flügeldurchlass (133) und im Werkzeugausrichtungsloch (155) aufgenommen wird, sodass ein Abschnitt der Ausrichtungsschraube (171) eine relative Drehung des Werkzeugadapters (150) und des inneren Aufhängers (120) mittels Kontakteingriff mit dem ausgewählten Flügeldurchlass (133) verhindert; und

Gehäuse- und Stiftverbindungen (106, 107) auf entsprechenden der ersten und zweiten Enden des Außenkragens (105), wobei die Gehäuse- und Stiftverbindungen (106, 107) geeignet sind,

den Außenkragen (105) in ein Bohrgestänge einzuschrauben.

- 5 5. Ausrichtungsaufhängeranordnung (100) nach einem der vorstehenden Ansprüche, in dem das zweite Ende des inneren Aufhängers (120) zumindest ein Fluidfenster (136) enthält, das angeordnet ist, einen Fluidstrom aus dem Inneren des inneren Aufhängers (120) zum Inneren des Außenkragens (105) zu ermöglichen, wenn der innere Aufhänger (120) vollständig im Außenkragen (105) aufgenommen ist.
- 10 6. Ausrichtungsaufhängeranordnung (100) nach Anspruch 5, in der eine Innenfläche des zweiten Endes des inneren Aufhängers (120) geformt ist, einen Fluidstrom aus dem Inneren des inneren Aufhängers (120) durch jedes Fluidfensters (136) zu fördern.
- 15 7. Ausrichtungsaufhängeranordnung (100) nach einem der vorstehenden Ansprüche, in der der Werkzeugadapter (150) zumindest eine ringförmige Vertiefung (153) enthält, die angeordnet ist, einen O-Ring aufzunehmen, der konfiguriert ist, einen ringförmigen Fluidstrom im Inneren des inneren Aufhängers (120) über den Werkzeugadapter (150) zu verhindern, wenn der Werkzeugadapter (150) auf das zweite Ende des inneren Aufhängers (120) geschraubt ist.
- 20 8. Ausrichtungsaufhängeranordnung (100) nach einem der vorstehenden Ansprüche, in der der vorbestimmte radiale Versatz null Grad ist.
- 25
- 30

35 Revendications

1. Ensemble de suspension à orientation (100) comprenant :

une suspension interne de forme générale tubulaire (120) disposée pour être reçue commodément dans un collier externe de forme générale tubulaire (105) de sorte que, lorsque la suspension interne (120) est complètement reçue dans le collier externe (105), un axe longitudinal (121) de la suspension interne (120) coïncide avec un axe longitudinal (110) du collier externe (105), qu'un épaulement interne annulaire (111) ménagé sur le collier externe (105) s'aboute à un épaulement annulaire externe (126) sur la suspension interne (120) et qu'une première et une seconde extrémité de la suspension interne (120) correspondent de manière générale à la première et à la seconde extrémité du collier externe (105) ;

un adaptateur d'outil MWD cylindrique (150) ayant une première et une seconde extrémité d'adaptateur (151, 152), la première extrémité

d'adaptateur (151) étant disposée pour s'engager par vissage sur la seconde extrémité (123) de la suspension interne (120) et la seconde extrémité d'adaptateur (152) étant disposée pour s'engager par vissage sur un outil MWD (160), l'adaptateur d'outil (150) comprenant en outre un trou d'orientation d'outil taraudé radial (155) ; le collier externe (105) ayant une paroi de collier tubulaire, la première extrémité du collier externe (105) comprenant au moins un trou de verrouillage taraudé (114) s'étendant à travers la paroi du collier ; la suspension interne (120) ayant une paroi de suspension tubulaire, la première extrémité (122) de la suspension interne (120) comprenant une partie annulaire externe moletée (129) formée sur la paroi de la suspension, la partie moletée (129) et le au moins un trou de verrouillage (114) étant situés de sorte que, lorsque la suspension interne (120) est complètement reçue dans le collier externe (105), une vis de verrouillage (170) puisse être reçue à travers chaque trou de verrouillage (114) et s'engage par frottement sur la partie moletée (129) ; la première extrémité de la suspension interne (120) fournissant en outre une encoche d'alignement interne (130) dans la paroi de la suspension ; la seconde extrémité (123) de la suspension interne (120) fournissant au moins deux ailes radiales opposées (131) s'étendant vers l'extérieur de celle-ci, l'une des ailes radiales (131) ayant un décalage radial prédéterminé autour de l'axe longitudinal interne de la suspension (121) vis-à-vis de l'encoche d'alignement (130), chaque aile radiale (131) se terminant sur une face d'aile distale (132) et ayant une longueur d'aile radiale commune de sorte que, lorsque la suspension interne (120) est reçue dans le collier externe (105), les faces d'ailes distales (132) soient situées commodément à côté d'une surface interne du collier externe (105) sur sa seconde extrémité, au moins l'une des ailes radiales (131) comprenant un passage d'aile ouvert (133) qui la traverse depuis sa face d'aile distale (132) à une surface interne de la suspension interne (120) à sa seconde extrémité, l'engagement par vissage de l'adaptateur d'outil (150) sur la seconde extrémité de la suspension interne (120) permettant de recevoir une vis d'orientation (171) à travers un passage d'aile sélectionné (133) et dans le trou d'orientation d'outil (155) de sorte qu'une partie de la vis d'orientation (171) empêche une rotation relative de l'adaptateur d'outil (150) et de la suspension interne (120) par engagement de contact avec le passage d'aile sélectionné (133) ; et des liaisons à filetage mâle et femelle (106, 107)

sur certaines correspondantes de la première et de la seconde extrémité du collier externe (105), les liaisons à filetage mâle et femelle (106, 107) convenant pour insérer par vissage le collier externe (105) dans une garniture de forage.

2. Ensemble de suspension à orientation (100) selon la revendication 1, dans lequel chaque trou de verrouillage taraudé (114) est contre-alésé sur un bord externe de la paroi du collier.
3. Ensemble de suspension à orientation (100) selon les revendications 1 ou 2, dans lequel la partie moletée (129) est située dans un évidement annulaire sur la première extrémité de la suspension interne (120).
4. Ensemble de suspension à orientation (100) comprenant :

une suspension interne de forme générale tubulaire (120) disposée pour être reçue commodément dans un collier externe de forme générale tubulaire (105) de sorte que, lorsque la suspension interne (120) est complètement reçue dans le collier externe (105), un axe longitudinal (121) de la suspension interne (120) coïncide avec un axe longitudinal (110) du collier externe (105), un épaulement interne annulaire (111) ménagé sur le collier externe (105) s'aboute sur un épaulement annulaire externe (126) sur la suspension interne (120) et une première et une seconde extrémité de la suspension interne (120) correspondent de manière générale à la première et la seconde extrémité du collier externe (105) ;

un adaptateur d'outil MWD cylindrique (150) ayant une première et une seconde extrémité d'adaptateur (151, 152), la première extrémité d'adaptateur (151) étant disposée pour s'engager par vissage sur la seconde extrémité (123) de la suspension interne (120) et la seconde extrémité d'adaptateur (152) étant disposée pour s'engager par vissage sur un outil MWD (160), l'adaptateur d'outil (150) comprenant en outre un trou d'orientation d'outil taraudé radial (155) ; un ensemble d'anneau fendu expansible fixé de manière rigide à la première extrémité (122) de la suspension interne (120) avec des éléments opposés en forme de C disposés de manière à s'engager circonférentiellement sur la première section de paroi de collier interne (112), l'ensemble d'anneau fendu étant configuré, lorsqu'il est engagé, pour empêcher un déplacement rotatif relatif entre la suspension interne (120) et le collier externe (105) lorsque la suspension interne (120) est complètement reçue dans le collier externe (105) ; dans lequel un mécanis-

me fileté sur l'ensemble d'anneau fendu étant actionné de manière à amener les éléments en forme de C à s'étendre ou à se rétracter conjointement ;

le collier externe (105) ayant une paroi de collier tubulaire, la suspension interne (120) ayant une paroi de suspension tubulaire, la première extrémité de la suspension interne fournissant en outre une encoche d'alignement interne (130) dans la paroi de la suspension ;

la seconde extrémité (123) de la suspension interne (120) fournissant au moins deux ailes radiales opposées (131) s'étendant vers l'extérieur de celle-ci, l'une des ailes radiales (131) ayant un décalage radial prédéterminé autour de l'axe longitudinal (121) de la suspension interne depuis l'encoche d'alignement (130), chaque aile radiale (131) se terminant sur une face d'aile distale (132) et ayant une longueur d'aile radiale commune de sorte que, lorsque la suspension interne (120) est reçue dans le collier externe (105), les faces d'ailes radiales (132) soient situées commodément près d'une surface interne du collier externe (105) à sa seconde extrémité, au moins l'une des ailes radiales (131) comprenant un passage d'aile ouvert (133) depuis sa face d'aile distale (132) jusqu'à une surface interne de la suspension interne (120) à sa seconde extrémité, un engagement par vissage de l'adaptateur d'outil (150) sur la seconde extrémité de la suspension interne (120) permettant à une vis d'orientation (171) d'être reçue à travers un passage d'aile sélectionné (133) et dans le trou d'orientation d'outil (155) de sorte qu'une partie de la vis d'orientation (171) empêche une rotation relative de l'adaptateur d'outil (150) et de la suspension interne (120) par engagement de contact avec le second passage d'aile (133) ; et


des liaisons à filetage mâle et femelle (106, 107) sur certaines correspondantes de la première et de la seconde extrémité du collier externe (105), les liaisons à filetage mâle et femelle (106, 107) convenant pour insérer par vissage le collier externe (105) dans une garniture de forage.


5. Ensemble de suspension à orientation (100) selon l'une quelconque des revendications précédentes, dans lequel la seconde extrémité de la suspension interne (120) comprend au moins une fenêtre à fluide (136) disposée pour permettre un écoulement de fluide venant de l'intérieur de la suspension interne (120) à l'intérieur du collier externe (105) lorsque la suspension interne (120) est complètement reçue dans le collier externe (105).

6. Ensemble de suspension à orientation (100) selon la revendication 5, dans lequel une surface interne

de la seconde extrémité de la suspension interne (120) est conformée pour encourager un écoulement de fluide de l'intérieur de la suspension interne (120) à travers chaque fenêtre de fluide (136).

7. Ensemble de suspension à orientation (100) selon l'une quelconque des revendications précédentes, dans lequel l'adaptateur d'outil (150) comprend au moins un évidement annulaire (153) disposé pour recevoir un joint torique configuré pour empêcher un écoulement de fluide annulaire dans la suspension interne (120) de passer par l'adaptateur d'outil (150) lorsque l'adaptateur d'outil (150) est engagé par vissage sur la seconde extrémité de la suspension interne (120).
8. Ensemble de suspension à orientation (100) selon l'une quelconque des revendications précédentes, dans lequel le décalage radial prédéterminé est de zéro degré.

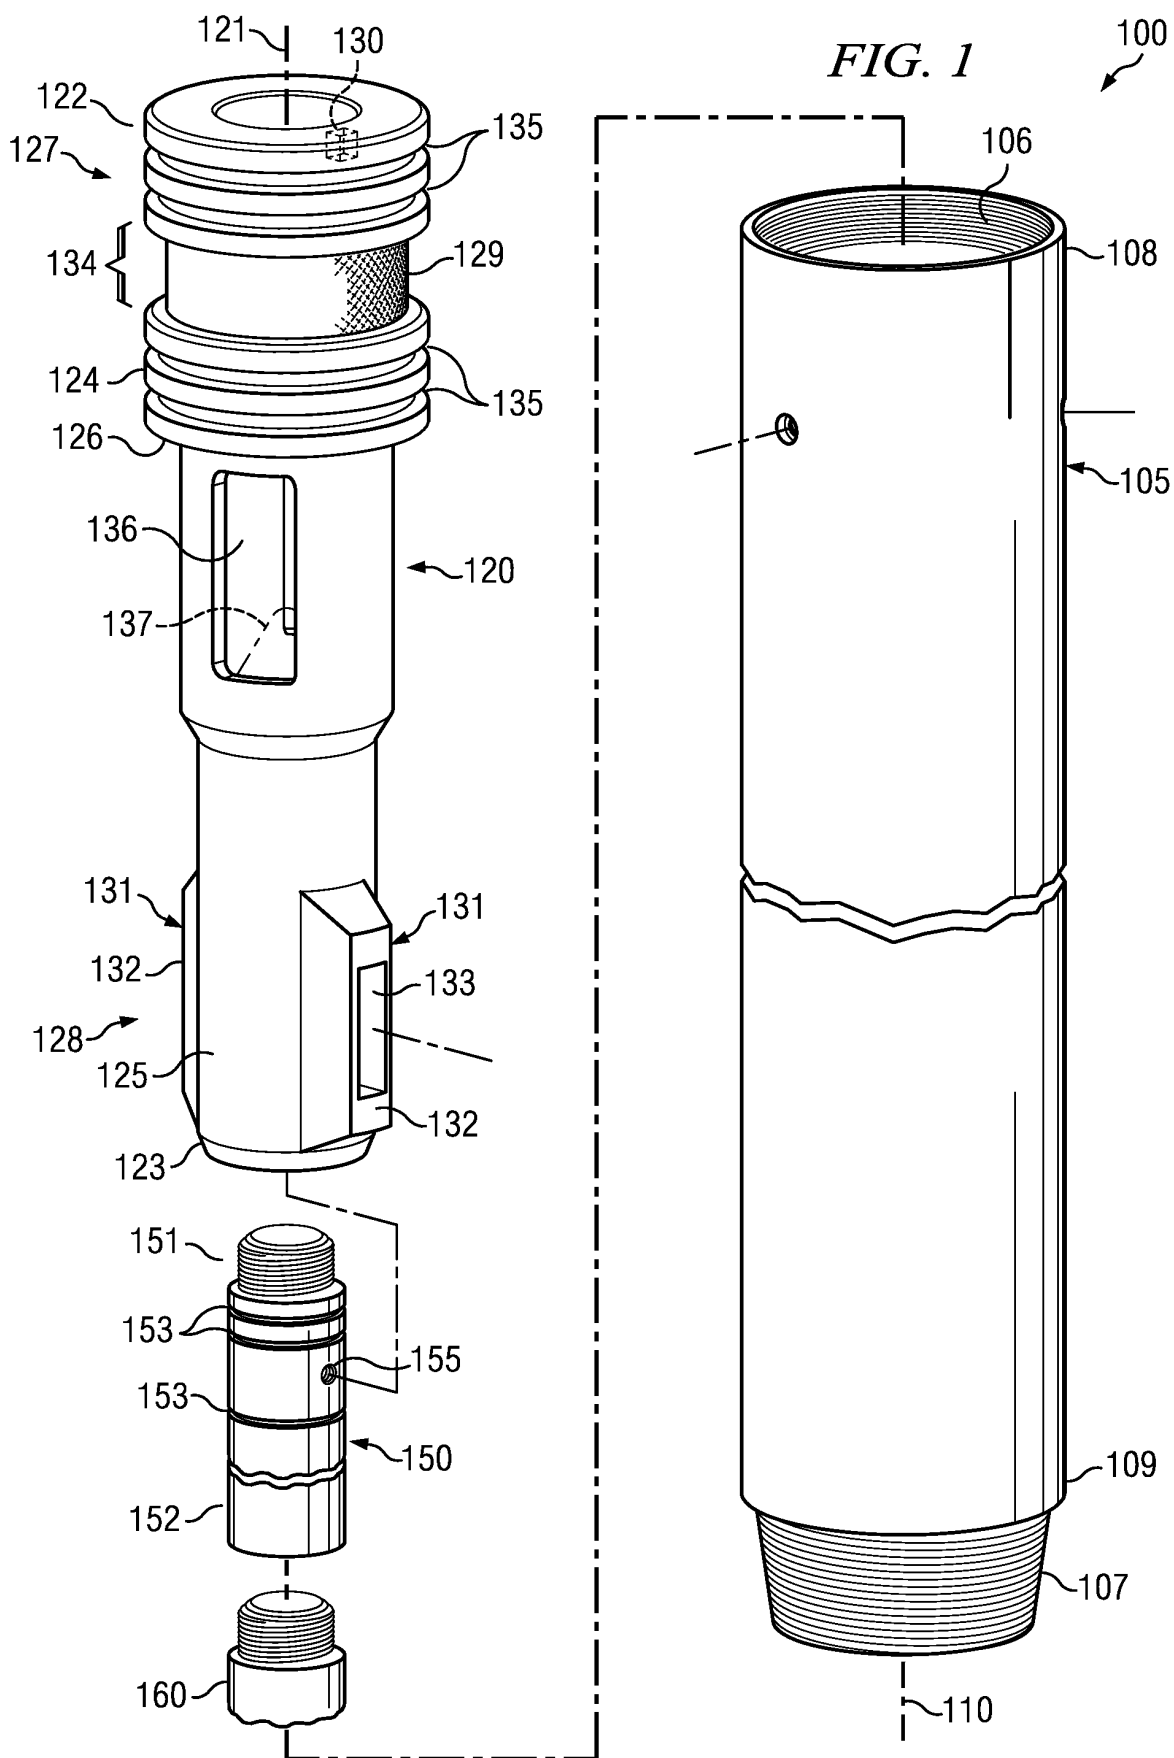

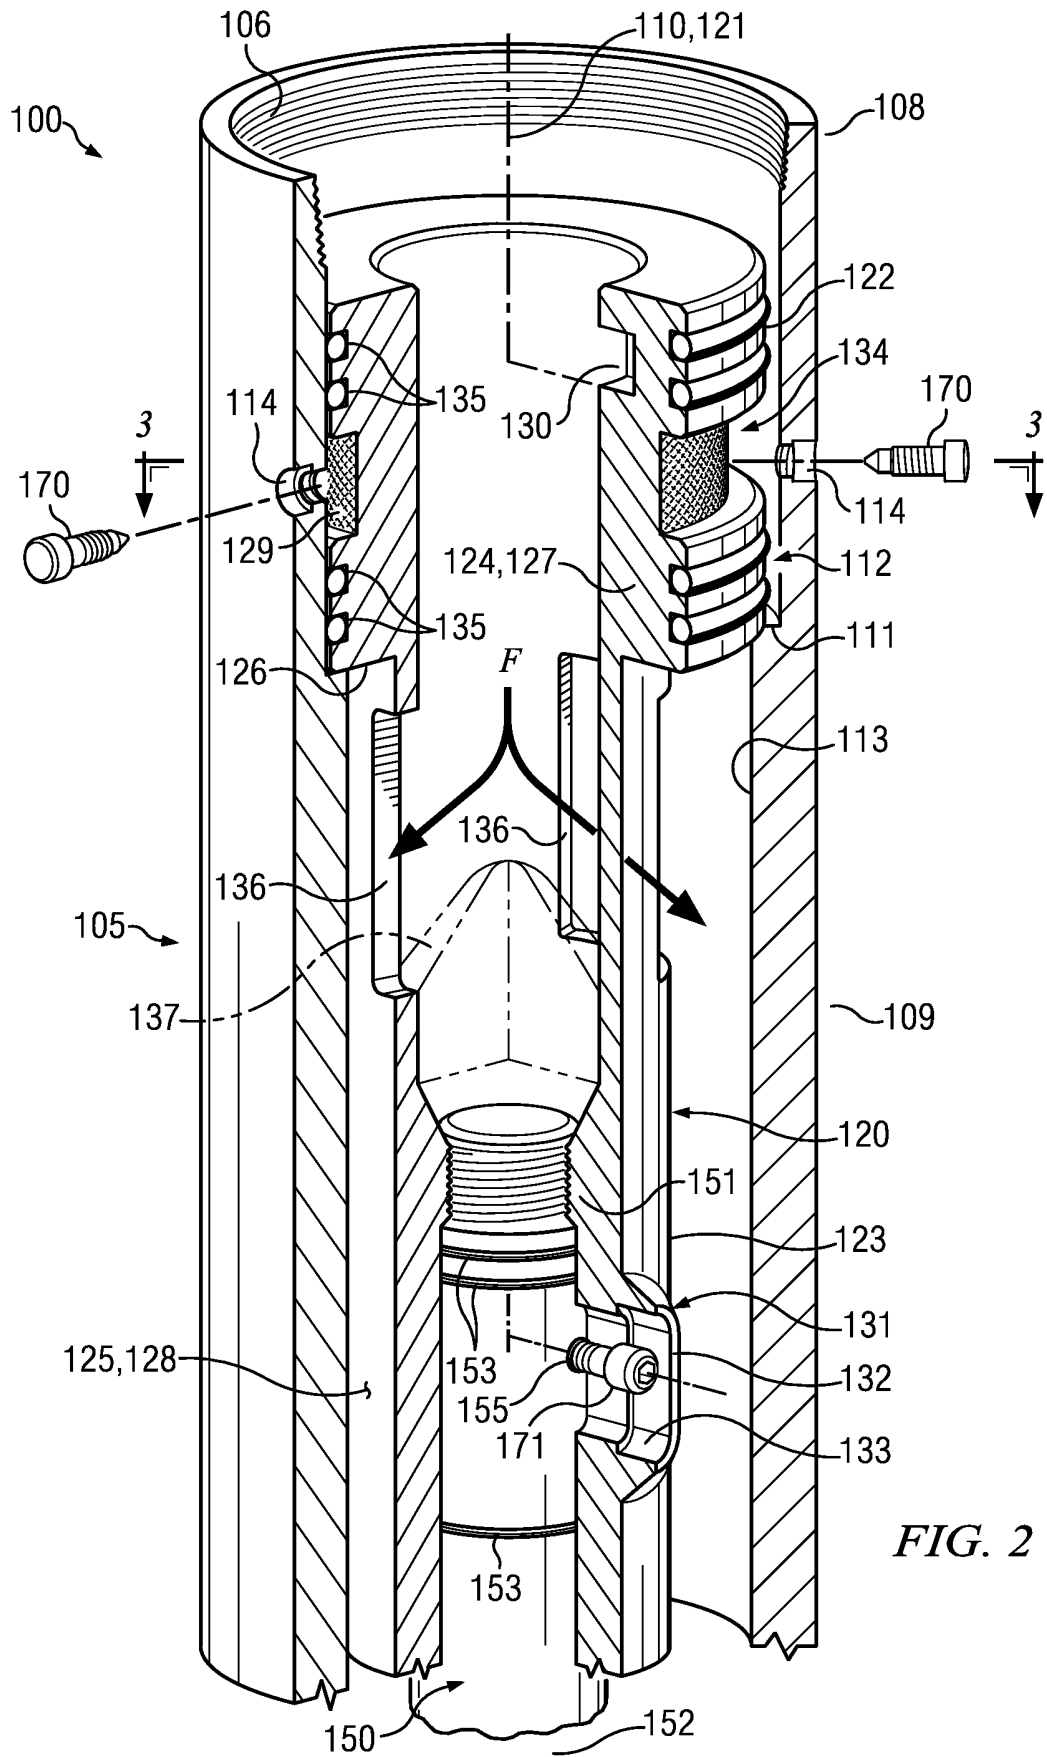

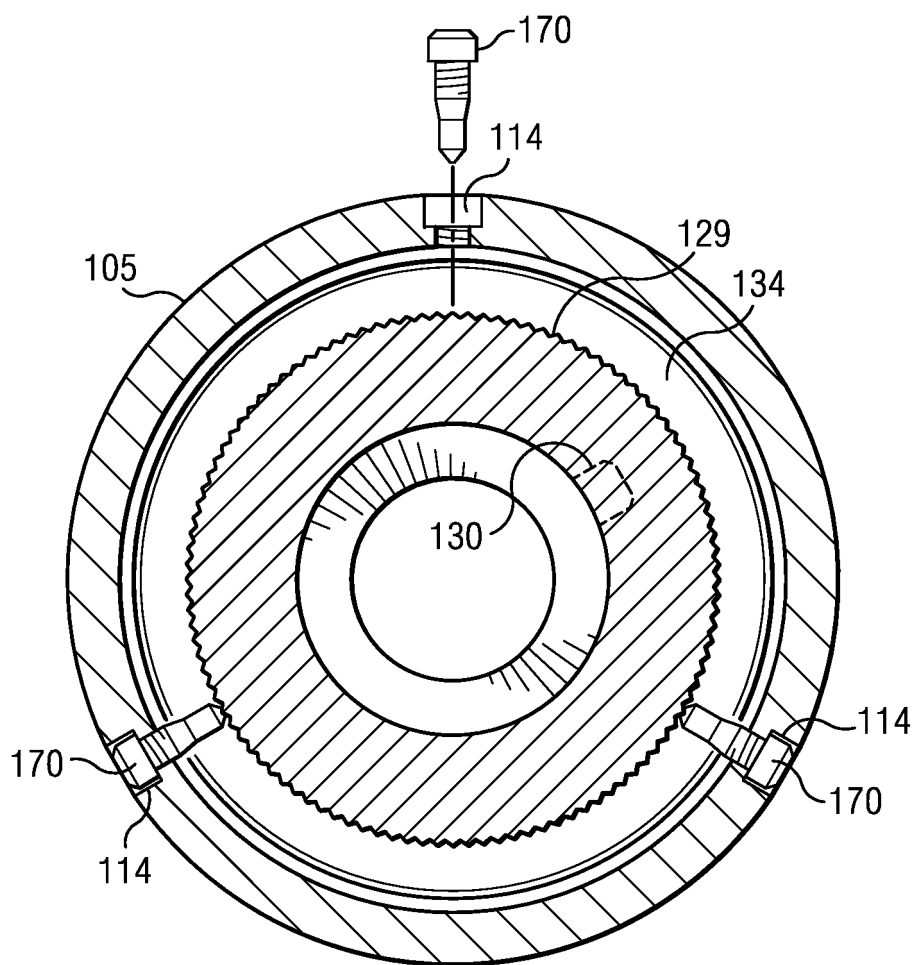


FIG. 3

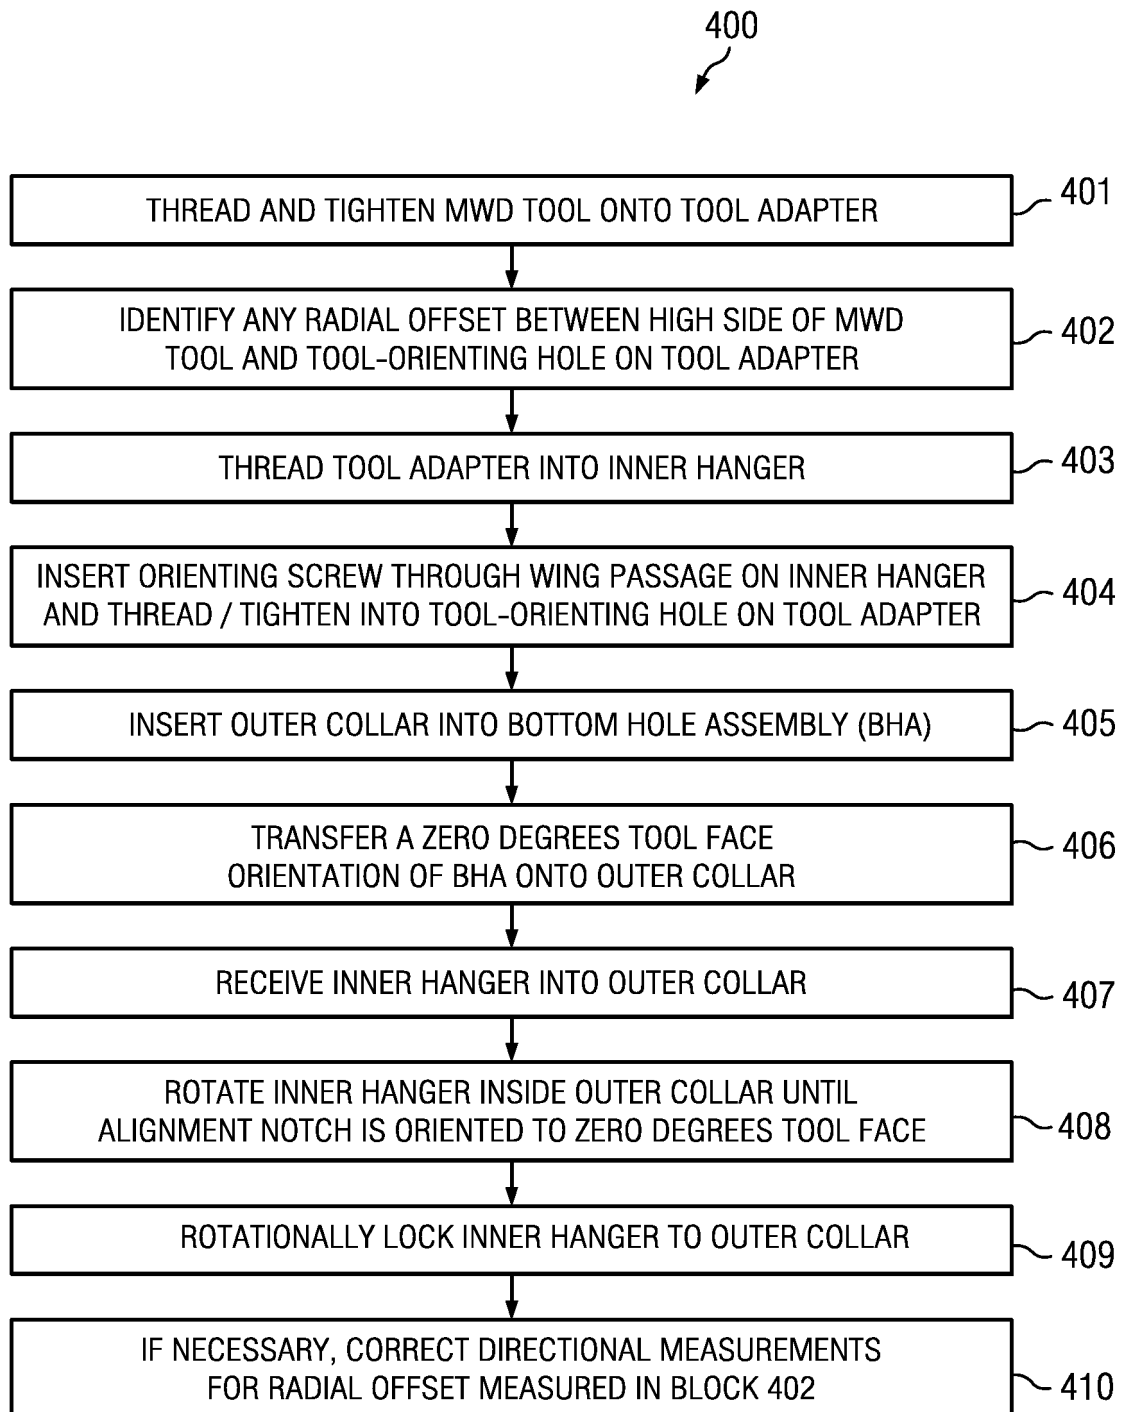


FIG. 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2007227780 A1 [0012]
- US 3765494 A [0013]
- US 2006098532 A1 [0014]
- US 2009301780 A1 [0015]
- US 2011186284 A1 [0016]