



(72) WESTERMANN, SOREN ERIK, DK


(71) TOPHOLM & WESTERMANN APS, DK

(51) Int.Cl.⁶ H04R 25/02

(30) 1997/04/15 (0422/97) DK

(54) **PROTHESE AUDITIVE "INTRA-CONQUE" A EFFET
D'OCCLUSION REDUIT, PROCEDE DE PRODUCTION ET
ADAPTATEUR PERMETTANT D'ADAPTER UNE TELLE
PROTHESE A L'UTILISATEUR**

(54) **IN-THE-EAR HEARING AID WITH REDUCED OCCLUSION
EFFECT AND METHOD FOR THE PRODUCTION AND USER-
FITTING OF SUCH A HEARING AID**

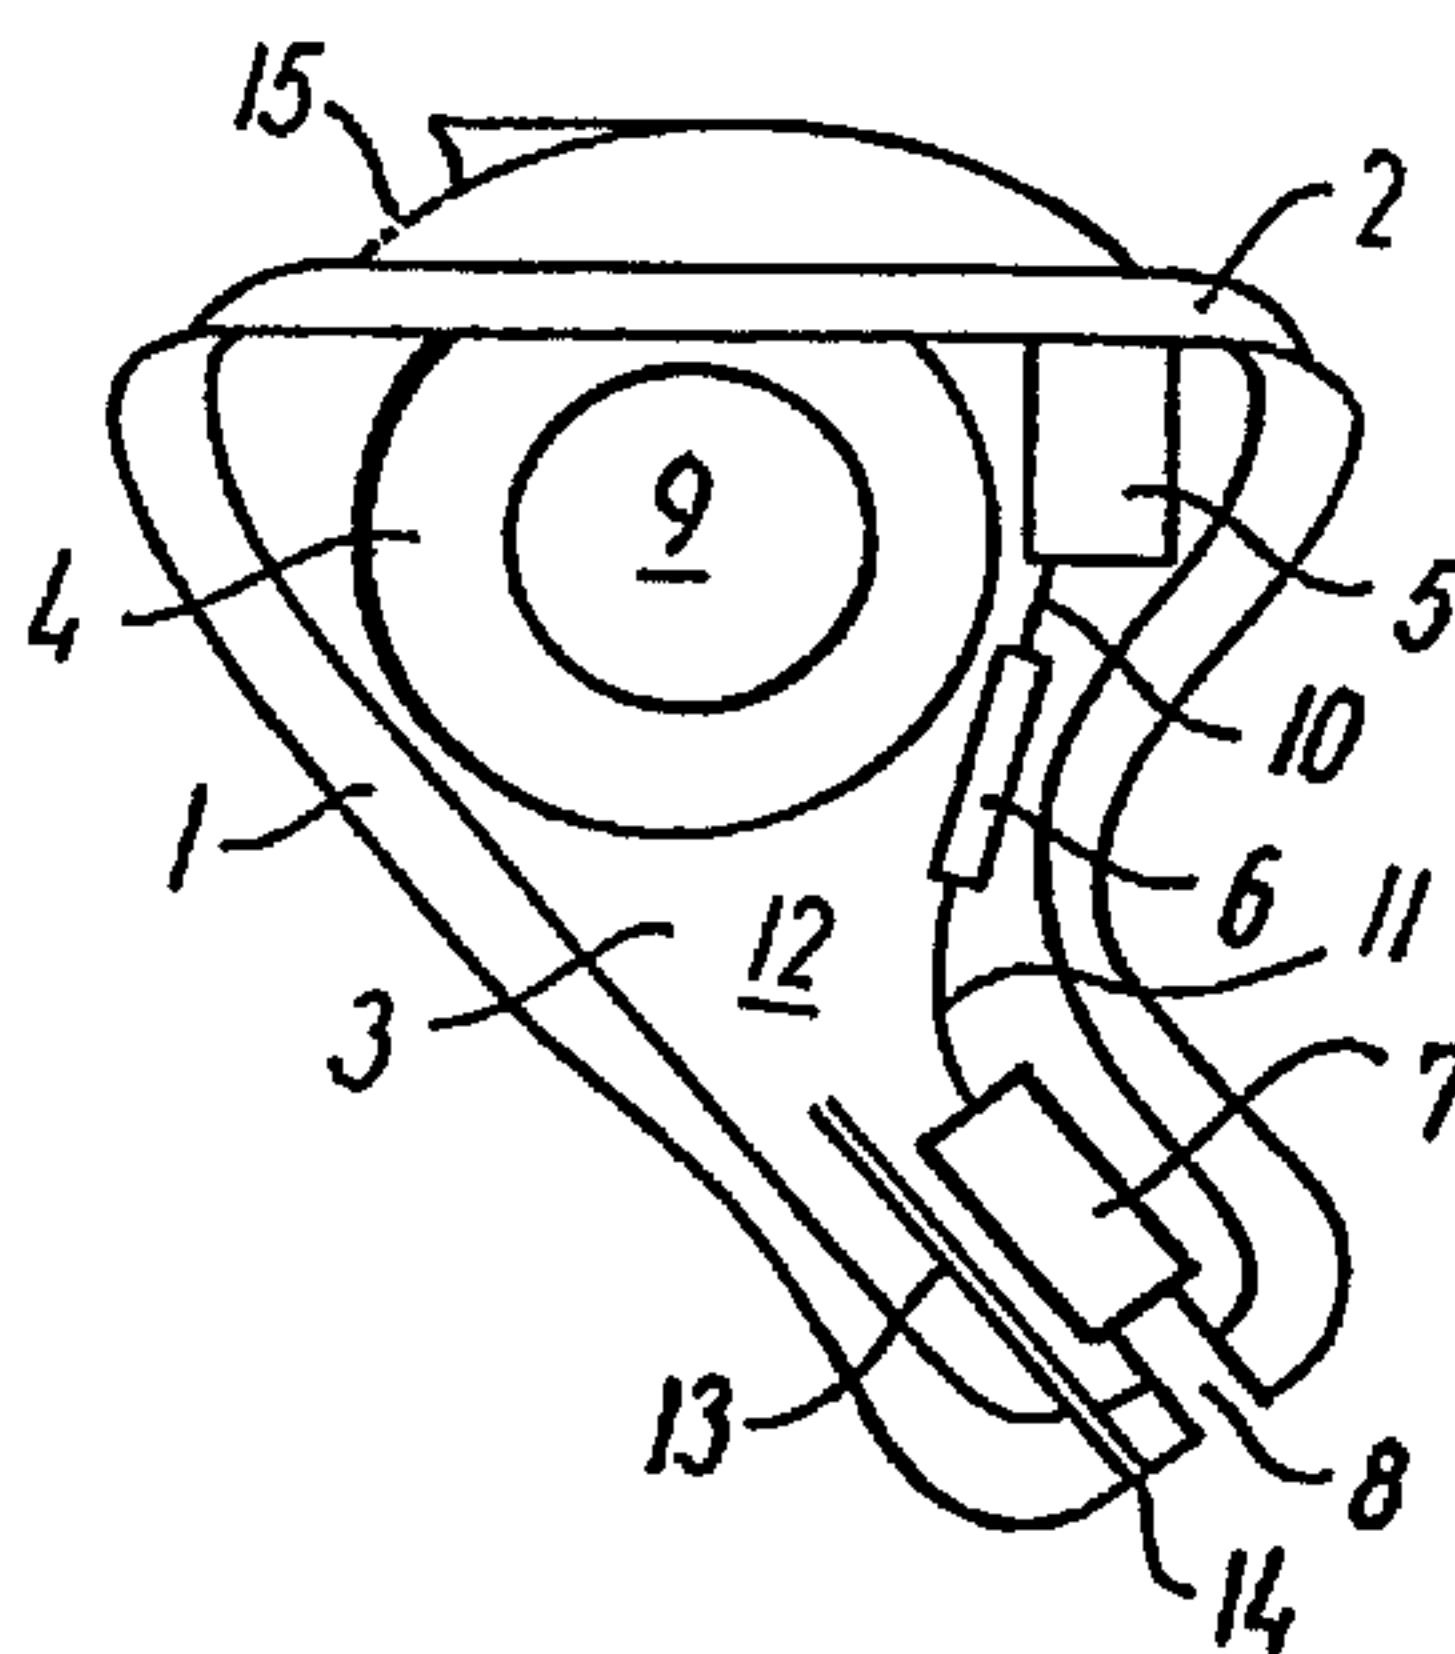

(57) L'invention concerne une prothèse auditive "intra-conque" comprenant un obturateur (1), destiné à être inséré dans le conduit auditif externe et doté d'une paroi en forme de coque faisant face à l'intérieur du conduit auditif externe, et une plaque frontale (2) extérieure. L'obturateur et la plaque frontale définissent ensemble une cavité (3) généralement fermée, dans laquelle sont placés les différents composants de la prothèse auditive. Une liaison acoustique, sous la forme d'un flexible ou d'un tube (13), est réalisée entre un orifice (14) du côté extérieur de la partie de la paroi de l'obturateur (1) faisant face à l'intérieur du conduit auditif externe et le volume restant (12) de la cavité interne de l'obturateur (1). Cette liaison acoustique forme avec le volume (12) restant un circuit acoustique dont la fréquence de résonance se situe approximativement dans la plage de celle des premiers organes formateurs de sons vocaux de l'utilisateur. On obtient ainsi une réduction significative de l'effet d'occlusion d'une manière simple dans une prothèse auditive.

(57) An in-the-ear hearing aid comprises a plug (1) for arrangement in the ear channel and having a shell-like wall facing the interior of the ear channel and an exterior faceplate (2) which together define a generally closed cavity (3), in which the individual components of the hearing aid are arranged. An acoustical link in the form of a hose or tube piece (13) is provided between an orifice (14) at the external side of the part of the wall of the plug (1) facing the interior of the ear channel and the residual volume (12) of the internal cavity of the plug (1) and forms together with said residual volume (12) an approximated acoustical circuit having a resonance frequency in the region of the first voice sound formants of the user. Thereby a significantly reduces occlusion effect can be obtained in a simple way in a completed hearing aid.

CORRECTED
VERSION*

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

8 FEB. 1999


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04R 25/02 // 1/28	A1	(11) International Publication Number: WO 98/47318 (43) International Publication Date: 22 October 1998 (22.10.98)
<p>(21) International Application Number: PCT/DK98/00147</p> <p>(22) International Filing Date: 8 April 1998 (08.04.98)</p> <p>(30) Priority Data: 0422/97 15 April 1997 (15.04.97) DK</p> <p>(71) Applicant (for all designated States except US): TØPHOLM & WESTERMANN APS [DK/DK]; Ny Vestergaardsvej 25, DK-3500 Værløse (DK).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): WESTERMANN, Søren, Erik [DK/DK]; Skovmosegaard, Grønholt, DK-3480 Fredensborg (DK).</p> <p>(74) Agents: RAFFNSØE, Knud, Rosenstand et al.; International Patent-Bureau, Høje Taastrup Boulevard 23, DK-2630 Taastrup (DK).</p>	<p>(81) Designated States: AU, CA, JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published With international search report. In English translation (filed in Danish).</p>	

(54) Title: IN-THE-EAR HEARING AID WITH REDUCED OCCLUSION EFFECT AND A METHOD FOR THE PRODUCTION AND USER-FITTING OF SUCH A HEARING AID

(57) Abstract

An in-the-ear hearing aid comprises a plug (1) for arrangement in the ear channel and having a shell-like wall facing the interior of the ear channel and an exterior faceplate (2) which together define a generally closed cavity (3), in which the individual components of the hearing aid are arranged. An acoustical link in the form of a hose or tube piece (13) is provided between an orifice (14) at the external side of the part of the wall of the plug (1) facing the interior of the ear channel and the residual volume (12) of the internal cavity of the plug (1) and forms together with said residual volume (12) an approximated acoustical circuit having a resonance frequency in the region of the first voice sound formants of the user. Thereby a significantly reduces occlusion effect can be obtained in a simple way in a completed hearing aid.

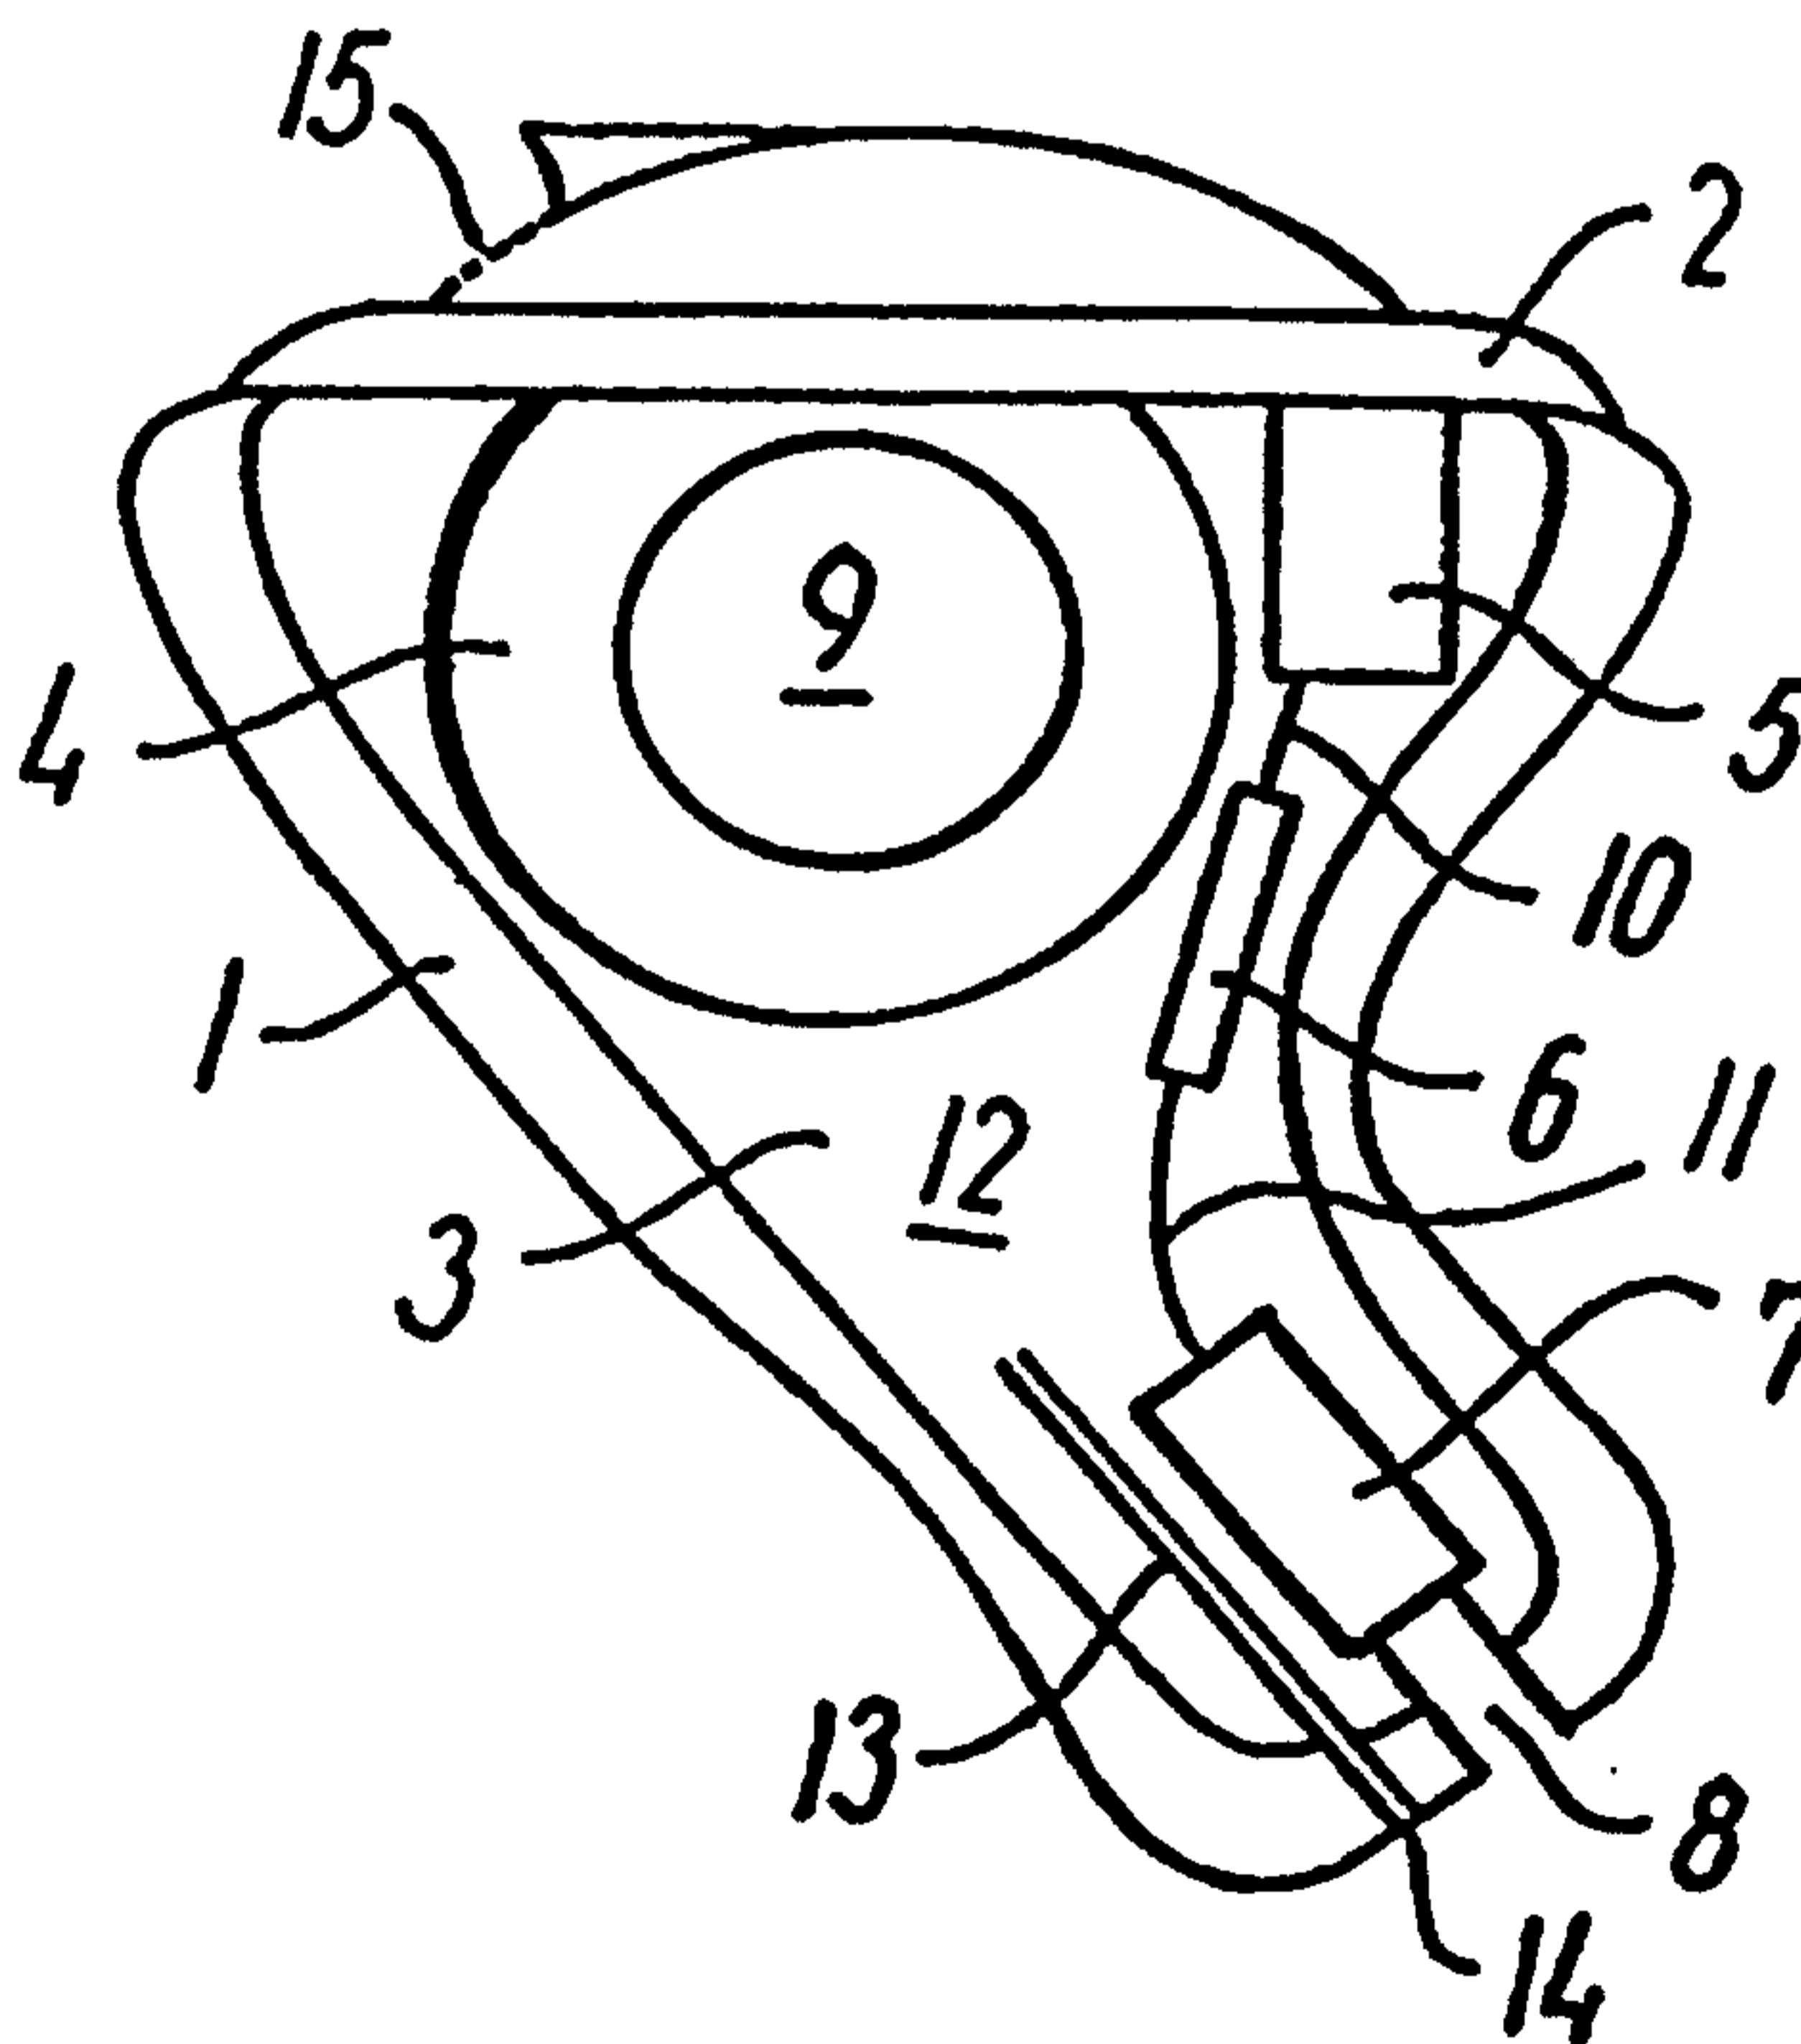

In-the-ear hearing aid with reduced occlusion effect and a method for the production and user-fitting of such a hearing aid

The present invention relates to a hearing aid for
5 arrangement in the ear, particularly completely inside
the ear canal, comprising a plug for arrangement in the
ear canal and having a shell-like wall facing the
interior of the ear canal and an outward faceplate
which together define a generally closed cavity in
10 which are arranged an input transducer, such as a
microphone, for transforming external sounds into an
electrical signal, a signal processor for processing
the signal produced by the input transducer and produc-
ing a hearing-loss compensating electrical signal, and
15 an output transducer for transforming the signal from
the signal processor into a hearing-loss compensating
sound signal, as well as a power source, such as a
battery.

In hearing aids of this type, so-called occlusion
20 effects often occur during use as a consequence of the
closure of the ear canal caused by the hearing aid,
which occlusion effects manifest themselves by the user
experiencing his or her voice as dominant, because
voice sounds are transmitted through bones and tissue
25 to the residual volume which is located innermost in
the ear canal and is defined by the housing of the
hearing aid and the eardrum. Furthermore, changes in
the differential pressure between the air in this
confined volume and the atmosphere, for example when
30 the user is inside an ascending airplane, may give rise
to an unpleasant feeling, which can usually, however,
be counteracted by the user making jaw movements that
propagate to the ear canal and create pressure-
equalizing leakages between the ear canal wall and the
35 hearing aid.

To solve this problem it is well-known to provide both hearing aids of the type stated and ear plugs for conventional behind-the-ear hearing aids with a through-going vent passage from the innermost end of the hearing aid or the ear plug to the surroundings. Typically, such a vent passage or vent is formed as a hose or a tube extending through the hearing aid plug. However, this measure is disadvantageous in that it often gives rise to acoustical feedback because part of the sound amplified by the hearing aid and produced in the ear canal reaches the microphone of the hearing aid.

Some ear plugs without an integral hearing aid have a cavity in the vent passage to remedy this problem. The purpose of this design is to make the vent passage with such intermediate cavity act like a low-pass filter to damp the passage of high-frequency sounds and thus reduce the tendency of acoustical feedback.

Solutions of this type are described, i.a., in the following articles by John Macrae:

"A new kind of earmold vent - the high-cut cavity vent", Hearing Instruments, vol. 32, No. 10, 1981, page 18 pp.,

"An improved version of the high-cut cavity vent", Australian Journal of Audiology, 1981 3:2, pages 36 - 39,

"Venting without feedback - further development of the high-cut cavity vent", Hearing Instruments, vol. 33, No. 4, 1982, page 12 pp., and

"A damped high-cut cavity vent for profound hearing loss", Australian Journal of Audiology, 1982 4:1, pages 22 - 25.

The vent systems discussed here for ear plugs function as ordinary vent passages as well as acoustic low-pass filters.

For hearing aids of the type indicated above of the ITE design, corresponding vent systems are known from, i.a., CH-A-681,125, the cavity coupled in here being constituted by the part of the cavity in the hearing aid housing not taken up by electronic components.

US-A-5,195,139 further describes a hearing aid in which, from a conventional vent passage formed by a longitudinal canal through the wall or shell of the hearing aid plug, an opening has been established into a closed cavity in the hearing aid. The system functions as a Helmholtz resonator, whereby transmission of undesired frequencies through the vent passage is damped. This is high-frequency damping in the range from 2.0 to 6.5 kHz. In addition to this filter characteristic, the vent passage functions as an ordinary vent passage.

Accordingly, it is an object of the invention to provide a hearing aid of the type stated, in which a significant damping of occlusion effects can be obtained without the use of a conventional vent passage or vent with the consequent problems in the form of manufacturing and mounting complications, acoustical feedback, etc.

For a hearing aid of the type stated, this is obtained according to the invention in that an acoustical link in the form of a hose or tube piece is provided between an orifice at the external side of the part of the wall of the plug facing the interior of the ear canal and the residual volume of the internal cavity of the plug and, together with said residual volume in the cavity, forms an approximated acoustical circuit having a resonance frequency in the region of the first voice sound formants of the user.

By means of the invention, undesired occlusion effects are damped through the increase of the residual

volume constituted by the part of the cavity in the hearing aid housing which is not taken up by the electronic components of the hearing aid and produced by said acoustical link in the interior of the ear canal 5 within the hearing aid, and this increase of volume is made virtually larger at the resonance frequency of the acoustical circuit. Through the increase of the residual volume, the sound pressure of occlusion sounds is reduced, since the surfaces that transmit the occlusion 10 sounds are not changed. Thereby the invention can damp occlusion sounds both with and without a through-going vent passage, as explained in detail below.

Formation of said approximated acoustical circuit having a resonance frequency in the region of the first 15 voice sound formants of the user, typically in the region from about 200 to about 800 Hz, causes a damping of the otherwise bothering propagation of the user's voice sounds.

According to one embodiment of the invention, a 20 certain softening of this damping may be obtained, if desired, by a through-going vent passage or vent being provided as well from said residual volume in the ear canal to the surroundings.

The invention also relates to a method for the 25 production and user-fitting of a hearing aid of the type stated, whereby a plug formed for arrangement in the ear canal is manufactured with a substantially closed shell-like wall facing the interior of the ear canal and an outward faceplate which together define a generally 30 closed cavity in which are arranged an input transducer, such as a microphone for transforming external sound into an electrical signal, a signal processor for processing the signal produced by the input transducer and producing a hearing-loss compensating electrical 35 signal, and an output transducer for transforming the

signal from the signal processor into a hearing-loss compensating sound signal, as well as a power source, such as a battery.

According to the invention, this method is characterized in that an acoustical link in the form of a hose or tube piece is provided between an orifice at the external side of the part of the wall of the plug facing the interior of the ear canal and the residual volume of the internal cavity of the plug, which hose or tube piece is tuned so that together with said residual volume in the cavity it forms an approximated acoustical circuit having a resonance frequency in the region of the first voice sound formants of the user.

Thereby the occlusion-effect-reducing acoustical link can be provided in a simple manner in a completed hearing aid.

Advantageous embodiments and features of the hearing aid and the method according to the invention are indicated in the dependent claims 2 - 7 and 9 - 14.

The invention will now be explained in more detail below with reference to the schematic drawing, in which

Fig. 1 shows an embodiment of a hearing aid according to the invention in a CIC design, and

Fig. 2 provides graphical reproductions of the sound pressure in a residual volume in the ear canal, partly for a conventional, unvented CIC hearing aid, partly for the hearing aid according to the invention with reduced occlusion effect without and with a through-going vent passage.

The hearing aid shown in Fig. 1 in a so-called CIC design, i.e., for arrangement completely inside the ear canal, comprises a preferably individually adapted plug 1 with a shell-like wall defining an outward orifice, at which a faceplate 2 is fastened to the plug 1, for example by gluing.

When such hearing aid is arranged in the ear canal, a residual volume is left between the tapering end of the plug 1 facing the interior of the ear canal and the eardrum, often giving rise to unpleasant occlusion effects manifesting themselves in an amplification of the user's own voice, especially in the region of the first voice sound formant, because of sound transmission to the residual volume through bones and tissue.

10 In the hearing aid of Fig. 1, which may suitably be constructed in a compact, modular design as described in the Applicant's concurrent DK patent application No. 0422/97, but is not limited thereto, the wall of the plug 1 and the faceplate 2 together
15 define a cavity 3 in which, during use of the hearing aid, are arranged a battery 4, a microphone part 5, a signal processing part 6 with the amplifier circuit of the hearing aid, and a sound reproducer in the form of a receiver 7, from which the sound is transmitted to
20 the residual volume of the ear canal through a sound exit orifice 8. Said components in the hearing aid are supplied with electric power from terminals 9 on the battery 4 and are in general interconnected via wire connections 10 and 11.

25 Although said components take up some space in the cavity 3, it will always have a free residual volume 12.

According to the invention, the above residual volume in the ear canal is connected with this residual
30 volume through an acoustical link in the form of a hose or tube piece 13, which is connected to an orifice 14 at the external side of the part of the shell-like wall of the plug 1 facing the interior of the ear canal.

Together with the residual volume 12 in the plug
35 1, this hose or tube piece 13 forms an approximated acoustical circuit having a resonance frequency in the

6a

region of the first voice sound formants of the user.

Theoretically and ideally, the tuned acoustical circuit acts as an approximated Helmholtz resonator according to the formula

$$\omega_0 = c \cdot (A / (L \cdot V))^{0,5},$$

5 where

ω_0 is the angular frequency

c is the velocity of sound in air, about 340 m/s,

A is the internal cross-sectional area of the hose or tube piece 13 in m^2 ,

10 L is the length of the hose or tube piece 13 in m, and

V is the volume of the cavity 3 in m^3 ,

resulting in the resonance frequency

$$F_0 = \omega_0 / (2 \cdot \pi)$$

15 This is a theoretically ideal formula. In practice, the values stated are tuned with empirically found correction factors. Thus, to the length L of the hose or tube piece 13, a correction factor depending on its internal diameter often has to be added and multiplied by a correction factor depending on the hose or
20 tube material.

Arrangement of this resonance frequency in the frequency region where the user's voice penetrates strongly to the residual volume in the ear canal
25 provides a substantial damping of occlusion effects and an improvement of the comfort of use and speech reproduction during conversation through a damping of the user's own voice.

For men, this frequency region is typically
30 between 200 and 800 Hz, while for women it is typically between 250 and 900 Hz.

At a dimensioning suitable for this, the cavity 3 in the plug 1 may thus have a volume V of 0.3 - 1.2 cm^3 , especially 0.6 cm^3 , while the hose or tube piece 13 may have an internal diameter of 0.5 - 2.0 mm, especially 1 mm, and a length L of 3 - 20 mm, especially 7 mm.

The acoustical link through the hose or tube piece 13 is preferably provided in a completed hearing aid by drilling a hole corresponding to the orifice 14, whereupon the hose or tube piece 13 is inserted into the plug 1 at an insertion length corresponding to the calculated value and is fastened to the plug 1 by gluing or melting.

In the graphical illustration in Fig. 2, the effect of providing the acoustical link according to the invention is illustrated by the fully drawn graph B, which, compared with the dashed graph A for a conventional non-vented CIC hearing aid, shows a significant resonance damping of about 15 dB around 700 Hz, whereas the damping some octaves below the resonance frequency only amounts to a value corresponding to the real volume increase from the cavity 3.

The graphs in Fig. 2 show the amplification in dB in relation to the frequency in Hz recorded in an acoustical coupler system pursuant to IEC 711 for a cavity 3 in the plug 1 having a volume of 0.6 cm^3 and a hose or tube piece 13 having an internal diameter of 1 mm and a length of 7 mm.

In practice, it will be desirable with a softening of the resonance damping in many cases. Such softening can be obtained according to one embodiment of the invention, by supplementing the system with a leak in the form of a through-going vent passage or vent from the residual volume in the ear canal to the surroundings.

As shown in Fig. 1, such vent passage can be established in a simple manner by drilling one or more pinholes 15 in the outward side of the hearing aid, for example in the battery lid 16. The aggregate vent passage will here extend from the orifice 14 through the hose or tube piece 13 and the cavity 3 to the pinhole or pinholes 15.

This measure typically provides a damping function as illustrated by the dotted graph C in Fig. 2.

10 As another possibility, a through-going vent passage may be formed as a separate passage through the hearing aid, for example in the shell-like wall of the plug 1, such as is described in WO 91/03139, whereby the acoustical link according to the invention is not part
15 of the vent passage, but can be freely dimensioned to provide the optimum damping of occlusion effects.

In many cases there will already be leaks between the plug 1 and the wall of the ear canal in themselves forming a vent passage. In such cases, the acoustical
20 link can also have the optimum design concerning damping of occlusion effects.

It is an advantage of the invention that it does not require special preparation of the hearing aid before provision of the acoustical link.

25 A first work step in an otherwise completed hearing aid may therefore be to decide whether an acoustical link should be provided.

To determine whether an acoustical link in the plug 1 is needed, a tightness/acoustical measurement with the
30 plug 1 arranged in the ear canal may be performed according to the method of the invention prior to provision of the acoustical link.

P A T E N T C L A I M S

1. A hearing aid for arrangement in the ear, particularly completely inside the ear canal, comprising a plug (1) for arrangement in the ear canal and
5 having a shell-like wall facing the interior of the ear canal and an outward faceplate (2) which together define a generally closed cavity (3) in which are arranged an input transducer, such as a microphone (5),
10 for transforming external sounds into an electrical signal, a signal processor (6) for processing the signal produced by the input transducer and producing a hearing-loss compensating electrical signal, and an output transducer (7) for transforming the signal from
the signal processor into a hearing-loss compensating
15 sound signal, as well as a power source, such as a battery (4), characterized in that an acoustical link in the form of a hose or tube piece (13) is provided between an orifice (14) at the external side of the part of the wall of the plug (1) facing
20 the interior of the ear canal and the residual volume (12) of the internal cavity (3) of the plug (1) and, together with said residual volume (12) in the cavity (3), forms an approximated acoustical circuit having a resonance frequency in the region of the first voice
25 sound formants of the user.

2. A hearing aid according to claim 1, characterized in that said resonance frequency is in the range between 50 and 1000 Hz.

3. A hearing aid according to claim 2, characterized in that said resonance frequency is
30 in the range between 200 and 800 Hz.

4. A hearing aid according to claim 3, characterized in that the cavity (3) in the plug (1) has a volume of 0.3 - 1.2 cm³, especially 0.6 cm³,
35 and that said hose or tube piece (13) has an internal diameter of 0.5 - 2.0 mm, especially 1 mm, and a length

of 3 - 20 mm, especially 7 mm.

5. A hearing aid according to any one of the preceding claims, characterized in that a through-going vent passage or vent is provided as well through the hearing aid plug 1 from the residual volume in the ear canal to the surroundings.

6. A hearing aid according to claim 5, characterized in that said hose or tube piece (13) forms part of said vent passage.

10 7. A hearing aid according to claim 6, characterized in that said vent passage comprises one or more pinholes (15) in a part of the hearing aid plug (1) facing the surroundings.

8. A method for the production and user-fitting of a hearing aid according to any one of the preceding claims, whereby a plug (1) for arrangement in the ear canal is manufactured with a substantially closed shell-like wall facing the interior of the ear canal and an outward faceplate (2) which together define a generally closed cavity (3) in which are arranged an input transducer (5), such as a microphone, for transforming external sound into an electrical signal, a signal processor (6) for processing the signal produced by the input transducer and producing a hearing-loss compensating electrical signal, and an output transducer (7) for transforming the signal from the signal processor into a hearing-loss compensating sound signal, as well as a power source, such as a battery (4), characterized in that an acoustical link in the form of a hose or tube piece (13) is provided between an orifice (14) at the external side of the part of the wall of the plug (1) facing the interior of the ear canal and the residual volume (12) of the internal cavity (3) of the plug, which hose or tube piece (13) is tuned so that together with said residual volume (12) in the cavity (3) it forms an

15
20
25
30
35

approximated acoustical circuit having a resonance frequency in the region of the first voice sound formants of the user.

9. A method according to claim 8, characterized in that said resonance frequency is in the range between 50 and 1000 Hz.

10. A method according to claim 9, characterized in that said resonance frequency is in the range between 200 and 800 Hz.

11. A method according to claim 8, characterized in that a hose or tube piece (13) having an internal diameter of 0.5 - 2.0 mm, especially 1 mm, and a length of 3 - 20 mm, especially 7 mm, is used for a cavity (3) in the plughousing (1) having a volume of 0.3 - 1.2 cm³, especially 0.6 cm³.

12. A method according to any one of claims 8 - 11, characterized in that said orifice (14) is formed in the shell of the hearing aid housing of a completed hearing aid, whereupon said hose or tube piece (13) is inserted into the cavity (3) of the hearing aid plug at an insertion length corresponding to the provision of said acoustical circuit.

13. A method according to any one of claims 8 - 12, characterized in that a measurement of tightness and/or response from the hearing aid arranged in position inside the ear canal is performed prior to providing said acoustical link.

14. A method according to claim 13, characterized in that a through-going vent passage or vent is provided through the hearing aid housing from said residual volume in the ear canal to the surroundings.

1/1

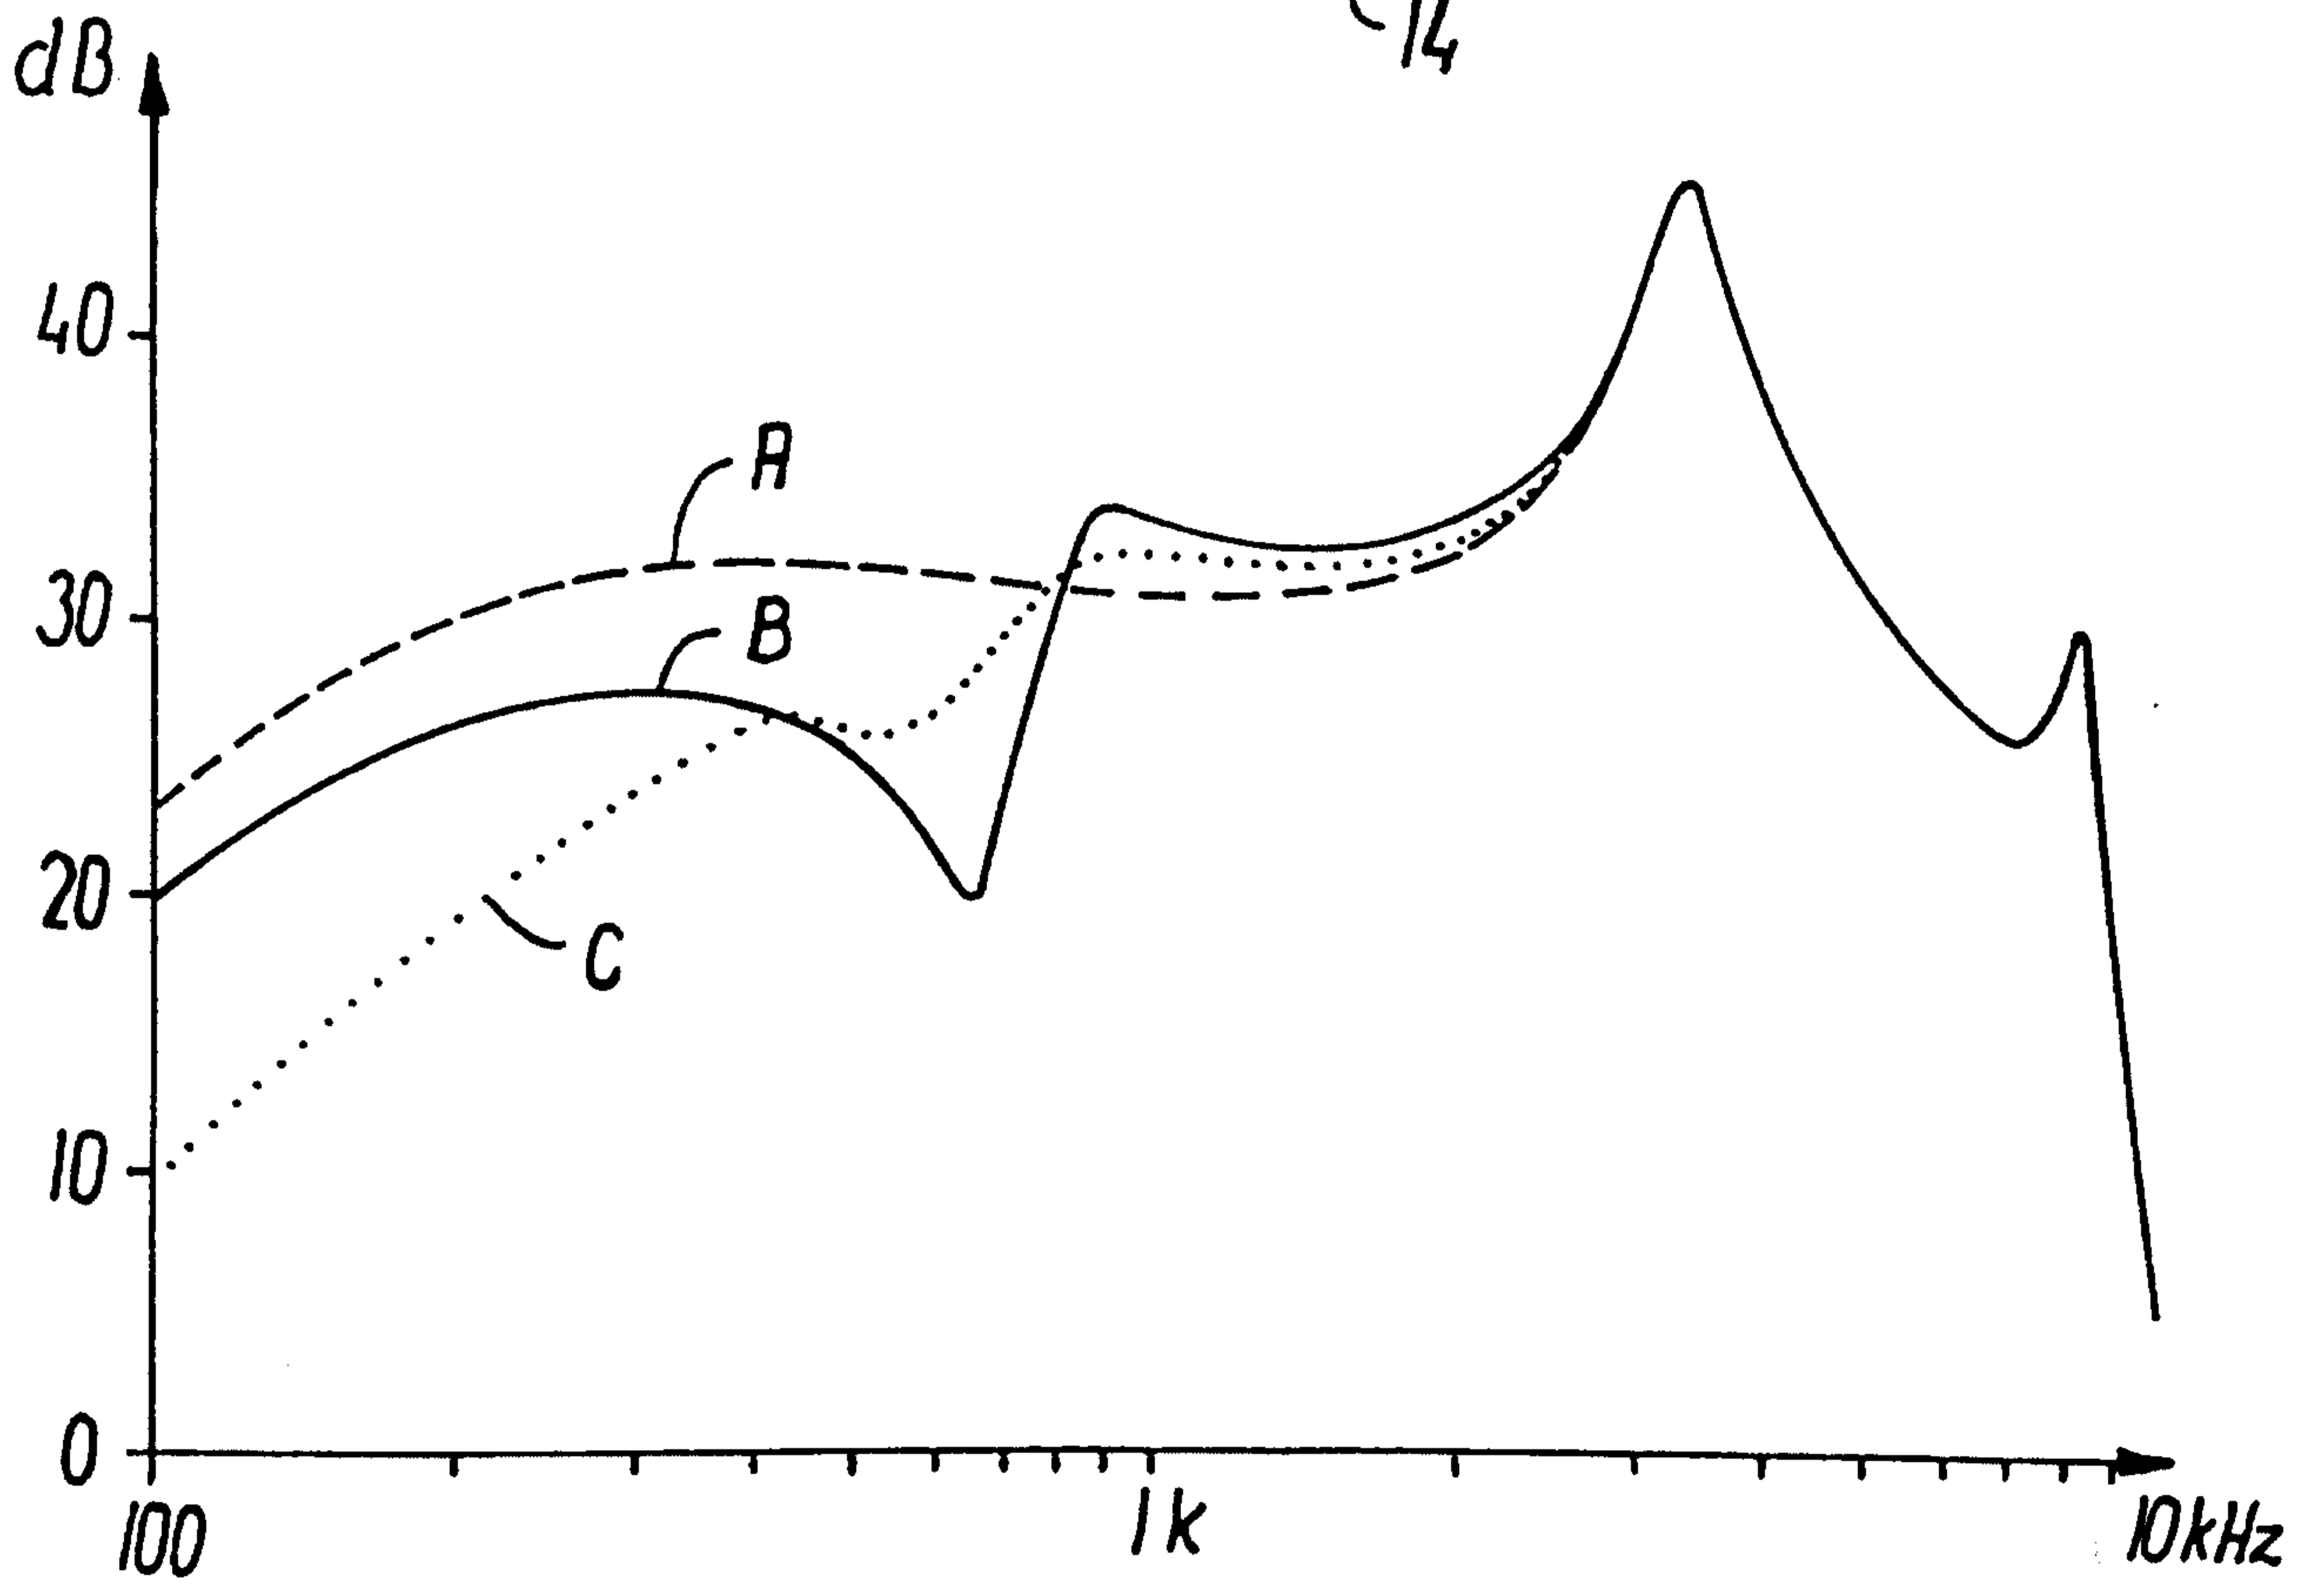
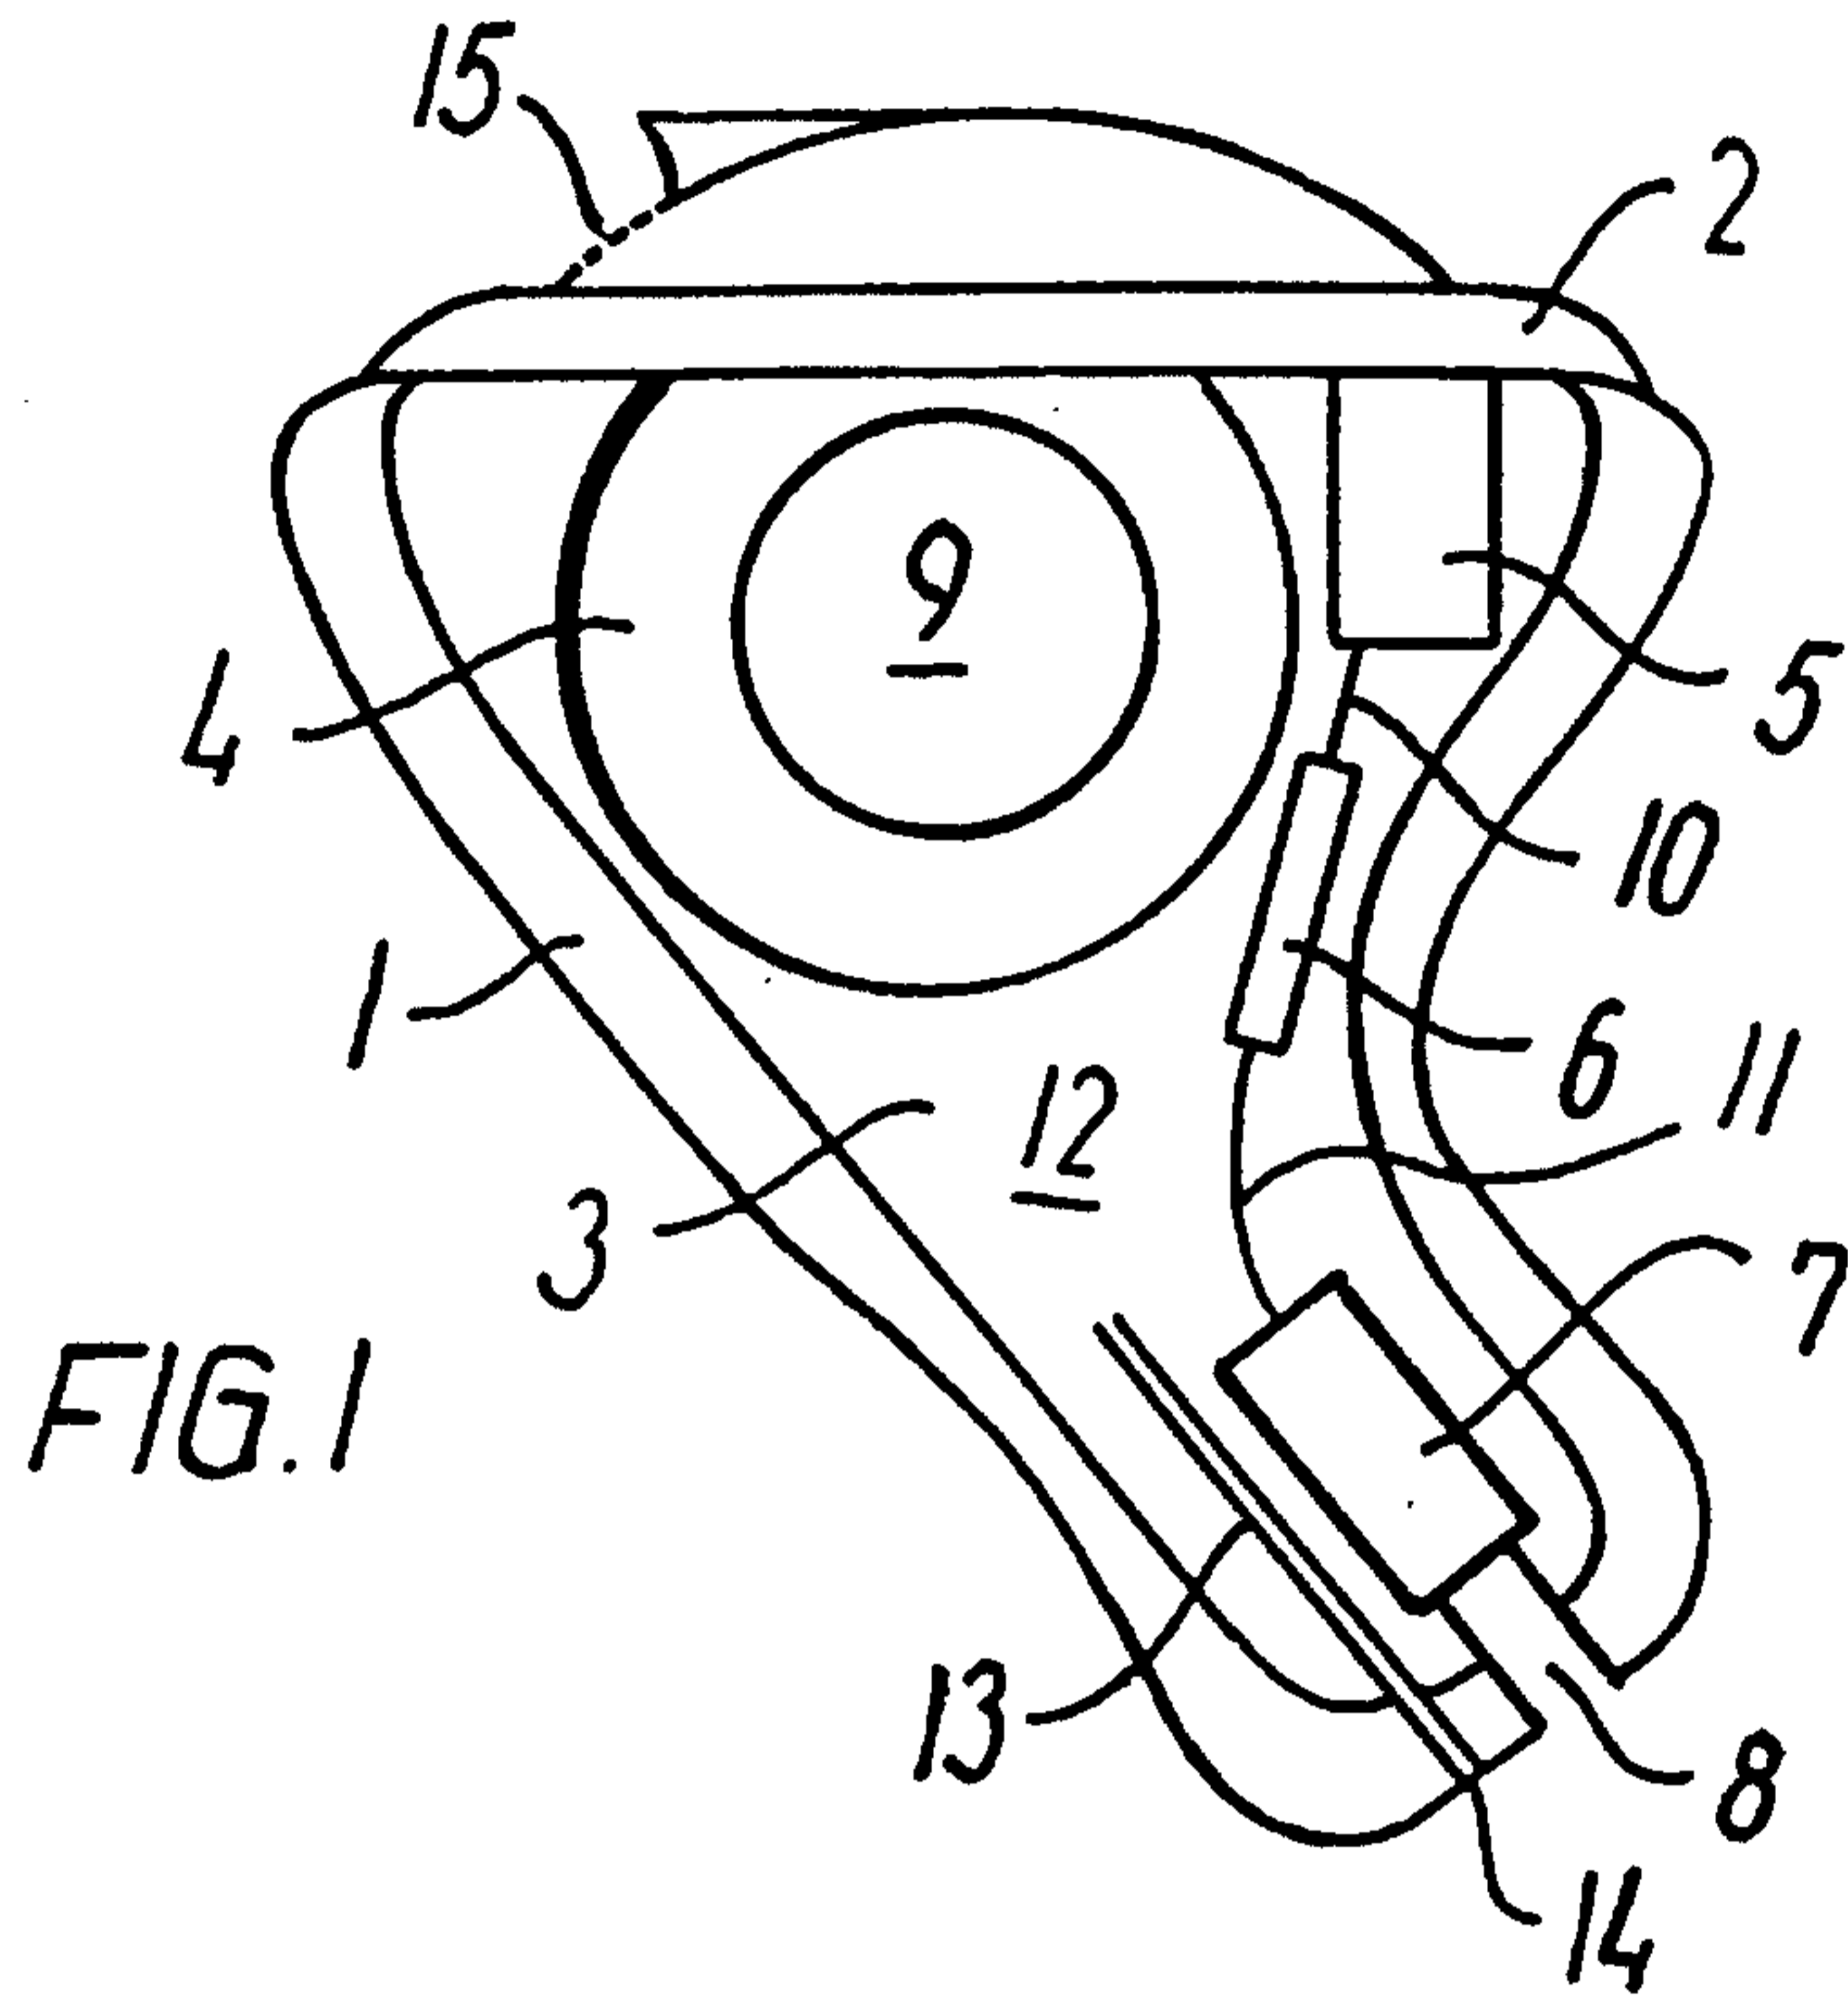


FIG. 2