

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
2 June 2005 (02.06.2005)

PCT

(10) International Publication Number
WO 2005/048845 A1

(51) International Patent Classification⁷: **A61B 6/06**

(74) Agent: **CHINA PATENT AGENT (H.K.) LTD.**; 22/F,
Great Eagle Centre, 23 Harbour Road, Wanchai, Hong
Kong (HK).

(21) International Application Number:
PCT/CN2003/000985

(22) International Filing Date:
20 November 2003 (20.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **GE
MEDICAL SYSTEMS GLOBAL TECHNOLOGY
COMPANY, LLC.** [US/US]; 3000 North GrandView
Boulevard-W-710, Waukesha, WI 53188 (US).

(84) Designated States (*regional*): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and


(75) Inventor/Applicant (*for US only*): **YANG, Zhao**
[CN/CN]; N0. 2 North Yong Chang Road, Beijing
Economic & Technological Development Area, Beijing
100176 (CN).

Published:

— with international search report

[Continued on next page]

(54) Title: COLLIMATOR AND RADIATION IRRADIATOR

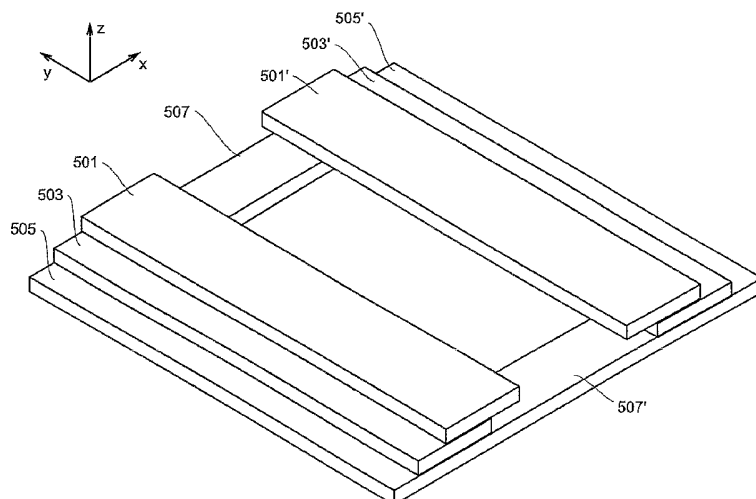

(57) Abstract: A collimator capable of being reduced in its external size without sacrificing an aperture is to be provided. To this end, the collimator comprises a pair of first plate members which defines a radiation passing aperture by a spacing between respective opposed end faces, a pair of second plate members which respectively overlap the first plate members at least partially so as to block any other radiation than the radiation passing through the aperture, a pair of third plate members which respectively overlap the second plate members at least partially so as to block any other radiation than the radiation passing through the aperture, an adjusting mechanism which adjusts the aperture by moving the pair of first plate members, and a follow-up mechanism which causes the pair of second plate members to move following the pair of first plate members with movement of the first plate members.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Collimator and Radiation Irradiator

BACKGROUND OF THE INVENTION

The present invention relates to a collimator and a
5 radiation irradiator. Particularly, the invention is
concerned with a collimator for a radiation, e.g., X-ray, and
a radiation irradiator provided with the collimator.

In a radiation irradiator there is used a collimator for
controlling the irradiation range of a radiation. The
10 collimator has an aperture which permits a radiation to pass
therethrough, and the radiation cannot pass through other
than the aperture. Thus, the irradiation range of the
radiation is controlled by the aperture. The degree of
opening of the aperture can be changed to adjust the
15 irradiation range of the radiation.

As shown in Fig. 10, the aperture-adjustable collimator
has a pair of movable plate members having a radiation
shielding property, i.e., blades 901 and 901'. The blades
901 and 901' are disposed so that respective end faces are
20 opposed to each other, and are movable in directions opposite
to each other in a plane parallel to their surfaces. For
widening the aperture, the pair of blades 901 and 901' are
moved away from each other, while for narrowing the aperture,
the both blades are moved to close to each other. Thus, the
25 aperture becomes maximum when the pair of blades are remotest
from each other, and becomes minimum when both blades are
closest to each other.

In a collimator having a large aperture adjusting range,
there are used blades of a large area. If the blade area is
30 large, an external form of the collimator comes to have a

large size corresponding to a maximum moving distance of blade outer edges, as shown in Fig. 11.

In a mammography apparatus which makes fluoroscopy of the breast with X-ray, a collimator assumes a position
5 confronting the face of a subject and so it is preferable that its external form be as small as possible. However, in the case of a mammography apparatus capable of making tomography, an increase in external form of the collimator has heretofore been unavoidable because a large aperture is needed.

10 SUMMARY OF THE INVENTION

Therefore, it is an object of the present invention to provide a collimator capable of being reduced in its external form without sacrificing an aperture, as well as a radiation irradiator provided with such a collimator.

15 (1) In one aspect of the present invention for achieving the above-mentioned object there is provided a collimator comprising a pair of first plate members having a shielding property against a radiation and movable in a direction parallel to surfaces thereof, the pair of first plate members
20 defining a radiation passing apertures by a spacing between respective opposed end faces, a pair of second plate members having a shielding property against a radiation and parallel to the pair of first plate members and movable in a direction parallel to surfaces thereof, the pair of second plate
25 members having end faces opposed to each other, the pair of second plate members overlapping the pair of first plate members at least partially so as to block any other radiation than the radiation passing through the aperture, a pair of
30 third plate members having a shielding property against a radiation and parallel to the pair of second plate members,

the pair of third plate members having respective end faces opposed to each other with a predetermined spacing, the pair of third plate members overlapping the pair of second plate members at least partially so as to block any other radiation than the radiation passing through the aperture, an adjusting mechanism which adjusts the aperture by moving the pair of first plate members, and a follow-up mechanism which causes the pair of second plate members to move following the pair of first plate members with movement of the first plate members.

(2) In another aspect of the present invention for achieving the above-mentioned object there is provided a radiation irradiator having a radiation source and a collimator for applying a radiation from the radiation source to an object through an aperture, the collimator comprising a pair of first plate members having a shielding property against a radiation and movable in a direction parallel to surfaces thereof, the pair of first plate members defining a radiation passing aperture by a spacing between respective opposed end faces, a pair of second plate members having a shielding property against a radiation and parallel to the pair of first plate members and movable in a direction parallel to surfaces thereof, the pair of second plate members having end faces opposed to each other, the pair of second plate members overlapping the pair of first plate members at least partially so as to block any other radiation than the radiation passing through the aperture, a pair of third plate members having a shielding property against a radiation and parallel to the pair of second plate members, the pair of third plate members having respective end faces

opposed to each other with a predetermined spacing, the pair of third plate members overlapping the pair of second plate members at least partially so as to block any other radiation than the radiation passing through the aperture, an adjusting
5 mechanism which adjusts the aperture by moving the pair of first plate members, and a follow-up mechanism which causes the pair of second plate members to move following the pair of first plate members with movement of the first plate members.

10 In the above aspects of the present invention, since movable blades are constituted by two sets of plate members so that corresponding ones overlap each other, it is possible to reduce the external form of the collimator without sacrificing the aperture.

15 For changing the aperture symmetrically with respect to the center of the collimator, it is preferable that the adjusting mechanism be able to move the pair of first plate members so as to be closed to and away from each other.

For permitting an appropriate follow-up motion of the
20 pair of second plate members with respect to the pair of first plate members, it is preferable that the follow-up mechanism comprise a rack provided in the first plate member, a gear provided in the second plate member rotatably and engaging with the rack, and a fixed rack provided in the moving
25 direction of the second plate member and engaging with the gear.

For the simplification of construction, it is preferable that the follow-up mechanism comprise an arm member mounted at an intermediate portion thereof to the second plate member
30 and rotatable about the mounting portion in a plane parallel

to the plate surface, a groove formed in the first plate member and with which one end of the arm member is engaged, the groove permitting movement of the end of the arm member in a direction perpendicular to the moving direction of the first plate member, and a groove formed in the third plate member and with which an opposite end of the arm member is engaged, the groove permitting movement of the opposite end of the arm member in a direction perpendicular to the moving direction of the second plate member.

For facilitating the adjustment of dose, it is preferable that the radiation be X-ray.

According to the present invention, it is possible to realize a collimator capable of being reduced in its external size without sacrificing the aperture, as well as a radiation irradiator provided with such a collimator.

Further objects and advantages of the present invention will be apparent from the following description of the preferred embodiments of the invention as illustrated in the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 illustrates a schematic construction of a radiation irradiator;

Fig. 2 illustrates the construction of a collimator;

Fig. 3 illustrates the construction of the collimator;

Fig. 4 illustrates the construction of the collimator;

Fig. 5 illustrates a blade drive mechanism;

Fig. 6 illustrates a partial construction of a blade;

Fig. 7 illustrates the construction of a follow-up mechanism;

Fig. 8 illustrates the construction of a follow-up

mechanism;

Fig. 9 illustrates a fully open condition of an aperture;

Fig. 10 illustrates a conventional collimator; and

Fig. 11 illustrates a fully open condition of an aperture
5 in the conventional collimator.

DETAILED DESCRIPTION OF THE INVENTION

Embodiments of the present invention will be described
in detail hereinunder with reference to the drawings. Fig.
1 illustrates a schematic construction of a radiation
10 irradiator according to an embodiment of the present
invention. The construction of this radiation irradiator
shows an example of how to carry out the present invention.

As shown in the same figure, the radiation irradiator has
a radiation source 1. As the radiation source 1 there is used
15 an X-ray tube for example. The radiation source 1 is not
limited to the X-ray tube, but may be any other radiation
source capable of emitting a suitable radiation such as β
ray or γ ray. The radiation source 1 is an example of the
radiation source used in the present invention.

20 A radiation 3 emitted from the radiation source 1 passes
through an aperture of a collimator 5 which embodies the
present invention and is applied to an object 7. The object
7 is an object for fluoroscopy using the radiation 3 or an
object for therapy using the radiation 3. In fluoroscopy,
25 the radiation which has passed through the object 7 is
received by a suitable light receiving means, e.g., a
photosensitive plate.

Fig. 2 schematically illustrates the collimator 5, which
embodies the present invention. Through the constitution of
30 this, one embodiment of the present invention is described.

As shown in the same figure, the collimator 5 has three pairs of blades 501, 501', 503, 503', and 505, 505'. Each blade is constituted by a quadrangular plate member.

As the material of the plate members there is used a material of a high radiation absorbance such as, for example, lead (Pb) or tungsten (W), whereby each blade comes to have a radiation shielding property.

The blades 501 and 501' are an example of the pair of first plate members in the present invention. The blades 503 and 503' are an example of the pair of second plate members in the present invention. The blades 505 and 505' are an example of the pair of third plate members in the present invention.

In Fig. 2, three directions perpendicular to one another assumed to be x, y, and z. The x direction is a direction of one side of each blade, and the direction will hereinafter be referred to also as the width direction. The y direction is a direction of another side of each blade, and the direction will hereinafter be referred to also as the length direction. The z direction is the thickness direction of each blade. The radiation source 1 lies in the z direction.

The three pairs of blades 501, 501', 503, 503', and 505, 505' overlap one another in the thickness direction. The blades 501 and 501' are upper blades, the blades 503 and 503' are intermediate blades, and the blades 505 and 505' are lower blades.

The lower blades 505 and 505' are supported by a pair of cross beams 507 and 507'. The cross beams 507 and 507' are also constituted by a material of a high radiation absorbance. The cross beams 507 and 507' constitute a picture frame-like frame together with the blades 505 and 505'.

The upper blades 501 and 501' are made movable in the x direction by means of a drive mechanism which will be described later. The blades 501 and 501' are movable so as to be close to and away from each other.

5 The intermediate blades 503 and 503' are made movable following the upper blades 501 and 501' by means of a follow-up mechanism to be described later. The movement of the blades 503 and 503' is done while maintaining their overlap with the blades 501, 501' and the blades 505, 505' constantly.

10 The size of the aperture through which the radiation passes is determined in the x direction by the spacing between opposed end faces of the blades 501 and 501' and in the y direction by the spacing between opposed end faces of the cross beams 507 and 507'.

15 The aperture size in the x direction varies with movement of the blades 501 and 501', while the aperture size in the y direction is fixed. That is, the collimator 5 has an aperture whose size in the x direction can be changed.

A fully closed state of the aperture is shown in Fig. 3 and a fully open state thereof is shown in Fig. 4. Throughout the whole process of aperture changes, the blades 503 and 503' are kept overlapped with the blades 501, 501' and the blades 505, 505'. Consequently, the passage of any other radiation than the radiation passing through the aperture is blocked.

25 Fig. 5 schematically illustrates the construction of a drive mechanism for the blades 501 and 501'. This drive mechanism is an example of the adjusting mechanism in the present invention. As shown in the same figure, the blades 501 and 501' have arms 601 and 601', respectively, which extend
30 in the y direction. End portions of the arms 601 and 601'

are in engagement with shafts 603 and 603', respectively.

The shafts 603 and 603' are parallel shafts extending in the x direction. Both shafts are spaced a predetermined distance in the z direction. The arm 601' is bent to equalize
5 the height in the z direction of the blade 501' to that of the blade 501.

The shafts 603 and 603' are threaded throughout the overall lengths thereof. The arms 601 and 601' are internally threaded at their portions engaged with the shafts
10 603 and 603'. Gears 605 and 605' are provided coaxially at one ends of the shafts 603 and 603' respectively. The gears 605 and 605' are in mesh with each other at a gear ratio of 1:1.

The gear 605 is rotated by means of a motor 607. The
15 motor 607, which is a reversible motor, is controlled by a control means (not shown). The control means controls both rotational direction and rotational quantity of the motor 607.

Since the gears 605 and 605' are in mesh with each other,
20 the shafts 603 and 603' rotate in directions opposite to each other. Consequently, the arms 601 and 601' engaged with the shafts 603 and 603' move reverse to each other in the x direction. That is, as the motor 607 rotates in one direction, both arms move to be close to each other, while
25 as the motor 607 rotates in the opposite direction, both arms move away from each other. Their movement quantity is determined by the amount of rotation of the motor 607. By such movements of the arms 601 and 601' there is adjusted the spacing between the blades 501 and 501', i.e., the degree of
30 opening of the aperture. In this way the degree of opening

of the aperture can be changed symmetrically with respect to the center of the collimator.

There is provided a follow-up mechanism for allowing the blade 503 and 503' to follow such movements of the blades 501 and 501'. The follow-up mechanism is constituted so as to span the three pairs of blades and the cross beams. As a part of the follow-up mechanism, the blade 503 is constituted as shown in Fig. 6, in which (a) is a plan view and (b) is a sectional view taken on line A-A in (a).

As shown in the same figure, the blade 503 has a gear 701. The gear 701 is mounted rotatably on a shaft 703 which is provided in the blade 503. To be more specific, the shaft 703 is disposed within a cutout portion 705 formed in one end portion in the y direction of the blade 503. The cutout portion 705 is formed in the x direction and the shaft 703 is mounted so as to cross the cutout portion 705 in the y direction. The cutout portion 705 is formed on one side in the x direction of the blade 503. The side where the cutout portion 705 is formed confronts the blade 503' which makes a pair with the blade 503.

The blade 503 has a similar gear also at its opposite end portion in the y direction. That is, the blade 503 has gears at both ends thereof in the y direction. The blade 503' is also of the same construction, provided the blades 503 and 503' are in a relation of specular symmetry.

Fig. 7 illustrates the construction of the follow-up mechanism schematically. This follow-up mechanism is an example of the follow-up mechanism defined in the present invention. As shown in the same figure, the follow-up mechanism is composed of the gear 701 provided in the blade

503, a rack 707 provided in the blade 501 and meshing with the gear 701, and a rack 709 provided in both blade 505 and cross beam 507 and meshing with the gear 701. The racks 707 and 709 extend in the x direction in parallel with each other.

5 The gear 701 is an example of the gear defined in the present invention. The rack 707 is an example of the rack defined in the present invention. The rack 709 is an example of the fixed rack defined in the present invention.

As the blade 501 is moved in the x direction, the gear meshing with the rack 707 moves in the same direction while rotating on the rack 709. The blade 503 also moves together with the gear 701. As a result, the blade 503 moves following the blade 501. The distance of the movement of the blade 503 is a half of that of the blade 501.

15 Such a follow-up mechanism is provided at both end portions of the blades 501, 503, and 505. This is also the case with the mating blades 501', 503', and 505'. With the follow-up mechanism, the follow-up motion of the blades 503 and 503' for the blades 501 and 501' can be done appropriately. Consequently, it becomes possible to make such aperture adjustment as shown in Figs. 2 to 4.

Fig. 8 schematically shows another constructional example of a follow-up mechanism. This follow-up mechanism is an example of the follow-up mechanism defined in the present invention. In the same figure, (a) is a plan view and (b) is a sectional view taken on line B-B in (a). As shown in the same figure, the blade 503 is provided with a shaft 803 at its center. The shaft 803 extends through the blade 503 perpendicularly to the plate surface. The shaft 803 is rotatable.

Arms 801 and 805 are fixed respectively to both ends of the shaft 803. The arms 801 and 805 are perpendicular to the shaft 803 and extend in directions opposite to each other. The shaft 803 and the arms 801, 805 form a crank. The
5 extending directions of the arms 801 and 805 in the crank are not coincident with the x direction. The arms 801 and 805 are an example of the arm member defined in the present invention.

The arms 801 and 805 are formed with lugs 811 and 851 at
10 respective free ends. The lugs 811 and 851 extend in the z direction so as to face reverse to each other. The lug 811 is loosely fitted in a groove 511 formed in the blade 501. The groove 511 is positioned on the blade 503 side of the blade 501 and extends in the y direction. The lug 851 is loosely
15 fitted in a groove 551 formed in the blade 505. The groove 551 is positioned on the blade 503 side of the blade 505 and extends in the y direction. The grooves 511 and 551 are an example of the grooves defined in the present invention.

In this construction, when the blade 501 is moved in the
20 x direction, the lugs 811 and 851 move in directions opposite to each other along the grooves 511 and 551, with the result that the crank rotates about the shaft 803.

The position of the blade 505 is fixed, so with the rotation of the crank, the shaft 803 moves in the x direction
25 following the blade 501 and the blade 503 moves in the same direction together with the shaft 803. By setting the lengths of the arms 801 and 805 equal to each other, the distance of the movement of the blade 503 becomes half of that of the blade 501. Thus, this follow-up mechanism becomes
30 simple in construction.

Such a follow-up mechanism is provided also on the side of the mating blades 501', 503', and 505'. As a result, it becomes possible to make such aperture adjustment as shown in Figs. 2 to 4.

5 In the fully open condition of the aperture shown in Fig. 4, corresponding ones in the three pairs of blades 501, 501', 503, 503', 505, and 505' overlap each other completely. Fig. 9 shows this state in terms of a sectional view. As shown in the same figure, the movable blades 501, 501', 503, and
10 503' overlap the fixed blades 505 and 505' completely. In this state, outer edges of the movable blades are in alignment with outer edges of the fixed blades, not protruding therefrom. Consequently, an external form of the collimator becomes constant irrespective of the degree of opening of the
15 aperture.

Therefore, if the maximum degree of opening of the aperture is set equal to that in the prior art shown in Fig. 11, it is possible to reduce the external form of the collimator to about three fourths. Alternatively, if the
20 external form of the collimator is made about the same as in the prior art, it is possible to enlarge the maximum value of the aperture to approximately $4/3$ time.

Many widely different embodiments of the invention may be configured without departing from the spirit and the scope
25 of the present invention. It should be understood that the present invention is not limited to the specific embodiments described in the specification, except as defined in the appended claims.

CLAIMS

1. A collimator comprising:

5 a pair of first plate members having a shielding property against a radiation and movable in a direction parallel to surfaces thereof, the pair of first plate members defining a radiation passing aperture by a spacing between respective opposed end faces;

10 a pair of second plate members having a shielding property against a radiation and parallel to the pair of first plate members and movable in a direction parallel to surfaces thereof, the pair of second plate members having end faces opposed to each other in the shielding property, the pair of second plate members overlapping the pair of first plate
15 members at least partially so as to block any other radiation than the radiation passing through the aperture;

a pair of third plate members having a shielding property against a radiation and parallel to the pair of second plate members, the pair of third plate members having respective
20 end faces opposed to each other with a predetermined spacing, the pair of third plate members overlapping the pair of second plate members at least partially so as to block any other radiation than the radiation passing through the aperture;

25 an adjusting mechanism which adjusts the aperture by moving the pair of first plate members; and

a follow-up mechanism which causes the pair of second plate members to move following the pair of first plate members with movement of the first plate members.

30 2. A collimator according to claim 1, wherein the adjusting mechanism can move the pair of first plate members

so as to be close to and away from each other.

3. A collimator according to claim 2, wherein the follow-up mechanism comprises:

a rack provided in the first plate member;

5 a gear provided in the second plate member rotatably and engaging with the rack; and

a fixed rack provided in the moving direction of the second plate member and engaging with the gear.

10 4. A collimator according to claim 1, wherein the follow-up mechanism comprises:

an arm member mounted at an intermediate portion thereof to the second plate member and rotatable about the mounting portion in a plane parallel to the plate surface;

15 a groove formed in the first plate member and with which one end of the arm member is engaged, the groove permitting movement of the one end of the arm member in a direction perpendicular to the moving direction of the first plate member; and

20 a groove formed in the third plate member and with which an opposite end of the arm member is engaged, the groove permitting movement of the opposite end of the arm member in a direction perpendicular to the moving direction of the second plate member.

25 5. A collimator according to claim 1, wherein the radiation is X-ray.

6. A radiation irradiator having a radiation source and a collimator for applying a radiation from the radiation source to an object through an aperture, the collimator comprising:

30 a pair of first plate members having a shielding property

against a radiation and movable in a direction parallel to surfaces thereof, the pair of first plate members defining a radiation passing aperture by a spacing between respective opposed end faces;

5 a pair of second plate members having a shielding property against a radiation, parallel to the pair of first plate members, and movable in a direction parallel to surfaces thereof, the pair of second plate members having end faces opposed to each other, the pair of second plate members
10 overlapping the pair of first plate members at least partially so as to block any other radiation than the radiation passing through the aperture;

a pair of third plate members having a shielding property against a radiation and parallel to the pair of second plate
15 members, the pair of third plate members having respective end faces opposed to each other with a predetermined spacing, the pair of third plate members overlapping the pair of second plate members at least partially so as to block any other radiation than the radiation passing through the aperture;

20 an adjusting mechanism which adjusts the aperture by moving the pair of first plate members; and

a follow-up mechanism which causes the pair of second plate members to move following the pair of first plate members with movement of the first plate members.

25 7. A radiation irradiator according to claim 6, wherein the adjusting mechanism can move the pair of first plate members so as to be close to and away from each other.

8. A radiation irradiator according to claim 6, wherein the follow-up mechanism comprises:

30 a rack provided in the first plate member;

a gear provided in the second plate member rotatably and engaging with the rack; and

a fixed rack provided in the moving direction of the second plate member and engaging with the gear.

5 9. A radiation irradiator according to claim 6, wherein the follow-up mechanism comprises:

an arm member mounted at an intermediate portion thereof to the second plate member and rotatable about the mounting portion in a plane parallel to the plate surface;

10 a groove formed in the first plate member and with which one end of the arm member is engaged, the groove permitting movement of the one end of the arm member in a direction perpendicular to the moving direction of the first plate member; and

15 a groove formed in the third plate member and with which an opposite end of the arm member is engaged, the groove permitting movement of the opposite end of the arm member in a direction perpendicular to the moving direction of the second plate member.

20 10. A radiation irradiator according to claim 6, wherein the radiation is X-ray.

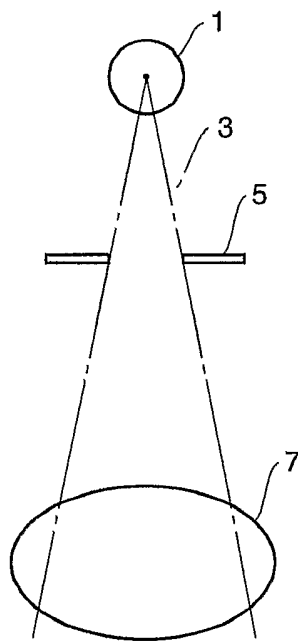


Fig. 1

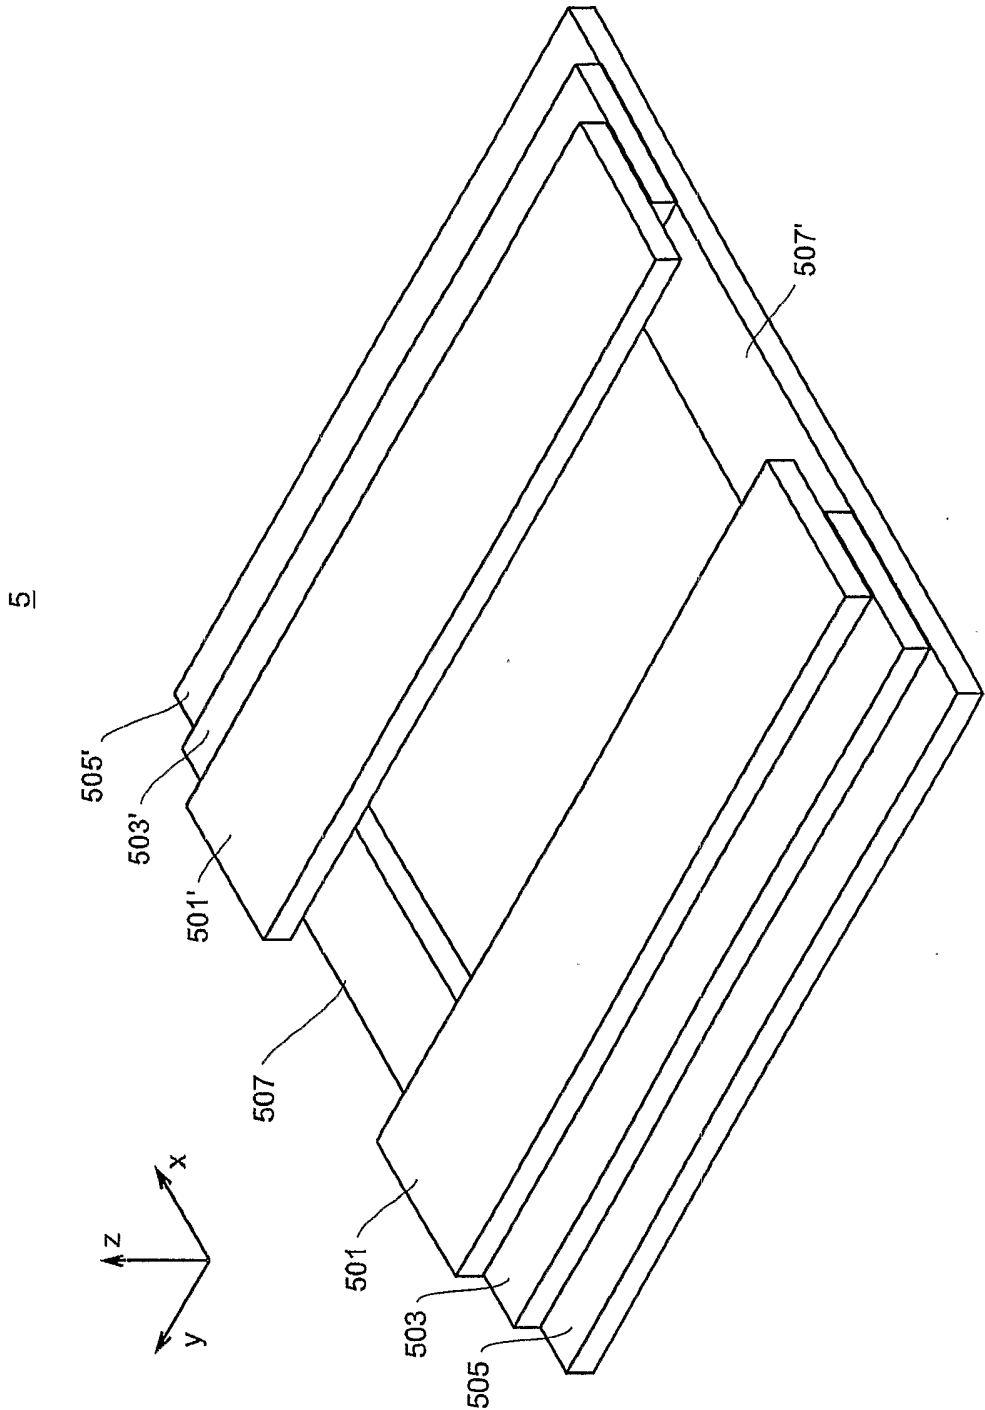


Fig. 2

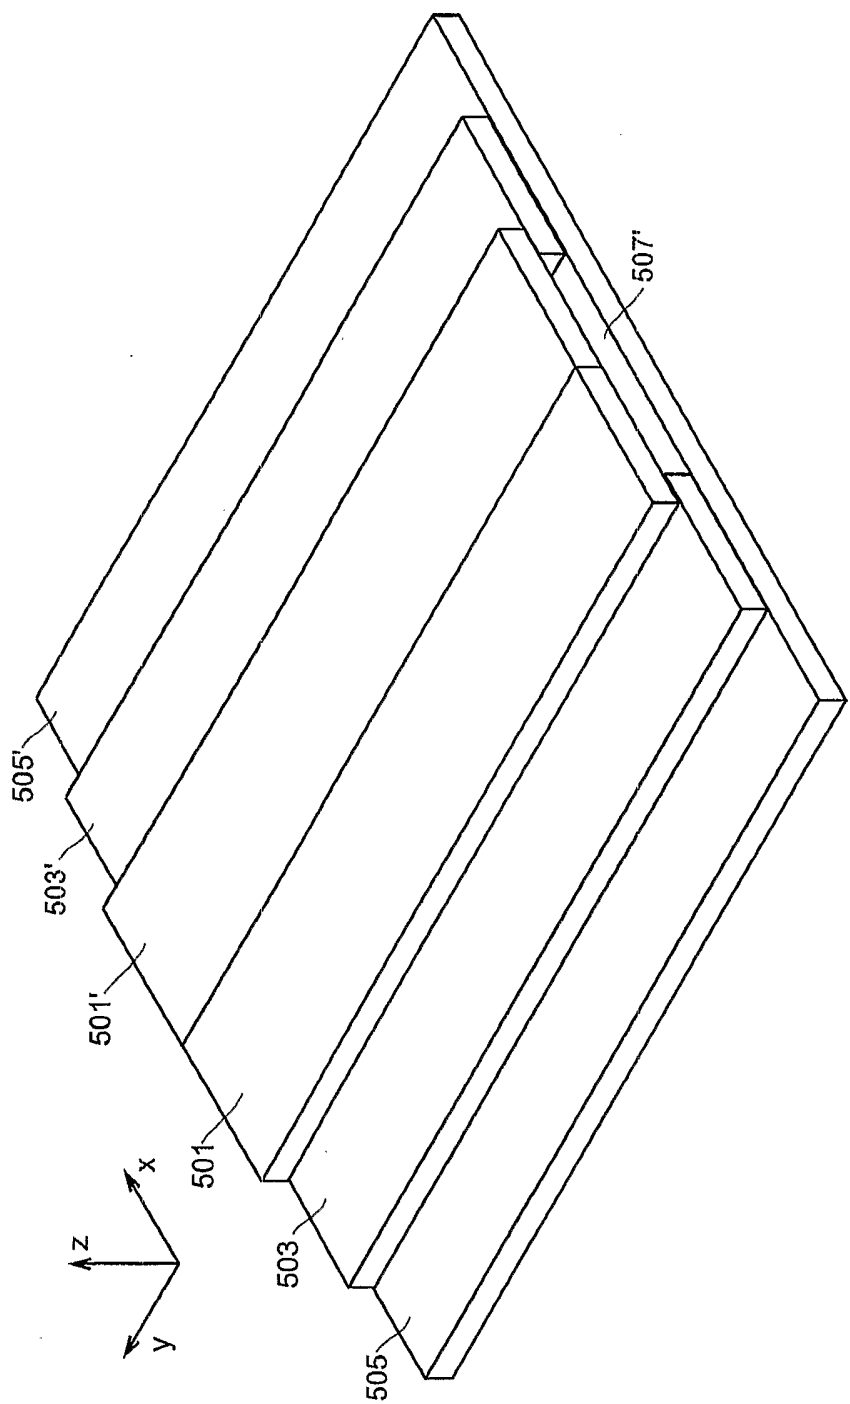


Fig. 3

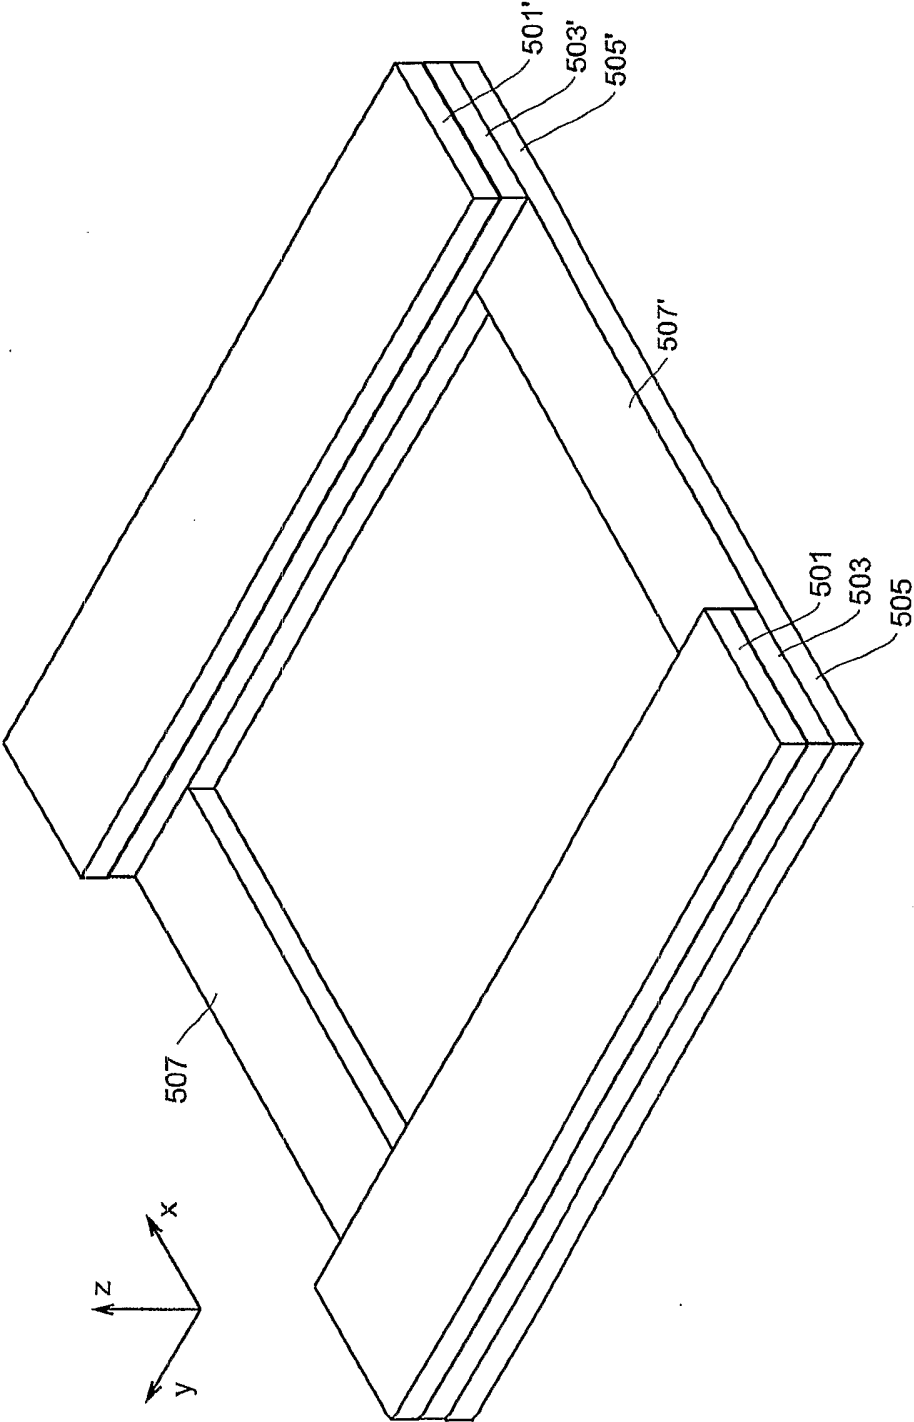


Fig. 4

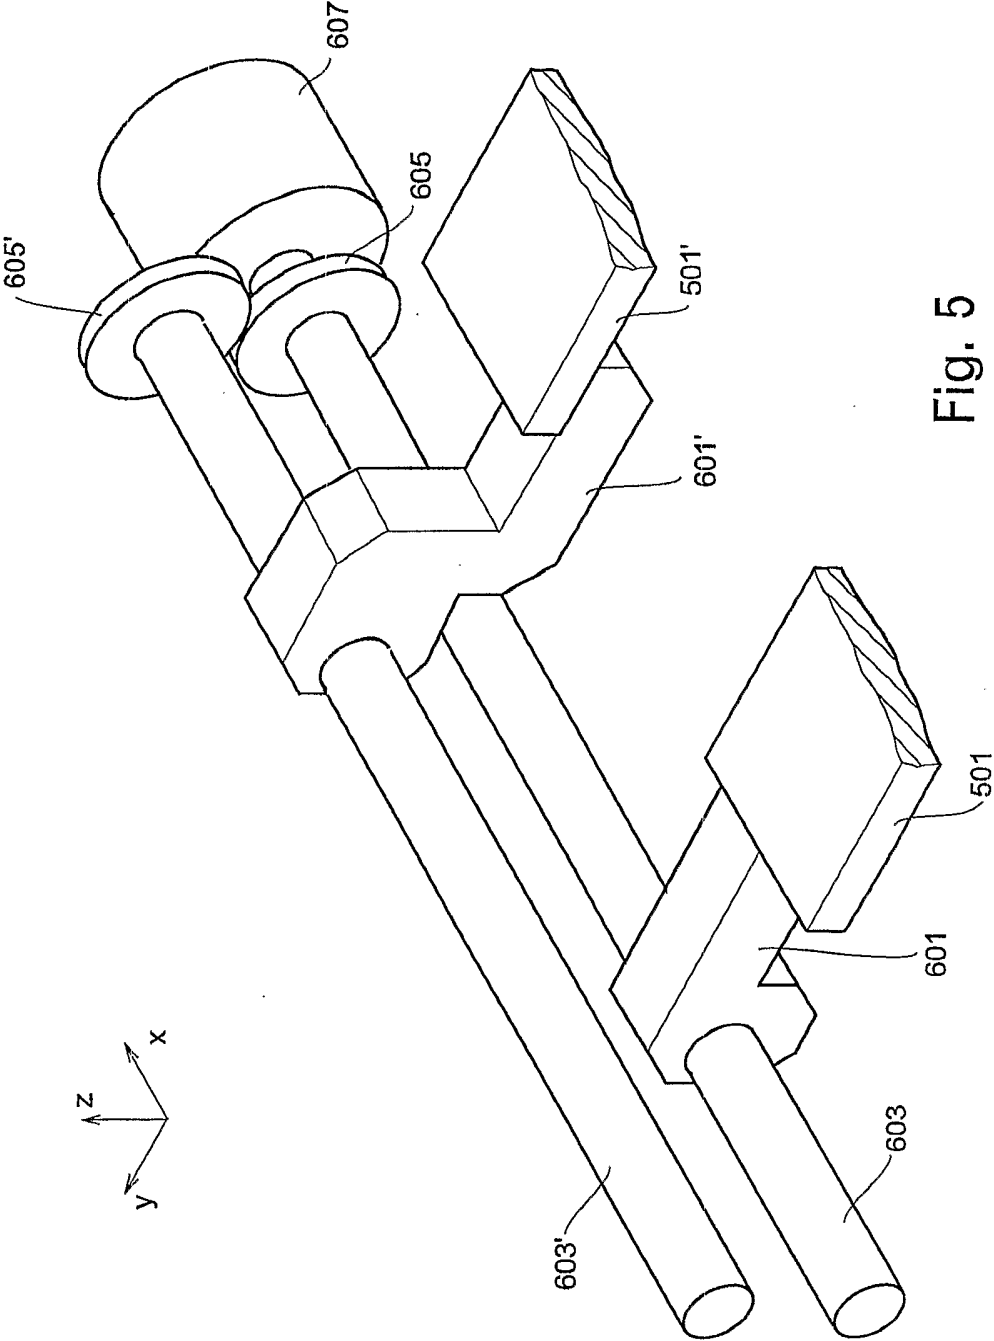


Fig. 5

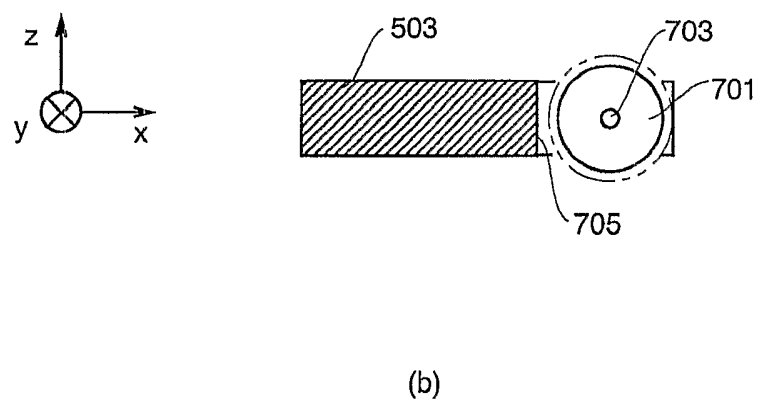
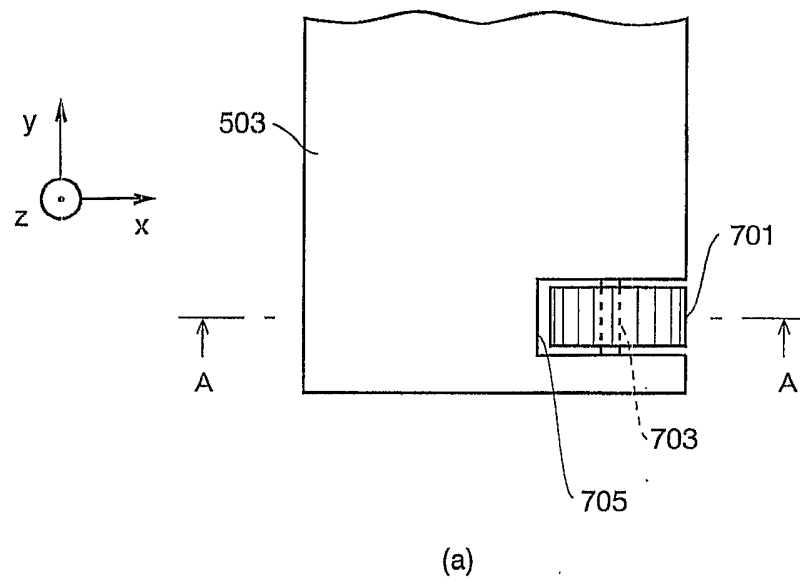


Fig. 6

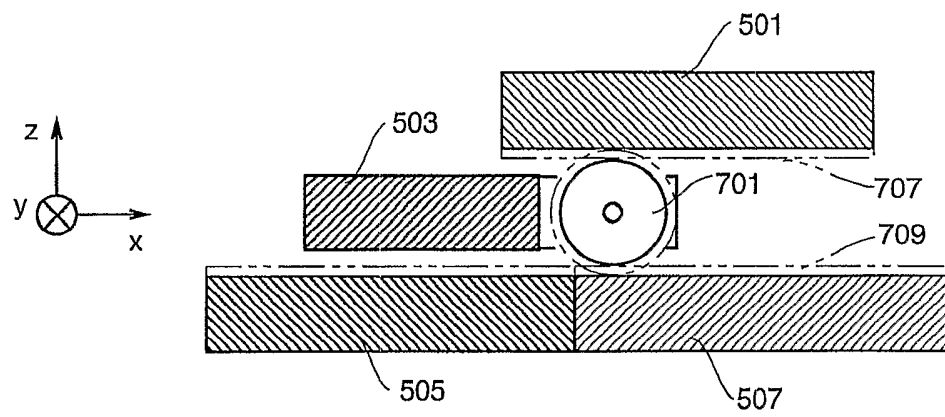


Fig. 7

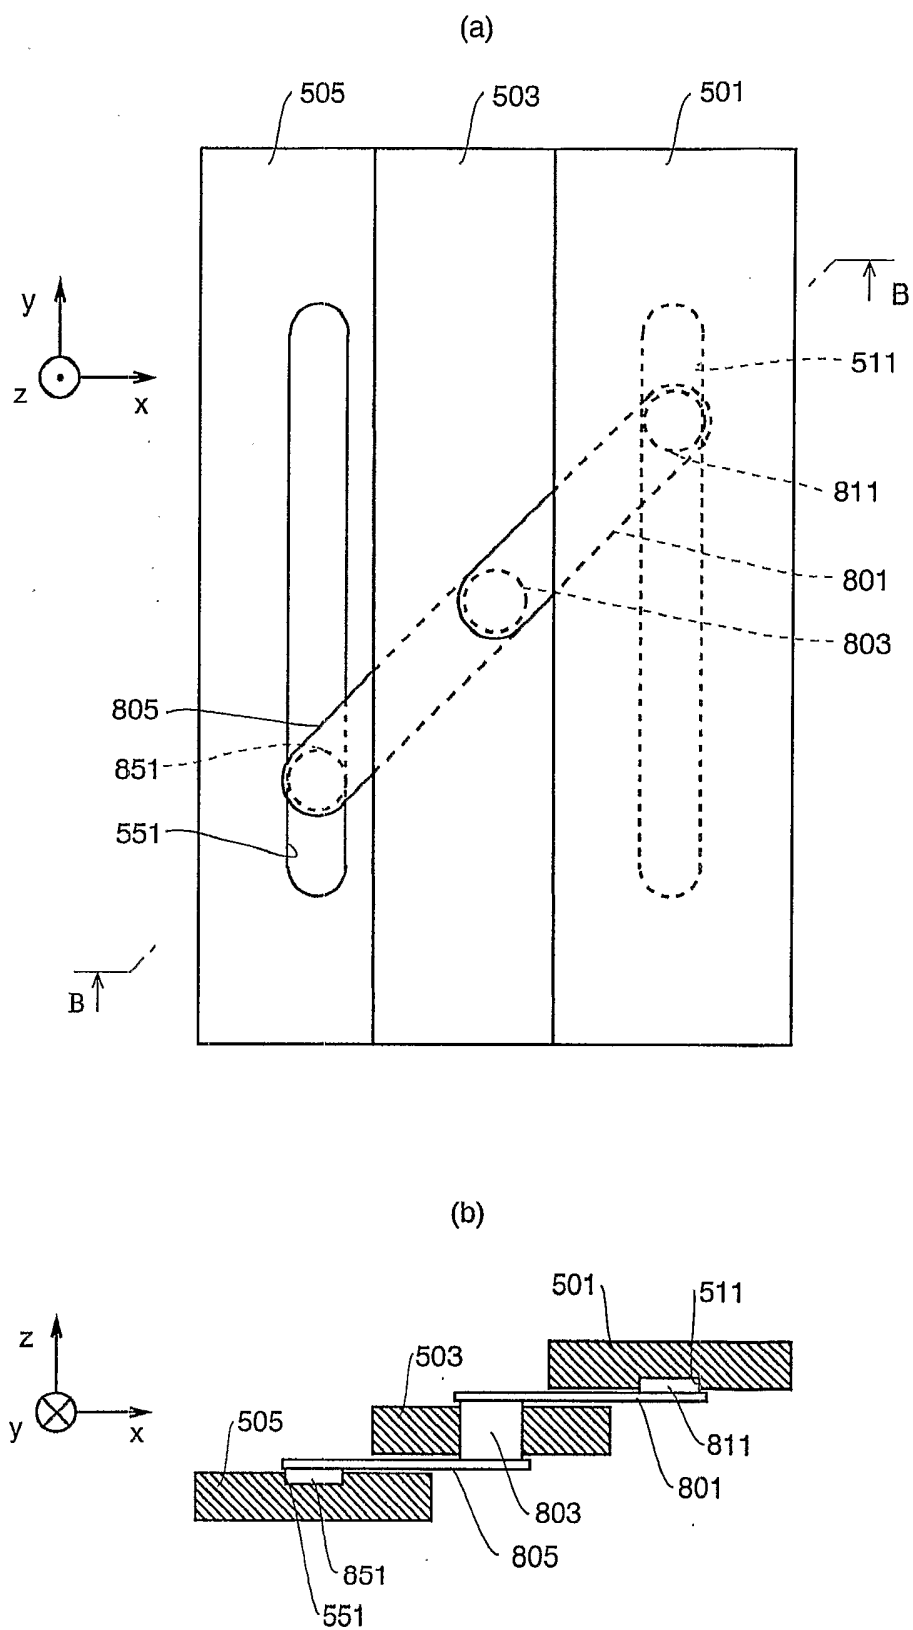


Fig. 8

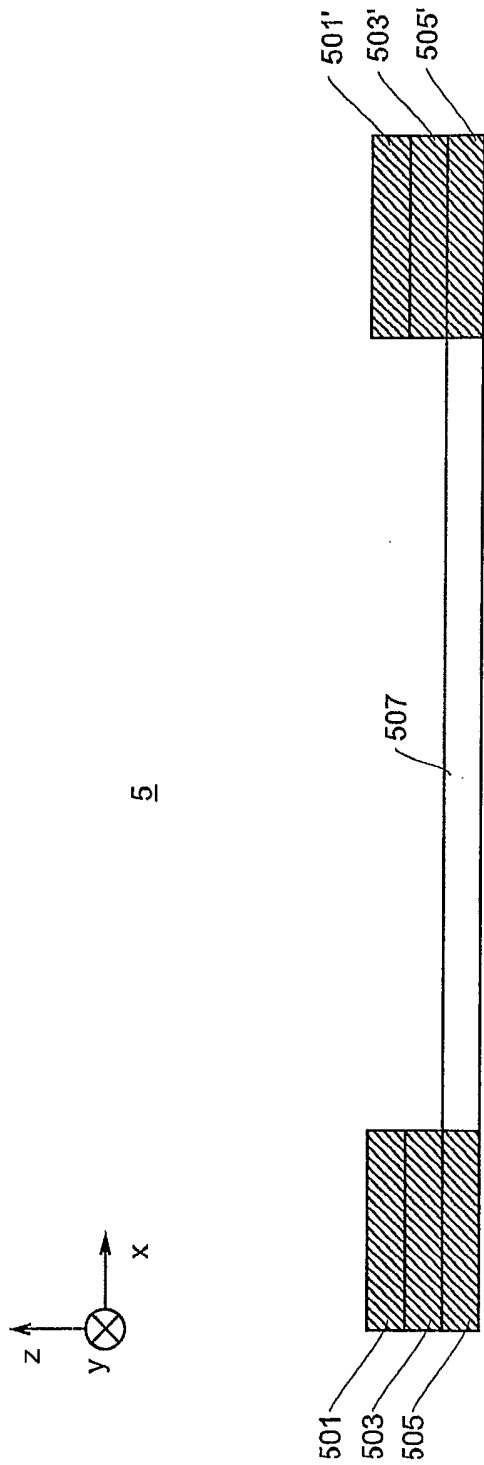


Fig. 9

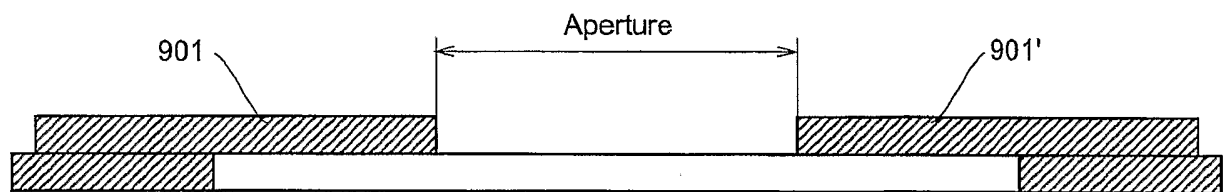


Fig. 10

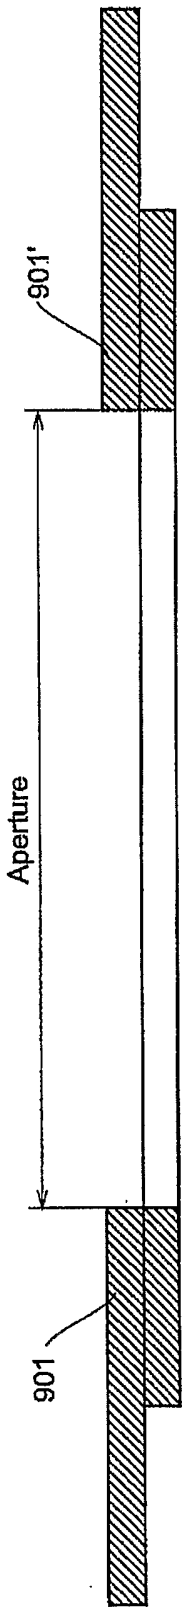


Fig. 11

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CN03/00985

A. CLASSIFICATION OF SUBJECT MATTER

IPC⁷ A61B6/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC⁷ A61B6/06 A61B6/00 A61N5/10 G21K1/00 G21K1/02 G21K1/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Chinese Patent Document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC, PAJ: collimator

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN, Y, 2514851 (Zheng Xiaoran) 09. OCT. 2002 (09.10.2002), the whole document	1、 6
A	US, A1,2002/0057761 (Mats Danielsson) 16. MAY. 2002 (16.05.2002), the whole document	1、 6
A	US, B1, 6330300 (Siemens,Inc) 11.DEC.2001(11.12.2001) , the whole document	1、 6
A	US, A, 4419585 (Massachusetts General Hospital) 06.DEC.1983 (06. 12.1983) , the whole document	1、 6
A	WO, A1, 0154137 (MAMEA IMAGING AB) 26.JUL.2001(26.07.2001), the whole document	1、 6
A	US, A, 6108400 (Siemens, Inc) 22.AUG.2000 (22.08.2000) , the whole document	1、 6
A	US, A, 6052430 (Siemens, Inc) 18.APR. 2000 (18.04.2000) , the whole document	1、 6

☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim (S) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
11.JUN.2004 (11.06.2004)

Date of mailing of the international search report

01 · JUL 2004 (01 · 07 · 2004)

Name and mailing address of the ISA/CN
6 Xitucheng Rd., Jimen Bridge, Haidian District,
100088 Beijing, China
Facsimile No. 86-10-62019451

Authorized officer

ZHANG

Telephone No. 86-10-62085846



INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CN03/00985

Patent document cited in search report	Publication date	Patent family Members	Publication Date
CN, Y, 2514851	09.10.2002	NONE	
US, A1,2002/0057761	16.05.2002	WO, A, 0060610	12.10.2002
		AU ,A,4161300	23.10.2000
		EP ,A, 1173856	23.01.2002
		US, B, 6504904	07.01.2003
US, B1, 6330300	11.12.2001	DE, A, 10141068	23.05.2002
		JP, A ,2002153567	28.05.2002
		GB ,A, 2370747	03.07.2002
US, A, 4419585	06. 12.1983	NONE	
WO, A1, 0154137	26.07.2001	SE, A, 0000228	25.07.2001
		AU, A,2901701	31.07.2001
		EP, A, 1258011	20.11.2002
		US, A ,2003012341	16.01.2003
US, A, 6108400	22.08.2000	EP ,A, 0984272	08.03.2000
		JP, A, 2000126318	09.05.2000
		US, A, 6097787	01.08.2000
		US, A, 6167114	26.12.2000
US, A, 6052430	18.04.2000	EP, A, 0905714	31.03.1999
		JP, A, 11151311	08.06.1999