

COMMONWEALTH OF AUSTRALIA

Patents Act 1952-1962

DECLARATION IN SUPPORT OF A CONVENTION OR NON-CONVENTION
APPLICATION FOR A PATENT OR PATENT OF ADDITION

INSTRUCTIONS

- (a) Insert No. if available.
(b) Insert full name(s) of applicant(s).

- (c) Insert title of invention.

- (d) Insert full name(s) of declarant(s) who must be PERSON or PERSONS, NOT a corporate body. (See head note).

- (e) Insert address(es) of declarant(s).

- (f) Delete entirely if applicant is corporate body.

- (g) Delete entirely if applicant is person or persons.

- (h) Delete entirely if Convention priority NOT claimed.

- (i) Insert country in which first basic application was filed.

- (j) Insert date of first basic application.

- (k) Insert full name(s) of basic applicant(s).

- (l) Delete entirely if applicant(s) NOT Inventor(s).

- (m) Insert full name(s) of actual Inventor(s) if applicant(s) NOT Inventor(s).

- (n) Insert address(es) of actual Inventor(s) if applicant(s) NOT Inventor(s).

- (o) Recite manner in which applicant(s) derive(s) title from actual inventor(s) if applicant(s) NOT Inventor(s).

- (p) Delete entirely if Convention priority NOT claimed.

- (q) Recite manner in which applicant(s) derive(s) title from basic applicant(s) if applicant(s) NOT basic applicant(s).

- (r) Signature(s) of declarant(s).
(N.B.—No seal or stamp impression to be applied).

In support of the application No. (a) PCT/US87/00155 (USSN 831,706)

made by (b) UNITED STATES GYPSUM COMPANY

for a patent/patent of addition for an invention entitled (c) CEMENT BOARD HAVING REINFORCED EDGES

I, (d) ARTHUR GAYNOR LEISTEN

of (e) UNITED STATES GYPSUM COMPANY

101 SOUTH WACKER DRIVE

CHICAGO, ILLINOIS 60606, U.S.A.

do solemnly and sincerely declare as follows:—

1. (f) I am/We are the applicant(s) for the patent/patent of addition.

1. (g) I am authorized by the abovementioned applicant for the patent/patent of addition to make this declaration on its behalf.

2. The basic application(s) as defined by Section 141 of the Act was/were made in the following country or countries on the following date(s) by the following applicant(s) namely:—

in (i) UNITED STATES OF AMERICA on (j) 20 FEBRUARY 1986

by (k) _____

in (i) _____ on (j) _____ 19____

by (k) _____

in (i) _____ on (j) _____ 19____

by (k) _____

3. (l) I am/We are the actual inventor(s) of the invention.

(m) ENSMINGER, McCLEARY, WENZLOW-LUKASCH,
ROBERT PEEL ROBERT ELLIOT LUDWIG (No Middle Name)

of (n) R.R. #1, Box #147 506 Easton Avenue 507 Longfellow

Carman, Illinois Geneva, Illinois Deerfield, Illinois

of (n) 61425 60134 60015

(U.S. OF AMERICA) (U.S. OF AMERICA) (U.S. OF AMERICA)

is/are the actual inventor(s) of the invention and the facts upon which the applicant(s) is/are entitled to make the application are as follows:—

—as regards entitlement under Section 34 of the Act:—(o) _____

The applicant is the assignee of the said actual inventors.

—as regards entitlement under Part XVI of the Act:—(q) _____

4. The basic application(s) referred to in paragraph 2 of this Declaration was/were the first application(s) made in a Convention country in respect of the invention the subject of the application.

Declared at Chicago, Illinois

this 30th day of March 1987
UNITED STATES GYPSUM COMPANY

Arthur G. Leisten
Vice President, Assistant
Secretary and General Counsel

To: The Commissioner of Patents,
Commonwealth of Australia.

(12) PATENT ABRIDGMENT (11) Document No. AU-B-70215/87
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 601968

(54) Title
CEMENT BOARD HAVING REINFORCED EDGES

International Patent Classification(s)
(51)⁴ **E04C 002/06 B32B 003/04 B32B 005/14 B32B 013/02**

(21) Application No. : **70215/87** (22) Application Date : **28.01.87**

(87) WIPO Number : **WO87/04976**

(30) Priority Data

(31) Number (32) Date (33) Country
831706 20.02.86 US UNITED STATES OF AMERICA

(43) Publication Date : **09.09.87**

(44) Publication Date of Accepted Application : **27.09.90**

(71) Applicant(s)
UNITED STATES GYPSUM COMPANY

(72) Inventor(s)
ROBERT PEEL ENSMINGER; ROBERT ELLIOT MCCLEARY; LUDWIG WENZLOW-LUKASCH

(74) Attorney or Agent
GRIFFITH HACK & CO, GPO Box 1285K, MELBOURNE VIC 3001

(56) Prior Art Documents
AU 74350/87 B32B
US 4647496
US 4351867

(57) Claim

1. A method for making a cementitious wallboard having reinforced longitudinal edges which comprises:

continuously towing on an endless conveyor belt an indefinitely long, non-adherent carrier sheet over a forming table which is upstream from the conveyor belt, said sheet being wider than the cement board being made;

forming a continuous trough by bending outer portions of the sheet upright;

continuously laying a first indefinitely long woven mesh of glass fibers into the trough, the mesh being wider than the trough;

continuously depositing a hydrating cementitious mix on the mesh and distributing the mix laterally to fill the trough to a substantially uniform depth;

towing the filled trough in an abutting relationship with and between a pair of fixedly spaced apart, indefinitely

(11) AU-B-70215/87
(10) 601968

-2-

long edger rails which rest longitudinally on the conveyor belt in slidable engagement therewith;

folding upright portions of the carrier sheet and outer portions of the mesh inward and over the mix; and

pressing the folded-over carrier sheet down onto the surface of the mix and the ~~woven~~ mesh into the mix.

10. An apparatus for the continuous manufacture of indefinitely long, reinforced cementitious wallboard having reinforced longitudinal edges, said apparatus comprising a forming table and a conveyor belt for towing a carrier sheet across the forming table and along a predetermined path, means for forming the sheet into a trough, means for continuously laying a mesh of reinforcing fibers into the trough, the mesh being wider than the trough, means for depositing a hydrating cementitious slurry on the advancing inlaid mesh, and means for leveling the slurry and distributing it transversely to the path;

a pair of spaced apart, parallel edger rails in slidable engagement with the conveyor belt and disposed longitudinally along the belt to define the path of the trough; and

means for folding the opposite margins of the trough and the inlaid mesh inward and pressing the margins down onto and into, respectively, the advancing slurry.

21. A cementitious wallboard having reinforced longitudinal edges produced by the method of any one of claims 1 to 9.

PCT

AU-AI-70215/87
WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification ⁴ : B32B 3/04, 13/02, 5/14		(11) International Publication Number: WO 87/04976
A1		(43) International Publication Date: 27 August 1987 (27.08.87)
(21) International Application Number: PCT/US87/00155		(74) Agent: DIDRICK, Robert, M.; USG Corporation, Dept. #157, 101 South Wacker Drive, Chicago, IL 60606 (US).
(22) International Filing Date: - 28 January 1987 (28.01.87)		
(31) Priority Application Number: 831,706		
(32) Priority Date: 20 February 1986 (20.02.86)		
(33) Priority Country: US		(81) Designated States: AT (European patent), AU, BE (European patent), DE (European patent), DK, FI, FR (European patent), IT (European patent), JP, NL (European patent), NO, SE (European patent).
(71) Applicant: UNITED STATES GYPSUM COMPANY [US/US]; 101 South Wacker Drive, Chicago, IL 60606 (US).		Published With international search report.
(72) Inventors: ENSMINGER, Robert, Peel ; R. R. #1, Box #147, Carman, IL 61425 (US). McCLEARY, Robert, Elliot ; 506 Easton Avenue, Geneva, IL 60134 (US). WENZLOW-LUKASCH, Ludwig ; 507 Longfellow, Deerfield, IL 60015 (US).		

This document contains the amendments made under Section 49 and is correct for printing.

A.D.J.P. - 8 OCT 1987

AUSTRALIAN
- 9 SEP 1987
PATENT OFFICE

(54) Title: CEMENT BOARD HAVING REINFORCED EDGES

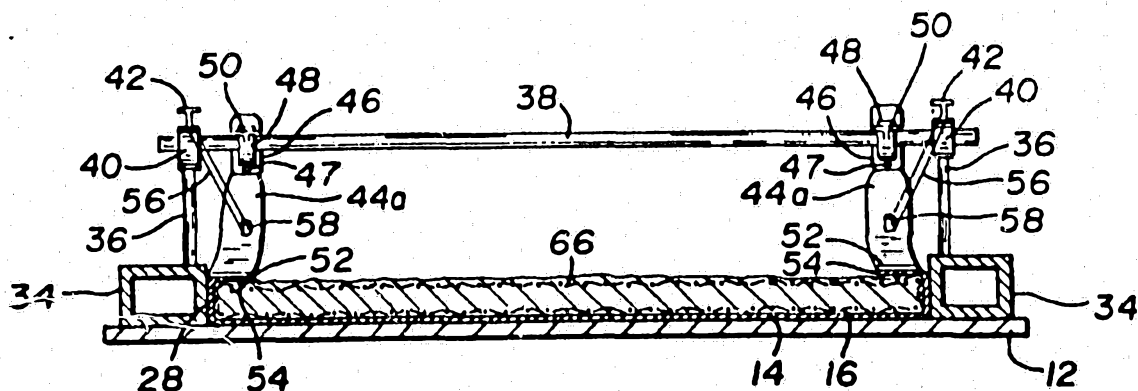

(57) Abstract:

A cement board having bare surfaces and a woven mesh of reinforcing fibers (16) underlying the top, bottom, and longitudinal edge surfaces is made continuously on an improved apparatus which comprises a pair of edger rails (34) which slidably rest on a conveyor belt (12) and define the path of the cement board being made on the conveyor belt and a means (44a) for folding and pressing outer margins of the bottom mesh into the edge surfaces and the top surface.

-1-

CEMENT BOARD HAVING REINFORCED EDGES

This invention relates to the continuous production of a reinforced cementitious panel. More particularly, it relates to a method and an apparatus for casting a cementitious slurry in the form of a thin, indefinitely long panel whose faces and longitudinal edges are reinforced by a network of fibers which is submerged just below the cementitious surface. Still more particularly, this invention relates to a bare cement board whose faces and longitudinal edges are reinforced by a sub-surface network of fibers.

Cement board, a thin, reinforced concrete panel, has become increasingly popular during the past two decades as a durable substrate for ceramic tile in bath rooms, shower rooms, and other areas where the walls are subject to frequent splashing of water and high humidity. There is a growing interest in the use of cement boards on the exterior of buildings as in the construction of curtain walls. Having such uses, a covering for the surface of the concrete is neither needed nor desired. Because the boards are often attached at the margins to the building framework with nails or screws, however, it is highly desirable that the longitudinal edges of the boards be fully and uniformly filled and that they be reinforced at least as well as the faces of the boards. The border regions of the faces adjacent to the edges must not be thicker than the field regions thereof lest the wall turn out to be wavy rather than flat.

-2-

Reinforced panels having cores formed of a cementitious composition are presently known. U.S. Pat. No. 1,439,954 discloses a wallboard having a core of gypsum or Portland cement and a mesh material such as cotton gauze, wire cloth, perforated paper or perforated cloth applied to both
5 faces of the core while the cementitious material is still in the plastic state.

U.S. Pat. No. 3,284,980 (Dinkel) discloses a pre-cast, lightweight concrete panel having a cellular core, a thin, high density layer on each face, and a layer of fiber mesh embedded in each of the high density
10 layers. Each panel is cast separately in forms in a step-wise procedure beginning with a thin layer of dense concrete mix, laying the mesh thereupon, pouring the lightweight concrete mix over the mesh to form the core, laying a second layer of mesh over the core mix, and pouring another layer of dense concrete mix over the second mesh layer.

Clear, in U.S. Pat. No. 4,203,799, discloses a continuous
15 method for the production of the panels disclosed by Dinkel. In said method, a continuous web of glass fiber mesh is passed through a cementitious slurry, the slurry-laden mesh is laid on a plurality of moving carrier sheets, a lightweight concrete mix is deposited on the mesh as it moves along with the carrier sheets, a second continuous web of mesh
20 is passed through a cementitious slurry and laid over the lightweight concrete core mix. The elongated sheet of concrete travels to a cutter station where the sheet is cut into individual panels.

Schupack, in U.S. Pat. No. 4,159,361, discloses a cold formable
25 cementitious panel in which fabric reinforcing layers are encapsulated by the cementitious core. The layers of reinforcing fabric and cementitious material of the Schupack panel are laid and deposited on a vibrating forming table from a fabrication train which reciprocates longitudinally over the table. The cementitious core mix is smoothed by
30 a laterally oscillating screed.

British Patent Application No. 2 053 779 A discloses a method for the continuous production of a building board which comprises advancing a pervious fabric on a lower support surface, depositing a slurry of

-3-

5 cementitious material such as gypsum plaster on said advancing fabric, contacting the exposed face of the slurry with a second fabric, passing the fabric faced slurry under a second support surface, and advancing the fabric faced slurry between the two support surfaces while vibrating said surfaces. The vibration is said to cause the slurry to penetrate through the fabric to form a thin, continuous film on the outer faces of the fabric.

10 The problem common to all methods of production of fiber mesh reinforced cementitious panels is the forming and reinforcing of smooth uniform longitudinal edges. Schupack teaches the utilization of more tightly woven reinforcing fabric at the margins of the panel but the fabric does not wrap around upright edges of the panel. The problem is particularly difficult when the economies of continuous production are desired. Glass fiber mesh, the reinforcing fabric of choice in most
15 instances, is bent easily but its resiliency causes it to spring back to its original shape when the bending force is removed.

In a method for the continuous production of a fiber reinforced cement board, Galer teaches in U.S. Patent No. 4,450,022 that the edges of a moving carrier sheet are bent upright as a concrete mix is directed
20 onto a fiber network carried by the carrier sheet. The trough-like sheet thus becomes a form for the continuous ribbon of concrete. After the mix is spread across and under the lower network and a second network is submerged in the upper surface of the mix, the upright edges of the carrier sheet are turned onto the upper surface. The fiber networks
25 are, however, not wrapped around the edges of the cement board. Consistently uniform filling of the edge portions of the cement board has remained a problem until the time of the invention disclosed and claimed in this application even when the improved method of concrete mix distribution taught by Galer in U.S. Patent No. 4,504,335 is employed.
30 Trimming of the irregular edges has been necessary to have a commercially acceptable product.

Altenhöfer et al, in U.S. Patent No. 4,504,533, points to difficulties that are encountered in making a gypsum board in which a first

-4-

composite web of an impermeable non-woven fiberglass felt and a woven fiberglass mat covers the lower face of the gypsum core and is wrapped around the longitudinal edges of the gypsum core so that the border regions of the composite web lie on the upper face of the core. The extension of both the non-woven felt and the fiberglass mat, as a composite web, around the longitudinal edges causes problems in the scoring of the composite web which is necessary for the wrapping around and folding process. Further problems arise when a second composite web, placed on the upper surface of the board and overlapping the borders of the first composite web, is adhesively bonded to the first web. Ridges and undulations form on the overlapping border regions, according to Altenhöfer et al. These are said to be undesirable because they cause poor adhesion and detract from the desired smooth surface of the gypsum board. To solve the problems, Altenhöfer et al teaches the use of composite webs in which the fiberglass mat component is absent from the longitudinal border regions. In the use of such a composite on the lower face of the gypsum core only the layer of non-woven felt needs to be scored, folded, and wrapped around. Cutting away the mat from the border regions of the upper composite web permits improved adhesive bonding between the upper and lower webs. The product is a gypsum board having a woven fiberglass mat embedded in the upper and lower faces of the core and a non-woven fiberglass felt extending across the lower face, around the longitudinal edges, and partially inward from the edges while the upper face is covered by another non-woven felt which is glued to the folded-in lower felt.

Thus, there still remains a need for a bare cement board fully reinforced by a submerged network of fibers under both faces and both longitudinal edges, said edges being uniform and smoothly surfaced and said board having a substantially uniform thickness.

~~It is an object of this invention, therefore, to provide a flat, bare cement board having smooth, uniform longitudinal edges which are reinforced by a woven mesh of glass fibers immediately below the edge surfaces.~~



According to the present invention there is provided a method for making a cementitious wallboard having reinforced longitudinal edges which comprises:

continuously towing on an endless conveyor belt an indefinitely long, non-adherent carrier sheet over a forming table which is upstream from the conveyor belt, said sheet being wider than the cement board being made;

forming a continuous trough by bending outer portions of the sheet upright;

continuously laying a first indefinitely long mesh of glass fibers into the trough, the mesh being wider than the trough;

continuously depositing a hydrating cementitious mix on the mesh and distributing the mix laterally to fill the trough to a substantially uniform depth;

towing the filled trough in an abutting relationship with and between a pair of fixedly spaced apart, indefinitely long edger rails which rest longitudinally on the conveyor belt in slidable engagement therewith;

folding upright portions of the carrier sheet and outer portions of the mesh inward and over the mix; and

pressing the folded-over carrier sheet down onto the surface of the mix and the mesh into the mix.

According to the present invention there is provided an apparatus for the continuous manufacture of indefinitely long, reinforced cementitious wallboard having reinforced longitudinal edges, said apparatus comprising a forming table and a conveyor belt for towing a carrier sheet across the forming table and along a predetermined path, means for forming the sheet into a trough, means for continuously laying a mesh of reinforcing fibers into the trough, the mesh being wider than the trough, means for depositing a hydrating cementitious slurry on the advancing inlaid mesh, and means for leveling the slurry and

MELBOURNE S

3 JUL 90 16:



distributing it transversely to the path;

a pair of spaced apart, parallel edger rails in slidable engagement with the conveyor belt and disposed longitudinally along the belt to define the path of the trough; and

means for folding the opposite margins of the trough and the inlaid mesh inward and pressing the margins down onto and into, respectively, the advancing slurry.

The aforementioned U.S. Patents 4,450,022 and 4,504,335, as well as U.S. Patent No. 4,488,909, are incorporated herein by reference. The '022 patent describes an apparatus and a method for creating a gap between the carrier sheet and the bottom mesh as they move over a forming table so that the concrete mix can penetrate the voids of the mesh and form a layer of concrete between the sheet and the mesh. The '335 patent describes a method for submerging a woven glass fiber mesh in the top surface of the concrete mix while the mix is moving over the forming table; the mesh is towed into the nip between the advancing mix and a cylindrical screeding roller which rotates counter to the direction of travel of the mix so that the roller presses the mesh into the surface of the mix and cleans itself of adhering mix by wiping the mix onto the upper surface of the mesh and into the voids thereof. The '909 patent describes a concrete mix which is preferred for the high speed continuous production of the cement board of this invention.

For a ready understanding of the apparatus and method used in the production of the cement board of this invention, they are illustrated in the attached drawings and described herein in association with portions of the production line described in the '022 and '335 patents.



-7-

Turning now to the drawings:

FIG. 1 is a fragmentary perspective view of the forming end of a cement board production line employing the apparatus of the invention.

5 FIG. 2 is a sectional view of the production line taken along line 2-2 of FIG. 1.

FIG. 3 is a diagrammatic side view, partially broken away, of another embodiment of the inventive apparatus.

FIG. 4 is a sectional view of the production line of FIG. 5, taken along the line 4-4.

10 FIG. 5 is a diagrammatic plan view of the production line of FIG. 3.

FIG. 6 is a cross-section of the cement board of this invention.

In FIG. 1, the forming table 10 and the conveyor belt 12 constitute the support for the carrier sheet 14 and the woven glass fiber mesh 16. Mounted transversely above the forming table 10 are the mortar distribution belt 18 and the stationary plow 20 whose blades 20a, 20b, 20c, and 20d contact the surface of the distribution belt 18 in scraping relationship. The guide flanges 22 are mounted on the table 10 just upstream from the mortar screeding roller 24 which is adjustable up and down so that the nip between it and the carrier sheet 14 may be set to the desired thickness of the panel to be manufactured. The roller 24 is journaled and driven by conventional means not shown.

The carrier sheet 14 is wider than the cement board being formed so that the sheet may be made into a continuous trough. The creaser wheels 26 are optional; they may be used to score longitudinal lines along side each lateral margin of the carrier sheet 14 to facilitate the bending of the sheet to form the upright walls 28 as the sheet is towed between the guide flanges 22. The mesh 16 is also wider than the desired board and, therefore, wider than the trough formed by the bent carrier sheet; it may be of the same or narrower width as the flat carrier sheet but not wider. The mesh 16 is fed into the trough under the hold-down roller 30 but because it is not scored and is rather resilient it does not conform precisely to the corners of the trough but rather curves from the bottom of the trough to the walls 28, leaving the spaces 32, as shown in FIG.

2.

-8-

The longitudinal edger rails 34 extend downstream from the forming table 10 in slidable contact with the conveyor belt 12. The posts 36 are mounted on the rails 34 and the rods 38 are slidably mounted within the rings 40, as shown more clearly in FIG. 4. The distance between the rails 34 is adjusted and maintained by sliding the rings 40 along the rods 38 and tightening the set screws 42 at the selected points. As shown in FIG. 3, several sets of the posts 36 and the rods 38 are spaced apart along the rails 34 to prevent lateral movement of the rails independently of each other and thus assure a constant cement board width. The rails may move laterally in tandem in response to occasional shifting of the conveyor belt as it travels around the drive and take-up pulleys but, since the distance between them is constant, the upright walls 28 of the carrier sheet are not allowed to fall away and let the concrete mix spread haphazardly. The edger rails 34 are continuous lengths of a lightweight material such as aluminum and, in a preferred embodiment of this invention, the rails are hollow in order to further lighten their weight and allow them to, in effect, float on the conveyor belt with negligible wear. The posts and rods are also made of lightweight material to achieve that effect. Preferably, the rails are rectangular in cross-section and about 1.5 inches wide and about 0.75 inch thick, their weight being distributed across their width as the conveyor belt glides beneath them.

The spatulas 44 are mounted in pairs on the rods 38, as shown in detail in FIG. 4. Only three pairs of spatulas are shown in FIG. 3 but it is to be understood that as many as eight or more pairs of spatulas may be spaced apart downstream from the roller 24. The first pair of spatulas are preferably spaced from about four to about eight feet (1.2 to 2.5 meters) downstream from said roller and the space between consecutive pairs is preferably from about five to about ten feet (1.5 to 3 meters). Each spatula is pivotably fastened to a bracket 46 by a screw 47. The bracket extends tangentially from a collar 48 which in turn is rotatably mounted on a rod 38 inboard from a ring 40 and is locked in place by a set screw 50. The blade tip 52 of each spatula is preferably cut back at an angle of about 20° or less as shown in FIG. 5 so that each spatula may be canted toward the respective rail 34 by pivoting it on the

-9-

5 bracket 46 and thus cause its tip 52 to be aligned at a substantially right angle with its respective rail. The outboard edge of the tip is thus caused to press down more heavily than the inboard edge on the folded strip 54 of the carrier sheet 14. In this manner, the margins of the cement are tapered to the desired degree. An angle of from about 5° to about 20° is preferred, 5° being particularly preferred. In the event that a spatula having a squared-off tip is used or that further biasing is needed, a rubber band 56 or other restraining means connects a peg 58 on the spatula blade to a set screw 42 as shown or to a ring 40. The spatula blade is made of a resilient material such as a chrome plated spring steel which is not readily corroded by contact with a hydraulic cement mixture. The blade is thin, e.g. about 20 gauge, and is about nine to twelve inches (23 to 30 cm) long. The folded strip 54 is preferably about 1.5 inches wide and the spatula blade may be as wide as the strip 54 but no wider because scraping of the concrete mix adjacent the strip is to be avoided.

10 An alternative means for mounting the spatulas on the rails 34 is a carrier having a foot insertable in the hollow end of a rail 34, an upright leg attached at an angle to the foot and extending above the horizontal plane of the foot, and a shaft attached to the leg at a right angle to the vertical plane passing through the foot so as to extend inboard when the foot is inserted in the rail. The first pair of spatula carriers are mountable in the upstream end of hollow rails 34; succeeding pairs may be inserted in hollow rail segments mounted atop the rails 34. Individual carriers may be right-handed or left-handed or they may be made reversible by making the feet bidirectional. The spatulas are mounted on the carrier shafts in the same way as on the rods 38.

15 Also shown in FIGS. 1, 3, and 5 are the air jets 60 connected to the valves 52 which are mounted on the forming table 10 and are connected to a source of compressed air. In FIGS. 3 and 5, the fingers 64, used only when it is desired to fold the margins of the lower mesh 16 to lie under the top mesh 66, are mounted on the table 10 and extend in over the guide flanges 22 to urge the upstanding margins of the bottom mesh 16 inward and downward so that said margins may be further bent down as they pass under the roller 24.

-10-

The finished cement board 70 is shown in cross-section in FIG. 6 to reveal the core 72 which extends through the bottom mesh 16 even as said mesh bends up and around to overlap the top mesh 66 which lies just beneath the upper surface of the board. Thus, the concrete mix in the cement board is an autogenous binder for the lapping meshes 16 and 66 at the margins 76 of the upper surface of the board. As shown, the edges 74 and the margins 76 are smooth because of the smoothing effect of the carrier sheet strips 54 being pressed onto the mix by the rails 34 and the spatulas 44. The smooth margins 76 are preferred when the cement boards are fastened side-by-side on a partition and joint tape is adhesively applied to the margins before joint compound is applied. If it is desired that the entire field of the upper surface of the board be nubby, the strips 54 may be peeled off, along creases made by the spatulas, before final set of the concrete mix has occurred. The strips 54 will then remove a thin layer of the mix from the margins and leave a roughened surface. If the creaser wheels 26 are used, all but the bottom of the carrier sheet 14 may be removed before or after final set.

Although FIG. 6 shows the folded bottom mesh 16 overlying the woven top mesh 66 along the margins, the board of this invention may be made so that the mesh 16 lies under the top mesh 66 when the fingers 64 are employed to bend the upstanding portions of the mesh 16 inward and downward before they reach the roller 24.

Moreover, although the continuous manufacture of the cement board having the top mesh 66 is further described as follows, it will be understood that said mesh is not essential to this invention.

The creased carrier sheet 14 and the woven mesh 16 are passed manually beneath the distribution belt 18, between the flanges 22, under the screeding roller 24 and onto the conveyor belt 12 so that when the conveyor drive means (conventional, not shown) is actuated, a mesh lined trough having the upright walls 28 is towed in the machine direction indicated by the arrow MD. Concrete mix is fed onto the belt 18 from a continuous mixer shown as the box CM and is scraped onto the mesh 16 by the plow blades 20a, b, c, and d. The streams of concrete mix thus formed spread and merge as the roller 24 dams their movement. The spreading mix penetrates the curved mesh 16 and moves into the spaces 32. The top mesh 66 is dragged between the roller 24 and the dammed mix while the roller rotates counter to the MD. The roller constantly

-11-

picks up a coat of concrete mix which squeezes through the voids of the woven top mesh 66 at the nip and then it wipes the mix onto the obverse face of the top mesh 66 to aid in the impregnation thereof. If the top mesh is slightly narrower than the cylindrical roller 24, a ring of the concrete mix clings to the unwiped edges of the cylinder. Said mix is thrown by centrifugal force alongside the upright walls 28 of the paper trough. If the walls 28 show a tendency to bend over prematurely, they may be held upright by the force of air directed against the walls by the air jets 60. Unwanted splatters of the mix on the walls 28 may be cleaned off by such air, also.

As the trough of concrete mix approaches the first pair of flexed spatulas 44a, the margins of the mesh 16 and the walls 28 of the trough are tucked under the spatulas 44a to initiate the folding over of the continuously approaching carrier sheet 14 and mesh 16. It is preferred to fold the bottom mesh over onto the concrete mix which already covers the top mesh 66 and use the pressure of the flexed spatula blades to press the strips 54 down onto the folded over mesh 16 to urge the woven glass fibers into the mix. Folding of the margins of the mesh 16 onto the body of the mix before the top mesh 66 is applied is another way to produce the reinforced-edge cement board of this invention. To do so, the fingers 64 of FIGS. 3 and 5 are placed so as to urge the margins of the mesh 16 inward and downward and the concrete mix ringing the edges of the roller 24 is thrown onto the bent-over margins. The weight of the mix further bends the margins down before the top mesh 66 is applied. The folded-over mesh 16 is thus embedded near the upper surface of the board along with the mesh 66 as they emerge from under the roller 24 but the mesh 16 still tends to rise up because of its resilience; the spatulas 44 are still necessary to press the margins of the mesh 16 down as the concrete mix sets.

The pressure of the flexed spatula blades on the strips 54 is varied according to the consistency of the concrete mix and the stiffness of the mesh. A range of from about 1 to about 4 psi (gauge) is preferred. The smallest pressure is applied by the first pair of spatulas 44a and the pressure is increased in increments as the strips 54 pass the succeeding pairs of flexed spatulas 44b, 44c,

-12-

The placing of the spatulas 44 downstream from the mixer CM is determined by the line speed at which the board is manufactured and the rate of hydration of the cement which, in turn, is a function the cement formulation and the temperature of the concrete mix. A rapid hardening, high early strength cement such as that described in the aforementioned U.S. Patent No. 4,488,909 is preferred in the production of the cement board of this invention. The high temperature concrete mix described in the '909 patent is preferred, also. Although U.S. 4,504,335 describes the mix as a relatively stiff, immobile mortar, a particularly preferred mix for the purposes of this invention has a consistency such that a dimple made in the mix just after it has been deposited on the belt 12 will disappear by the time the mix arrives at the roller 24, i.e., about 4 seconds. It has been found that when such a self-leveling mortar is used the bottom mesh 16 may be well embedded in the mortar even though the means for creating a gap between the carrier sheet and the bottom mesh described in U.S. 4,450,022 is not used. An example of such a mortar is one in which the cement powder consists of 68.1% Type III portland cement, 17.79% high alumina cement, 5.69% landplaster, 0.57% hydrated lime, and 7.84% fly ash. A lower cost cement powder may be used if a fine high alumina cement (about 6000 cm²/g Blaine) is employed at about a 12.5% level with concomitant changes in the amounts of the other cementitious solids for an optimized formulation. The mortar also contains blast furnace slag in an amount equal to, on a dried basis, the weight of the cement powder. The self-leveling property of the mortar is enhanced and prolonged by one part of Lomar D superplasticizer and about 0.5 part of an 8% aqueous solution of citric acid per hundred parts by weight of the cement powder. The water to cement powder ratio is about 0.35 by weight, including the water introduced with wet slag, the superplasticizer and citric acid solution. Foam and expanded polystyrene beads are also introduced into the continuous mixer along with the other solids and liquids so as to make a cement board having a density of from about 74 to about 80 pounds per cubic foot.

-13-

The embedding of the folded-over mesh 16 must, of course, take place before the initial set of the concrete has occurred but the mix cannot be so soupy at the first spatula pair that the mesh will rise up again after passing under a spatula. A convenient and satisfactory way to measure the extent of hydration of the cement at various points along the line is to place a sample from the mixer in a calorimeter connected to a recording chart so as to plot the rise in temperature against elapsed time. The total temperature rise up to the equilibrium temperature is noted. The distance between the roller 24 and the selected spatula position is measured and that distance is divided by the line speed to give the travel time for the concrete mix from the roller 24 to the selected position. A time factor for the travel of the mix from the mixer CM to the roller 24 must be added. This factor can be determined by measuring the travel time of a spot of pigment such as iron oxide placed in the mix at the mouth of the mixer. A plot of the age of the concrete mix on the time-temperature curve gives the temperature rise at the selected spatula position. The ratio of the incremental temperature rise against the total temperature rise is an indication of the extent of hydration at the selected position. For example, a concrete mix prepared according to the '909 patent reached the equilibrium temperature in 12.5 minutes, which is within the range of set time disclosed in said patent, and the total temperature rise was 27°F (from 103°F to 130°F). At a line speed of 32 feet per minute (1 foot = 0.3 meter), the extent of hydration, as a percentage of the hydration which has occurred at the equilibrium temperature, at the locations of four pairs of the spatulas 44, spaced at 7 feet, 17 feet, 26 feet, and 35 feet from the roller 24, was 15%, 22%, 26%, and 32%, respectively. The travel time for the concrete mix from the mixer to the roller 24 was estimated to be about 12 seconds. The spatulas may be used to press the mesh 16 into the upper longitudinal margins of the concrete ribbon and to form, in co-operation with the edger rails 34, smooth reinforced edges along the ribbon while the extent of hydration, as so expressed, is in the range of from about 10 to about 35%. It is preferable that the spatulas 44a are placed to press down lightly upon the strips 54 as the hydration reaches a stage equal to from about 10 to about 18% of the hydration which will have occurred at the equilibrium temperature.

-14-

The woven mesh is preferably composed of glass fibers but nylon, metal, and aramid resin fibers may also be used. The mesh size and the fiber diameter are selected according to the strength desired in the board and the size of the aggregate in the concrete mix. A mesh having
5 a thread count per inch of from 4 x 4 to 18 x 14 or 10 x 20 is acceptable for most purposes. A mesh having a tighter weave along the margins may be used to further strengthen the edges and margins of the board.

In the manufacture of a 36 inch (1 inch = 2.54 cm) wide x 1/2 inch
10 thick cement board of this invention, for example, the mesh 16 was 38.5 inches wide, the mesh 66 was 35.75 inches wide, the thread count of each was 10 x 10, and the carrier sheet 14 was 40 inches wide. The edge of the mesh 66 was inset 1/8 inch from each longitudinal edge of the board and there was a 7/8 inch overlap of the folded-over portion of the mesh
15 16 above the mesh 66 at each longitudinal margin of the board.

The cement board of this invention is an improved tile backer board for the construction of bathrooms, particularly shower enclosures, locker rooms, swimming pool rooms and other units which are subject to high humidity and splashing water. Reinforcement of the edges and margins
20 of board makes attachment of the board to the framework of a room with nails or screws more secure. Use of the edge-reinforced boards in the construction of exterior curtain walls is also contemplated.

Ten samples of 1/2 inch thick cement board of this invention were tested to learn how much force would be necessary to pull a nail laterally
25 through the reinforced edge of the board. To do so, a 1/8 inch hole centered 3/8 inch from the edge of the board is drilled in the margin of the board and the board is clamped in place. A 1/8 inch diameter pin simulating a nail is passed through the hole and pulled laterally by a Tinius-Olsen machine attached to both ends of the pin and the force
30 necessary to pull the pin laterally through the edge of the board is recorded. The average force required in the ten tests was 96 pounds (427 newtons). When the same test was performed on glass fiber reinforced cement boards of approximately the same age but not having the reinforced edges, the force required to pull the pin out laterally was
35 generally on the order of about 40 pounds (178 newtons).

-15-

The invention has thus far been described in terms of a wallboard having a hydraulic cementitious core. A wallboard having a non-hydraulic but, nevertheless, hydrated cementitious core is also regarded as part of the subject matter of this invention. Thus, a gypsum wallboard without the usual paper covering but strengthened by woven mesh of reinforcing fibers embedded in the core at the top, bottom and longitudinal edge surfaces may be made by substituting a slurry of calcium sulfate hemihydrate for the concrete mix in the process described above.

5

-16-

The subject matter claimed is:

1. A method for making a cementitious wallboard having reinforced longitudinal edges which comprises:

continuously towing on an endless conveyor belt an indefinitely long, non-adherent carrier sheet over a forming table which is upstream from the conveyor belt, said sheet being wider than the cement board being made;

forming a continuous trough by bending outer portions of the sheet upright;

continuously laying a first indefinitely long woven mesh of glass fibers into the trough, the mesh being wider than the trough;

continuously depositing a hydrating cementitious mix on the mesh and distributing the mix laterally to fill the trough to a substantially uniform depth;

towing the filled trough in an abutting relationship with and between a pair of fixedly spaced apart, indefinitely long edger rails which rest longitudinally on the conveyor belt in slidable engagement therewith;

folding upright portions of the carrier sheet and outer portions of the mesh inward and over the mix; and pressing the folded-over carrier sheet down onto the surface of the mix and the ~~woven~~ mesh into the mix.

2. The method of claim 1 ~~characterized further by~~ ^{further comprising} continuously submerging a second indefinitely long woven mesh of glass fibers beneath the surface of the mix and overlapping the margins of the first and second mesh.

3. The method of claim 2 wherein the outer portions of the first mesh are pressed into the mix after the second mesh has been submerged into the mix.

4. The method of claim 2 wherein the outer portions of the first mesh are folded into the mix before the second mesh is submerged in the mix.



5. The method of any preceding claim wherein the folded-over carrier sheet and mesh are pressed down under a pressure which increases as the filled trough travels downstream.

6. The method of claim 5 wherein the mix is concrete and the pressure is from about 1 psi to about 4 psi.

7. The method of any preceding claim wherein the mix is concrete and the extent of hydration of the mix during the pressing step is from 10% to 35% of the hydration which will have occurred at the maximum temperature of the hydrating mixture.

8. The method of claim 7 wherein the mix is concrete and the pressing is initiated when the mix has hydrated to an extent equal to from 10% to 18% of the hydration which will have occurred at the maximum temperature of the hydrating mixture.

9. The method of any preceding claim in which the mesh or meshes is/are woven.

10. An apparatus for the continuous manufacture of indefinitely long, reinforced cementitious wallboard having reinforced longitudinal edges, said apparatus comprising a forming table and a conveyor belt for towing a carrier sheet across the forming table and along a predetermined path, means for forming the sheet into a trough, means for continuously laying a mesh of reinforcing fibers into the trough, the mesh being wider than the trough, means for depositing a hydrating cementitious slurry on the advancing inlaid mesh, and means for leveling the slurry and distributing it transversely to the path;

a pair of spaced apart, parallel edger rails in slidable engagement with the conveyor belt and disposed longitudinally along the belt to define the path of the trough; and

means for folding the opposite margins of the trough and the inlaid mesh inward and pressing the margins



down onto and into, respectively, the advancing slurry.

11. The apparatus of claim 10 further comprising a stabilizing rod connecting the edger rails.

12. The apparatus of claim 11 wherein the rails are adjustable transversely with respect to the rod.

13. The apparatus of any one of claims 10 to 12 wherein the folding and pressing means is a pair of spatulas connected to the edger rails and superposed above the opposite longitudinal margins of the path.

14. The apparatus of claim 13 further comprising a post mounted on each rail, a ring on each post, a rod transversing the path and slidably mounted within each ring, means for locking the rod within the rings, and means for connecting the spatulas to the rod inboard from the rings.

15. The apparatus of claim 14 wherein the spatula connecting means comprises a pair of collars slidably encircling the rod.

16. The apparatus of claim 15 wherein the connecting means further comprises a bracket extending tangentially from each collar.

17. The apparatus of any one of claims 10 to 16 further comprising an air jet means for preventing premature bending of the opposite margins of the trough.

18. The apparatus of any one of claims 10 to 17 further comprising a means, intermediate the slurry depositing means and levelling means, for urging the opposite margins of the mesh inward and downward.

19. The apparatus of claim 16 wherein the spatulas are pivotably attached to the brackets.

20. The apparatus of claim 19 wherein the spatula blade is cut back from the outer edge of the blade at an angle of about 20 degrees or less.

21. A cementitious wallboard having reinforced longitudinal edges produced by the method of any one of claims 1 to 9.



22. A cementitious wallboard having reinforced longitudinal edges produced by the apparatus of any one of claims 10 to 20.

23. The apparatus of any one of claims 10 to 20 in which the mesh or meshes is/are woven.

24. A method for making a cementitious wallboard having reinforced longitudinal edges substantially as hereinbefore described with reference to any one of the accompanying drawings.

25. An apparatus for the continuous manufacture of indefinitely long, reinforced cementitious wallboard having reinforced longitudinal edges substantially as hereinbefore described with reference to any one of the accompanying drawings.

Dated this 2nd day of July, 1990


UNITED STATES GYPSUM COMPANY

By its Patent Attorneys:

GRIFFITH HACK & CO.

Fellows Institute of Patent
Attorneys of Australia.



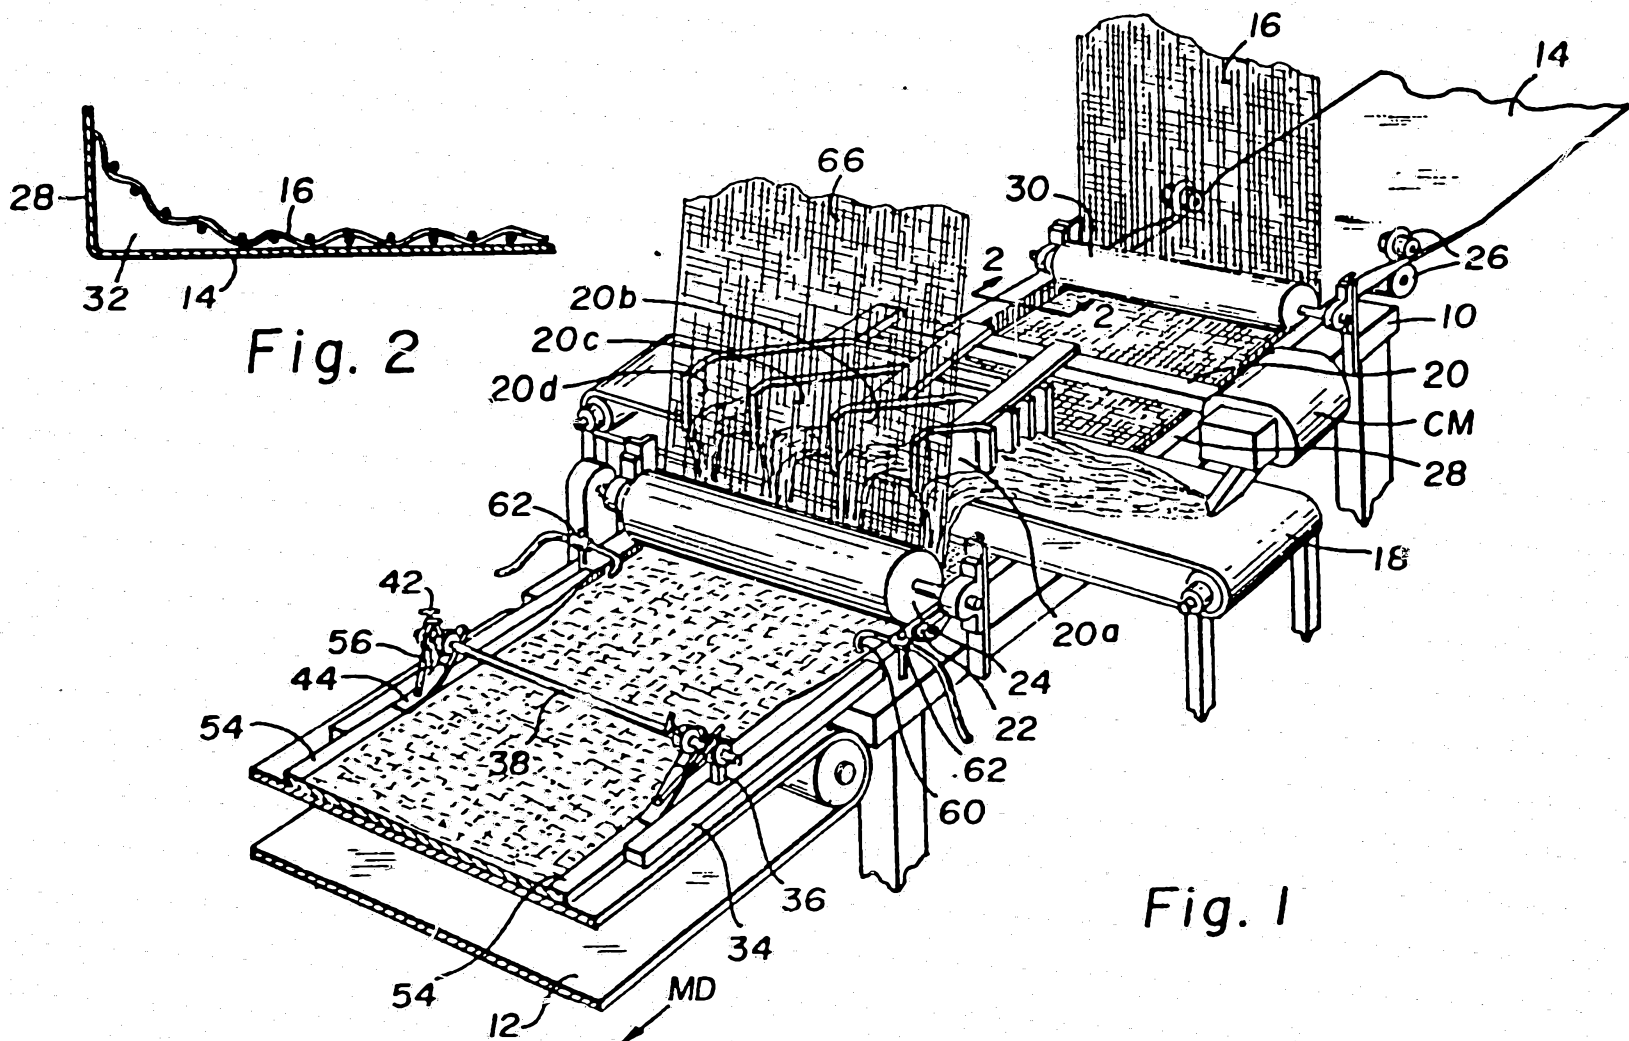

SUBSTITUTE SHEET

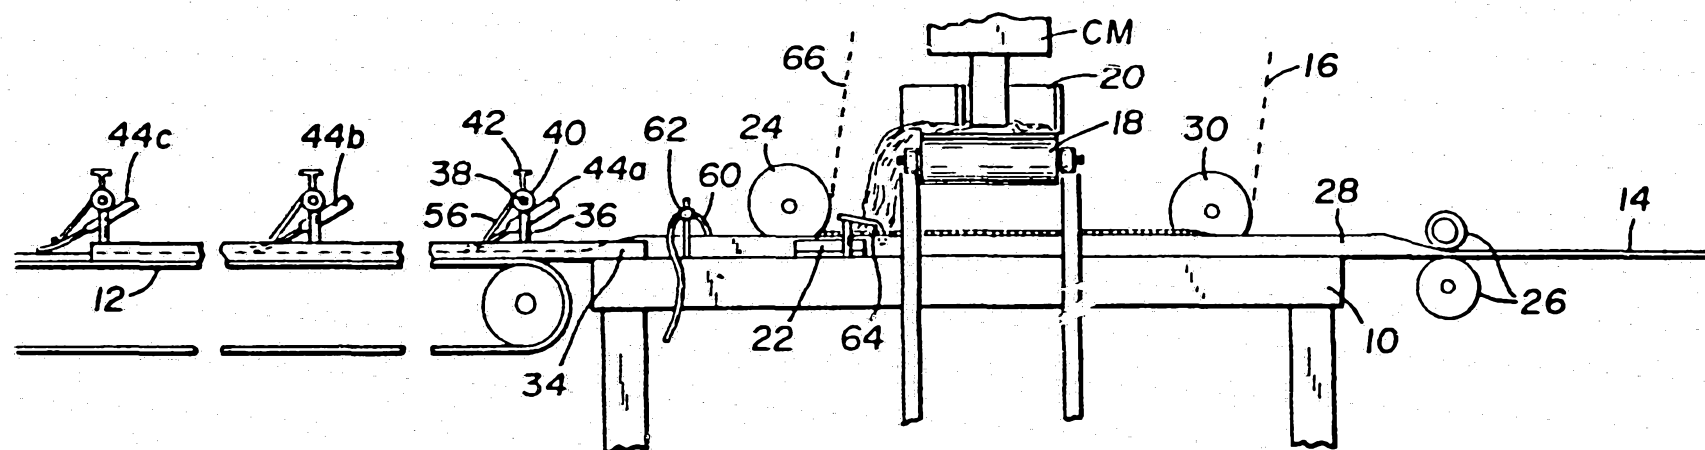


Fig. 3

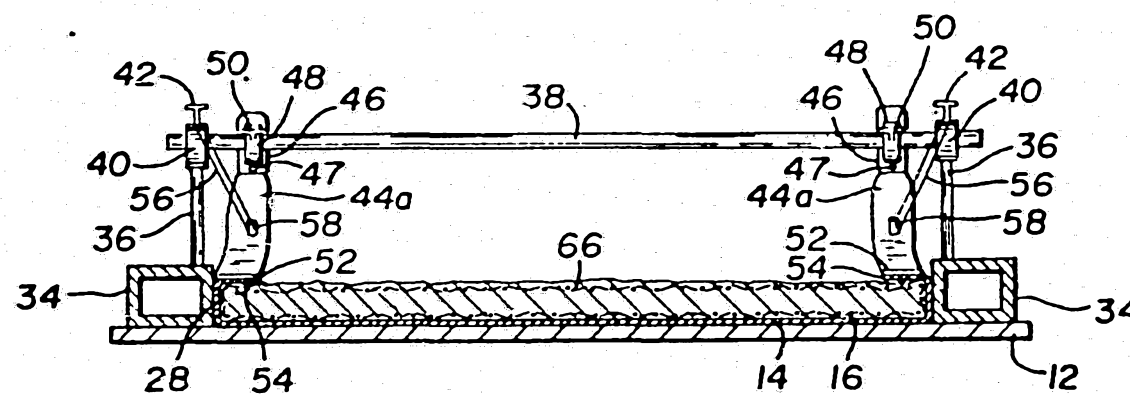


Fig. 4

SUBSTITUTE SHEET

2 / 4

3 / 4

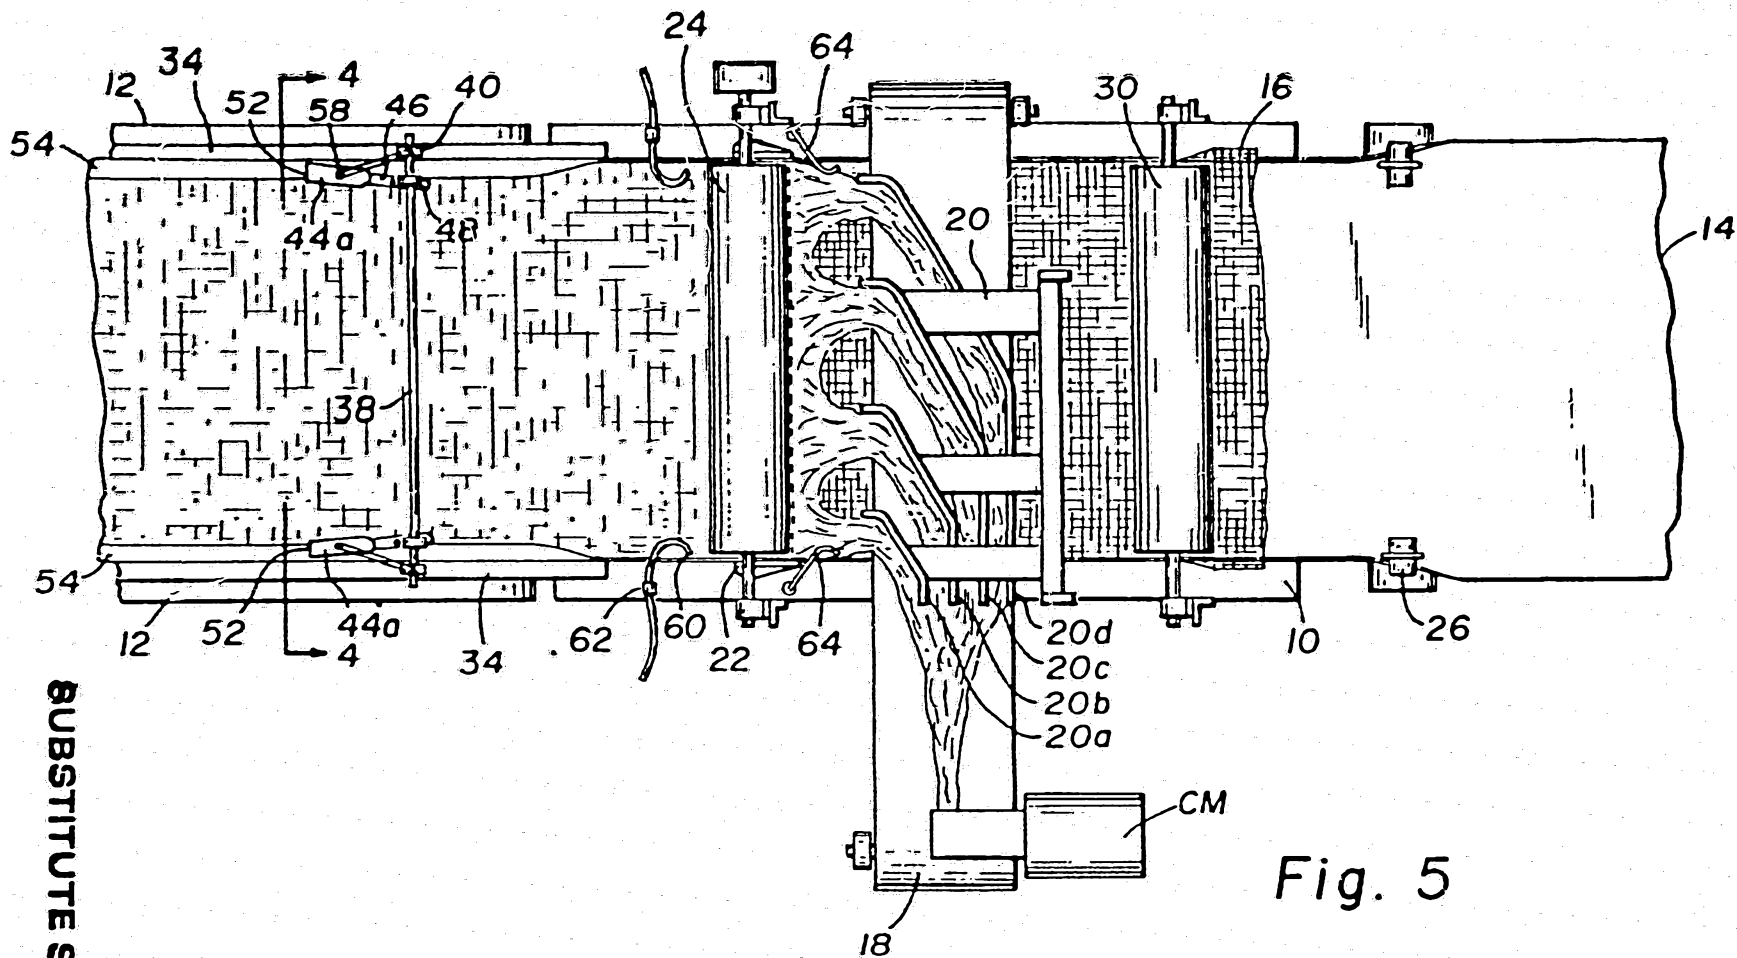


Fig. 5

SUBSTITUTE SHEET

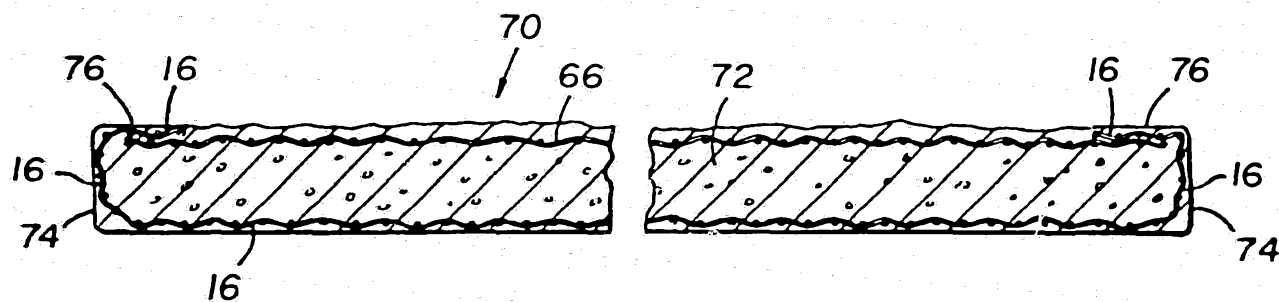


Fig. 6

SUBSTITUTE SHEET

INTERNATIONAL SEARCH REPORT

International Application No PCT/US87/00155

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ³		
According to International Patent Classification (IPC) or to both National Classification and IPC		
INT CL 4 B32B 3/04, 13/02, 5/14		
US CL 156/42, 348; 428/192, 193, 703		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁴		
Classification System	Classification Symbols	
U.S.	156/42, 346, 348; 428/192, 193, 309.9, 312.4, 703	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁵		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴		
Category ⁶	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸
X,E Y,E	US,A, 4,647,496 (LEHNERT) 03 MARCH 1987, entire columns 11-14.	1-25 1-19
Y	US,A, 4,504,335 (GALER) 12 MARCH 1985, Figures 1 and 2.	1-19
X	US,A, 4,351,867 (MULVEY) 28 SEPTEMBER 1982, entire columns 3-6.	20-22,24,25
X	US,A, 4,002,788 (LOTT) 11 JANUARY 1977, Figure 2.	20-22,24,25
* Special categories of cited documents: ¹⁵ "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search ²	Date of Mailing of this International Search Report ³	
01 APRIL 1987	13 APR 1987	
International Searching Authority ¹	Signature of Authorized Officer ¹⁰	
ISA/US	W. J. VANBALEN	