




(43) International Publication Date
10 November 2016 (10.11.2016)

- (51) International Patent Classification:
F16H 41/24 (2006.01) *F16H 41/28* (2006.01)
- (21) International Application Number:
PCT/EP2016/059795
- (22) International Filing Date:
2 May 2016 (02.05.2016)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14/704,263 5 May 2015 (05.05.2015) US
- (71) Applicant: VALEO EMBRAYAGES [FR/FR]; 81 avenue ROGER DUMOULIN, 80009 AMIENS cedex 2 (FR).
- (72) Inventor: DEPRAETE, Alexandre; 1950 Lone Pine Road, Bloomfield, Michigan 48302 (US).
- (74) Agent: CARDON, Nicolas; VALEO Embrayages, See Propriété Intellectuelle, 14 Avenue des BEGUINES, 95892 Cergy Pontoise Cedex (FR).

- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: STATOR ASSEMBLY OF HYDROKINETIC TORQUE CONVERTER, AND METHOD FOR MAKING THE SAME

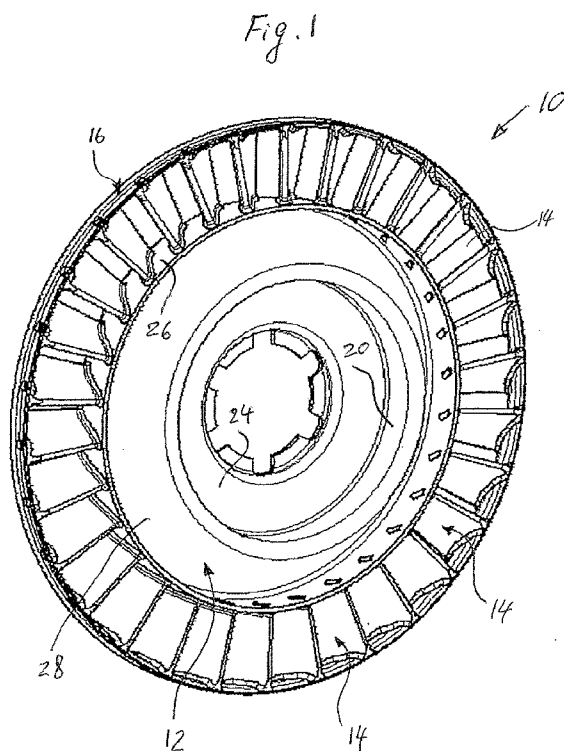

(57) Abstract: A stator of a hydrokinetic torque converter comprises a stator hub having an axis, a stator belt coaxial to the axis and a plurality of stator blades extending radially outwardly between the stator hub and the stator belt. Each of the stator blades has radially inner and outer mounting pins. The stator hub has hub slots, and the stator belt has belt slots. The radially inner mounting pin of one of the stator blades is disposed in one of the hub slots of the stator hub and the radially outer mounting pin of one of the stator blades is disposed in one of the belt slots of the stator belt.



Published:

— *with international search report (Art. 21(3))*

STATOR ASSEMBLY OF HYDROKINETIC TORQUE CONVERTER, AND
METHOD FOR MAKING THE SAME

BACKGROUND OF THE INVENTION

5 Field of the Invention

[0001] This invention generally relates to hydrokinetic torque converters in general, and more particularly, to a stator assembly for a hydrokinetic torque converter and a method for making the same.

Description of the Related Art

10 [0002] Typically, a hydrokinetic torque converter includes a drive pump (or impeller), a driven turbine, a stator (sometimes referred to as the reactor). The stator (or stator assembly) is positioned between the impeller and turbine to redirect hydraulic work fluid from the turbine back to the impeller in an efficient manner. The stator is typically mounted on a one-way clutch to prevent the stator from counter-rotation. Thrust bearings are interposed
15 between side bearing rings of the stator and the impeller and the turbine.

[0003] The turbine is operatively connected with a hub linked in rotation to a driven shaft, which is itself linked to an input shaft of a transmission of a vehicle. The turbine works together with the impeller, which is linked in rotation to a casing that is linked in rotation to a driving shaft driven by an internal combustion engine. The stator is interposed axially
20 between the turbine and the impeller, and is mounted so as to rotate on the driven shaft with the interposition of the one-way clutch. Typically, the stator is made by a single-piece casting or molding.

[0004] Typically, the stator is a single-piece body made of aluminum by die casting. Various

machining processes also required to be added to the stator body. As typical stators are made by die casting from aluminum, the cost is relatively high as aluminum is expensive material, and die casting tool is complex to design and costly. Moreover, the typical process of making stators constrains design options.

- 5 [0005] While conventional stators of the hydrokinetic torque converters, including but not limited to that discussed above, have proven to be acceptable for vehicular driveline applications and conditions, improvements that may enhance their performance and cost are possible. The need therefore exists for a stator for a hydrokinetic torque converter that is lighter, simple in design, compact in construction and economical to package and
- 10 manufacture, improves stator blade design flexibility for hydrodynamic performance (allows blade overlap, allows radial/angular shape for stator hub and stator belt thanks to no axial pulling requirement), and does not use complex and expansive die casting tool.

BRIEF SUMMARY OF THE INVENTION

- [0006] According to a first aspect of the invention, there is provided a stator assembly for a
- 15 hydrokinetic torque converter. The stator assembly comprises a stator hub having an axis, a stator belt coaxial to the axis, and a plurality of stator blades extending radially outwardly between the stator hub and the stator belt. Each of the stator blades has a radially inner mounting pin and a radially outer mounting pin. The stator hub has a plurality of hub slots. The stator belt has a plurality of belt slots. The radially inner mounting pin of one of the
- 20 plurality of the stator blades is disposed in one of the hub slots of the stator hub, and the radially outer mounting pin of one of the plurality of the stator blades is disposed in one of the belt slots of the stator belt.

[0007] In an embodiment, the plurality of the hub slots of the stator hub are complementary to the radially inner mounting pins of the stator blades; and wherein the plurality of the belt slots of the stator belt are complementary to the radially outer mounting pins of the stator blades.

[0008] In another embodiment the stator hub defines a substantially cylindrical hub bore
5 coaxial to the axis, the hub bore adapted to house a one-way clutch of the hydrokinetic torque converter.

[0009] In another embodiment, the stator hub further includes an annular base rim coaxial to the axis X and a transverse wall integral with the base rim and extending radially inwardly from the base rim so as to define the substantially cylindrical hub bore.

10 [0010] In another embodiment, the hub bore within the stator hub is delimited by a cylindrical inner peripheral surface of the base rim and an annular inner transverse surface of the transverse wall.

[0011] In another embodiment, the transverse wall includes at least one support tab extending radially inwardly from the transverse wall and axially offset therefrom; and wherein the at
15 least one support tab is configured to prevent axial movement of components of the one-way clutch of the hydrokinetic torque converter in the direction of the axis X relative to the stator hub.

[0012] In another embodiment, the stator hub further includes a connection wall extending radially outwardly from the base rim toward the outer rim and integrally connecting the base
20 rim to the outer rim.

[0013] In another embodiment, the radially inner mounting pins and the hub slots have non-circular cross-sections in the plane perpendicular to the radial direction; and wherein the

radially outer mounting pins and the belt slots have non-circular cross-sections in the plane perpendicular to the radial direction.

[0014] In another embodiment, the stator hub has a substantially annular outer rim coaxial to the axis; wherein the stator belt has a substantially annular belt body coaxial to the axis;

5 whereon the stator blades extend radially outwardly between the outer rim of the stator hub and the belt body of the stator belt; wherein the hub slots are formed in the outer rim of the stator hub; and wherein the belt slots are formed in the belt body of the stator belt.

[0015] According to a second aspect of the present invention, there is provided a method for making a stator assembly of a hydrokinetic torque converter. The method involves the steps

10 of forming a stator hub having an axis, forming a metal strip, providing a plurality of stator blades, non-rotatably securing the stator blades to the stator hub at radially inner ends of the stator blades, deforming the metal strip to a substantially annular shaped deformed metal strip so that free opposite distal ends of the metal strip are positioned adjacent to each other, and non-rotatably securing the stator blades to the deformed metal strip at radially outer ends of
15 the stator blades.

[0016] In an embodiment, the method further comprising the steps of:

forming a plurality of hub slots in a substantially annular outer rim of the stator hub, the outer rim of the stator hub coaxial to the axis;

forming a plurality of belt slots in the metal strip; and

20 forming the stator blades so that each of the stator blades having a radially inner mounting pin (37) complementary to the hub slots and a radially outer mounting pin complementary to the belt slots.

[0017] In another embodiment, the plurality of the hub slots in the outer rim of the stator hub are complementary to the radially inner mounting pins of the stator blades; and wherein the plurality of the belt slots in the belt body of the stator belt are complementary to the radially outer mounting pins of the stator blades.

5 [0018] In another embodiment, the step of non-rotatably securing the stator blades to the stator hub includes the step of inserting the radially inner mounting pin of each of the stator blades into one of the hub slots; wherein the step of non-rotatably securing the deformed metal strip to the stator blades includes the step of inserting the radially outer mounting pin of each of the stator blades into one of the belt slots in the deformed metal strip so that free
10 opposite distal ends of the metal strip are positioned adjacent to each other.

[0019] In another embodiment, the method further comprises the step of joining the free opposite distal ends of the metal strip together so as to form a substantially annular belt body of a stator belt.

[0020] In another embodiment, the stator hub is a single-piece part formed by stamping a
15 blank of a sheet metal material.

[0021] In another embodiment, the plurality of the hub slots are formed radially in the outer rim of the stator hub are formed by punching.

[0022] In another embodiment, the radially inner mounting pins and the complementary hub slots have non-circular cross-sections in the plane perpendicular to the radial direction; and
20 wherein the radially outer mounting pins and the complementary belt slots have non-circular cross-sections in the plane perpendicular to the radial direction.

[0023] In another embodiment, the metal strip is made by metal rolling.

[0024] In another embodiment, the plurality of the belt slots are formed by punching.

[0025] In another embodiment, the plurality of the stator blades are formed by molding or casting.

5 [0026] Other aspects of the invention, including apparatus, devices, systems, converters, processes, and the like which constitute part of the invention, will become more apparent upon reading the following detailed description of the exemplary embodiments.

BRIEF DESCRIPTION OF THE DRAWING(S)

[0027] The accompanying drawings are incorporated in and constitute a part of the
10 specification. The drawings, together with the general description given above and the detailed description of the exemplary embodiments and methods given below, serve to explain the principles of the invention. The objects and advantages of the invention will become apparent from a study of the following specification when viewed in light of the accompanying drawings, in which like elements are given the same or analogous reference
15 numerals and wherein:

[0028] Fig. 1 is a perspective view of a stator assembly in accordance with an exemplary embodiment of the present invention;

[0029] Fig. 2 is a perspective view of the stator assembly in accordance with the exemplary embodiment of the present invention with a one-way clutch mounted thereon;

20 [0030] Fig. 3 is a front view of the stator assembly in accordance with the exemplary embodiment of the present invention;

[0031] Fig. 4 is a front view of the stator assembly in accordance with the exemplary embodiment of the present invention with the one-way clutch mounted thereon;

[0032] Fig. 5A is a cross-sectional view of the stator assembly according to the exemplary embodiment of the present invention taken along the lines 5A-5A in Fig. 3;

[0033] Fig. 5B is a cross-sectional view of the stator assembly according to an alternative embodiment of the present invention;

5 [0034] Fig. 6 is a cross-sectional view of the stator assembly according to the exemplary embodiment of the present invention taken along the lines 6-6 in Fig. 3;

[0035] Fig. 7 is partial perspective view of a stator hub of the stator assembly in accordance with the exemplary embodiment of the present invention;

[0036] Fig. 8 is a perspective view of a stator blade of the stator assembly in accordance with
10 the exemplary embodiment of the present invention; and

[0037] Fig. 9 is partial perspective view of a stator belt of the stator assembly in accordance with the exemplary embodiment of the present invention.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS AND EMBODIED METHODS OF THE INVENTION

15 [0038] Reference will now be made in detail to exemplary embodiments and methods of the invention as illustrated in the accompanying drawings, in which like reference characters designate like or corresponding parts throughout the drawings. It should be noted, however, that the invention in its broader aspects is not limited to the specific details, representative devices and methods, and illustrative examples shown and described in connection with the
20 exemplary embodiments and methods.

[0039] This description of exemplary embodiments is intended to be read in connection with the accompanying drawings, which are to be considered part of the entire written description. In the description, relative terms such as "horizontal," "vertical," "up," "down," "upper",

"lower", "right", "left", "top" and "bottom" as well as derivatives thereof (e.g., "horizontally," "downwardly," "upwardly," etc.) should be construed to refer to the orientation as then described or as shown in the drawing figure under discussion. These relative terms are for convenience of description and normally are not intended to require a particular orientation.

5 Terms concerning attachments, coupling and the like, such as "connected" and "interconnected," refer to a relationship wherein structures are secured or attached to one another either directly or indirectly through intervening structures, as well as both movable or rigid attachments or relationships, unless expressly described otherwise. The term "operatively connected" is such an attachment, coupling or connection that allows the
10 pertinent structures to operate as intended by virtue of that relationship. Additionally, the words "a" and "an" as used in the claims mean "at least one" and the word "two" as used in the claims means "at least two".

[0040] A stator assembly according to the exemplary embodiment of the present invention, suitable for use in a hydrokinetic torque converter, is generally represented in the
15 accompanying drawings by reference numeral 10, as best shown in Figs. 1-4. The stator assembly 10 is typically mounted between an impeller (not shown) and a turbine (not shown) of the torque converter. A one-way (or overrunning) clutch 46 is disposed between the stator 10 and a stator shaft (not shown) and permits rotation of the stator assembly 10 in one direction only.

20 **[0041]** The stator assembly 10 is rotatable about an axis of rotation X and comprises a substantially annular stator hub 12 coaxial to the axis X, a plurality of stator blades (or vanes) 14 extending radially outwardly from the stator hub 12, which is located radially inwardly and central to the stator blades 14, and a substantially annular stator belt 16 mounted to the stator

blades 14 so that the stator blades 14 extend radially between the stator hub 12 and the stator belt 16. The stator belt 16 is located outside the stator hub 12.

[0042] Herein, the axial and radial orientations (or directions) are considered with respect to the axis X of the stator assembly 10. The relative terms such as "axially," "radially," and

5 "circumferentially" are with respect to orientations parallel to, perpendicular to, and circularly around the axis X, respectively.

[0043] As best shown in Figs. 5A and 7, the stator hub 12 includes a substantially annular

base rim 20 coaxial to the axis X, and a transverse wall 22 integral with the base rim 20 and extending radially inwardly from the base rim 20 so as to define a substantially cylindrical

10 hub bore 24 coaxial with the axis X. The hub bore 24 within the stator hub 12 is delimited by a cylindrical inner peripheral surface 21 of the base rim 20 and a substantially annular inner

transverse surface 23 of the transverse wall 22. The cylindrical inner peripheral surface 21 of the base rim 20 extends substantially coaxially to the axis X, while the inner transverse

surface 23 of the transverse wall 22 extend substantially perpendicular to the axis X. The hub

15 bore 24 within the stator hub 12 houses the one-way clutch 46 of the hydrokinetic torque converter (not shown).

[0044] The transverse wall 22 includes one or more support tabs 25 extending radially

inwardly from the transverse wall 22 and axially offset therefrom. The transverse wall 22 of the stator hub 12 with the support tabs 25 is configured to prevent axial movement of

20 components of the one-way clutch 46 of the hydrokinetic torque converter in the direction of the axis X relative to the stator hub 12.

[0045] The stator hub 12 further includes a substantially annular outer rim 26 coaxial with the axis X, and a connection wall 28 extending radially outwardly from the base rim 20 toward

the outer rim 26 and integrally connecting the base rim 20 to the outer rim 26. According to the exemplary embodiment of the present invention, the stator hub 12 is made of a sheet metal material, such as carbon steel, by stamping as a single-piece part. As best shown in Fig. 5A, the annular outer rim 26 of the stator hub 12 has a substantially cylindrical (i.e., straight in the axial direction) radially outer surface 27 of the outer rim 26. Alternatively, as best shown in Fig. 5B, an annular outer rim 26' of the stator hub 12 has a curved, concave (in the axial direction) radially outer surface 27'. The curvature of the concave annular outer rim 26' is selected so as to optimize the shape for fluid flow and to follow the curvature of a torus 48, as best shown in Fig. 5B. It results in a better flow efficiency and better hydrodynamic performance of the hydrokinetic torque converter.

[0046] As best shown in Fig. 7, the stator hub 12 has a plurality of hub slots (through holes) 30 formed through the outer rim 26 thereof. The hub slots 30 are circumferentially equidistantly spaced from one another. According to the exemplary embodiment of the present invention, the hub slots 30 in the outer rim 26 of the stator hub 12 are structurally and dimensionally identical. In the exemplary embodiment of the present invention, the hub slots 30 extend substantially obliquely with regards to an axis parallel to the axis of rotation X and which goes through the hub slots 30. In alternatively, the hub slots 30 could extend perpendicularly or parallel to the same axis.

[0047] Further according to the exemplary embodiment of the present invention, the stator blades 14 are structurally and dimensionally identical. As best shown in Figs. 5A and 8, each of the stator blades 14 includes a curved blade body 32 having a radially outer (or first) end 33₁ with a radially outer surface 34 juxtaposed to the stator belt 16, and a radially inner (or second) end 33₂ with a radially inner surface 36 juxtaposed to the outer rim 26 of the stator

hub 12. The radially outer surface 34 of the stator blades 14 is formed curved complementary to a radially inner surface 17 of the stator belt 16, while the radially inner surface 36 of the stator blades 14 is formed complementary to a radially outer surface 27 of the outer rim 26.

[0048] Moreover, each of the stator blades 14 further includes a radially outer mounting pin

35 extending substantially radially outwardly from the radially outer surface 34 of the radially outer end 33₁ of the blade body 32 toward the stator belt 16, and a radially inner mounting pin 37 extending substantially radially inwardly from the radially inner surface 34 of the radially inner end 33₂ of the blade body 32 toward the outer rim 26 of the stator hub 12. Alternatively, each of the stator blades 14 may include more than one radially outer mounting pin 35

extending substantially radially outwardly from the radially outer surface 34 of the blade body 32, and more than one radially inner mounting pin 37 extending substantially radially inwardly from the radially inner surface 34 of the blade body 32.

[0049] Furthermore, a number of the hub slots 30 formed through the outer rim 26 of the stator hub 12 correspond to a number of the radially inner mounting pins 37 of the stator

blades 14. In an assembled condition of the stator assembly 10, the radially inner mounting pins 37 of the stator blades 14 are disposed in and extend through the hub slots 30 in the radial direction. Accordingly, the hub slots 30 are geometrically complementary to the corresponding radially inner mounting pins 37.

[0050] As best shown in Figs. 5A and 9, the stator belt 16 includes a substantially annular belt body 40 having a plurality of belt slots (through holes) 42 formed therethrough. The belt slots 42 are circumferentially equidistantly spaced from one another. According to the exemplary embodiment of the present invention, the belt slots 42 in the belt body 40 of the stator belt 16 are structurally and dimensionally identical.

[0051] Furthermore, a number of the belt slots 42 formed through the belt body 40 of the stator belt 16 correspond to a number of the radially outer mounting pins 35 of the stator blades 14. In an assembled condition of the stator assembly 10, the radially outer mounting pins 35 of the stator blades 14 are disposed in and extend through the belt slots 42 in the radial direction. Accordingly, the belt slots 42 are geometrically complementary to the corresponding radially outer mounting pins 35. The belt slots 42 can be oriented substantially perpendicularly (as shown in Fig. 9) or obliquely with regards to an axis which is parallel to the axis of rotation X.

[0052] In order to retain the stator blades 14 in the appropriate, angularly non-moveable (i.e., non-rotatable) position relative to the stator hub 12, the radially inner mounting pins 37 and the corresponding hub slots 30 have non-circular cross-sections in the plane perpendicular to the radial direction, such as substantially rectangular, as best shown in Figs. 7 and 8.

Similarly, the radially outer mounting pins 35 and the corresponding belt slots 42 have non-circular cross-sections in the plane perpendicular to the radial direction, such as substantially rectangular, as best shown in Figs. 8 and 9, in order to retain the stator blades 14 in the appropriate, angularly fixed (or non-rotatable) position relative to the stator belt 16.

Therefore, the radially outer mounting pins 35/the belt slots 42 and the radially inner mounting pins 37/the hub slots 30 define an anti-rotation mechanism that prevents the rotation of the stator blades 14 relative to the stator hub 12 and the stator belt 16. It should be understood that the anti-rotation mechanism may undertake alternative forms.

[0053] The stator assembly 10 according to the present invention allows the stator blade overlap configuration that is not typically feasible. Specifically, as best shown in Fig. 6, the stator blades 14 partially overlap each other in the axial and circumferential directions. As

shown in Fig. 6, the stator blades 14 overlap each other in the circumferential directions by an overlap amount δ between adjacent vanes 14. Such an overlapped stator blade arrangement allows a significant improvement in torque ratio and efficiency of the hydrokinetic torque converter.

5 [0054] Described below is an exemplary method whereby the stator assembly 10 of the hydrokinetic torque converter according to the exemplary embodiment of the present invention is manufactured. It should be understood that alternative methods may be practiced within the scope of the invention.

[0055] According to the embodied method, the stator hub 12 is made of a sheet metal material
10 by stamping a blank of the sheet metal material to form a single-piece part defining the hub bore 24, the outer rim 26 and having an axis X. Then, the hub slots 30 are formed radially through the outer rim 26 of the stator hub 12 by any appropriate technique known in the art, such as by punching. Moreover, the hub slots 30 have non-circular cross-sections in the plane perpendicular to the radial direction, such as substantially rectangular, and are formed at
15 equidistantly spaced apart locations on the outer rim 26.

[0056] Next, the stator belt 16 is made of a metal strip (or band). According with the exemplary embodiment of the present invention, the metal strip is made of steel, such as carbon steel, by metal rolling process. The belt slots 42 are formed at equidistantly spaced apart locations on the rolled steel band by any appropriate technique known in the art, such as
20 by punching

[0057] Then, the stator blades 14 are provided. As described above, each of the stator blades 14 is formed with the radially outer mounting pin 35 extending substantially radially outwardly from the radially outer surface 34 of the blade body 32, and the radially inner

mounting pin 37 extending substantially radially inwardly from the radially inner surface 34 of the blade body 32. Both the radially outer mounting pin 35 and the radially inner mounting pin 37 of each of the stator blades 14 have non-circular cross-sections in the plane perpendicular to the radial direction, such as substantially rectangular. Moreover, the stator blades 14 are formed so that the belt slots 42 are geometrically complementary to the corresponding radially outer mounting pins 35, while the hub slots 30 are geometrically complementary to the corresponding radially inner mounting pins 37. The stator blades 14 are made by injection molding or die casting of light material, such as hard plastic, aluminum, magnesium, etc.

[0058] Subsequently, the stator blades 14 are angularly non-moveably (i.e., non-rotatably) mounted to the stator hub 12. Specifically, the radially inner mounting pin 37 of each of the stator blades 14 is inserted into and through one of the hub slots 30 through the outer rim 26 of the stator hub 12, as best shown in Fig. 5A.

[0059] Then, the rolled steel strip is deformed to a substantially annular shape, placed over the stator hub 12, and mounted to the stator blades 14 so that the radially outer mounting pin 35 of each of the stator blades 14 is inserted into and through one of the belt slots 42 in the rolled steel stator belt 16, thus angularly non-moveably (i.e., non-rotatably) mounting the stator blades 14 to the rolled steel band. As a result, free opposite distal ends of the rolled steel band are positioned adjacent to each other.

[0060] Next, the free opposite distal ends of the rolled steel band are welded together so as to form the substantially annular belt body 40 of the stator belt 16. It should be understood that alternative methods of connecting (or joining) the opposite distal ends of the rolled steel band may be practiced within the scope of the invention.

[0061] The one-way clutch 46 may be later mounted in the hub bore 24 of the stator hub 12.

[0062] Therefore, the present invention provides a novel stator assembly for a hydrokinetic torque converter and a method for making the same that reduces the size/packaging of the stator assembly and the cost of making the stator assembly by saving expensive material, such as aluminum, typically used for making the stator assembly. The novel method for making the stator assembly according to the present invention also allows new stator blade configuration and overlaps that are not typically feasible with current state of the art. This new stator blade arrangement allows a significant improvement in torque ratio and efficiency of the hydrokinetic torque converter, improves stator blade design flexibility for hydrodynamic performance by allowing blade overlap and radial/angular shape for stator hub and stator belt, and does not use complex and expansive die casting tool.

[0063] The foregoing description of the exemplary embodiment(s) of the present invention has been presented for the purpose of illustration in accordance with the provisions of the Patent Statutes. It is not intended to be exhaustive or to limit the invention to the precise forms disclosed. The embodiments disclosed hereinabove were chosen in order to best illustrate the principles of the present invention and its practical application to thereby enable those of ordinary skill in the art to best utilize the invention in various embodiments and with various modifications as suited to the particular use contemplated, as long as the principles described herein are followed. This application is therefore intended to cover any variations, uses, or adaptations of the invention using its general principles. Further, this application is intended to cover such departures from the present disclosure as come within known or customary practice in the art to which this invention pertains. Thus, changes can be made in

the above-described invention without departing from the intent and scope thereof. It is also intended that the scope of the present invention be defined by the claims appended thereto.

CLAIMS

1. A stator assembly (10) of a hydrokinetic torque converter, comprising:

a stator hub (12) having an axis (X);

5 a stator belt (16) coaxial to the axis; and

a plurality of stator blades (14) extending radially outwardly between the stator hub and the stator belt, each of the stator blades having a radially inner mounting pin (37) and a radially outer mounting pin (35);

the stator hub having a plurality of hub slots (30);

10 the stator belt having a plurality of belt slots (42);

the radially inner mounting pin of one of the plurality of the stator blades disposed in one of the hub slots the stator hub and the radially outer mounting pin of one of the plurality of the stator blades disposed in one of the belt slots of the stator belt.

2. The stator assembly as defined in claim 1, wherein the plurality of the hub slots of

15 the stator hub are complementary to the radially inner mounting pins of the stator blades; and wherein the plurality of the belt slots of the stator belt are complementary to the radially outer mounting pins of the stator blades.

3. The stator assembly according to one of the claims 1 to 2, wherein the stator hub

defines a substantially cylindrical hub bore (24) coaxial to the axis, the hub bore adapted to

20 house a one-way clutch of the hydrokinetic torque converter.

4. The stator assembly according to one of the claims 1 to 3, wherein the stator hub

further includes an annular base rim (20) coaxial to the axis X and a transverse wall (22)

integral with the base rim and extending radially inwardly from the base rim so as to define the substantially cylindrical hub bore.

5 5. The stator assembly as defined in claim 4, wherein the hub bore within the stator hub is delimited by a cylindrical inner peripheral surface (21) of the base rim and an annular inner transverse surface (23) of the transverse wall.

6. The stator assembly according to one of the claims 3 to 4, wherein the transverse wall (25) includes at least one support tab extending radially inwardly from the transverse wall and axially offset therefrom; and wherein the at least one support tab is configured to prevent axial movement of components of the one-way clutch of the hydrokinetic torque
10 converter in the direction of the axis X relative to the stator hub.

7. The stator assembly according to one of the claims 4 to 6, wherein the stator hub further includes a connection wall (28) extending radially outwardly from the base rim toward the outer rim and integrally connecting the base rim to the outer rim.

8. The stator assembly according to one of the claims 1 to 7, wherein the radially inner
15 mounting pins and the hub slots have non-circular cross-sections in the plane perpendicular to the radial direction; and wherein the radially outer mounting pins and the belt slots have non-circular cross-sections in the plane perpendicular to the radial direction.

9. The stator assembly according to one of the claims 1 to 8, wherein the stator hub has a substantially annular outer rim coaxial to the axis; wherein the stator belt has a
20 substantially annular belt body coaxial to the axis; whereon the stator blades extend radially outwardly between the outer rim of the stator hub and the belt body of the stator belt; wherein the hub slots are formed in the outer rim of the stator hub; and wherein the belt slots are formed in the belt body of the stator belt.

10. A method for making a stator assembly (10) of a hydrokinetic torque converter, the method comprising the steps of:

forming a stator hub (12) having an axis;

forming a metal strip;

5 providing a plurality of stator blades (14);

mounting the stator blades to the stator hub at radially inner ends of the stator blades;

deforming the metal strip to a substantially annular deformed metal strip so that free opposite distal ends of the metal strip are positioned adjacent to each other; and

10 mounting the deformed metal strip to the stator blades at radially outer ends of the stator blades.

11. The method as defined in claim 10, further comprising the steps of:

forming a plurality of hub slots (30) in a substantially annular outer rim of the stator hub, the outer rim of the stator hub coaxial to the axis;

forming a plurality of belt slots (42) in the metal strip; and

15 forming the stator blades so that each of the stator blades having a radially inner mounting pin (37) complementary to the hub slots and a radially outer mounting pin (35) complementary to the belt slots.

12. The method as defined in claim 11, wherein the plurality of the hub slots in the outer rim of the stator hub are complementary to the radially inner mounting pins of the stator
20 blades; and wherein the plurality of the belt slots in the belt body of the stator belt are complementary to the radially outer mounting pins of the stator blades.

13. The method according to one of the claims 11 to 12, wherein the step of non-rotatably securing the stator blades to the stator hub includes the step of inserting the radially

inner mounting pin of each of the stator blades into one of the hub slots; wherein the step of non-rotatably securing the deformed metal strip to the stator blades includes the step of inserting the radially outer mounting pin of each of the stator blades into one of the belt slots in the deformed metal strip so that free opposite distal ends of the metal strip are positioned adjacent to each other.

14. The method as defined in claim 13, further comprising the step of joining the free opposite distal ends of the metal strip together so as to form a substantially annular belt body of a stator belt.

15. The method according to one of the claims 10 to 14, wherein the stator hub is a single-piece part formed by stamping a blank of a sheet metal material.

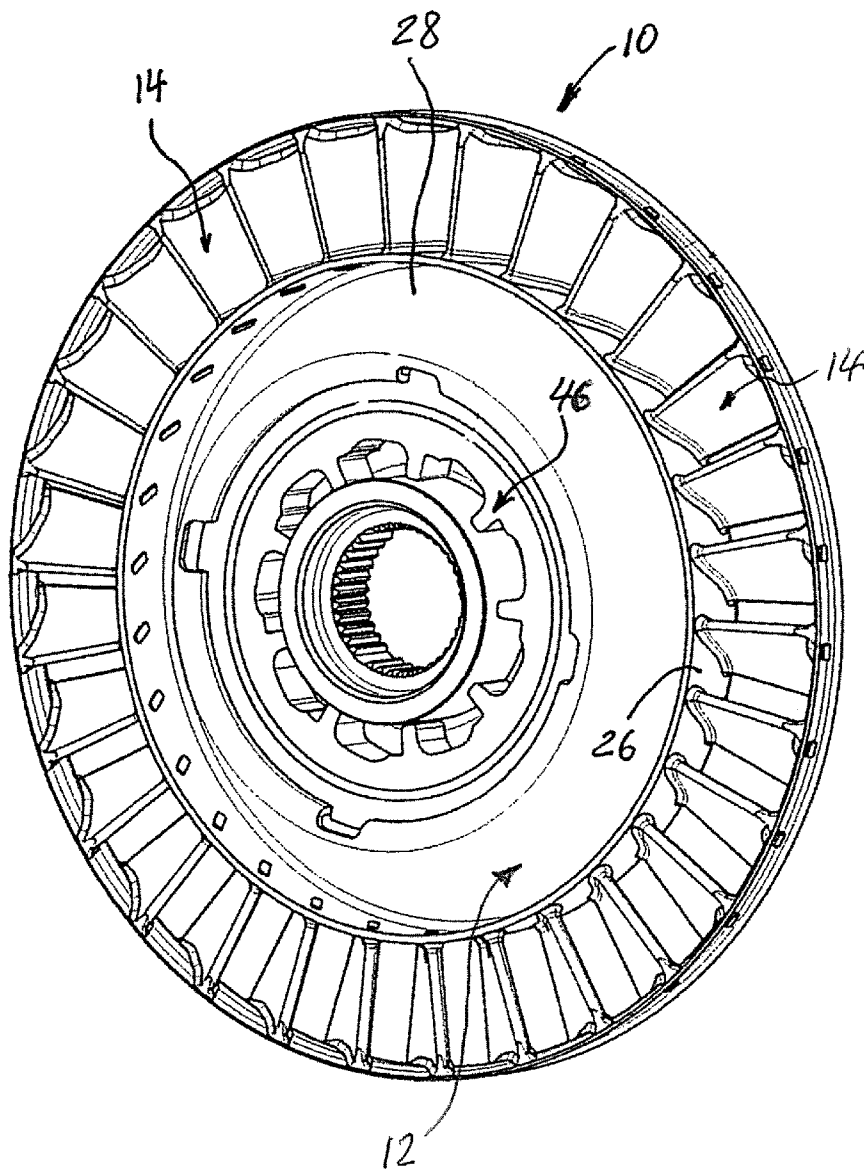
Fig. 2

Fig. 3

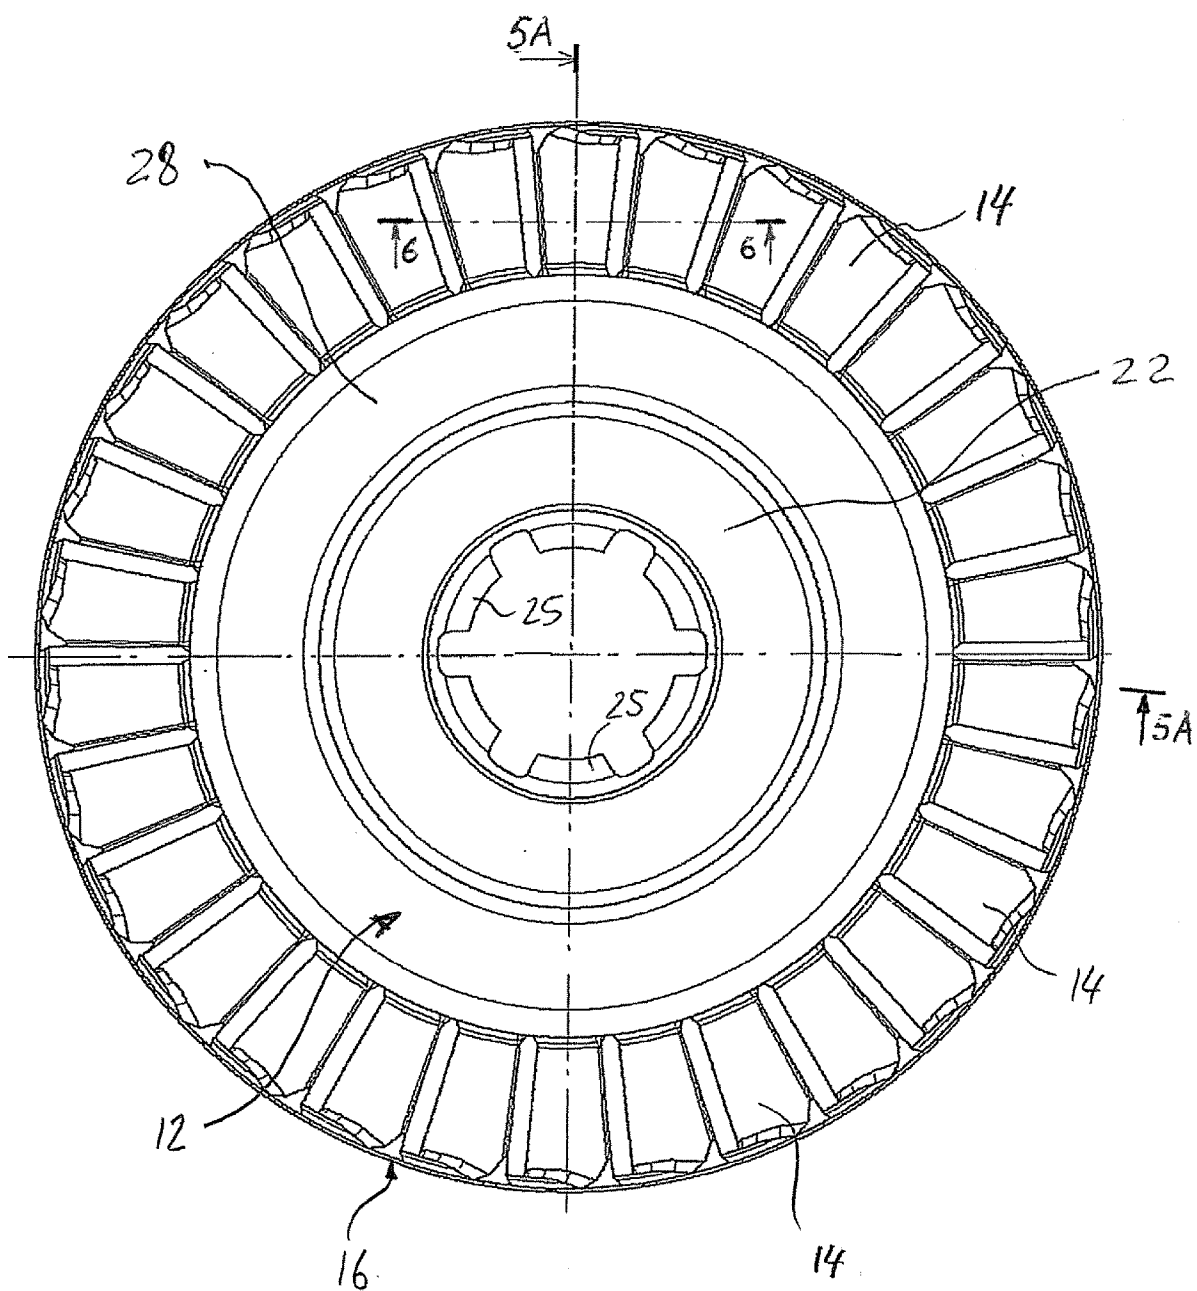


Fig. 4

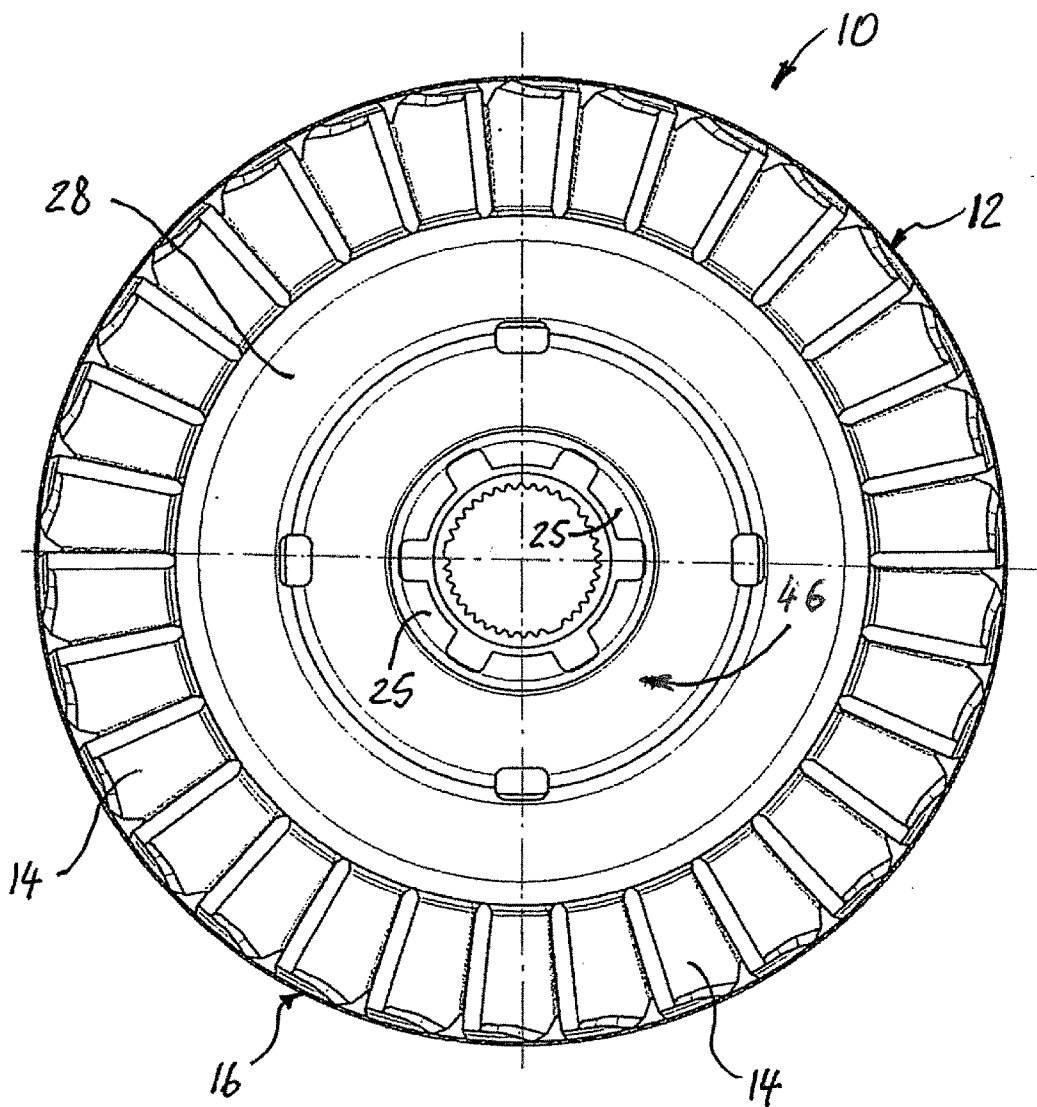


Fig. 5A

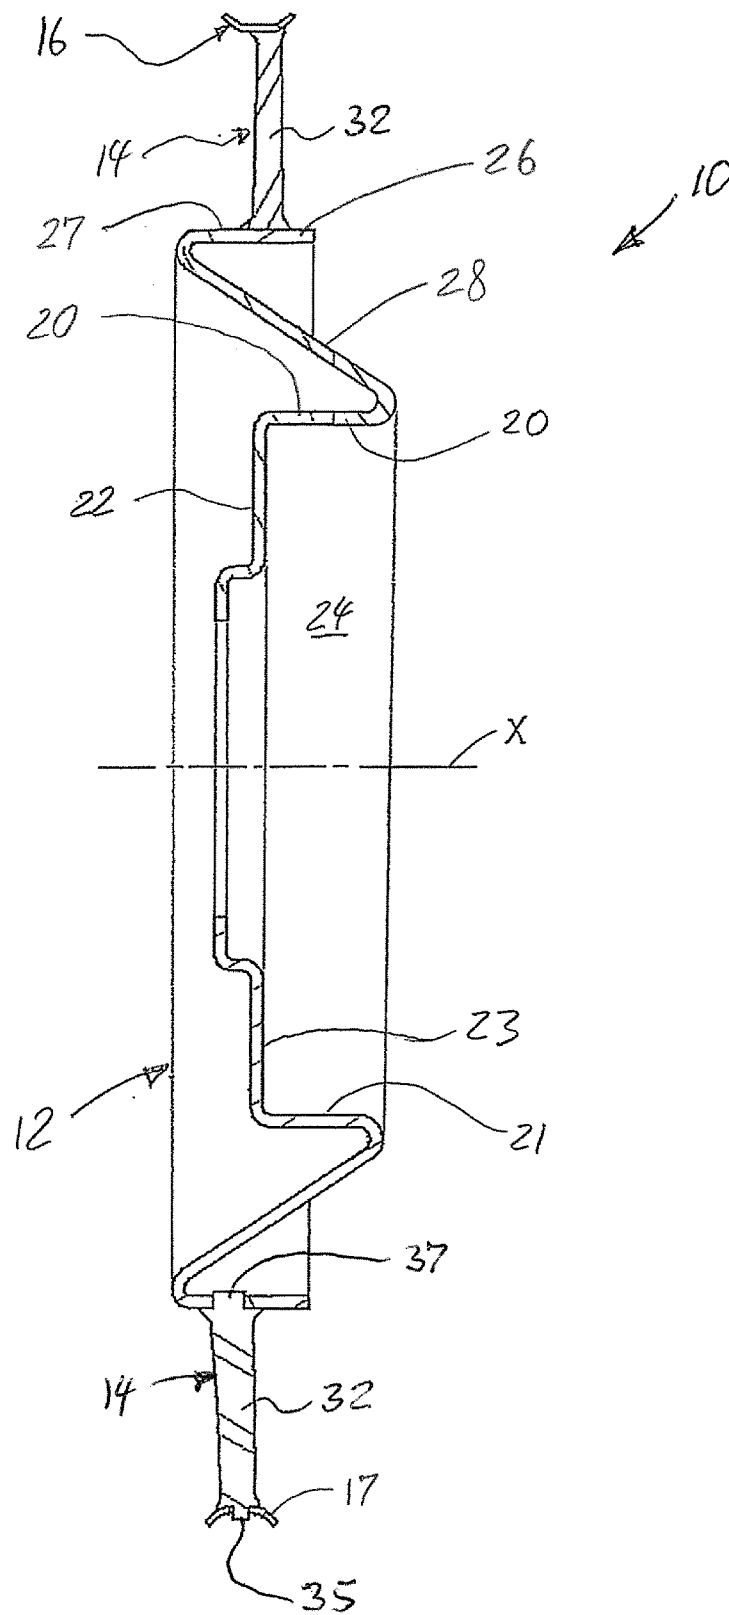
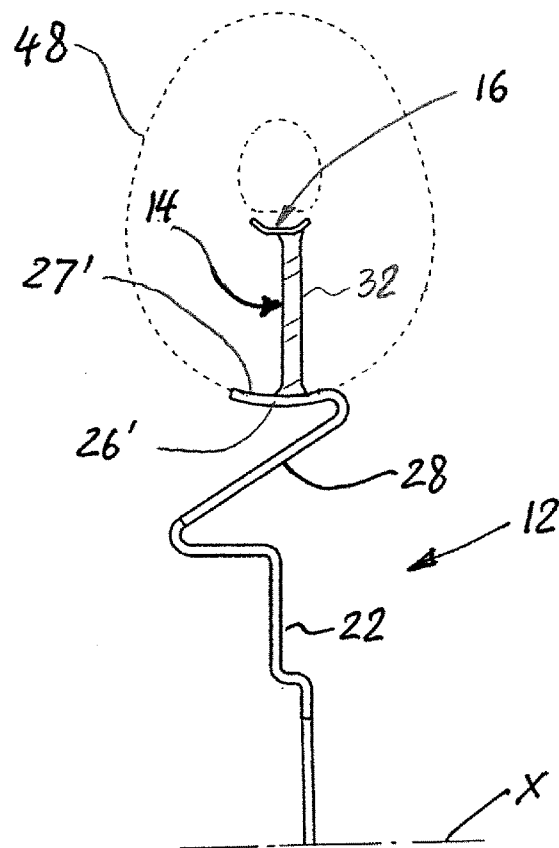


Fig. 5B

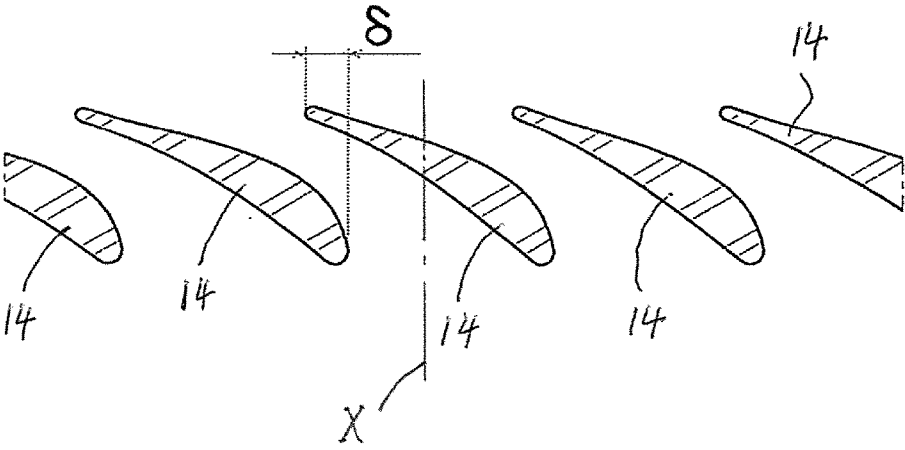


Fig. 6

Fig. 7

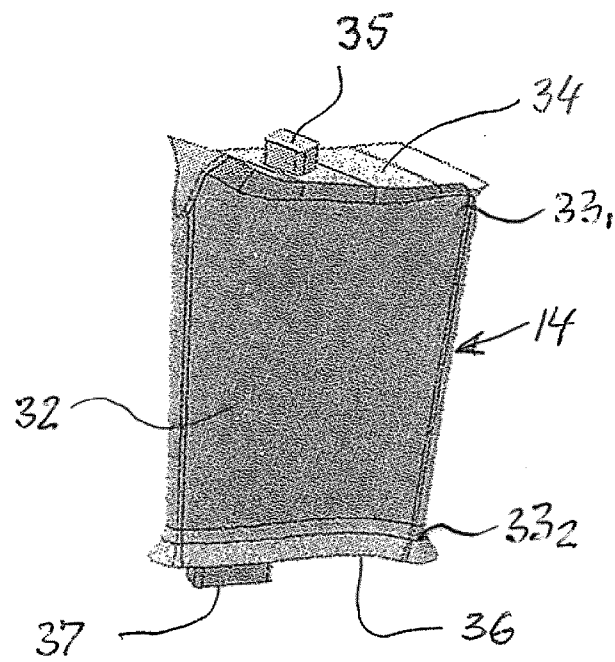
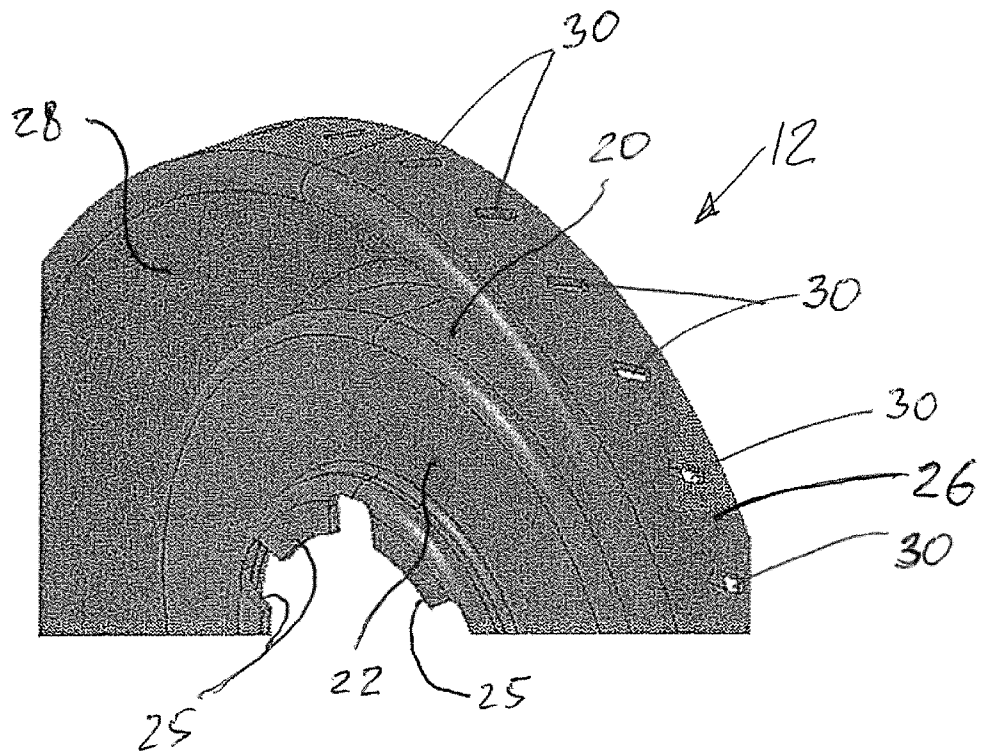


Fig. 8

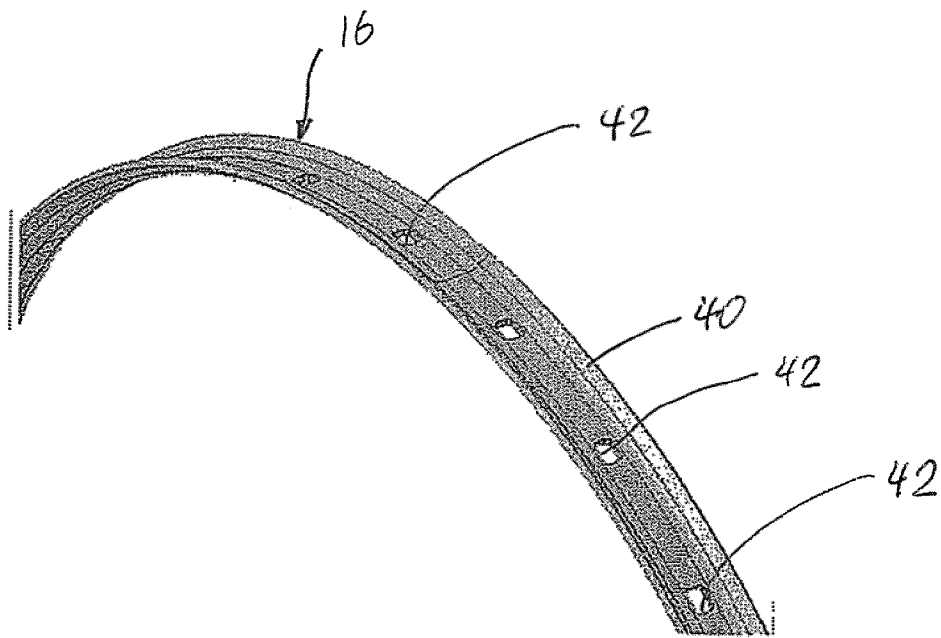


Fig. 9

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2016/059795

A. CLASSIFICATION OF SUBJECT MATTER

INV. F16H41/24 F16H41/28
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F16H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP S50 13911 A (XXX) 13 February 1975 (1975-02-13)	1-5,8-14
A	the whole document	6,7,15
X	US 2007/140841 A1 (GEORGE PHILIP [US] ET AL) 21 June 2007 (2007-06-21)	10
A	paragraph [0055] - paragraph [0059]; claims 34-39; figures 14-16	1-9, 11-15
A	GB 706 752 A (BORG WARNER) 7 April 1954 (1954-04-07)	1-15
A	US 2 598 620 A (SWIFT JOHN F) 27 May 1952 (1952-05-27)	1-15
	column 4, line 52 - column 5, line 3; figure 1	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

8 July 2016

Date of mailing of the international search report

18/07/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Masset, Candie

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2016/059795

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP S5013911	A	13-02-1975	NONE	

US 2007140841	A1	21-06-2007	DE 102006058969 A1	28-06-2007
			EP 1801459 A1	27-06-2007
			US 2007140841 A1	21-06-2007

GB 706752	A	07-04-1954	NONE	

US 2598620	A	27-05-1952	NONE	
