

(51) International Patent Classification:
A63B 61/00 (2006.01)(21) International Application Number:
PCT/US2016/065645(22) International Filing Date:
8 December 2016 (08.12.2016)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/265,392 9 December 2015 (09.12.2015) US
15/370,993 6 December 2016 (06.12.2016) US

(72) Inventor; and

(71) Applicant : GENTIL, Gregoire [US/US]; 1037 Amarillo
avenue, Palo Alto, California 94303 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG,
NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS,
RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY,
TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: PLANAR SOLUTIONS TO OBJECT-TRACKING PROBLEMS

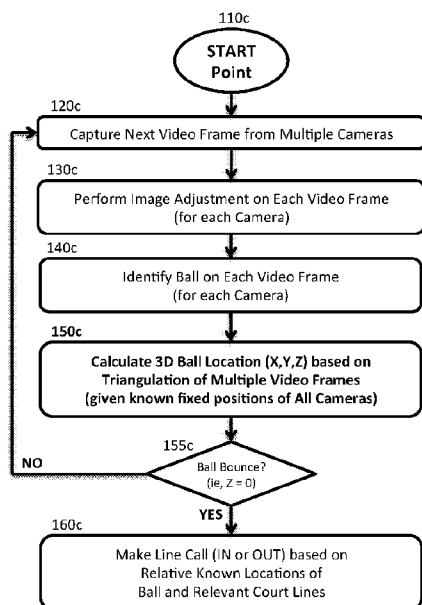


FIG. 1C

(57) Abstract: The present invention overcomes deficiencies of existing line-calling devices by leveraging a single fixed-location camera to identify object state conditions that resolve object-tracking problems that otherwise require multi-camera or moving-camera solutions. Though described in the context of an automated tennis line-calling device, the invention is equally applicable to other object-tracking problems that can be resolved by identifying object state conditions without employing moving or multiple cameras. The tennis line-calling device is attached to (or at least located in proximity to) the net post of a tennis court, thereby enabling a "close-up" view of both static (court lines) and moving (ball, players, etc.) objects. In one embodiment, integration of a video camera system with line-calling functionality provides additional benefits, including attachment of a single turn-key device to any tennis net post so as to provide automated line-calling functionality without the need for any external video cameras or processing functionality.

Planar Solutions to Object-Tracking Problems

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit, pursuant to 35 U.S.C. §119(e), of U.S. Provisional Patent Application No. 62,265,392, filed December 9, 2015, entitled “Sports apparatus to locate a ball and provide feed-back to players: Application to Tennis,” which is incorporated herein by reference.

BACKGROUND

Field of Art

[0002] The present invention relates generally to the field of computer vision, and in particular to leveraging the object-tracking capabilities of a single fixed-location camera to identify object state conditions that yield planar solutions to certain 3D object-tracking problems. The invention illustrates a tennis line-calling scenario with a portable, integrated, standalone auto-calibrating device that is easy to set up in seconds attached (or in close proximity) to a tennis net post.

Description of Related Art

[0003] It is generally understood in the field of computer vision that multiple cameras enable the extraction of 3D information (including relative depth information) from digital images. For example, the precise location of an object in 3D space can be determined by applying the process of “stereo photography” to the images generated by two or more displaced cameras (analogous to the operation of human “binocular vision”) – after accounting for lens distortion, noise and other related factors. Similarly, multiple video cameras can be employed to track the trajectory of moving objects as they travel through 3D space. [See, e.g., Wikipedia articles on “Computer stereo vision,” “Triangulation” and “Video tracking.”]

[0004] Because 3D object-tracking scenarios often involve fast-moving objects, real-time decision-making capabilities are frequently required. While single-camera object-tracking approaches have been explored (see, e.g., U.S. Pat. App. Pub. No. US/2002/0094135, “Computer Vision in Sports,” Moeslund et al, Springer 2014, Chapter 2, and “Supporting the Tennis Coach: Automatically Analyzing and Evaluating Tennis Footage,” Marc Kuijpers, Master’s thesis, Delft University of Technology, October 13, 2010), such solutions tend to rely either on a single moving camera or on

advance knowledge of object or camera trajectories. Moreover, they are mostly tailored to post-event analysis and video annotation of recorded “behind-the-player” televised video, which has an entirely different set of objectives and constraints from object tracking and real-time decision making.

[0005] Because real-time decision-making in 3D object-tracking scenarios does not universally lend itself to single-camera solutions, multi-camera and moving-camera solutions are most often preferred. Consider, for example, the recent emergence of self-driving vehicles, which employ multiple cameras, lasers, sonar and radar devices and various other sensors. Even “assisted-driving” vehicles which are less than fully autonomous address a host of real-time object-tracking and decision-making problems including, for example, tracking nearby pedestrians, vehicles and other objects, recognizing stop signs and colored traffic signals, and making virtually instantaneous decisions to turn, stop, accelerate or decelerate the vehicle.

[0006] Professional sports, such as tennis, have also employed systems with multiple cameras to address the problem of tracking fast-moving objects in 3D space (e.g., a tennis ball) and making real-time decisions (e.g., line calls). Of course, other sports (baseball, football, basketball, ice hockey, soccer, cricket, squash, handball, racquetball, pickleball, volleyball, badminton, etc.) and activities present similar problems.

[0007] Yet, multi-camera solutions can be impractical from both a time and cost perspective, often imposing extensive advance setup, maintenance and operating obstacles. For example, in the field of professional tennis, the “HAWK-EYE”™ system has been employed by the ITF (International Tennis Federation) since 2006 to confirm or overrule certain line-call decisions made by chair and line umpires.

[0008] This HAWK-EYE™ system **100a**, illustrated in **FIG. 1A**, includes a number of video cameras **110a** placed in fixed locations above and around a tennis court **120a**. These video cameras **110a** enable a complete view (from multiple different angles and perspectives) of the tennis court **120a** (including the court lines, net, etc.) and surrounding area, as well as moving objects such as players **122a** (and their racquets) and, of course, the tennis ball **125a**. In addition to the video cameras **110a**, system **100a** also includes external processing devices **116a** with human supervision and intervention to make line-call decisions based upon input from the video cameras **110a** (e.g., by employing 3D triangulation to track the trajectory of the ball), and a video display screen **117a** to display a graphic visualization of the results of such decisions.

[0009] Though considered very accurate, the cost of the HAWK-EYE™ system **100a** is extremely high – in the \$50,000 – \$100,000 range per court – thereby limiting its utility to high-end professional tennis venues that can afford not only this initial cost, but the extensive associated installation, setup, maintenance and operating costs. Moreover, system **100a** is not fully automated, as it requires human operators to perform certain of its functions. Nevertheless, the HAWK-EYE™ system **100a** is currently deployed or under development for use in certain other sports, such as cricket, Australian football, Gaelic football and hurling.

[0010] To address the limited utility of the HAWK-EYE™ system, an Israeli company, “PlaySight Interactive Ltd.,” recently developed a similar, but lower-cost, “SmartCourt”™ system designed to be more automated and usable by tennis players. In addition to its lower cost (roughly \$20,000 per court plus a monthly fee), it is focused on a variety of features beyond automated line-calling and instant replay, including analysis of strokes, tactics and player statistics. These additional features expand its market reach to a wide variety of other sports and activities where interactive analysis is desired.

[0011] Similar to the HAWK-EYE™ system **100a**, the PLAYSIGHT® (SmartCourt™) system **100b**, illustrated in **FIG. 1B**, also includes multiple video cameras **110b** placed in fixed locations above and around a tennis court **120b**. These video cameras **110b** similarly enable a complete view (from multiple different angles and perspectives) of the tennis court **120b** (including the court lines, net, etc.) and surrounding area, as well as moving objects such as players **122b** (and their racquets) and, of course, the tennis ball **125b**. In addition to the video cameras **110b**, system **100b** also includes an external interactive kiosk **115b** that includes both a processing device **116b** to make automated line-call decisions based upon input from the video cameras **110b** (e.g., by employing 3D triangulation to track the trajectory of the ball), and a video display screen **117b** to display a graphic visualization of the results of such decisions.

[0012] By combining the processing device **116b** and the video display screen **117b** into a single integrated kiosk **115b**, system **100b** enables players **122b** and others (e.g., coaches and friends) to obtain not only real-time line calls and instant replays, but also extensive interactive feedback and analysis of their game, both during and after matches or practice sessions. In addition, system **100b** includes network and Internet connectivity **118b** to enable players and others to share and interact with the results of the recorded video and perform detailed statistical and visual analyses, both on the court (e.g., via a smartphone, tablet, laptop, etc.) and remotely (e.g., over the Internet, including via social media, to a computer at home).

[0013] Yet, both the HAWK-EYE™ system **100a** and PLAYSIGHT® (SmartCourt™) system **100b** retain significant limitations that limit their market to professional or high-end venues. Multiple cameras must be installed in fixed locations, external to the devices that implement the system's real-time decision-making functionality. Substantial setup and maintenance is required, even apart from the up-front costs.

[0014] Thus, there is a need for a much lower-cost automated solution that can address these problems for smaller venues (e.g., public tennis courts, small tennis clubs, etc.) and even individuals. Such a solution could also be applied beyond tennis to other sports and activities, and essentially to any 3D object-tracking scenario requiring decisions relating to the actual or relative locations of moving and static objects.

[0015] Consider, for example, the similarities between the real-time decisions required by the self-driving vehicle and tennis line-calling scenarios referenced above (independent of the issue of whether a multi-camera or moving-camera approach is cost-prohibitive or otherwise impractical). In both scenarios, multiple cameras are employed to detect and track moving objects (e.g., pedestrians crossing a street, or tennis players moving across a court as well as the ball they hit back and forth over the net) and identify conditions requiring real-time decisions (e.g., a yellow traffic light requiring the vehicle to make a deceleration decision, or a yellow tennis ball bouncing on a court requiring a line-call decision).

[0016] In both scenarios, the question arises as to whether a single-camera approach is sufficient to enable an automated real-time decision, despite the general inability of a single camera from a fixed location to track precise trajectories of objects moving through 3D space. As will be explained below, the answer provided by the present invention lies in its ability to leverage a single fixed-location camera to identify "object state conditions" that effectively transform a 3D object-tracking problem that otherwise would require a multi-camera or moving-camera solution into a 2D planar problem that can be solved by relying upon video frames generated by a single fixed-location camera.

[0017] To illustrate these object state conditions, consider the multi-camera approach currently employed by existing tennis line-calling systems (such as the HAWK-EYE™ and PLAYSIGHT® SmartCourt™ systems), illustrated in flowchart **100c** in **FIG. 1C**. Starting at step **110c** at the beginning of each point in a tennis match, these systems generate successive "video frames" from each of the multiple video cameras in step **120c**. For example, high-speed video cameras might

generate a single high-resolution video frame at a very high frame rate. To address lens curvature, lighting conditions, video noise and other related factors, these systems perform “image adjustments” in step **130c** to facilitate accurate identification of both moving and static objects in each video frame.

[0018] In step **140c**, these systems identify the tennis ball in the “snapshot” video frame generated by each camera at a given moment in time. In step **150c**, these systems leverage the fact that, at each moment in time, each of the multiple cameras generates a video frame from its “perspective” at its known fixed location. Employing standard 3D triangulation methods (and perhaps also relying on information obtained from previously generated video frames) in step **150c**, these systems calculate the precise location of the tennis ball in 3D space.

[0019] Note, however, that knowledge of this precise 3D ball location does not necessarily trigger the need for the ultimate line-calling decision (i.e., because line calls cannot be made until the moment when the ball first impacts or bounces on the surface of the tennis court). So, in step **155c**, these systems determine whether a ball bounce has occurred. Yet, given the precise 3D ball location (e.g., in a standard X-Y-Z coordinate system) previously calculated in step **150c**, this process is trivial – i.e., simply checking whether $Z = 0$, indicating that the height of the tennis ball is 0, and has thus first bounced on the surface of the tennis court. If not, these systems return to step **120c** to generate the next set of video frames at the next moment in time. It should be noted that certain conditions (e.g., a ball being volleyed by a player before the ball can bounce, or a ball extending outside a camera’s field of view) are not addressed in this simplified high-level flowchart **100c**.

[0020] This process continues until the initial ball bounce is detected in step **155c**, at which point these systems then make the line-call decision (IN or OUT) in step **160c** by comparing the relative location of the tennis ball upon its initial bounce to the known location of relevant court lines (previously determined in a step not shown in **FIG. 1C** before the system is put into service). This process is also relatively straightforward given precise 3D locations (i.e., 2D locations in an X-Y coordinate system on the surface of the tennis court) of both the tennis ball and all court lines.

[0021] Note that this process **100c** raises a question as to the necessity of the calculation of a precise 3D ball location in step **150c**, given that detection of the initial ball bounce in step **155c** is the key object state condition that triggers the need for the key decision (line call) in step **160c**. As will be illustrated below, there is a need for a system that addresses the deficiencies resulting from

unnecessary applications of multi-camera and moving-camera “solutions” to decisions required in 3D object-tracking scenarios.

SUMMARY

[0022] While the scope of the present invention extends to virtually any 3D object-tracking scenario requiring decisions relating to the actual or relative locations of moving and static objects, the key concepts of the present invention, and the way in which these concepts overcome the deficiencies of existing approaches noted above, can best be understood in the context of specific decision-making scenarios. In the field of computer vision, as suggested above, many of these deficiencies result from the unnecessary use of multi-camera and moving-camera approaches to decision-making scenarios in which such “solutions” are cost-prohibitive or otherwise impractical.

[0023] The present invention overcomes these deficiencies by leveraging a single fixed-location camera to identify object state conditions that effectively transform a 3D object-tracking problem that otherwise would require a multi-camera or moving-camera solution into a 2D planar problem that can be solved by relying upon video frames generated by a single fixed-location camera. The following embodiments, though described in the context of an automated tennis line-calling scenario, are equally applicable to other 3D object-tracking scenarios in which such object state conditions can be identified without employing moving or multiple cameras.

[0024] The present invention, in one embodiment, is implemented as a line-calling device that contains a single fixed-location camera located in proximity to the net post of a tennis court. In some embodiments, the device is physically attached to one of the net posts, while in others it is located on a tripod or other stand nearby one of the net posts (or even on an umpire chair if available). In any event, locating the device in proximity to the net post provides a relatively close-up view of each side of the tennis court (regardless of the number of cameras employed).

[0025] The device includes, in one embodiment, a single fixed-location camera with a field of view that covers both sides of the tennis court. In another embodiment, the device includes two such cameras, with each camera having a field of view covering one of the two sides of the tennis court (effectively providing greater resolution per camera by covering a smaller area).

[0026] Various cost and engineering tradeoffs will determine not only the number of cameras, but their characteristics, such as speed, resolution, field of view, etc. Based on these tradeoffs, additional cameras may be included in other embodiments covering even smaller sections of the

tennis court. In still other embodiments, two devices are employed (one in proximity to each net post) for the purpose of minimizing the likelihood of an obstructed view of a moving tennis ball (e.g., due to a player being in the line of sight of a camera's view of the ball – more likely in doubles than in singles).

[0027] It is important to emphasize, however, that regardless of the type and number of cameras employed (or even the number of devices in proximity to each net post), the device of the present invention also includes an integrated processing mechanism to implement the device's line-calling functionality. In one embodiment, this integrated processing mechanism relies upon the video frame generated by a single fixed-location camera at any given moment in time (even though prior video frames from other cameras may be considered to determine which camera's video frame to select as a ball travels from one side of the tennis court to the other).

[0028] In other words, 3D triangulation (though made possible by employing multiple cameras viewing a given location at a given moment in time) is unnecessary to achieve the benefits of the present invention. When warranted, additional cameras are employed to obtain other benefits (e.g., minimizing player obstruction, leveraging lower-resolution cameras, etc.). In certain cases, optional 3D triangulation may also be employed, though it is unnecessary to achieve the benefits of the present invention.

[0029] One key advantage of the device of the present invention is an extremely simple setup process. One can attach the device to virtually any tennis net post in a matter of seconds, and remove it even more easily, making it extremely portable. Another key advantage is its integrated processing mechanism that implements line-calling and other functionality without requiring external devices. An internal battery provides sufficient power for the typical length of an entire match, thus eliminating the need to rely on the presence of external court-side power.

[0030] In addition, an auto-calibration feature enables the device, in one embodiment, to identify the court lines within a few seconds, greatly simplifying the initial setup process and making the device truly portable among different tennis courts. As a result of this auto-calibration process, a "court map" is generated, reflecting known static locations of the court lines, the net and the camera (based on known tennis court dimensions), as well as a "court model" reflecting a function translating 2D coordinates from a video frame to 3D coordinates on the court map (based on the assumption that the ball has bounced and is thus in contact with the 2D surface of the tennis court).

[0031] Because the device is fully automated, once it performs its auto-calibration process, it tracks the state of the tennis match without the need for a manual operator. In particular (as will be explained in greater detail below), it identifies the beginning of each point and automatically generates and indicates line calls (e.g., via a flashing colored light and/or sound – whether after each bounce, only on “OUT” calls, close calls or other desired permutations). In addition to “match mode,” the device has a practice or “free play” mode in one embodiment to enable selective line calls and statistics (e.g., limiting line calls to the baseline or a particular service line or sideline). In another embodiment, the device transmits the results of line calls wirelessly to a wearable device (e.g., a Bluetooth vibrator located on a player’s racquet, shirt, pocket, etc.). In yet another embodiment, the device displays and/or calls out the score before each point (or at designated intervals, such as the beginning of each game).

[0032] The device includes an integrated accelerometer in another embodiment to detect “let cords” and a microphone to facilitate ball and player detection (e.g., to assist in the detection of which side of the court the ball is on, as well as to analyze sound-wave harmonics with a Fourier transformation in order to distinguish shot types). In another embodiment, data from racquet sensors are utilized to enhance the accuracy of player and ball detection.

[0033] The device includes an interactive integrated video display screen in one embodiment for displaying match statistics and other data, as well as recorded video (all of which can be stored locally, e.g., on a removable memory card, and downloaded via a wired USB or other connection, as well as streamed/uploaded wirelessly over Bluetooth or a local WiFi network or the Internet, to a smartphone, tablet, laptop or other device). Players can view instant replays (optionally skipping changeovers and other “dead time”) and ball bounce location as well as various match statistics and visualizations upon demand, whether via the integrated video display screen or a connected device (from courtside or remotely over the Internet). Such statistics are similar to those provided by professional television tennis analysts – such as ball location percentages within multiple zones, ball speed and RPM, player coverage maps, etc.

[0034] In another embodiment, additional software (e.g., an iOS, Android or other smartphone app, or MacOS, Windows or other desktop application) provides for added long-term storage and analytic and visualization functionality to the extent not integrated directly in the device. For example, such functionality includes analysis of the speed, spin and placement of each player’s shots, and an augmented reality (including 3D visualization) overlay on recorded video of the match. An open API is included in another embodiment to provide extensibility for third parties to

provide additional analytic, visualization and other functionality (e.g., recommended player strategies against particular opponents or types of players, based on prior performances and AI/predictive analyses). Such additional functionality can also be provided as in-app purchases in another embodiment.

[0035] It should be emphasized that the device of the present invention provides integrated real-time line-calling functionality that is not dependent on the cloud or any network connection, or any external processing device. It generates highly accurate line calls – e.g., within a few centimeters of any line. Because the accuracy of the device is essentially proportional to the frame rate and resolution of the integrated camera system, the device’s accuracy will only improve over time as camera technology improves and costs decrease.

[0036] As will be discussed in greater detail below, because the device in one embodiment is incapable of tracking ball location in 3D space via a single fixed-location camera (whether covering the entire court or limited to one side of the court), the device instead makes line calls by detecting “ball bounce” as the key object state condition that triggers a line call. Upon detecting the initial bounce of the ball, the line-call decision has now been transformed to a 2D planar problem – i.e., determining whether the ball (known to be in the 2D plane of the tennis court surface) is “OUT” relative to any relevant line (e.g., whether a service line, baseline or sideline).

[0037] Various alternative methods of making line-call decisions are discussed below, including translating ball coordinate locations from video frames to the court map (with or without the benefit of a controlled laser device), or alternatively analyzing the relative locations of the ball and relevant court lines solely on the video frames themselves. As will be emphasized below, these determinations do not necessarily even require that the precise location of the ball within the 2D court plane be determined.

[0038] Finally, it should be noted that the hardware and software embodiments described below are the result of cost and engineering tradeoffs that can be modified without departing from the spirit of the present invention. Whether functionality is implemented purely in hardware or software, or in a combination of the two (including “firmware” and custom as opposed to general-purpose hardware) is a function of these tradeoffs, and not necessarily essential to the spirit of the present invention. Moreover, division of functionality into particular hardware components or software modules is also the result of such tradeoffs. Functionality can therefore be allocated (combined or divided) into different physical hardware components or conceptual software

modules from those illustrated in the embodiments below without departing from the spirit of the present invention. Similarly, the present invention can be implemented with variations in device placement and attachment mechanisms, as well as the type and number of cameras and other sensors. Finally, the present invention can be implemented for different sports or other activities without departing from the spirit of the present invention, essentially covering virtually any 3D object-tracking scenario requiring decisions relating to the actual or relative locations of moving and static objects.

BRIEF DESCRIPTION OF DRAWINGS

[0039] FIG. 1A is an image illustrating an existing system (known as HAWK-EYE™) that employs multiple cameras and external processing to visually track the location and trajectory of a ball for the purpose of performing line-calling and other functions in tennis and a variety of other sports.

[0040] FIG. 1B is an image illustrating an existing system (known as the PLAYSIGHT® SmartCourt™ system) that employs multiple cameras and external processing to visually track the location and trajectory of a ball for the purpose of performing line-calling and other functions in tennis and a variety of other sports.

[0041] FIG. 1C is a high-level flowchart illustrating key steps performed by existing multi-camera systems (such as HAWK-EYE™ and PLAYSIGHT® SmartCourt™) in a tennis line-calling scenario.

[0042] FIG. 2 is an image illustrating one embodiment of an integrated device of the present invention in a tennis line-calling scenario in which the integrated device is in proximity to a tennis net post.

[0043] FIG. 3A is an image illustrating a close-up view of one embodiment of an integrated device of the present invention attached to a tennis net post, with a distinct camera pointing toward each side of the tennis court.

[0044] FIG. 3B is an image illustrating a close-up view of one embodiment of an attachment mechanism by which one embodiment of an integrated device of the present invention is attached to a tennis net post.

[0045] FIG. 3C is an image illustrating a close-up top view of one embodiment of an integrated device of the present invention attached to a tennis net post and incorporating a built-in interactive video display screen.

[0046] FIG. 4A is a hardware block diagram illustrating key hardware elements of one embodiment of an integrated device of the present invention.

[0047] FIG. 4B is a software block diagram illustrating key software elements of one embodiment of an integrated device of the present invention.

[0048] FIG. 5A is an image of a video frame, generated by a “left-side” camera component of one embodiment of an integrated device of the present invention, that reflects the field of view of that camera covering the left side of a tennis court, and includes a coordinate system employed by the integrated device to identify individual pixels and objects within that video frame.

[0049] FIG. 5B is an image of a video frame, generated by a “right-side” camera component of one embodiment of an integrated device of the present invention, that reflects the field of view of that camera covering the right side of a tennis court, and includes a coordinate system employed by the integrated device to identify individual pixels and objects within that video frame.

[0050] FIG. 6 is a graphic illustration of a court map of a tennis court, produced by one embodiment of an integrated device of the present invention by processing video frames generated by the “left-side” and “right-side” camera components of that integrated device, and employed by the integrated device to translate individual pixels and object locations on a video frame to corresponding locations on the playing surface of the tennis court represented by the court map.

[0051] FIG. 7 is a flowchart illustrating key steps performed by an Auto Calibration component of one embodiment of an integrated device of the present invention to generate a court map and a court model that facilitates the translation of individual pixels and object locations on a video frame to corresponding locations on the playing surface of the tennis court represented by the court map.

[0052] FIG. 8 is a flowchart illustrating key steps performed by a Player Detection component of one embodiment of an integrated device of the present invention to identify relative locations of tennis players and facilitate “Point State” detection in a tennis line-calling scenario.

[0053] FIG. 9 is a flowchart illustrating key steps performed by a Point State component of one embodiment of an integrated device of the present invention to identify when each point of a tennis match starts and stops and identify relevant lines on the tennis court to facilitate the performance of a Line Calling function by the integrated device.

[0054] **FIG. 10** is a flowchart illustrating key steps performed by a Bounce Detection component of one embodiment of an integrated device of the present invention to identify when a tennis ball bounces on the playing surface of a tennis court.

[0055] **FIG. 11A** is a flowchart illustrating key steps performed by a Translation Line Calling component of one embodiment of an integrated device of the present invention, following detection of a ball bounce by the Bounce Detection component of the integrated device.

[0056] **FIG. 11B** is a flowchart illustrating key steps performed by an alternative Line Calling component of one embodiment of an integrated device of the present invention, following detection of a ball bounce by the Bounce Detection component of the integrated device.

[0057] **FIG. 11C** is a flowchart illustrating key steps performed by an improved Translation Line Calling component of one embodiment of an integrated device of the present invention, employing a laser to follow the trajectory of a ball and more precisely detect its location when it bounces on the playing surface of a tennis court.

DETAILED DESCRIPTION

[0058] In one embodiment of the present invention, illustrated in image **200** of **FIG. 2**, an automated tennis line-calling device **210** is located in proximity to a tennis net post **221** on a tennis court **220** (including standard court lines and a net attached between two net posts). Image **200** includes the entire tennis court **220** and surrounding area, as well as players **222** (only one shown) and the tennis ball **225**. Also shown in image **200** is a laser **216** (discussed in greater detail below) employed in an alternative embodiment of the present invention to facilitate precise location of a ball upon its initial bounce on the surface of a tennis court.

[0059] Line-calling device **210** is illustrated as physically attached to net post **221** to provide a relatively close “camera view” of both sides of the entire tennis court **220**, and to facilitate an extremely convenient setup process since all tennis courts have net posts. In other embodiments, line-calling device **210** is located in proximity to net post **221**, but not necessarily physically attached (e.g., on a tripod or other stand nearby net post **221**). One key advantage of locating line-calling device **210** in proximity to net post **221** (regardless of the number of cameras employed) is that it enables line-calling device **210** to obtain a relatively close view of both sides of the entire tennis court **220**.

[0060] Image **300a** in **FIG. 3A** illustrates a close-up view of one embodiment of tennis line-calling device **310a** containing a single fixed-location camera (camera **315La** for the left side and camera **315Ra** for the right side) for each of the two sides of the tennis court. In other embodiments, a single fixed-location camera covers the entire tennis court (both left and right sides), though at the expense of potentially greater image resolution, particularly at the far baselines of tennis court **320**. In still other embodiments, multiple cameras (e.g., one on top of the other) and/or multiple devices (e.g., one on each net post, with each device containing one or more cameras) are employed.

[0061] In these “multiple video cameras per side of the court” embodiments (including multiple line-calling devices), optional 3D triangulation may be employed. Moreover, even without 3D triangulation, certain other advantages are evident. For example, a second line-calling device would minimize player obstruction (e.g., a player’s foot blocking a single video camera’s view of the tennis ball). This could be particularly useful for a doubles tennis match. Moreover, greater accuracy could be obtained by using the “closer” video camera (e.g., minimizing errors due to the distance from a line-calling device to the far corner of the baseline). Finally, computation could be shared among two line-calling devices, increasing performance.

[0062] Line-calling device **310a** also includes, in one embodiment, a memory card reader **314a** that enables removable local storage of recorded video as well as related statistical data. As will be discussed in greater detail below, line-calling device **310a** can also (in another embodiment) transmit recorded video and data to connected devices (e.g., smartphones, tablets, laptops, etc.) via a built-in wireless communication component, or enable such devices to download recorded video and data directly via a wired connection (e.g., via a built-in USB port in line-calling device **310a**).

[0063] Physical attachment mechanism **313a** enables line-calling device **310a** to be attached to virtually any net post **321a** in a matter of seconds. Such “compatibility” is significant in that no other central location is guaranteed to be available at virtually any tennis court from which a line-calling device can provide a relatively close view of both sides of a tennis court (regardless of the number of cameras employed).

[0064] Image **300b** in **FIG. 3B** illustrates a close-up view of one embodiment of this “universal” attachment mechanism **313b** that enables line-calling device **310b** to be attached to virtually any net post **321b** in under a minute. In this embodiment, attachment mechanism **313b** includes an “L-shaped stand” **313-1b** that provides a flat level surface to which line-calling device **310b** is attached,

and an elastic strap **313-2b** that attaches stand **313-1b** to net post **321b**. Compare, for example, the much more extensive setup task of installing multiple video cameras at various locations around a tennis court, not to mention providing a mechanism for those video cameras to communicate to an external processing system incorporating line-calling functionality.

[0065] Image **300c** in **FIG. 3C** illustrates a close-up top view of one embodiment of line-calling device **310c** (attached to net post **321c**), revealing a built-in interactive video display screen **350c** that enables players (e.g., during changeovers) to view instant replays of recent points, including a zoomed-in view of the ball (and nearby court lines) upon its initial bounce on the surface of the tennis court. In other embodiments, interactive video display screen **350c** also provides players with interactive graphic illustrations, visualizations, statistical data and strategic analyses, both during and after matches or practice sessions.

[0066] Block diagram **400a** in **FIG. 4A** illustrates key hardware elements of one embodiment of line-calling device **410a**, as well as net-post attachment mechanism **413a** and an external laser **475a** that is employed in alternative embodiments to facilitate precise location of a ball upon its initial bounce on the surface of a tennis court. As will be discussed in greater detail below, external laser **475a** enables line-calling device **410a** to track the trajectory of a ball (via rotation motor **476a**) and more precisely detect its location when it bounces on the surface of a tennis court (via Emitter **477a** and Sensor **478a**, which enable line-calling device **410a** to calculate a precise distance to the ball).

[0067] As noted above, line-calling device **410a** includes a camera system **415a** which, in this embodiment, includes two cameras (each camera generating video frames for one side of the tennis court). In other words, a single video camera generates video frames covering the left side of the court, while another video camera generates video frames covering the right side of the court. In this manner, as will be discussed in greater detail below (e.g., with respect to auto-calibration, bounce detection and line-calling processes), device **410a** can record a relatively close-up view of the ball as it travels from one side of the court across the net to the other side of the court (with device **410a** initially selecting one of the two cameras for video frame processing, and switching to the other camera as the ball reaches a threshold proximity to the net – i.e., the edge of the video frame). As noted above, in other embodiments, camera system **415a** can be limited to a single fixed-location camera covering the entire court with a very wide angle (though at the expense of resolution, particularly toward the ends of the court).

[0068] Having generated and selected a video frame for processing at any given moment in time (as well as retrieving prior video frames), Image Processing Unit **420a** performs image adjustments on that video frame to account for lens curvature, lighting conditions, video noise and other related factors. In essence, individual pixels of a video frame are modified (or, for example, compared to different threshold values to aid in object recognition) based on which particular algorithms are employed.

[0069] Because different types of processors (e.g., ISP **422a**, DSP **424a** and GPU **426a**) provide different types of hardware functionality, a particular processor is selected for a particular part of the image-adjustment process based upon its suitability to the particular algorithm being employed. For example, if ISP **422a** provides dedicated hardware support for a frequently-repeated step in a noise-reduction algorithm, that processor might be faster (and thus more suitable) for that aspect of the image-adjustment process.

[0070] As low-cost smartphone chipsets become more available and cost-effective, the use of these various different types of processors adds relatively little overall design and implementation cost. Moreover, given the large number of pixels that must be processed in real time (i.e., between the generation of each video frame), multiple co-processors are employed in parallel (in one embodiment) to perform certain sub-tasks of the image-adjustment process. In any event, those skilled in the art may make different tradeoffs regarding processor selection for different aspects of the image-adjustment process, including reliance upon parallel processing, without departing from the spirit of the present invention.

[0071] Once the video frame is adjusted by Image Processing Unit **420a**, line-calling device **410a** employs Algorithmic Processing Unit **430a** to perform various object detection, analysis and decision-making processes (described in greater detail below), depending upon its state. During initial setup and live-play phases, line-calling device **410a** relies upon Algorithmic Processing Unit **430a** to perform various tasks.

[0072] For example, after being attached to a tennis net post, line-calling device **410a** performs an auto-calibration process, described in greater detail below with reference to **FIG. 7**. Once activated (e.g., at the beginning of a tennis match), line-calling device **410a** continuously determines the state of the match – in particular the state of each point as described in greater detail below with reference to **FIG. 9** (including detection of player locations at the start of each point per **FIG. 8**). As the server puts the ball into play, line-calling device **410a** monitors each bounce (or player volley,

etc.) per **FIG. 10**, working together with **FIG. 9**, until the point ends and a line-call decision is made by line-calling device **410a** via **FIG. 11A**, **FIG. 11B** and/or **FIG. 11C**.

[0073] In one embodiment, Algorithmic Processing Unit **430a** relies upon multiple general-purpose CPUs (CPU #1 **432a**, CPU #2 **434a**, . . . CPU#n **436a**) to implement these tasks. In other embodiments, processors from Image Processing Unit **420a** are also utilized to assist with certain sub-tasks, such as identifying moving areas from prior video frames. As with the image-adjustment process, the multiple processors of Algorithmic Processing Unit **430a**, in one embodiment, perform certain of these tasks or sub-tasks in parallel. Here too, those skilled in the art may make different tradeoffs regarding allocation of tasks among the multiple processors (including ISP **422a**, DSP **424a** and GPU **426a**), including reliance upon parallel processing, without departing from the spirit of the present invention.

[0074] Line-calling device **410a** relies upon system memory **414a**, as well as memory allocated explicitly to Image Processing Unit **420a** and/or Algorithmic Processing Unit **430a** (or the processors contained therein), to store data to facilitate all of its tasks, including storage of software and firmware that controls the operation of these tasks (described in greater detail below with reference to **FIG. 5**). Those skilled in the art may allocate functionality differently between dedicated hardware and such software and firmware without departing from the spirit of the present invention.

[0075] In one embodiment, Algorithmic Processing Unit **430a** takes as input (in addition to the video frames generated by Camera System **415a**) external acceleration data from Accelerometer **412a** to assist in the calling of a “let cord” during a serve or rally. In other embodiments, input from Microphone **411a** is used for a variety of purposes, including detection of the sound of the ball to aid in determining which side of the court the ball is on, as well as shot-type detection (e.g., topspin, slice, etc.) and player location detection (e.g., to determine the location of the player about to serve). In one such embodiment, these determinations are based on the harmonics of detected sound waves extracted via calculation of Fourier transformations. In yet another embodiment, player and ball location accuracy is improved by integration with data from external racquet sensors (not shown).

[0076] Whenever Algorithmic Processing Unit **430a** makes a line-call decision, line-calling device **410a** employs Signal unit **440a** to indicate the results of that line-call decision (i.e., IN or OUT) to the players. In one embodiment, a colored flashing light is employed (e.g., green for IN and red for

OUT), while in another embodiment a sound is emitted instead of, or in addition to the flashing light. In other embodiments, Signal unit **440a** generates a line-call indicator signal (light and/or sound) only when the ball is called OUT, or only when the ball bounces close to a relevant line.

[0077] As noted above, line-calling device **410a** includes a built-in interactive video display screen **450a** for displaying match statistics and other data, as well as recorded video. Players can view instant replays, zoomed-in ball bounce location and various match statistics and interactive graphics and visualizations upon demand (e.g., during changeovers or after a match or practice session). In one embodiment, recorded video and related statistical and strategic data can also be live-streamed to a network-connected device (e.g., a smartphone, tablet or laptop) via Wireless Communication unit **460a**, or stored locally on Removable Local Storage unit **467a** (e.g., a removable memory card) for subsequent downloading to such external devices. In other embodiments, recorded video and related statistical data are stored in System Memory **414a** and downloaded to such external devices via a wired connection, such as USB port **468a**.

[0078] In one embodiment, Power unit **465a** includes a built-in removable battery that provides line-calling device **410a** with sufficient power to monitor and record an entire (average-length) tennis match – e.g., two+ hours. In another embodiment, line-calling device **410a** also accepts external power (e.g., via an AC plug) for off-court use or in the event of an available courtside power source. In other embodiments, line-calling device **410a** also accepts external battery packs (or an attached solar array) for extended usage.

[0079] Block diagram **400b** in **FIG. 4B** illustrates key conceptual software modules of one embodiment of line-calling device **410a**. In conjunction with Image Processing unit **420a**, Video Image Processor module **420b** controls the image adjustment process. Video Frame Generator module **422b** extracts the video frames generated by Camera System **415a** so that Video Frame Selector module **424b** can select a video frame (from the video frames generated by the left-side and right-side video cameras) for image adjustment.

[0080] In one embodiment, Video Frame Selector module **424b** initially selects the camera on the server's side, and continually analyzes subsequent video frames to determine when the ball is approaching the net, at which point it selects video frames from the other camera. Video Image Adjuster module **426b** then implements the various image-adjustment algorithms referenced above (and described in greater detail below with reference to **FIGs. 7 and 10**) to modify each video frame to address lens curvature, lighting conditions, video noise and other related factors.

[0081] Static Object Detectors module **430b** includes modules for detecting static objects, such as tennis court lines (Line Detector module **432b**), tennis court net (Net Detection module **434b**) and, in other embodiments, other static objects (Other Detectors module **436b**) – e.g., in other applications such as the goals of a soccer field. The details of one embodiment of such a static object detection process performed by line-calling device **410a** are described below in connection with the auto-calibration process illustrated in **FIG. 7**.

[0082] During the playing of each point of a tennis match, line-calling device **410a** relies on Moving Object Detectors module **440b** to identify specific moving objects, such as the tennis ball (via Ball Detector module **442b**) as it moves from one side of the tennis court to the other. In one embodiment, at the start of each point of a tennis match (as determined by the process illustrated in **FIG. 9**), line-calling device **410a** relies on Player Detector module **444b** to identify the relative locations of the players (as illustrated in **FIG. 8**) for the purpose of determining which side of the court the server is on (e.g., left or right side relative to line-calling device **410a**), as well as to which service box the server will be serving (e.g., deuce or ad service box).

[0083] Those skilled in the art may select from a variety of well-known object detection algorithms to identify a tennis ball and tennis player from successive video frames without departing from the spirit of the present invention. In other embodiments, line-calling device **410a** relies on Other Detectors module **446b** to detect moving objects in other applications – e.g., a puck in ice hockey, multiple billiard balls, etc.

[0084] As noted above, after line-calling device is attached to a tennis net post, it performs an auto-calibration process, which is described in greater detail below with reference to **FIG. 7**. Auto-Calibration module **450b** performs two key aspects of this auto-calibration process – i.e., the generation of a court map and a court model.

[0085] Court Map Generator module **452b** generates a static court map (see **FIG. 6** below) based upon known tennis court dimensions and an analysis of the lines and corners of the tennis court detected by Static Object Detectors module **430b** from the video frames (see **FIGs. 5A and 5B** below) generated for each side of the tennis court. Court Model Generator module **454b** then generates a court model that, in one embodiment, is a function that translates 2D coordinates on a video frame to 3D coordinates on the court map (based on the assumption that, once the tennis ball has bounced, it is in contact with the 2D surface of the tennis court). The court model thus facilitates the translation of individual pixels and object locations (assumed to lie on the surface of

the tennis court) from a video frame to corresponding locations on the surface of the tennis court represented by the court map.

[0086] Once the auto-calibration process has been completed and a tennis match begins, State Analyzer **470** manages the state of the match, and in particular the beginning and end of each point (as described in greater detail below with reference to **FIG. 9**. As noted above, once each point begins, one of the key aspects of the automatic line-calling functionality performed by line-calling device **410b** is the detection of each ball bounce (or player volley) as the ball moves across the net from one side of the court to the other. This process, performed by Ball Bounce Detector module **460b** and summarized briefly below, is described in greater detail below with reference to **FIGs. 9 and 10**.

[0087] In one embodiment, Directional Ball Tracker module **462b** tracks the velocity (i.e., the speed and direction) of the tennis ball as it moves across the net from one side of the court to the other. As noted above, the precise location of the ball in 3D space at each moment in time (i.e., on each video frame generated by the relevant camera) cannot be determined from the video frames generated by a single fixed-location camera.

[0088] However, by recognizing that a “ball bounce” will result in an abrupt change in the ball’s vertical direction (as compared with its expected “gravity-driven” direction), Directional Ball Tracker module **462b** can, in one embodiment, determine whether such an abrupt change has occurred. If so, it then determines whether such a change is consistent with a “ball-bounce” event, requiring a line call. If Directional Ball Tracker module **462b** determines that no such abrupt change occurred, or that the abrupt change was not consistent with a ball-bounce event (e.g., a volley by a receiving player), then the ball bounce detection process continues until a ball-bounce event occurs or until the end of the point is otherwise determined (e.g., a ball that leaves the field of view of the video cameras for a predefined period of time).

[0089] In another embodiment, Laser Ball Tracker **464b** is employed to assist in the ultimate line-call determination (e.g., as described in greater detail below with reference to **FIGs. 10, 11A and 11C**). In essence, Laser Ball Tracker **464b** continually determines from successive video frames (i.e., while the ball is moving in accordance with an expected “gravity-driven” direction, but has not yet bounced) the change in the ball’s angle relative to the fixed location of Laser **475a**. Laser Ball Tracker **464b** then adjusts the angle of Laser **475a** accordingly (via Rotation Motor **476a** – controlled by a PID algorithm) to continue to track the ball.

[0090] Once Directional Ball Tracker module **462b** determines that the ball has bounced, this bounce is confirmed by the fact that the beam emitted by Emitter **477a** returns to Laser **475a**, thereby enabling calculation of a precise distance between the ball (upon its initial bounce on the surface of the tennis court) and Laser **475a** – whether via direct “time of flight” or “phase-based” laser scanning. This distance is then utilized (as discussed below) to enable line-calling device **410b** to make a more precise line call.

[0091] Upon a determination by Directional Ball Tracker module **462b** that the ball has bounced, Line Call Analyzer module **480b** makes the actual line call. In one embodiment, Court Model Translator module **482b** utilizes the court model to translate the ball’s location on the video frame (upon its initial bounce on the surface of the tennis court) to its corresponding location on the court map, from which a line-call determination can be made by Line Call Analyzer module **480b** (as described in greater detail below with reference to **FIG. 11A**).

[0092] Note, however, that this translation may still be subject to a certain degree of error, which can be reduced significantly if Laser **475a** is present. In such an embodiment, the precise distance generated by Laser Ball Tracker **464b** is used by Laser Ball Location Updater **486b** to update the location on the court map determined by Court Model Translator module **482b** before Line Call Analyzer module **480b** makes its line-call determination.

[0093] In an alternative embodiment, Line Call Analyzer module **480b** does not rely upon Court Model Translator module **482b**, which utilizes the court model. Instead, it relies upon Video Frame Comparator **484b** to make the line call based solely upon the relative locations of the ball and relevant court lines on the video frame generated upon the ball’s initial bounce on the surface of the tennis court. This embodiment is particularly useful when the ball bounces very close to a relevant line – assuming Laser **475a** is not present and the accumulated error in a translation based upon the court model is non-negligible. This embodiment is discussed in greater detail below with reference to **FIG. 11B**. It should be noted, however, that this embodiment (as compared to the embodiments illustrated in **FIGs. 11A and 11C**) has the disadvantage of not determining a precise location of each ball-bounce event, which could otherwise be useful for subsequent statistical analyses and visualizations.

[0094] Finally, Communications module **477b** manages a variety of different types of communications of line-calling device **410b** with the outside world. In one embodiment, such communications include, for example, indications of the results of line calls via Signal unit **440a**

(e.g., flashing red and green lights, sounds, etc.), displays of instant video replays of points with zoomed-in ball locations, statistics, graphics and visualizations via Display unit **450a**, wireless streaming of recorded video, as well as statistics, visualizations and other data to external devices (e.g., smartphones, tablets and laptops), both on local networks and via the Internet (via Wireless Communication unit **460a**), and physical downloads of such recorded video and data via Removable Local Storage **467a** and wired connections, such as USB Port **468a**.

[0095] As referenced above, one embodiment of line-calling device **410a** includes a Camera System **415a** containing two high-speed, high-resolution video cameras – one for each side of the tennis court. During each moment in time (depending on video camera frame rates), each camera generates a video frame, one of which is selected and used (in conjunction with prior video frames from that camera) to detect objects (ball, players, etc.) and ultimately make line-call decisions. The video frame generated by each of these cameras is illustrated, respectively, in **FIGs. 5A and 5B**, and discussed below with respect to the coordinate system employed to identify the locations of individual pixels and objects on a video frame.

[0096] Turning to **FIG. 5A**, image **500a** illustrates a video frame generated by a left-side camera component of Camera System **415a** that reflects the field of view of that camera covering the left side of tennis court **520a**. The location of the lowest pixel of tennis ball **525a** on video frame **500a** is represented by a point “B” which has 2D pixel coordinates (x_p, y_p) in the video frame coordinate system **505a** having an X-axis width of “W” pixels and a Y-axis height of “H” pixels.

[0097] Similarly, in **FIG. 5B**, image **500b** illustrates a video frame generated by a right-side camera component of Camera System **415a** that reflects the field of view of that camera covering the right side of tennis court **520b**. The location of the lowest pixel of tennis ball **525b** on video frame **500b** is represented by a point “B” which has 2D pixel coordinates (x_p, y_p) in the video frame coordinate system **505b** having an X-axis width of “W” pixels and a Y-axis height of “H” pixels.

[0098] It should be emphasized that, as a general matter, the actual location of a tennis ball in 3D space cannot be determined solely from its 2D pixel location in a video frame, such as image **500a** in **FIG. 5A** or image **500b** in **FIG. 5B**. However, such a determination can be made given certain knowledge about the geometry of the scene.

[0099] For example, as will be described in greater detail below with reference to **FIGs. 6 and 7**, the dimensions of a tennis court are standardized, and thus well known. Moreover, the location of the

video camera which generates a video frame (e.g., of one or both sides of a tennis court) is known. Therefore, the precise locations of the court lines on the surface of a tennis court can be reconstructed from a video frame that includes those court lines in the camera's field of view. Given this information, a "court map" can be constructed (illustrated in **FIG. 6** below), as can a function or "court model" that facilitates the translation of individual pixels and object locations on a video frame to corresponding locations on the surface of the tennis court represented by the court map (as described with reference to **FIG. 7** below).

[00100] Turning to **FIG. 6**, image **600** is a graphic illustration of one embodiment of a court map **620** of a tennis court, reconstructed from known court dimensions and 2D pixel coordinates of corners **630** (i.e., seven court-line intersections on each side) on video frames generated by left-side and right-side cameras of line-calling device **410a**. Court map **620** is illustrated as a "court map overlay" in that points, represented in centimeters in the 3D court map coordinate system **606** (x_{cm} , y_{cm} , z_{cm}) are "overlaid" upon their corresponding locations (in pixels) in the 2D video frame coordinate system **605** (x_p , y_p).

[00101] Note, however, that points in court map **620** are all located on the surface of the tennis court (i.e., $z = 0_{cm}$), with the exception of the camera **615**, the height of which is known (e.g., 107_{cm} in one embodiment). Camera **615** is illustrated as a single point at the origin of 3D court map coordinate system **606** for illustrative purposes, even though the precise locations of the left-side and right-side video cameras of line-calling device **410a** differ slightly, and are considered in generating a single court map **620** from the respective video frames generated by these two cameras.

[00102] Though their coordinates are not illustrated in **FIG. 6**, each corner **630** can be represented as a single point (e.g., at the center of the intersection of two or more court lines, in one embodiment) that can be described in the 2D video frame coordinate system **605** in pixels as a point (x_p , y_p) in its video frame (e.g., image **500a** in **FIG. 5A** or image **500b** in **FIG. 5B**), as well as in the 3D court map coordinate system **606** in centimeters (x_{cm} , y_{cm} , 0_{cm}) on the surface of the tennis court. These points can be described in both the 2D video frame coordinate system **605** (x_p , y_p) and the 3D court map coordinate system **606** (x_{cm} , y_{cm} , 0_{cm}) because they exist in the same plane – i.e., the surface of the tennis court.

[00103] As a result, line-calling device **410a** can generate a function (referred to herein as a court model) that translates such points between these two coordinate systems (as described in

greater detail below with reference to **FIG. 7**). This court model function is employed to translate individual pixels and object locations on a video frame to corresponding locations on the surface of the tennis court represented by court map **620** (and vice-versa).

[00104] Line-calling device **410a** therefore also employs this court model function to translate the location of a tennis ball (upon its initial bounce on the surface of a tennis court) between these two coordinate systems. Once a tennis ball bounces on the surface of the tennis court, the point “B” **625**, representing the lowest pixel of the tennis ball first touching the tennis court, can be described both in the 2D video frame coordinate system **605** – as point (x_p, y_p) **625_p** – and in the 3D court map coordinate system **606** – as point $(a_{cm}, b_{cm}, 0_{cm})$ – thereby enabling line-calling device **410a** to determine the tennis ball’s precise location on the surface of the tennis court (subject to a certain degree of translation error, discussed below). Given that location, line-calling device **410a** can then determine whether the tennis ball is “IN” or “OUT” relative to any relevant line (e.g., baseline, service line, sideline, etc.), as discussed in greater detail below with reference to **FIGs. 11A and 11C**.

[00105] Turning to **FIG. 7**, flowchart **700** describes key steps performed by line-calling device **410a** during its auto-calibration process. In one embodiment, this process is initiated after line-calling device **410a** is attached to one of the net posts of a tennis court. As a result of this process, line-calling device **410a** generates the court map and court model to facilitate translations of individual pixels and object locations on a video frame (in particular the tennis court line corners and the tennis ball upon its initial bounce) to corresponding locations on the surface of the tennis court represented by the court map.

[00106] Once line-calling device **410a** initiates the auto-calibration process in step **705**, Video Frame Generator **422b** extracts (in step **710**) the video frames captured by Camera System **415a** (from both left-side and right-side video cameras) for processing. In step **720**, Video Image Adjuster **426b** initiates an image-adjustment process. In particular, in step **722**, it converts the video frames to a Y8 luminosity level to adjust for differences in environmental lighting levels, and then undistorts the video frames, in step **724**, to adjust for distortion due to the curved lens in each video camera (based, in one embodiment, on a “lens model” specific to the particular lens employed). Those skilled in the art may employ different image-adjustment algorithms to enable Video Image Adjuster **426b** to perform this image-adjustment process without departing from the spirit of the present invention.

[00107] In step **730**, Line Detector **432b** initiates a process consisting of multiple steps to identify the tennis court lines from the video images, including the edges or corners where those lines intersect. This process is facilitated by the knowledge of standard tennis court dimensions.

[00108] In step **732**, Line Detector **432b** applies the Sobel operator on X and Y gradients within the video frames to detect the white pixels of the tennis court lines, also employing adaptive thresholding for edge detection. Line Detector **432b** performs a shadow-exclusion algorithm in step **734** to exclude any “false lines” resulting from shadows on the court. Line Detector **432b** also employs Hough line transformations commonly used to detect lines on video images. In step **736**, Line Detector **432b** eliminates any “non-court” lines that are inconsistent with known standard tennis court dimensions (e.g., the fence, adjacent courts, etc.). Finally, in step **738**, Line Detector **432b** determines the corners of the remaining tennis court lines, again utilizing its knowledge of standard tennis court dimensions. As with the image-adjustment process, those skilled in the art of line and edge detection may employ different algorithms to enable Line Detector **432b** to perform this line-detection process without departing from the spirit of the present invention.

[00109] Having detected the lines and corners of the tennis court from the video images covering both sides of the court, Court Map Generator **452b**, in step **740**, generates the Court Map **620**, illustrated in **FIG. 6** and described above. In particular, as described above, given the known tennis court dimensions – represented in a 3D court map coordinate system **606** (x_{cm} , y_{cm} , z_{cm}) – the lines of the tennis court can be “overlaid” upon the 2D video frame coordinate system **605** (x_p , y_p).

[00110] This is made possible because Line Detector **432b** identified the corners **630** of the tennis court on the video frames, enabling these corners to be represented as points in both coordinate systems. Given these known co-planar points (including the known location of the video cameras in Camera System **415a**), Court Model Generator **454b** generates the court model in step **750**, after which the auto-calibration process ends in step **760**. Those skilled in the art can employ various different algorithms to effect such a translation (given the locations of a sufficient number of co-planar points on a video frame generated by a single fixed-location camera) without departing from the spirit of the present invention. [See, e.g., “A Simple Algorithm for Object Location from a Single Image without Camera Calibration,” Bénallal and Meunier, Computational Science and its Applications, Volume 2667 of the series Lecture Notes in Computer Science, pp. 99-104, Springer, June 18, 2003.]

[00111] As noted above, this court model is a function that facilitates the translation of individual pixels and object locations on a video frame to corresponding locations on the playing surface of the tennis court represented by the court map. Note that this translation applies only to pixels and objects that are known to be in the same plane as the surface of the tennis court (i.e., on the ground). As will be discussed below, one such key object is the tennis ball upon its initial bounce (which is separately determined as discussed below with reference to **FIG. 10**).

[00112] Once line-calling device **410a** has been attached to a tennis net post, and has completed its auto-calibration process within a few seconds (as described in **FIG. 7** above), the players can then, in one embodiment, initiate match play at any time. As will be discussed below with reference to **FIG. 9**, State Analyzer **470b** then tracks the state of the match, and in particular the beginning and end of each point. In other embodiments, line-calling device **410a** has additional modes, such as a practice or “free play” mode, in which it makes selective line calls (e.g., limiting line calls to the baseline or a particular service line or sideline) and extracts related statistics.

[00113] At the start of each point, before the server puts the ball into play, Player Detector **440b** detects each of the players in the video frames generated by the video cameras in Camera System **415a**, as described below with reference to player-detection process **800** of **FIG. 8**. In short, it detects the relative location of the players, enabling line-calling device **410a** to identify the server and the target service box (and, in one embodiment, call out the score before each serve), which facilitates the processes of monitoring the “point state” (described below with reference to **FIG. 9**) and detecting the ball bounce (as described below with reference to **FIG. 10**).

[00114] In step **805**, line-calling device **410a** initiates the player-detection process. In step **810**, Video Frame Generator **422b** extracts the video frames captured by Camera System **415a** (from both left-side and right-side video cameras) for processing. In step **820**, Video Image Adjuster **426b** initiates an image-adjustment process, similar to the one described above with respect to auto-calibration process **700** in **FIG. 7**. It should be noted, however, that the steps of player-detection process **800** are performed continuously while players are moving in between points, as opposed to auto-calibration process **700** which processes static tennis court lines.

[00115] In step **822**, Video Image Adjuster **426b** converts the video frames to a Y8 luminosity level to adjust for differences in environmental lighting levels, and then undistorts the video frames, in step **824**, to adjust for distortion due to the curved lens in each video camera (based, in one embodiment, on a “lens model” specific to the particular lens employed).

[00116] Then, in step **830**, Player Detector **444b** detects differences over time among prior video frames so that, in step **840**, moving areas can be detected across multiple video frames. In step **850**, Player Detector **444b** filters these moving areas to isolate the largest ones – i.e., those that constitute tennis players. In this manner, Player Detector **444b** determines a player's location on one or more successive video frames (employing Video Frame Selector **424b** to select video frames generated by either the left-side or right-side video camera, depending upon the player's location on a particular side of the court).

[00117] Player-detection process **800** continues until, in step **855**, all players have been detected, at which point, in step **860**, Player Detector **444b** applies a Kalman filter algorithm to confirm the players' relative locations, ending player-detection process **800** at step **875**, and returning to step **912** of **FIG. 9**. In the event one or more remaining players have yet to be detected in step **855**, Player Detector **444b** returns to step **810** to invoke Video Frame Generator **422b** to extract and process subsequent video frames.

[00118] In one embodiment, each player is defined by a bounding rectangle on one or more successive video frames, with the lowest pixels in that rectangle representing the part of the player (i.e., the player's feet) touching the surface of the tennis court. Player Detector **444b** then invokes Court Model Translator **482b** to translate the locations of the player's feet on a video frame (and on the surface of the tennis court) to corresponding locations on the court map **620**.

[00119] In this embodiment, each player's location on court map **620** facilitates determination of the players' relative locations in step **912**, as described below (e.g., deuce v ad side for server and receiver, including partners for doubles). Such player locations are also utilized, in one embodiment, for various statistics, such as court coverage by each player.

[00120] In another embodiment, player-detection process **800** is employed as part of a process to detect player racquets and shot type (e.g., forehand, backhand, etc.). It should be noted, however, that such functionality is relatively CPU-intensive, even if employed relatively infrequently over time.

[00121] Those skilled in the art may employ different player-detection and object-detection algorithms to enable Player Detector **444b** to perform this player-detection process (e.g., to detect differences among video frames, identify moving areas and identify large objects such as tennis players) without departing from the spirit of the present invention.

[00122] Turning to “point-state” process **900** in **FIG. 9**, which begins in step **905** once each prior point of the tennis match has ended, Player Detector **444b** initiates, in step **910**, the player-detection process described above with reference to **FIG. 8**. Once all players have been detected and their relative locations ascertained, control returns to step **912**, where State Analyzer **470b** determines which player is the server and to which service box (deuce or add side) the serve will be targeted to initiate the point.

[00123] In step **914**, State Analyzer **470b** invokes Ball Bounce Detector **460b** to determine when/whether the first or second serve bounces on the playing surface of the tennis court. This bounce-detection process **1000** is described in greater detail below with reference to **FIG. 10**.

[00124] In step **915**, State Analyzer **470b** determines whether the ball bounce resulted from an actual serve, or merely from the server bouncing the ball prior to serving the ball (a relatively simple determination given the location of the ball bounce). If the server simply bounced the ball before serving, then State Analyzer **470b** ignores this bounce and re-invokes Ball Bounce Detector **460b**, until eventually a ball bounce resulting from an actual serve is detected. In other embodiments, line-calling device **410a** first detects the initiation of the serve itself (e.g., by detecting the intersection between the server’s racquet and the ball), thereby eliminating the need to detect these “false bounces.”

[00125] Once a ball bounce from an actual serve has been detected, Line Call Analyzer **480b** is invoked, in step **920**, to make the service line call (as described below with reference to **FIGs. 11A-11C**). Note that, apart from actual ball bounces, it is possible that the served ball leaves the field of view of Camera System **415a** and no bounce is ever detected (within a predefined threshold period of time). Other (relatively rare) scenarios include pre-bounce obstacles, including another player’s racquet, fence, etc. In such scenarios (though not illustrated in **FIG. 9**), Line Call Analyzer **480b** is not invoked.

[00126] In either event, State Analyzer **470b** determines, in step **922**, whether a first serve has been called OUT or is deemed OUT due to a “timeout” or other non-bounce scenario. If so, control returns to step **914**, where State Analyzer **470b** again invokes Ball Bounce Detector **460b** to determine when/whether the second serve bounces.

[00127] Otherwise, State Analyzer **470b** determines, in step **925**, whether the point has ended. For example, a point ends upon a second serve being called OUT (or a “timeout” in lieu of a

bounce), or an unusual scenario such as a serve striking an opposing player. If the point has ended, then Communications module **477b** is invoked, in step **950**, to update and indicate the score to the players, returning control to step **905** to start the next point.

[00128] If, however, Line Call Analyzer **480b** determines, in step **925**, that the point has not ended (e.g., if a first or second serve is called IN, thereby starting a rally), then State Analyzer **470b** invokes Ball Bounce Detector **460b**, in step **930**, to detect the next ball bounce (or “timeout” or other relevant scenario) during the rally.

[00129] Once a rally ball-bounce event has been detected, Line Call Analyzer **480b** is invoked, in step **940**, to make the rally line call (as described below with reference to **FIGs. 11A-11C**). Here too, apart from actual ball bounces, it is possible that a ball leaves the field of view of Camera System **415a** and no bounce is ever detected (within a predefined threshold period of time), in which case Line Call Analyzer **480b** is not invoked, but the ball is deemed OUT. Other scenarios include an opposing player volley, which also obviates the need to invoke Line Call Analyzer **480b**.

[00130] In any event, control then returns to step **925** to determine whether the rally has ended. If not, steps **930** (ball-bounce detection) and **940** (line calls) are repeated until the point eventually ends (e.g., due to an OUT line call), after which Communications module **477b** is invoked, in step **950**, to update and indicate the score to the players, returning control to step **905** to start the next point.

[00131] Though not illustrated in **FIG. 9**, State Analyzer **470b** (in other embodiments) maintains the state of a tennis match, as well as practice sessions and other predefined scenarios. For example, in addition to monitoring the start and end of each point, State Analyzer **470b** maintains the game and set score throughout an entire match (or other predefined scoring system for a practice session or similar scenario).

[00132] Turning to **FIG. 10**, flowchart **1000** describes one embodiment of the ball-bounce detection process referenced above, beginning with step **1005** (invoked during serves and subsequent shots of a rally). As noted above, this bounce-detection process is an important step in the ultimate goal of making line calls.

[00133] In step **1010**, Video Frame Generator **422b** extracts the video frames captured by Camera System **415a** (from both left-side and right-side video cameras) for processing. In step **1020**, Video Image Adjuster **426b** initiates an image-adjustment process that is similar to the one

described above (regarding the player-detection process illustrated in **FIG. 8**) in that it is performed continuously – in this case, while the ball moves across the tennis court. However, because a close-up view of the tennis ball facilitates accurate bounce detection, Video Frame Selector **424b** selects for image adjustment the video frame generated by the “closer” of the left-side and right-side video cameras. For example, it starts with the server-side video camera, and repeatedly switches to the other camera each time the ball reaches a threshold proximity to the net – i.e., the edge of the video frame.

[00134] In step **1022**, Video Image Adjuster **426b** converts the video frame to a Y8 luminosity level to adjust for differences in environmental lighting levels, and then undistorts the video frame, in step **1024**, to adjust for distortion due to the curved lens in each video camera (based, in one embodiment, on a “lens model” specific to the particular lens employed).

[00135] In step **1030**, Ball Detector **442b** detects differences over time among prior video frames so that, in step **1040**, moving areas can be detected across multiple video frames. In step **1045**, Ball Detector **442b** filters these moving areas to isolate small distinctive moving areas that could represent the known shape and size of a tennis ball.

[00136] In step **1050**, Directional Ball Tracker **462b** employs a Kalman filter algorithm, based on a gravity model, to predict and confirm the path of the tennis ball over time (across successive video frames). In other words, the path of a “candidate” detected tennis ball moving across successive video frames is confirmed to the extent it is consistent with the path of a tennis ball primarily affected by gravity.

[00137] Despite the inability of a single fixed video camera to determine the precise location in 3D space of a tennis ball, the ball’s expected trajectory (based on a gravity model) can be compared with its actual trajectory as captured over time on successive video frames (revealing, for example, unexpected changes in vertical direction that are consistent with a ball bounce). Moreover, a gravity model also facilitates the important distinction between a ball bounce and a volley, as will be explained below.

[00138] Other environmental factors (e.g., wind) have significantly less effect (between video frames) on the path of a relatively fast-moving tennis ball than does gravity. Apart from speed and gravity, wind is essentially a “third-order” or minimal factor. The use of a gravity model also helps eliminate “false positives” from video noise and other nearby moving objects (e.g., trees or birds).

[00139] In one embodiment, an optional external Laser **475a** is employed to facilitate accurate location of each bounce of the tennis ball (particularly when the tennis ball bounces near a relevant court line, as explained below). In particular, in step **1076** (explained in greater detail below with reference to **FIG. 11C**), Laser Ball Tracker **464b** continuously adjusts the angle of Laser **475a** to track the moving tennis ball until the beam emitted by Laser **475a** intersects the tennis ball (i.e., confirming a ball bounce), at which point Laser Ball Location Updater **486b** determines a precise location of the tennis ball on court map **620** and returns control to step **1072** to complete the line-calling process (as described below). In the interim, until a ball bounce is confirmed, control returns to step **1055**, as it would if no Laser **475a** was employed.

[00140] In step **1055**, Directional Ball Tracker **462b** determines (from its analysis of successive video frames in the context of the gravity model) whether the ball has experienced an abrupt change in direction. If not (as is normally the case while a tennis ball is in flight after each shot, being affected primarily by gravity), then Directional Ball Tracker **462b** returns control to step **1005** to repeat bounce-detection process **1000** with respect to successive video frames.

[00141] Once Directional Ball Tracker **462b** determines that the ball has experienced an abrupt change in direction, then it determines, in step **1065**, whether the abrupt change in direction is consistent with an actual ball bounce. In other words, by tracking the angle, speed and direction of the tennis ball (even without knowing its precise location in 3D space), Directional Ball Tracker **462b** can distinguish the path of the tennis ball (primarily affected by gravity) that bounces on the playing surface of the tennis court from alternate paths resulting, for example, from a volley or other collision (e.g., with the body of a tennis player).

[00142] In the event the abrupt change in direction is not consistent with a ball bounce, then Directional Ball Tracker **462b** returns control to **FIG. 9** step **940** (or step **915**, in the event of a first or second serve) for continued “point state” analysis as described above. For example, with reference to step **925** above, a detected “volley” (or, in one embodiment, a “let cord” during a serve or rally) would result in continuation of the point and a repeat of the ball-bounce detection process per step **930**. On the other hand, a detected deflection off the receiving player would end the point (with the receiving player losing the point), while a detected deflection off a fence or other obstacle would also end the point, but in favor of the receiving player.

[00143] If, however, Directional Ball Tracker **462b** determines that the ball has indeed bounced, then Ball Bounce Detector **460b** extracts, in step **1070**, the video frame reflecting the

initial ball bounce (e.g., even if subsequent video frames are processed to confirm the ball bounce) and invokes Line Call Analyzer **480b**.

[00144] In one embodiment, Ball Detector **442b** employs a common computer-vision “template matching” algorithm to facilitate the player-detection and ball-detection processes (e.g., to identify moving areas and identify small distinctive objects such as a tennis ball, a person or a racquet). Those skilled in the art may, however, employ different ball-detection algorithms without departing from the spirit of the present invention.

[00145] Once Line Call Analyzer **480b** is invoked to make a line call, multiple alternative and complementary line-call methodologies may be employed, as are described below with reference to **FIGs. 11A – 11C**.

[00146] In one embodiment, Ball Bounce Detector **460b** invokes Court Model Translator **482b** to perform, in step **1072**, a “court map translation” line call, as described in greater detail below with reference to **FIG. 11A**. To supplement this method in another embodiment, an external laser (Laser **475a**) is employed to enable Laser Ball Location Updater **486b** to obtain a more precise location of the tennis ball when it bounces, as noted above with respect to step **1076** and described in greater detail below with reference to **FIG. 11C**. In that scenario, this more precise location is utilized by Line Call Analyzer **480b** to improve its line call (as illustrated by the arrow between steps **1076** and **1072**).

[00147] In an alternative embodiment, Ball Bounce Detector **460b** invokes Video Frame Comparator **484b** to perform, in step **1074**, a “video frame comparison” line call (based upon locations within one or more video frames, without translation to corresponding court map **620** locations), as described in greater detail below with reference to **FIG. 11B**.

[00148] In other embodiments, different combinations of these line-calling methods may be employed without departing from the spirit of the present invention. For example, in one embodiment, both “court map translation” and “video frame comparison” line-calling methods are employed. In another embodiment, the selection of one method over the other is based on an estimated “error probability” calculated for each method – e.g., based in part on the “closeness” of the ball bounce location to a relevant line (as estimated from the initial ball bounce video frame).

[00149] Turning to **FIG. 11A**, “court map translation” line-calling process **1100a** begins with step **1105a**, upon being invoked by Ball Bounce Detector **460b** in step **1072** of **FIG. 10**. Court Model

Translator **482b**, in step **1110a**, employs the court model function (with respect to the video frame reflecting the initial ball bounce) to translate the ball's location on that video frame to its corresponding location on court map **620**.

[00150] As noted above, the court model translation may result in some degree of error (in addition to any errors generated during the image-adjustment process) due, for example, to detection of "far-away" pixels at the baseline and far sidelines (relative to the location of line-calling device **410a**). Such errors are, of course, more significant as the location of the ball bounce is closer to a relevant court line. If Laser **475a** is present, then the more precise ball bounce location it generates can be utilized, in one embodiment, in lieu of the translated location.

[00151] In any event, Line Call Analyzer **480b** identifies, in step **1120a**, the relevant court lines. For example, in the event of a serve to the deuce court, the relevant court lines are the three lines of the deuce service box (center line, sideline and service line). In the event of a rally, the relevant court lines are the entirety of both sidelines and the baseline. In other embodiments (e.g., a doubles match), the alley lines are considered as well. Note that the locations of all of the court lines were previously translated to corresponding locations on court map **620** during auto-calibration process **700**, described with reference to **FIG. 7** above.

[00152] In step **1130a**, Line Call Analyzer **480b** compares the ball bounce location determined in step **1110a** to the relevant line locations generated in step **1120a** to make the line call. For example, in one embodiment, all points on the "IN" side of the relevant court lines (including the court lines themselves) are designated as "IN" points. If the ball bounce location intersects with any of those "IN" points, then the line call is "IN." Otherwise, it is "OUT." Many other similar algorithms may be employed to make the line call (given the locations on court map **620** of the bounced ball and the relevant court lines) without departing from the spirit of the present invention.

[00153] Finally, in step **1135a**, Line Call Analyzer **480b** returns control to **FIG. 9** step **940** (or step **915**, in the event of a first or second serve) for continued "point state" analysis as described above. As noted above, the ball bounce location is stored in System Memory **414a** for use by Communications module **477b** in communicating shot-location and related statistics and generating associated visualizations.

[00154] Turning to **FIG. 11C**, flowchart **1100c** describes one embodiment of a method, starting in step **1105c**, for calculating a more precise ball bounce location in the event Laser **475a** is present. As noted above with respect to step **1110a**, this more precise ball bounce location is utilized by Line Call Analyzer **480b** (in lieu of the translated location) to improve its line call.

[00155] In step **1110c**, Laser Ball Tracker **464b** determines (based upon the video frame reflecting the initial ball bounce) the angle between the net (in line with the known location of Laser **475a**) and the tennis ball. Then, in step **1120c**, Laser Ball Tracker **464b** causes Rotation Motor **476a** to rotate Laser **475a** to align it with the current location of the tennis ball.

[00156] Then, in step **1125c**, Laser Ball Tracker **464b** determines whether the beam emitted by Laser **475a** intersects with the tennis ball (i.e., indicating that the ball has bounced on the playing surface of the tennis court, given that Laser **475a** is located on the ground). In another embodiment, if the height of Laser **475a** is slightly above the ground (e.g., one inch), this height is taken into account in determining when the beam is deemed to have intersected with the tennis ball.

[00157] If Laser Ball Tracker **464b** determines that the beam has not yet intersected with the tennis ball (as will normally be the case as the tennis ball is in flight prior to bouncing), then control is returned (in step **1127c**) to step **1055** of **FIG. 10** to continue the bounce-detection process, as described above. In other words, Laser Ball Tracker **464b** continuously adjusts the angle of Laser **475a** to track the moving tennis ball until the beam emitted by Laser **475a** intersects the tennis ball (i.e., confirming a ball bounce).

[00158] Once the beam intersects the tennis ball (confirming a ball bounce), then Laser Ball Location Updater **486b** calculates (in step **1130c**) the location of the tennis ball upon its initial bounce. Whether employing direct “time of flight” or “phase-based” laser scanning, Laser Ball Location Updater **486b** determines the distance between the known location of Laser **475a** and the tennis ball, which in turn yields the location of the tennis ball on court map **620**.

[00159] Finally, in step **1135c**, control is returned to step **1072** of **FIG. 10** to complete the line-calling process as described above (i.e., by replacing the translated location of the tennis ball with the more precise location calculated by Laser Ball Location Updater **486b**).

[00160] In another embodiment (not illustrated in **FIG. 11C**), Laser **475a** is used to obtain a precise location of each corner where court lines intersect, thus enabling process **1100c** (invoked at

step **1076** of **FIG. 10**) to operate entirely independent of the “court map translation” process **1100a** in **FIG. 11A** and the “video frame comparison” process **1100b** in **FIG. 11B**. Before invoking the automated pre-calibration process (e.g., prior to the start of a match or practice session), the players place small reflective objects on each corner (e.g., at the intersections of the outer edges of the court lines), enabling Laser **475a** to identify these corners and determine precise distances to each corner. In this embodiment, Line Call Analyzer **480b** makes the line call (given the known location of the ball bounce and the court lines) without requiring assistance from Court Model Translator **482b** (per **FIG. 11A**) and Video Frame Comparator **484b** (per **FIG. 11B**). In another embodiment, multiple Lasers **475a** are employed (e.g., one at each net post) to enable a more precise location of the ball bounce to be determined via triangulation (i.e., the intersection of two circles).

[00161] As noted above, in an alternative embodiment (e.g., when Line Call Analyzer **480b** determines that the location of the ball bounce on the video frame is deemed sufficiently close to a relevant court line), Video Frame Comparator **484b** is invoked to perform a “video frame comparison” (without translation to corresponding court map **620** locations) as described in flowchart **1100b** with reference to **FIG. 11B**, starting in step **1105b**.

[00162] As noted above, this method has certain advantages over the “court map translation” method, including elimination of some degree of translation errors (which increase as line calls are closer) as well as faster performance, e.g., by avoiding the CPU time required to perform the translations. Moreover, this method also has a lower probability of errors given less distortion in a small portion of the video frame (i.e., the portion of the relevant court lines in proximity to the ball bounce location). The full court line in the video frame, by contrast, has more curvature, and thus exhibits a greater likelihood of error. These advantages, however, are offset by the loss of accurate ball bounce locations, which could otherwise be useful for subsequent statistical analyses and visualizations. The decision as to which method to employ is therefore a tradeoff that those skilled in the art may make differently without departing from the spirit of the present invention.

[00163] In any event, in step **1110b**, Video Frame Comparator **484b** invokes Ball Detector **442b** to detect the white pixels of the tennis ball in the video frame reflecting the initial ball bounce. In step **1120b**, Video Frame Comparator **484b** invokes Line Detector **432b** to detect the relevant court lines (see description above of step **1120a** of **FIG. 11A**) in the video frame – as was done for all court lines as described above in step **730** of **FIG. 7**.

[00164] In step **1125b**, Video Frame Comparator **484b** compares the relative locations of the ball bounce and relevant court lines. In step **1030b**, Video Frame Comparator **484b** makes the line call. If it can identify on the video frame at least one pixel between the ball bounce location on the video frame and the “OUT” side of any relevant court line, then the line call is “OUT.” Otherwise, the line call is “IN.” Finally, in step **1135b**, Line Call Analyzer **480b** returns control to **FIG. 9** step **940** (or step **915**, in the event of a first or second serve) for continued “point state” analysis as described above.

[00165] In addition to the various embodiments of the present invention described above, alternative embodiments will be evident to those skilled in the art without departing from the spirit of the present invention. For example, instead of utilizing a fully integrated line-calling device including video cameras and line-calling functionality, one could attach an existing video camera (such as a “GoPro”® or similar video camera) to a net post (or in proximity to a net post), which transmits recorded video and data to an external smartphone app for line-call and other functionality. Such an embodiment would still fall within the spirit of the present invention in that it retains the “close-up” view of the tennis ball (due to the video camera’s proximity to the net post) as well as the line-call functionality based upon satisfaction of an object state condition (ball bounce) – in this case determined from a single fixed-location video camera (even though not integrated into the line-call processing device – i.e., the smartphone).

[00166] Finally, it should be noted that many variations of the real-time and post-event statistical and visualization processing described herein and in U.S. Provisional Patent Application No. 62,265,392, which is incorporated herein by reference (whether performed externally or internally by line-calling device **410a**) will be evident to those skilled in the art without departing from the spirit of the present invention. These include estimation of ball speed and RPM (“roll per minute”) based upon gravity and speed models, AI-based prediction and other algorithms for optimizing player strategy, shot-detection and classification (e.g., offensive and defensive), conclusions derived automatically from statistics (e.g., higher success rate when volleying more frequently against a particular opponent, generally or in particular point scenarios), as well as many other variations.

CLAIMS

1. A tennis line-calling system that makes line calls for a plurality of tennis players striking a tennis ball with their respective tennis racquets, causing the tennis ball to move across each side of a tennis court, comprising:

(a) an integrated tennis line-calling device that includes:

(i) a camera system that generates successive video frames covering court lines of the tennis court and the tennis ball as it moves across each side of the tennis court; and

(ii) a line call analyzer that:

(A) processes the video frames in real time,

(B) determines when the tennis ball bounces on the playing surface of the tennis court based upon the processing of the video frames,

(C) determines the location of the tennis ball upon its initial bounce relative to the location of one or more of the court lines of the tennis court, and

(D) makes a line call based upon the relative location of the tennis ball upon its initial bounce and the one or more court lines of the tennis court;

and

(b) an attachment mechanism that enables the integrated tennis line-calling device to be attached to or in proximity to a net post of a tennis court.

2. A tennis line-calling system that makes line calls for a plurality of tennis players striking a tennis ball with their respective tennis racquets, causing the tennis ball to move across each side of a tennis court, comprising:
- (a) a video capture device that includes:
 - (i) a camera system that generates successive video frames covering court lines of the tennis court and the tennis ball as it moves across each side of the tennis court; and
 - (ii) a wireless real-time communicator that wirelessly transfers the video frames in real time to an external tennis line-calling device;
 - (b) an attachment mechanism that enables the video capture device to be attached to or in proximity to a net post of a tennis court; and
 - (c) the external tennis line-calling device that includes:
 - (i) a wireless receiver that receives the video frames transferred from the video capture device; and
 - (ii) a line call analyzer that:
 - (A) processes the video frames in real time,
 - (B) determines when the tennis ball bounces on the playing surface of the tennis court based upon the processing of the video frames,
 - (C) determines the location of the tennis ball upon its initial bounce relative to the location of one or more of the court lines of the tennis court, and
 - (D) makes a line call based upon the relative location of the tennis ball upon its initial bounce and the one or more court lines of the tennis court.

3. A tennis line-calling system that makes line calls for a plurality of tennis players striking a tennis ball with their respective tennis racquets, causing the tennis ball to move across each side of a tennis court, comprising:

- (a) an integrated tennis line-calling device that includes:
 - (i) a camera system that generates successive video frames covering court lines of the tennis court and the tennis ball as it moves across each side of the tennis court, wherein the camera system includes a single fixed-location video camera covering each side of the tennis court; and
 - (ii) a line call analyzer that:
 - (A) processes the video frames in real time,
 - (B) determines when the tennis ball bounces on the playing surface of the tennis court based upon the processing of the video frames,
 - (C) determines the location of the tennis ball upon its initial bounce relative to the location of one or more of the court lines of the tennis court, and
 - (D) makes a line call based upon the relative location of the tennis ball upon its initial bounce and the one or more court lines of the tennis court;

and

- (b) an attachment mechanism that enables the integrated tennis line-calling device to be attached to or in proximity to a net post of a tennis court.

4. An auto-calibration method for a tennis line-calling system that includes a camera system having one or more video cameras that generate video frames covering the lines of a tennis court, the method comprising the following steps:
- (a) extracting one or more video frames generated by the camera system, wherein the video frames cover the lines of a tennis court;
 - (b) identifying on the one or more video frames the pixels that constitute the tennis court lines;
 - (c) generating a court map based on known tennis court dimensions, wherein the court map represents each corner, where two or more tennis court lines intersect, as both:
 - (i) a set of pixels having coordinates in a video frame coordinate system, measured in pixels; and
 - (ii) a corresponding set of one or more points having coordinates in a court map coordinate system, measured in units of physical distance;
- and
- (d) generating a court model function that translates pixels from the video frame coordinate system to corresponding points in the court map coordinate system.

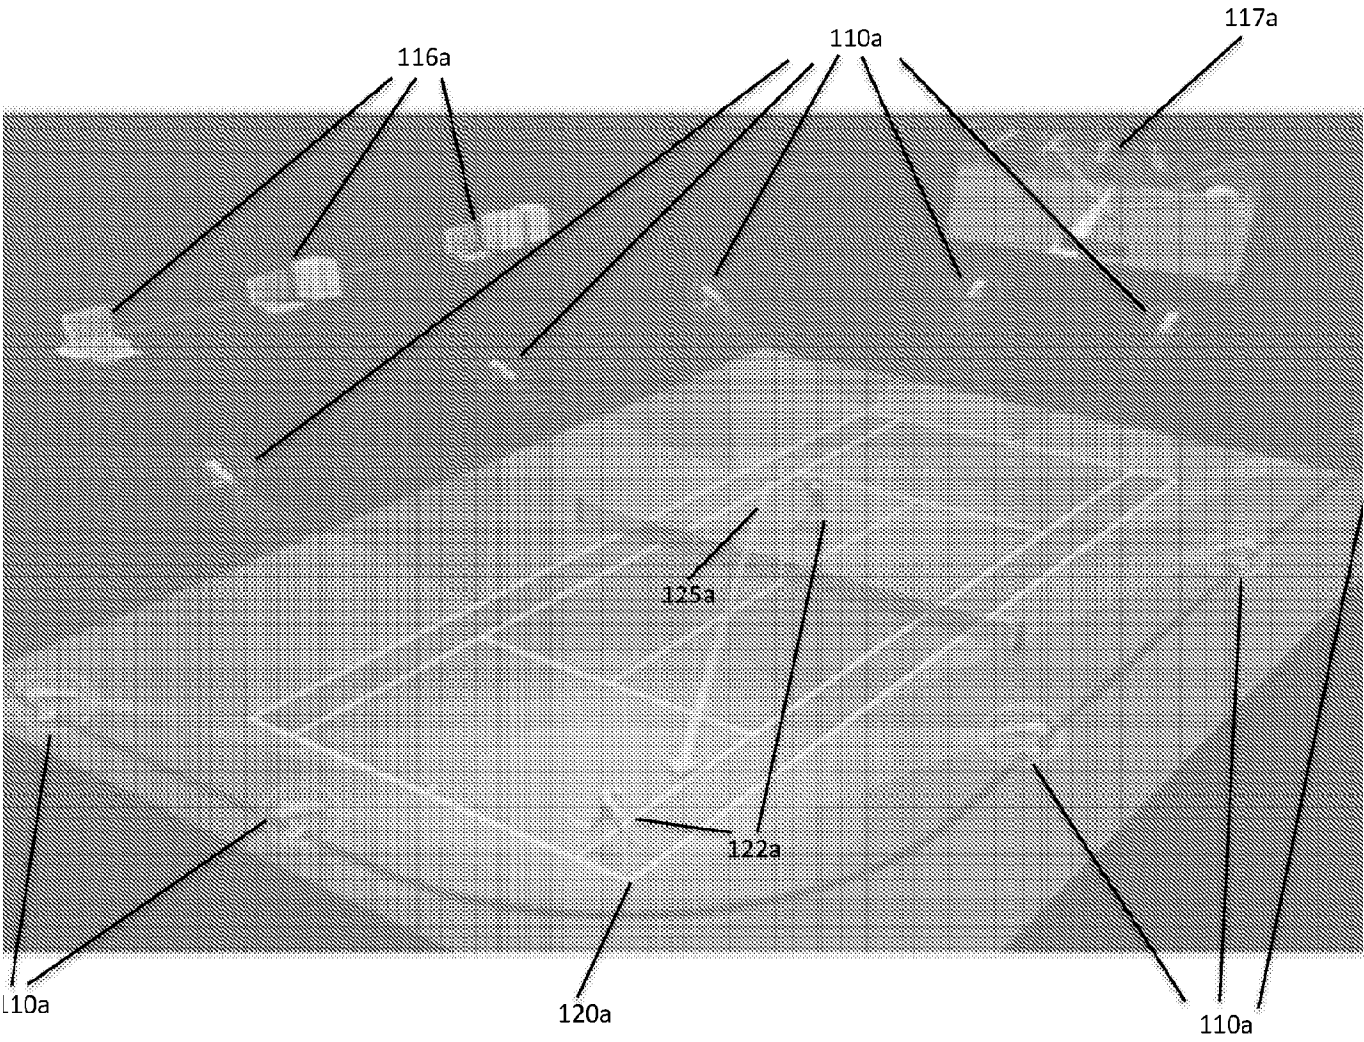


FIG. 1A

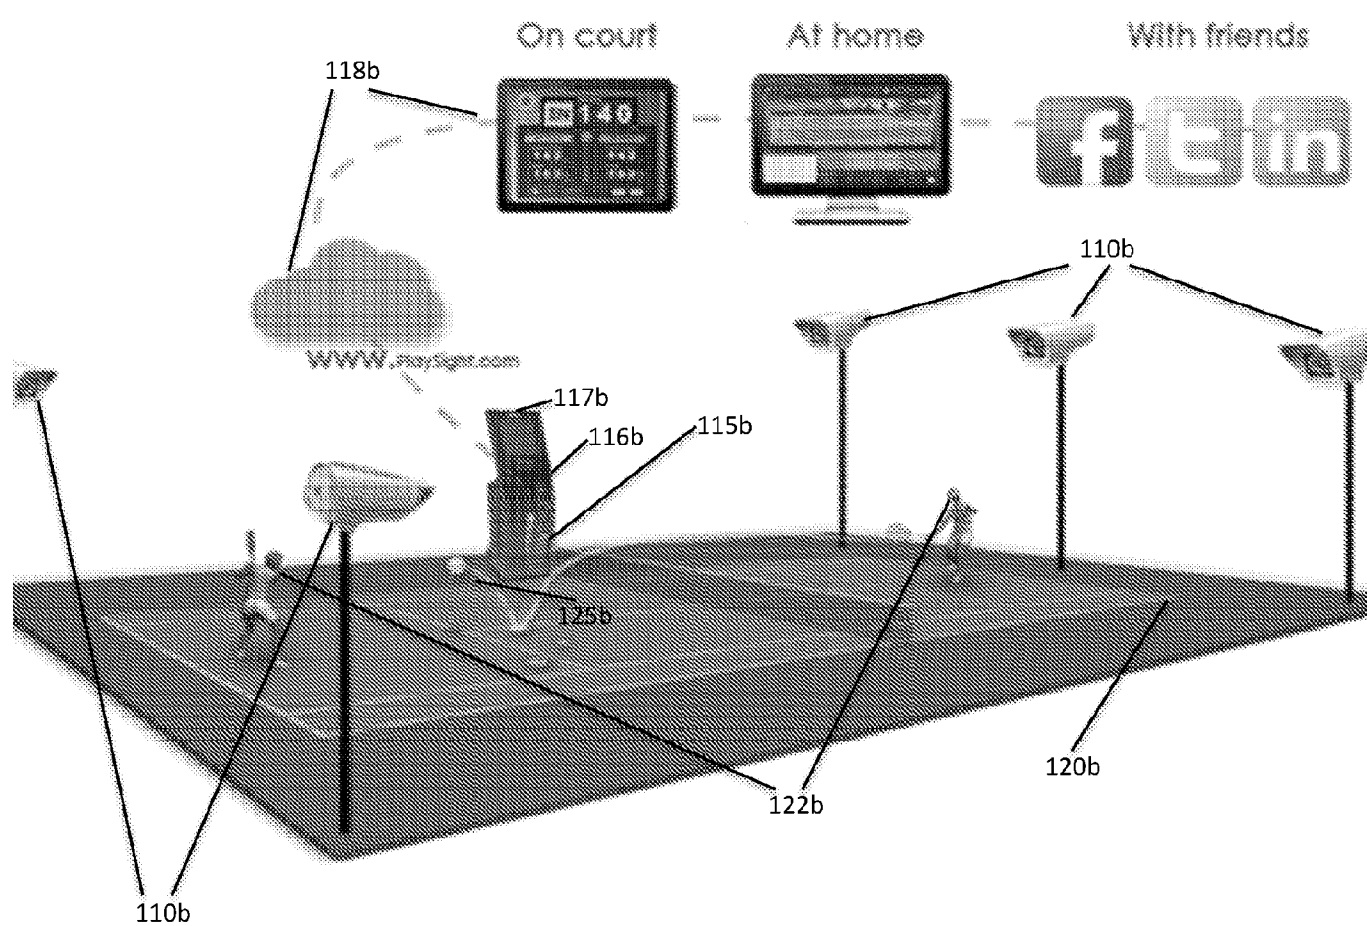
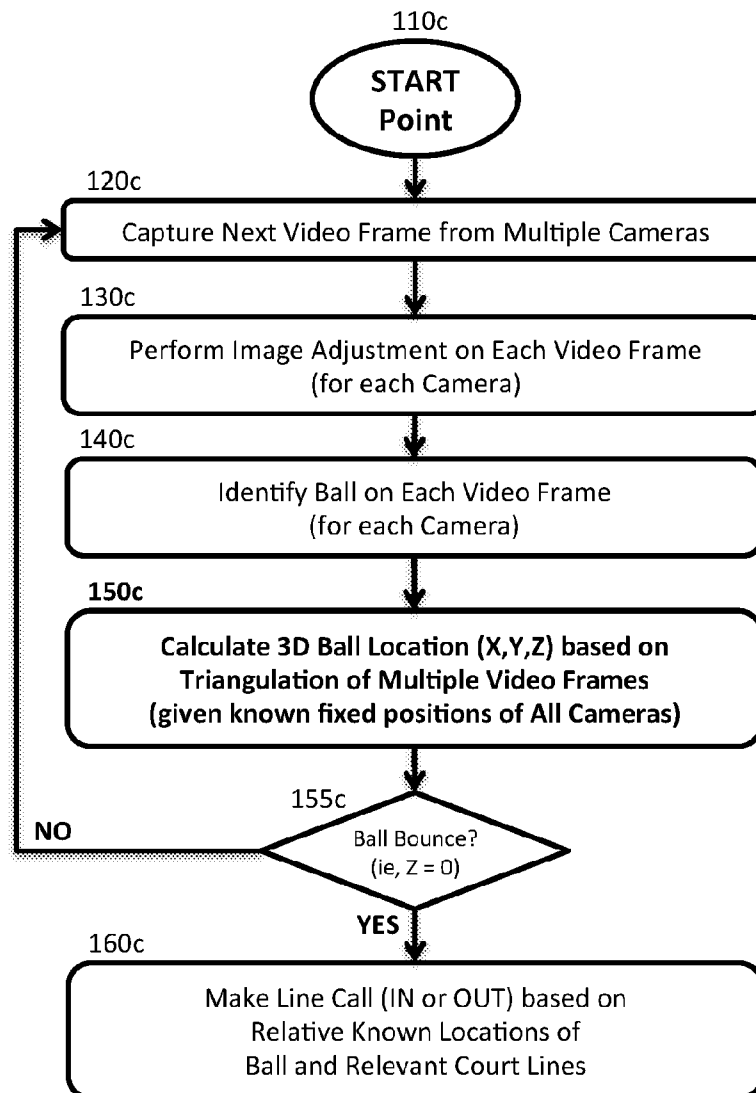


FIG. 1B

3/19

**FIG. 1C**

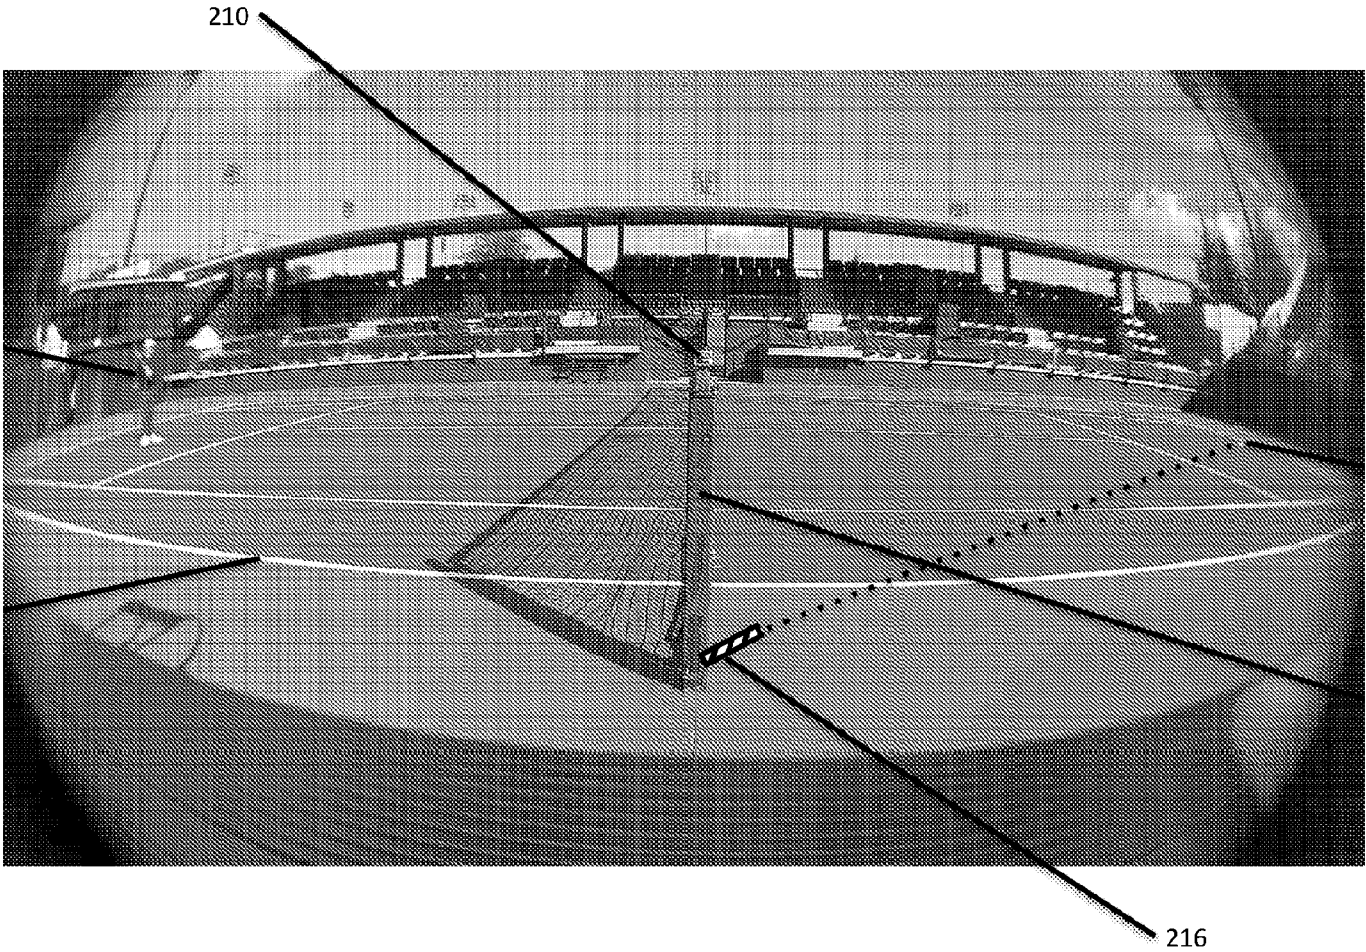


FIG. 2

5/19

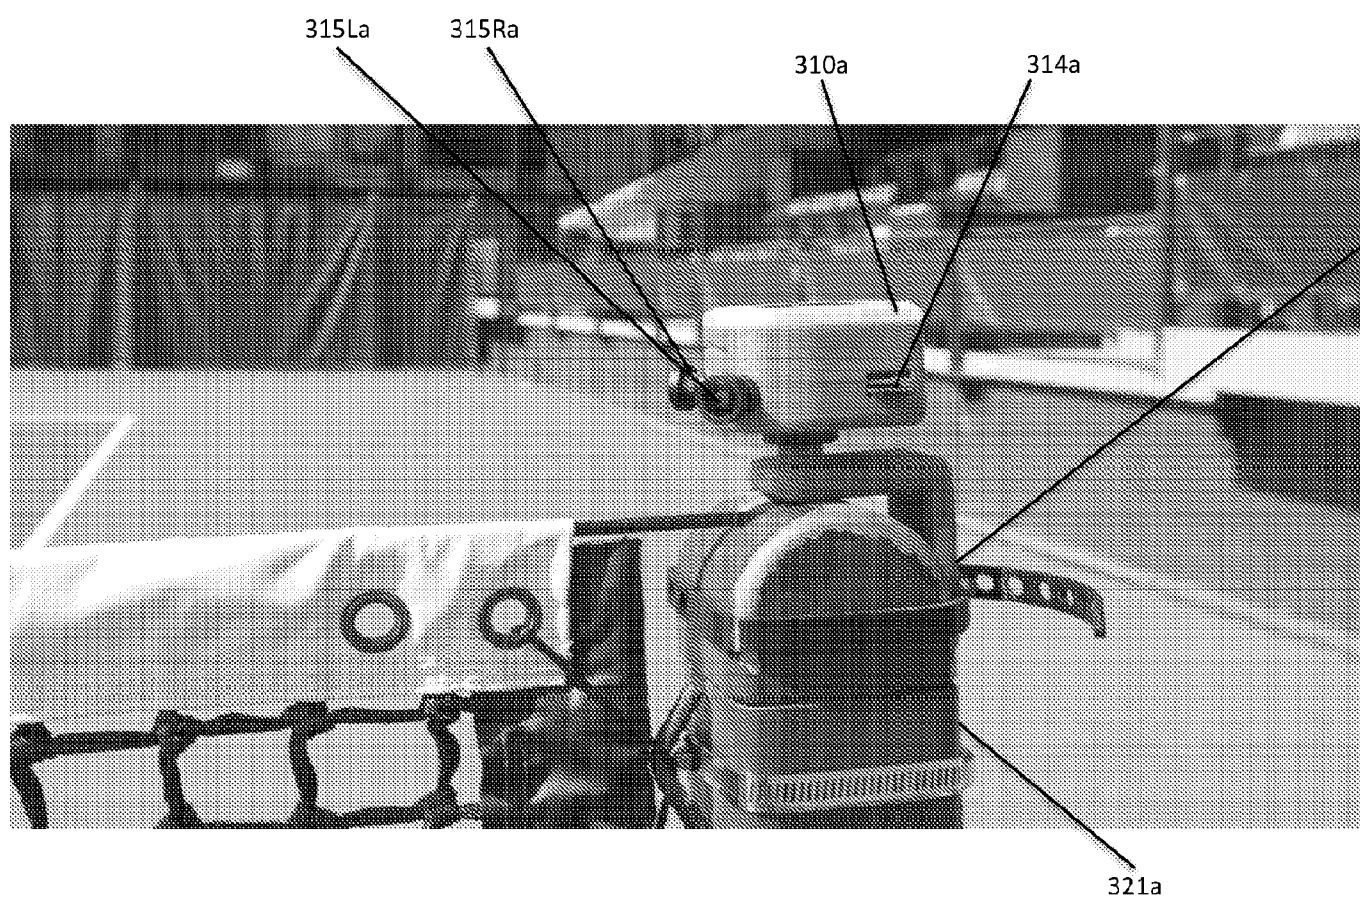


FIG. 3A

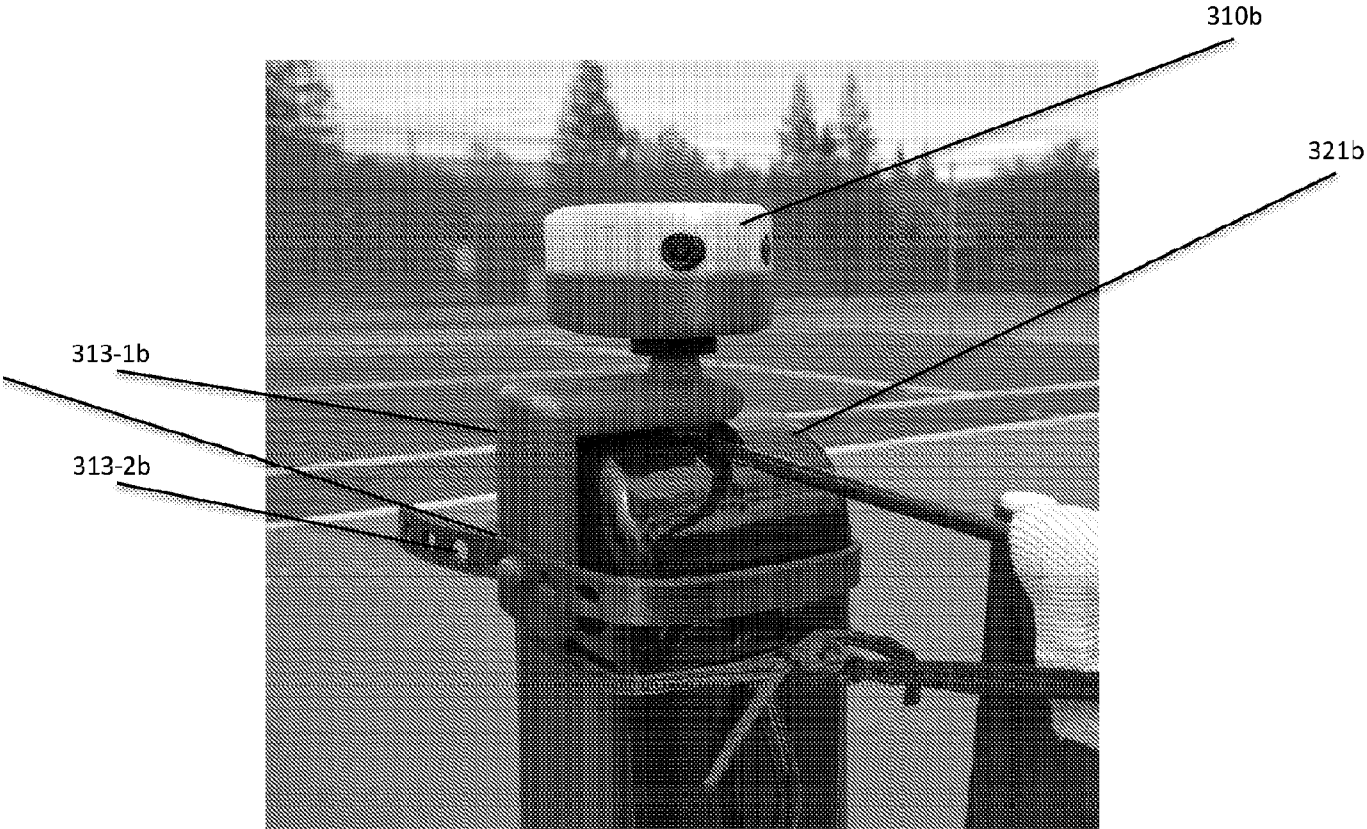


FIG. 3B

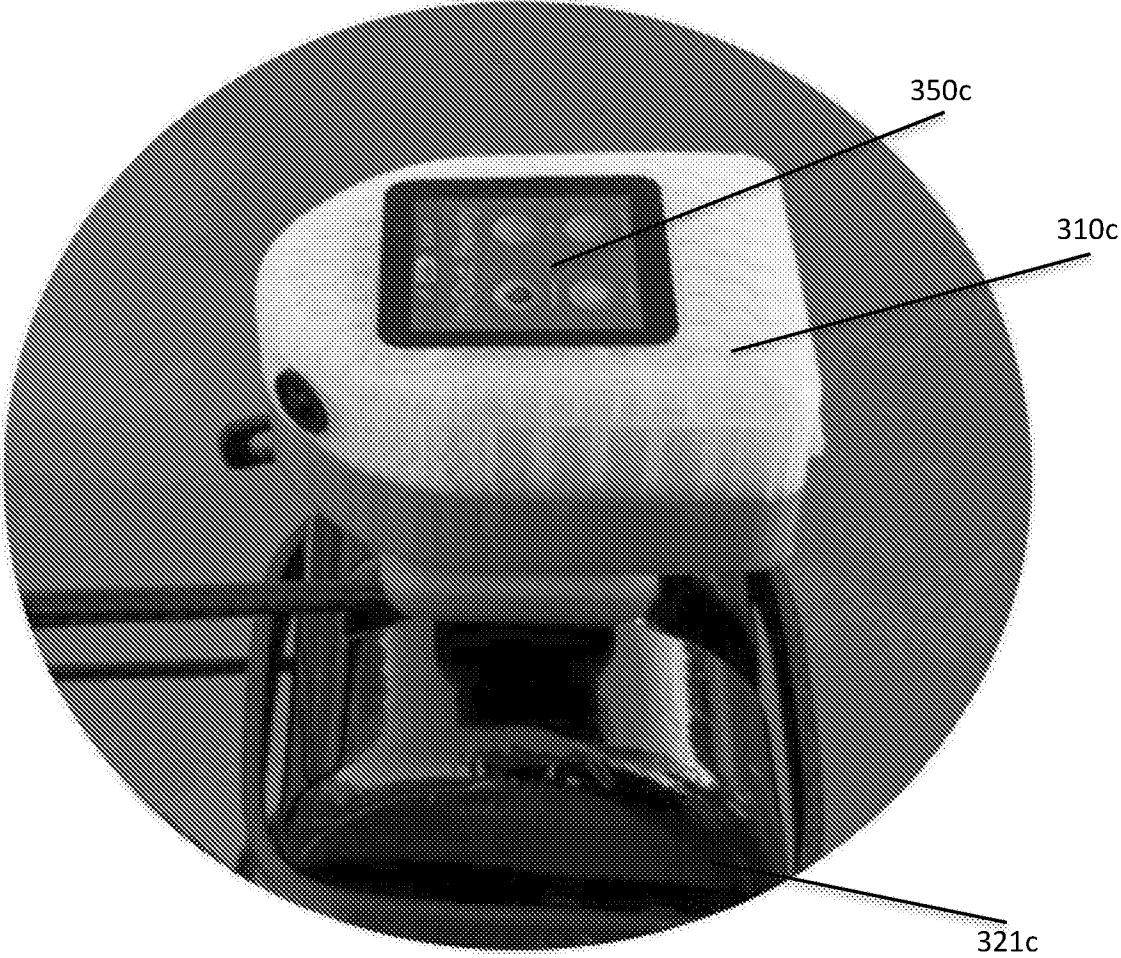


FIG. 3C

8/19

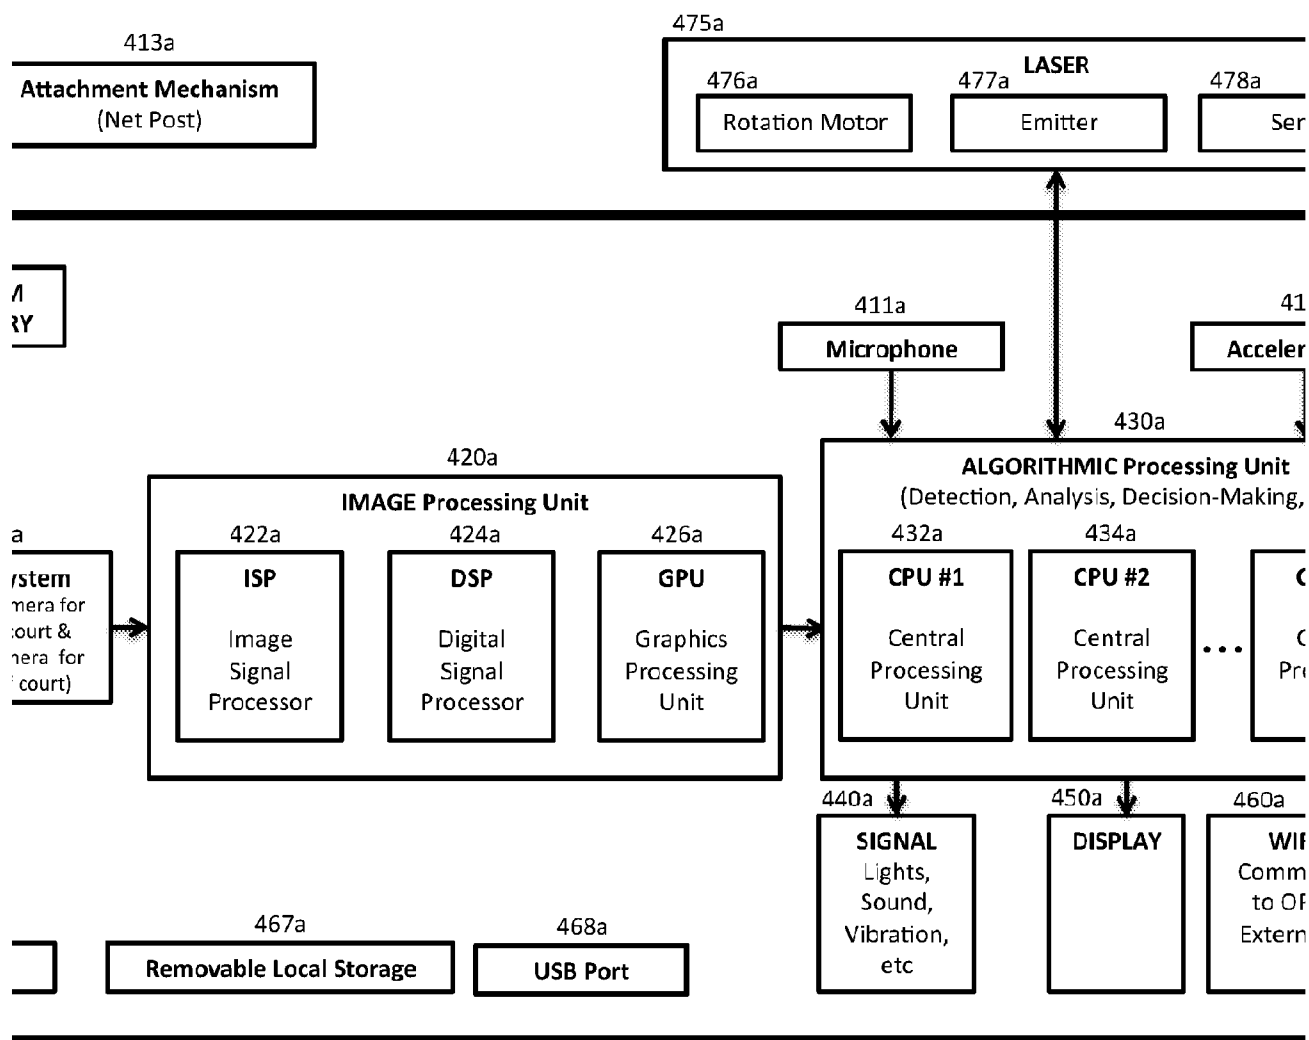


FIG. 4A

9/19


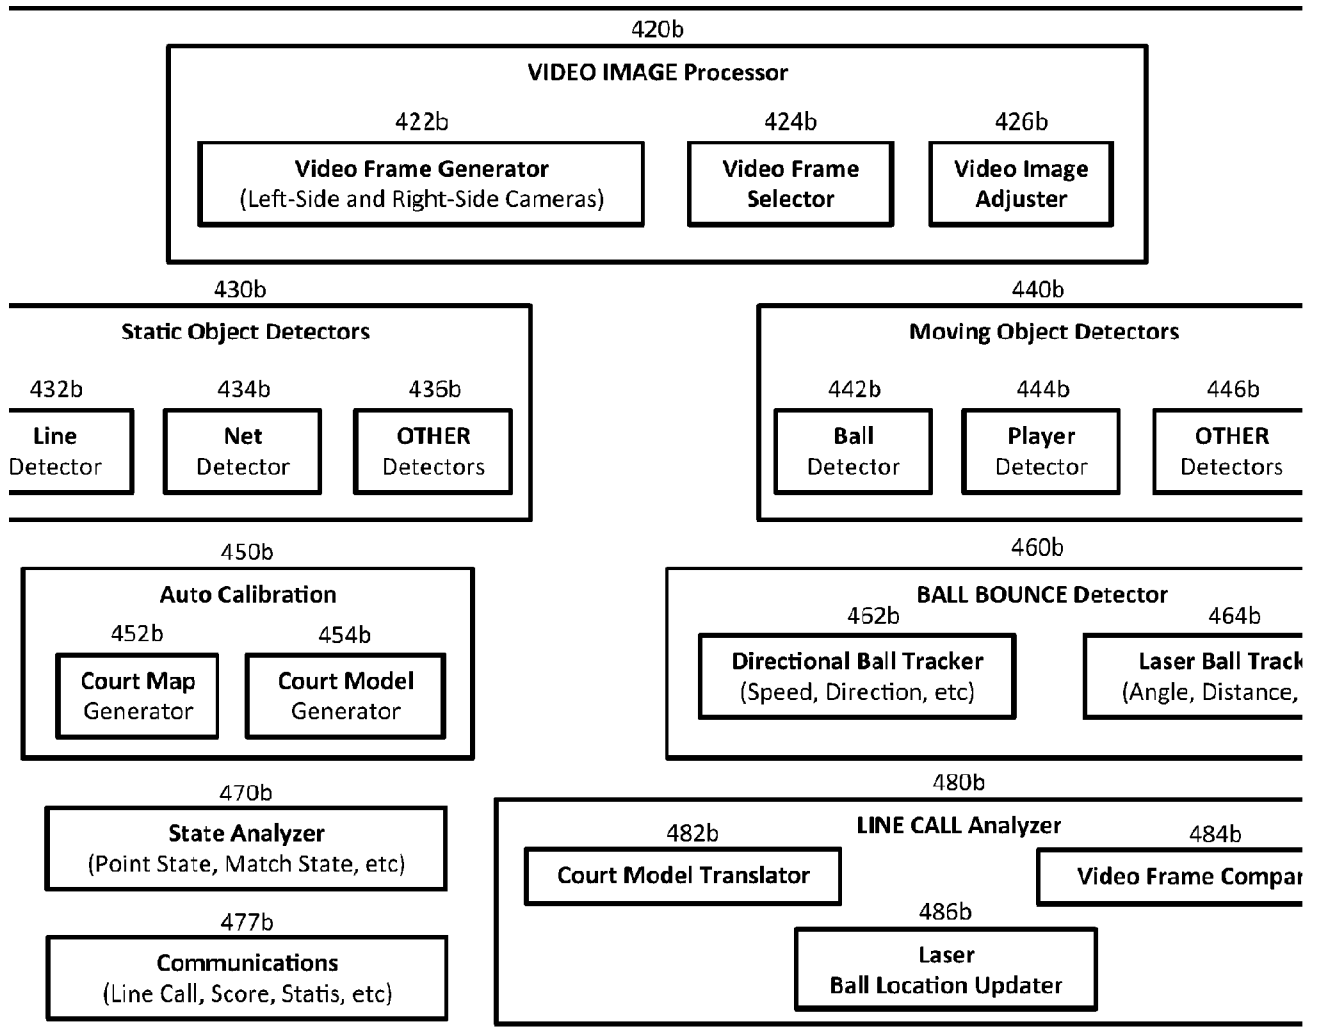


FIG. 4B

10/19

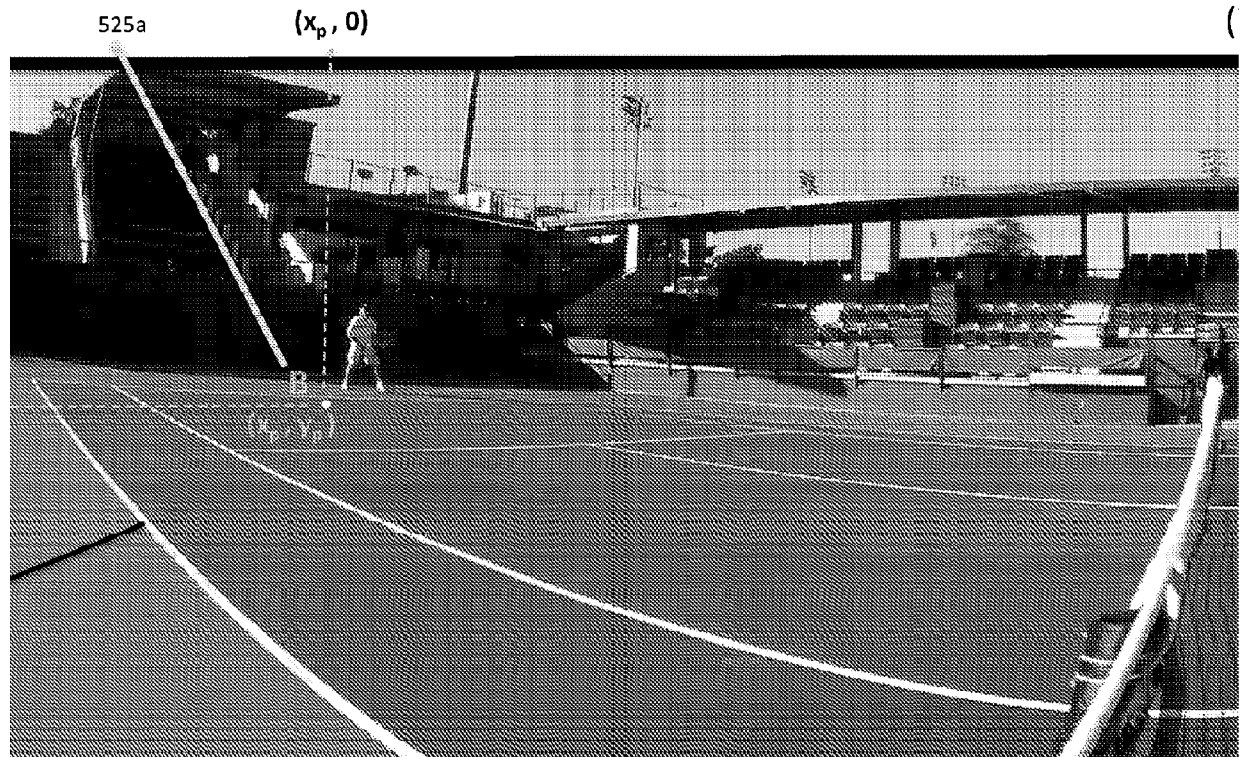

505a **VIDEO FRAME Coordinates**
(from Left-Side court Camera)

W pixels wide (along X axis)

H pixels high (along Y axis)

FIG. 5A

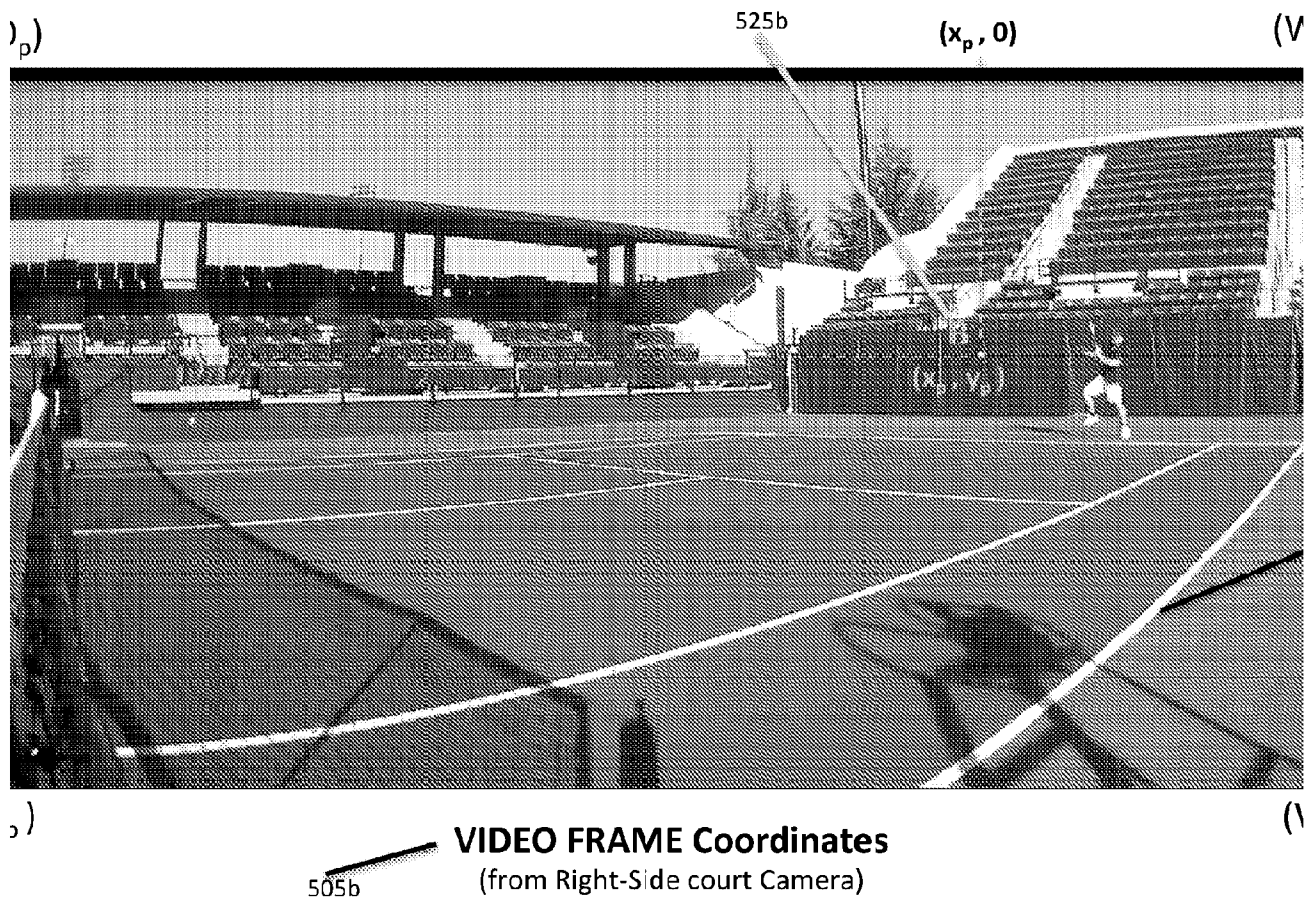


FIG. 5B

12/19

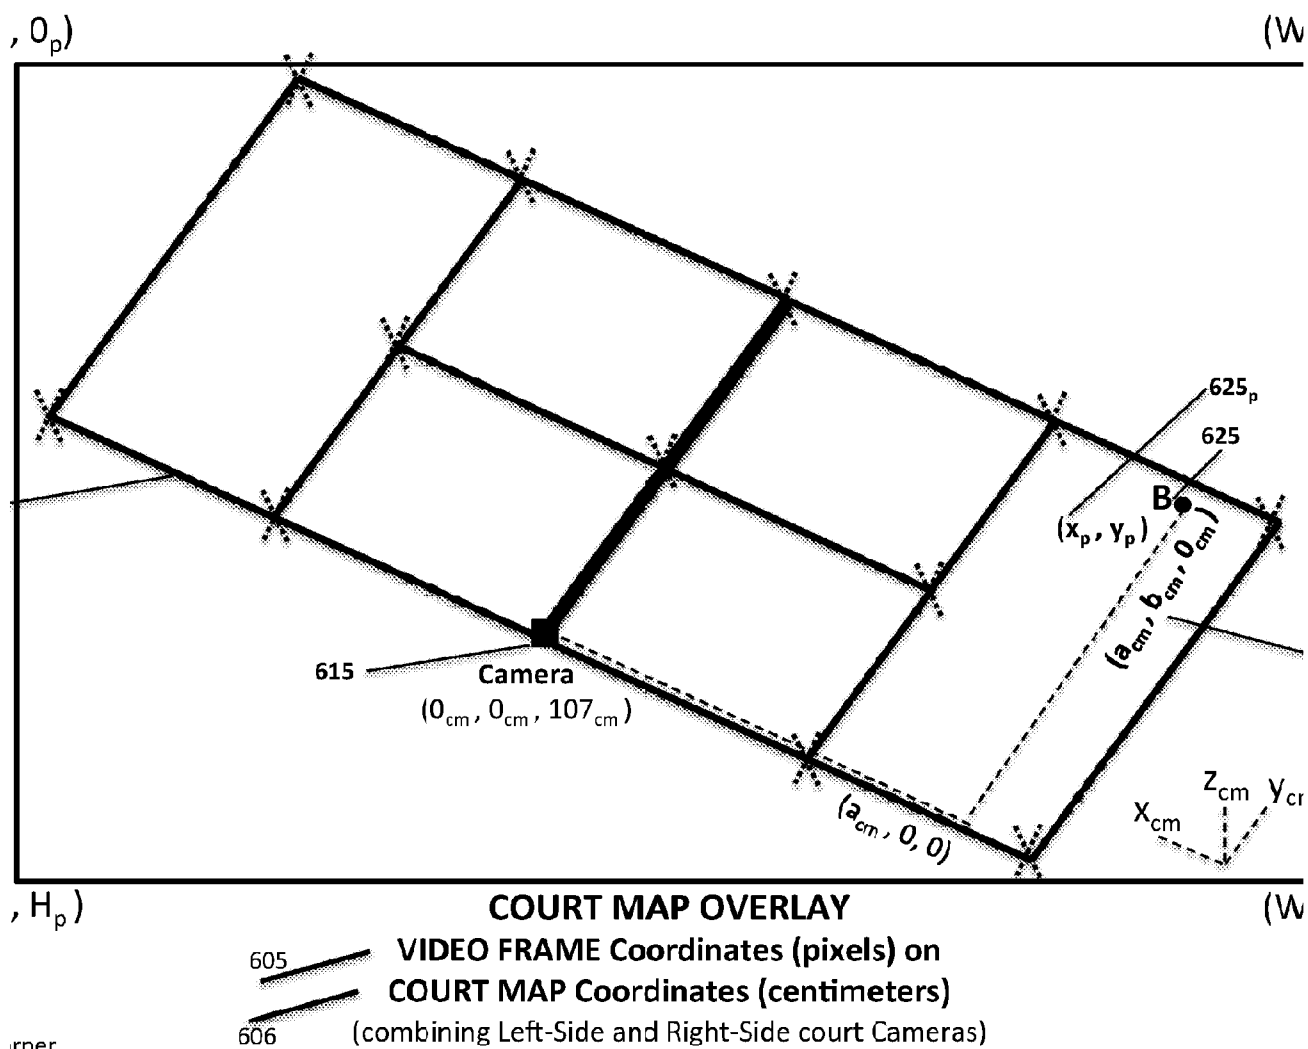


FIG. 6

13/19

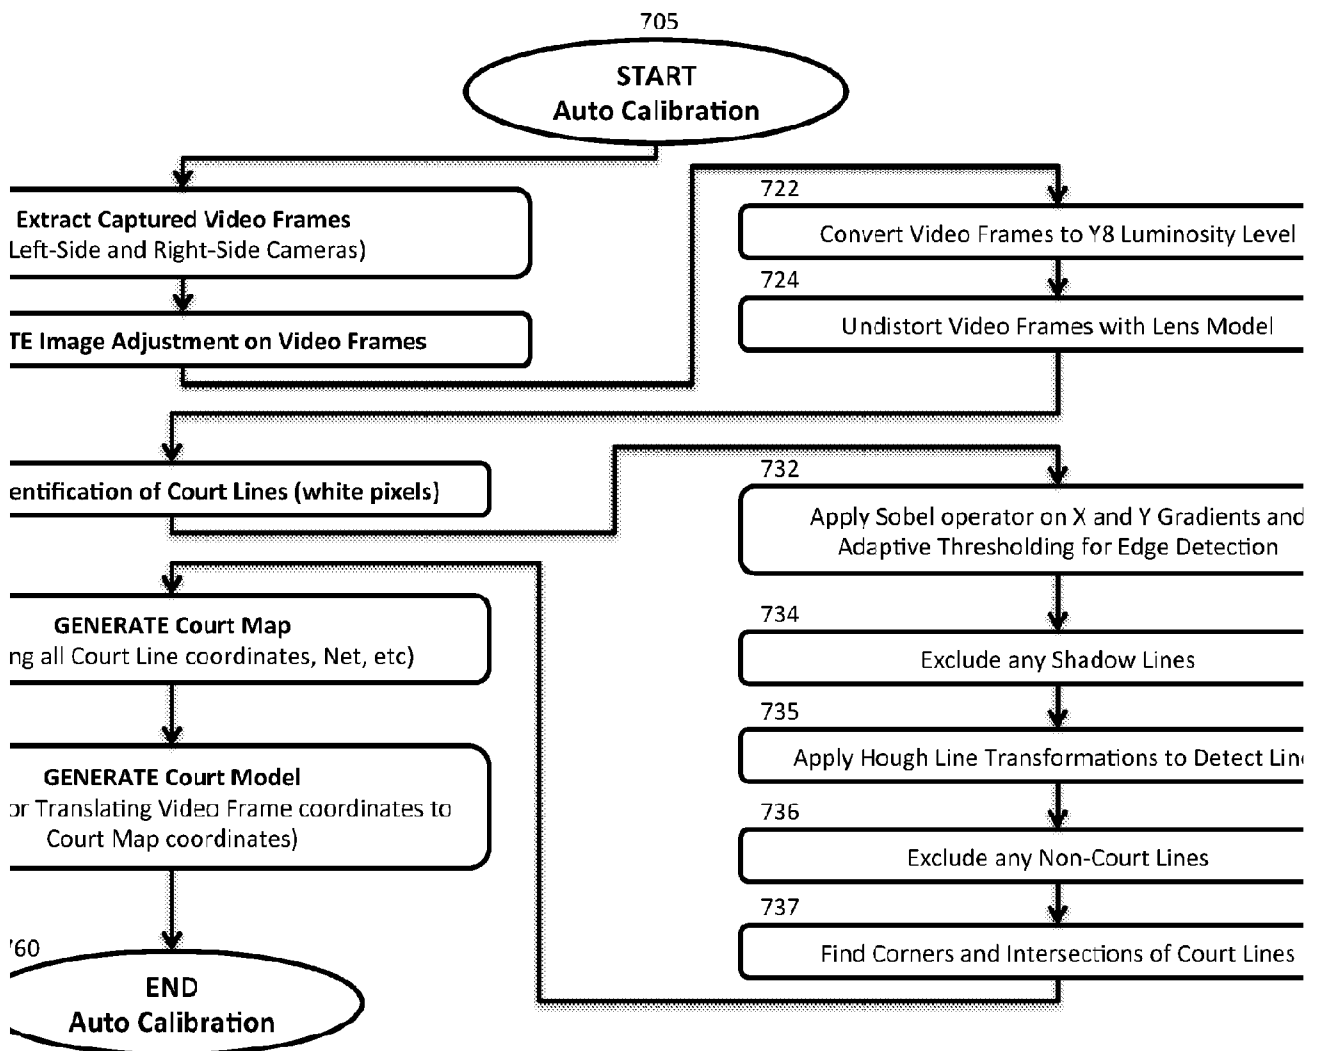


FIG. 7

14/19

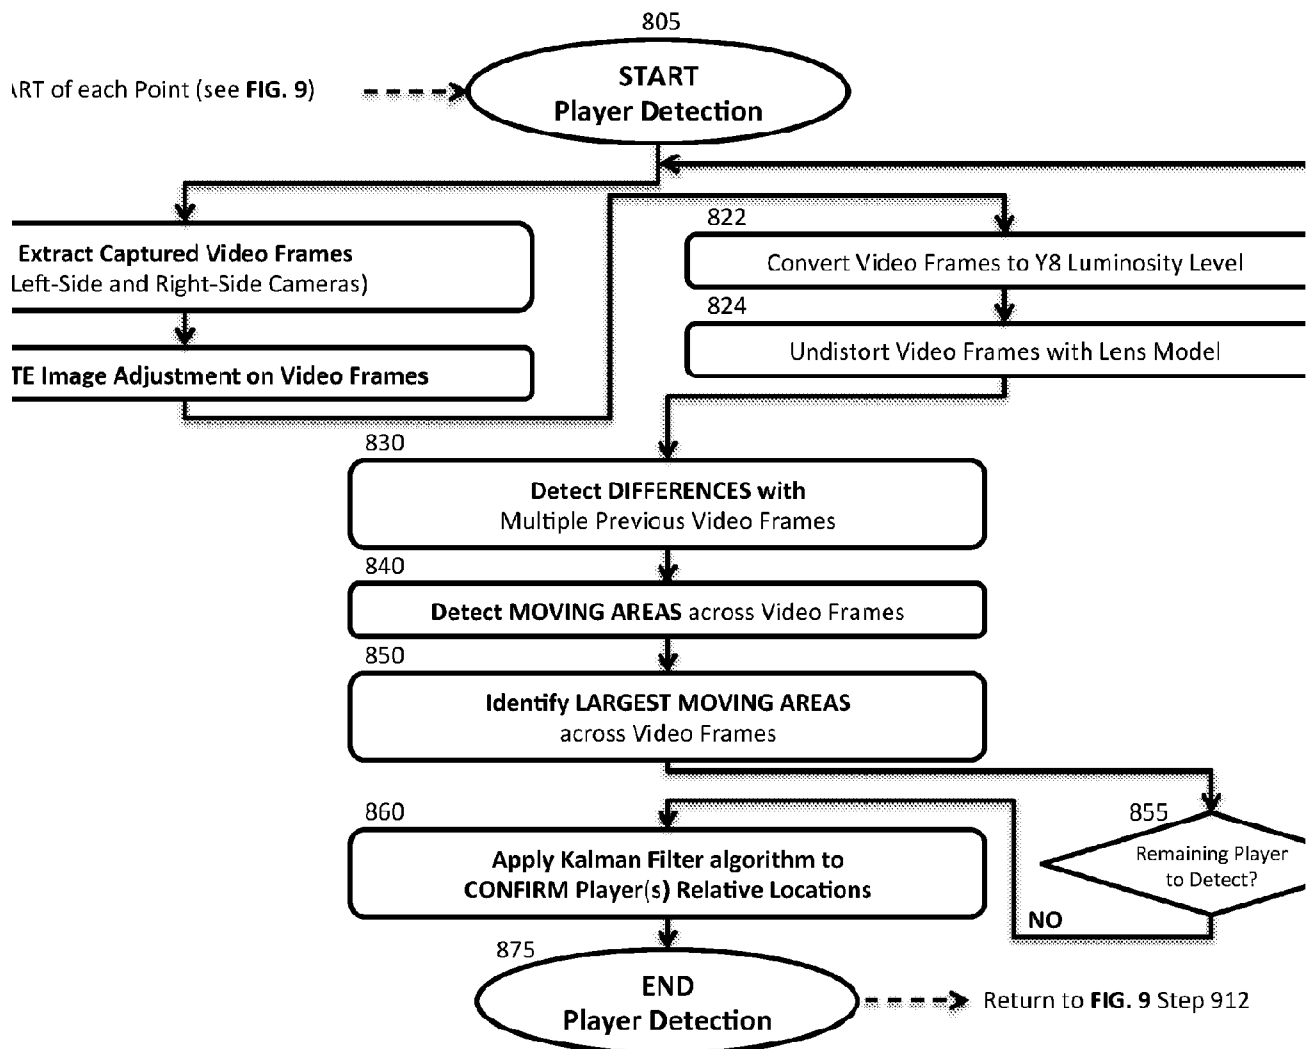


FIG. 8

15/19

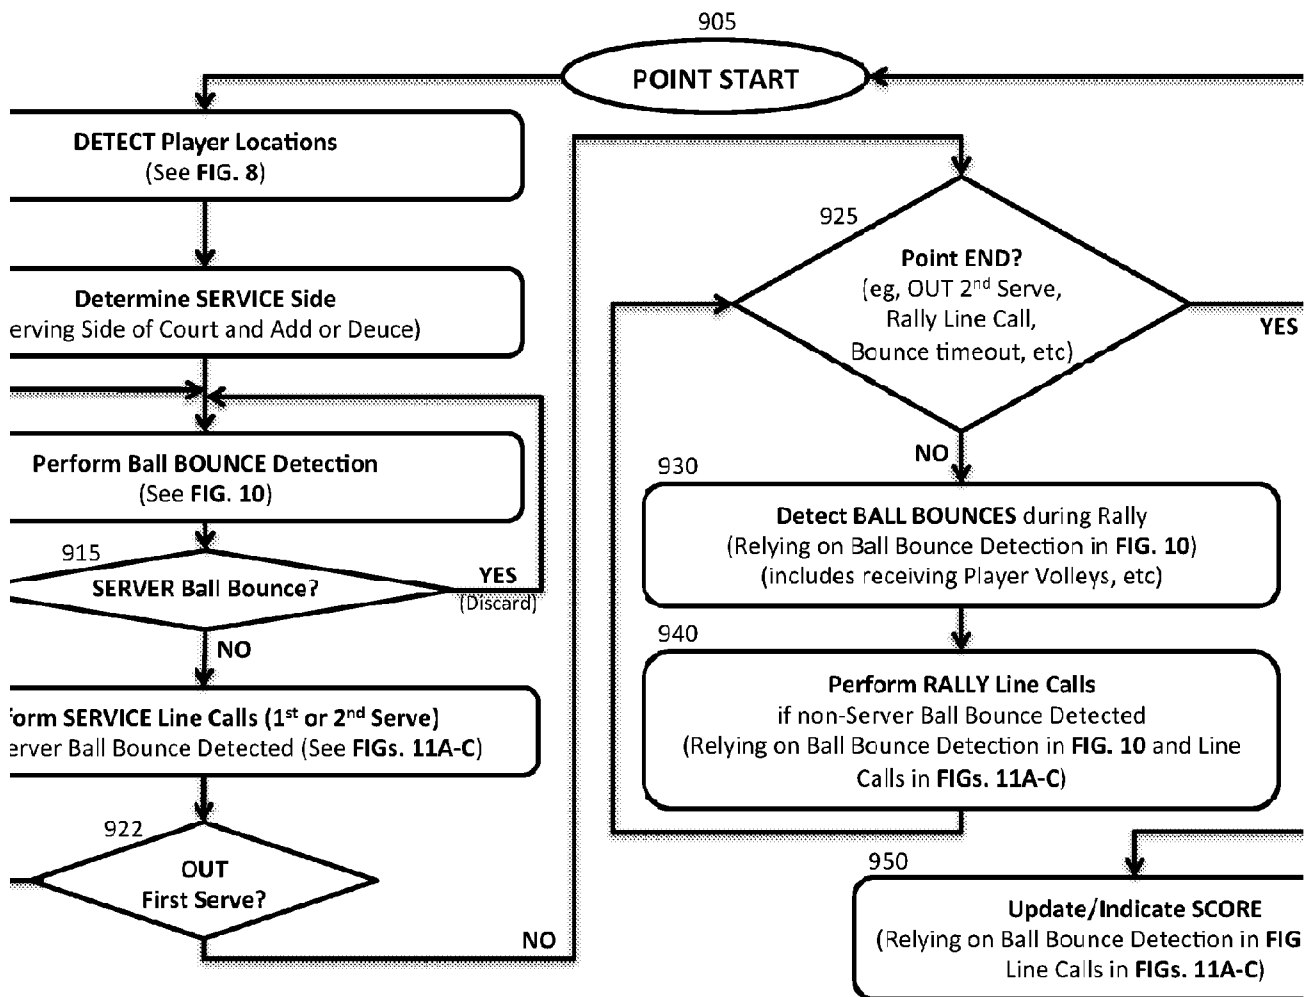


FIG. 9

17/19

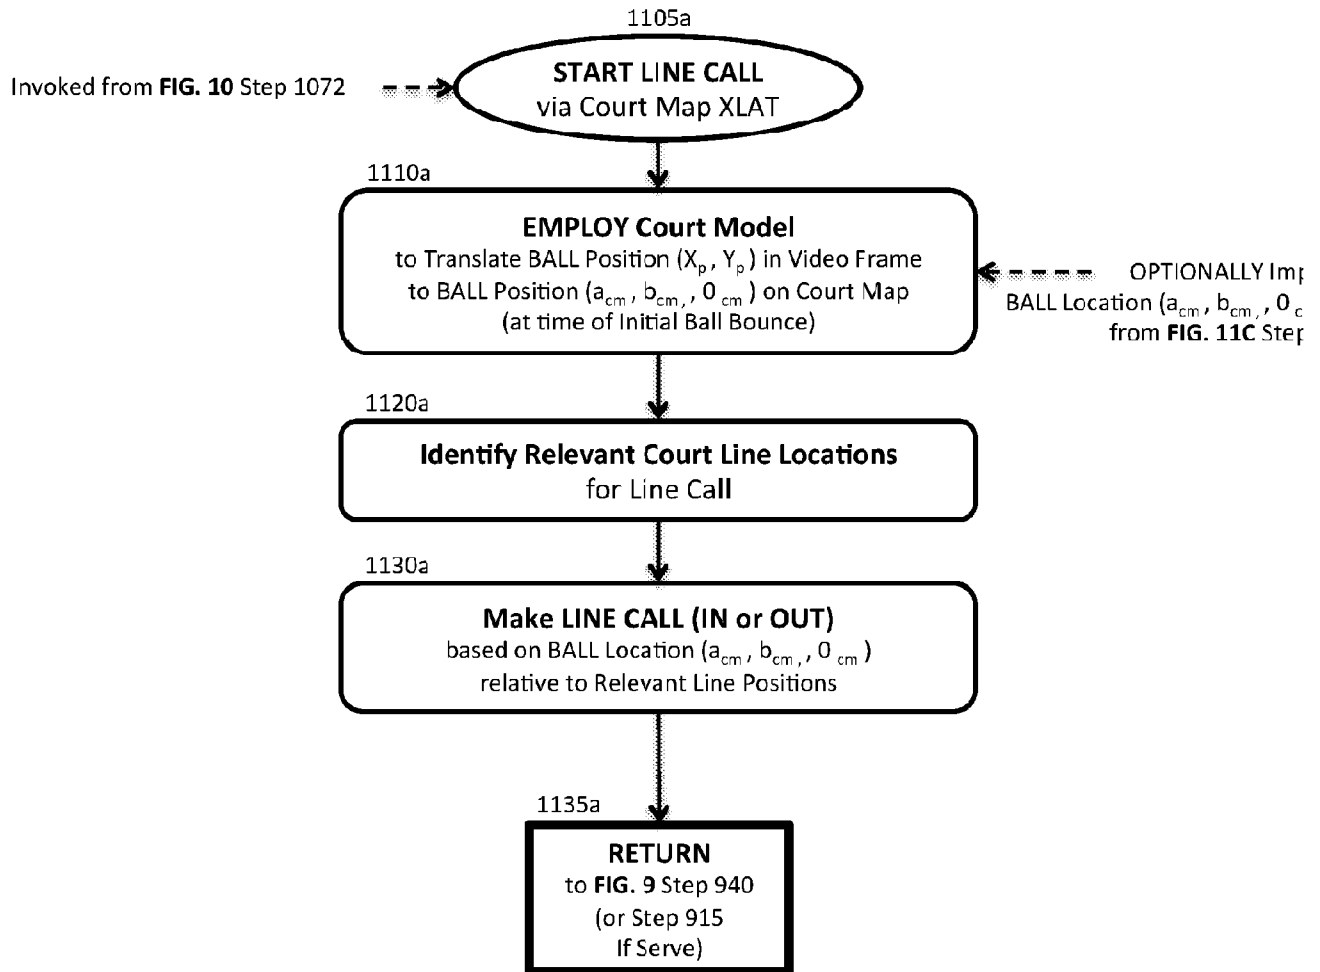


FIG. 11A

18/19

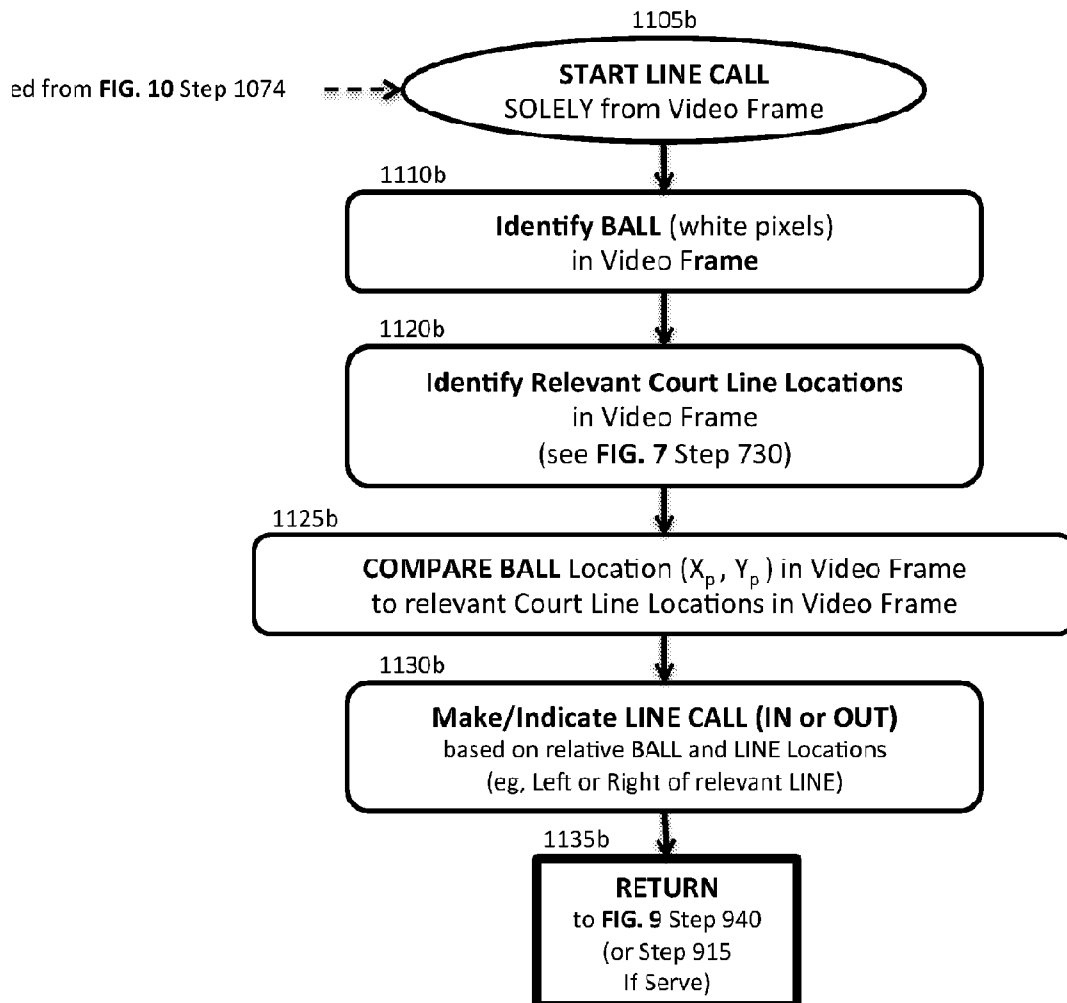


FIG. 11B

19/19

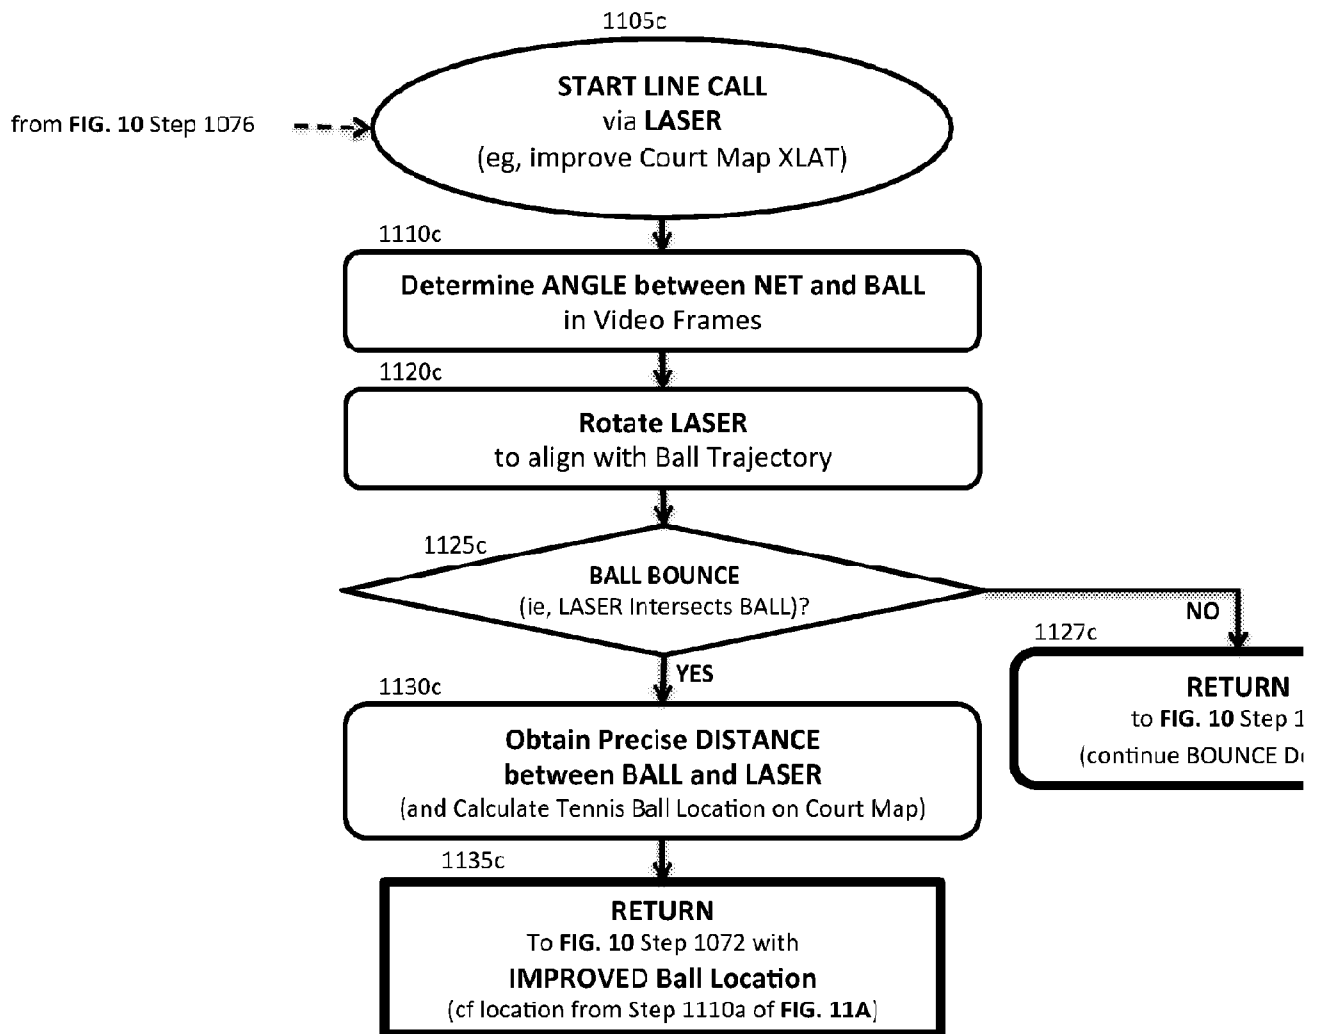


FIG. 11C

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 16/65645

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A63B 61/00 (2017.01)

CPC - A63B 61/00; A63B 2071/0611; A63B 2220/806

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8)- A63B 61/00 (2017.01)

CPC- A63B 61/00; A63B 2071/0611; A63B 2220/806

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

IPC(8)- A63B61/00; A63B71/06 (2017.01)

CPC-A63B61/00; A63B71/06,0605; A63B2071/0611,0613; A63B2220/806,807; USPC-348/157; 473/467

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatBase, Proquest Dialog, Google Patents, Google Scholar,

Search terms used: tennis, ball, line calling, camera, image, video, bounce, wireless, radio, attach, mount, net post, calibration, court, model, map, coordinate

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 8,199,199 B1 (SHLYAK) 12 June 2012 (12.06.2012) Fig 1, 4, abstract, col 1, ln 7-12, col 3, ln 28-55, col 6, ln 15-col 7, ln 7	1, 3 ----- 2, 4
Y	US 8,189,857 B2 (JOHNSON et al.) 29 May 2012 (29.05.2012) abstract, col 1, ln 22-25, col 13, ln 24-41	2
Y	US 2012/0154593 A1 (ANDERSON) 21 June 2012 (21.06.2012) abstract, para [0028], [0029]	4

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

03 February 2017

Date of mailing of the international search report

28 FEB 2017

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774