

(21) Application No: 1007659.4

(22) Date of Filing: 07.05.2010

(71) Applicant(s):
Westinghouse Brake and Signal Holdings Limited
(Incorporated in the United Kingdom)
Portland House, Bressenden Place, LONDON,
SW1E 5BF, United Kingdom

(72) Inventor(s):
Simon Chadwick

(74) Agent and/or Address for Service:
Page Hargrave
Southgate, Whitefriars, Lewins Mead, BRISTOL,
BS1 2NT, United Kingdom


(51) INT CL:
B61L 25/06 (2006.01) **B61L 25/02** (2006.01)

(56) Documents Cited:
GB 1532638 B **EP 0407875 A**
WO 2006/136783 A **JP 2005247024 A**
US 20030236598 A

(58) Field of Search:
INT CL **B61L**
Other: **EPODOC, WPI.**

(54) Title of the Invention: **Train location system**
Abstract Title: **Train location display system**

(57) Disclosed is a train location display method and system. The method first creates a dynamic railway map of a region. This is done by providing a static map of the railway lines or tracks, providing information about the state of the points in the region. The static map and the points information are then combined to create the dynamic railway map. The points information may be obtained from the signalling system. The dynamic map is then used with global navigation satellite system information provided by the trains running in the region to determine the location of the trains. The train may provide its current and previous speed, and current and previous heading. The step of combining the GNSS information with the map may include comparing the time at which the map was created with the time that the GNSS information was obtained. The method may be performed on the trains or at a track side location.

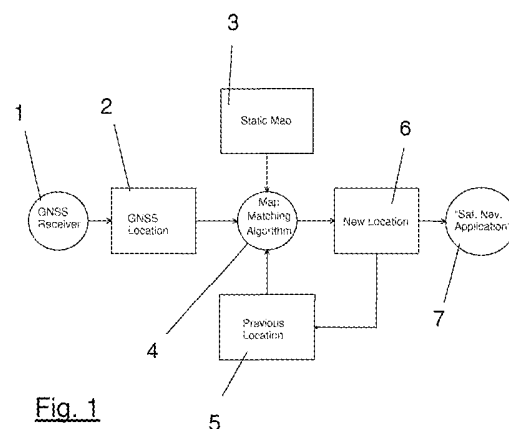

1 / 5

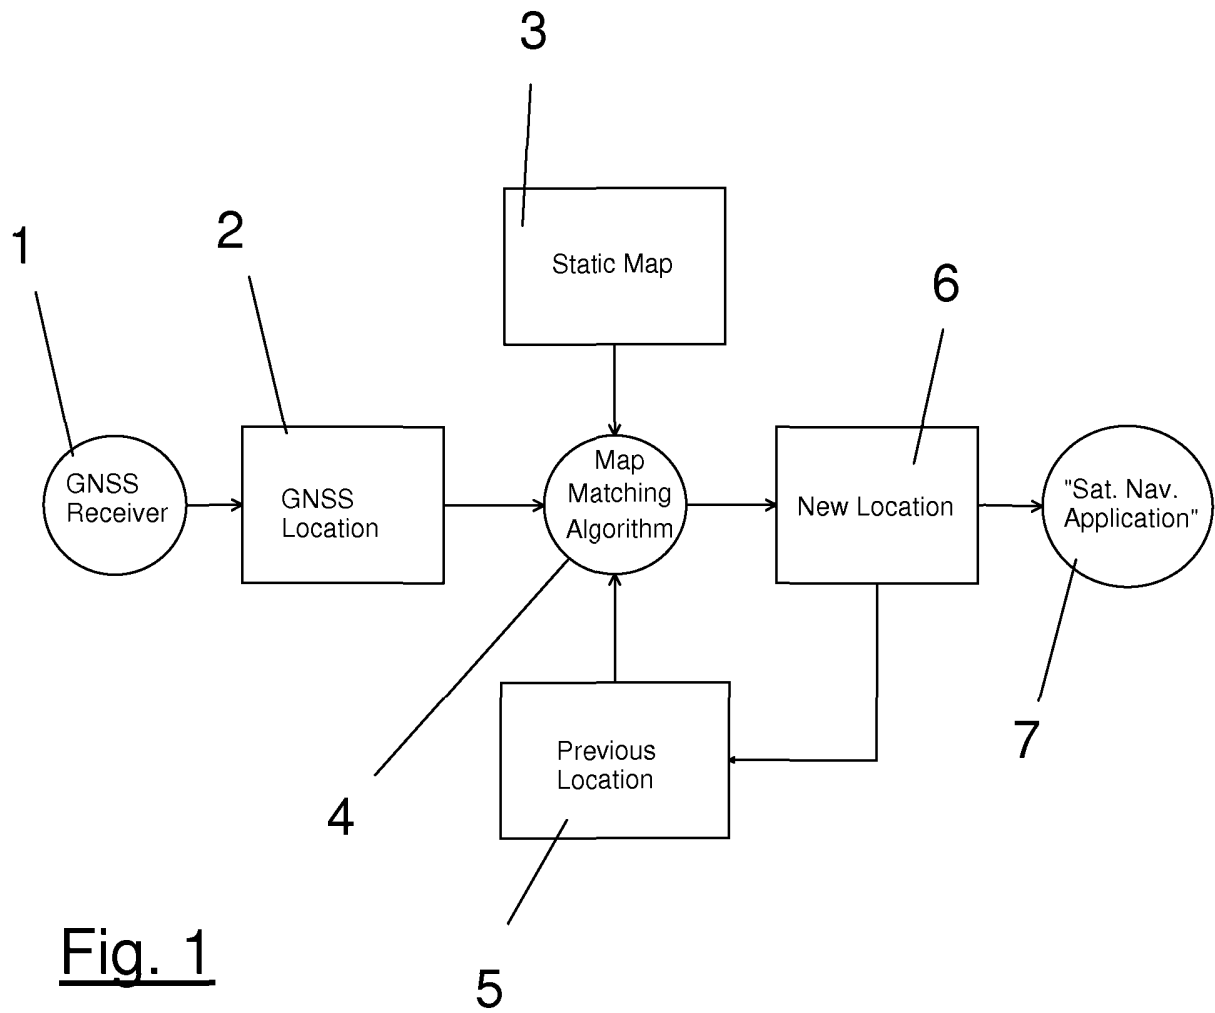


Fig. 1

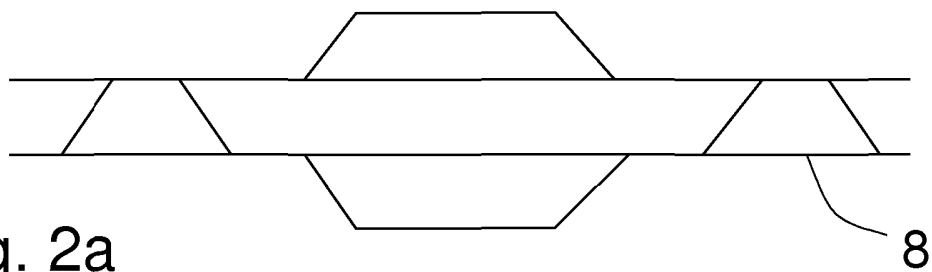


Fig. 2a

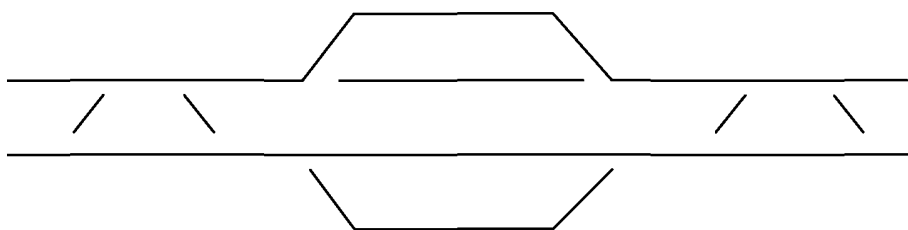


Fig. 2b

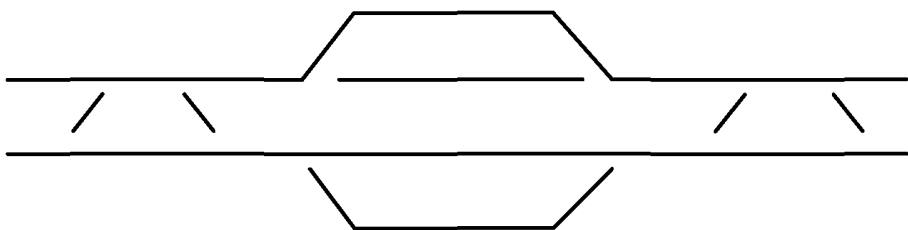


Fig. 2c

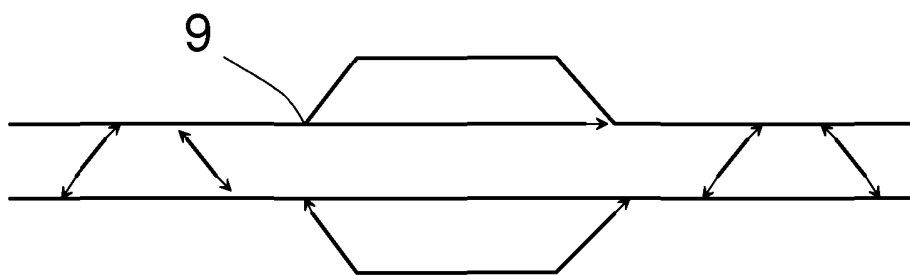


Fig. 2d

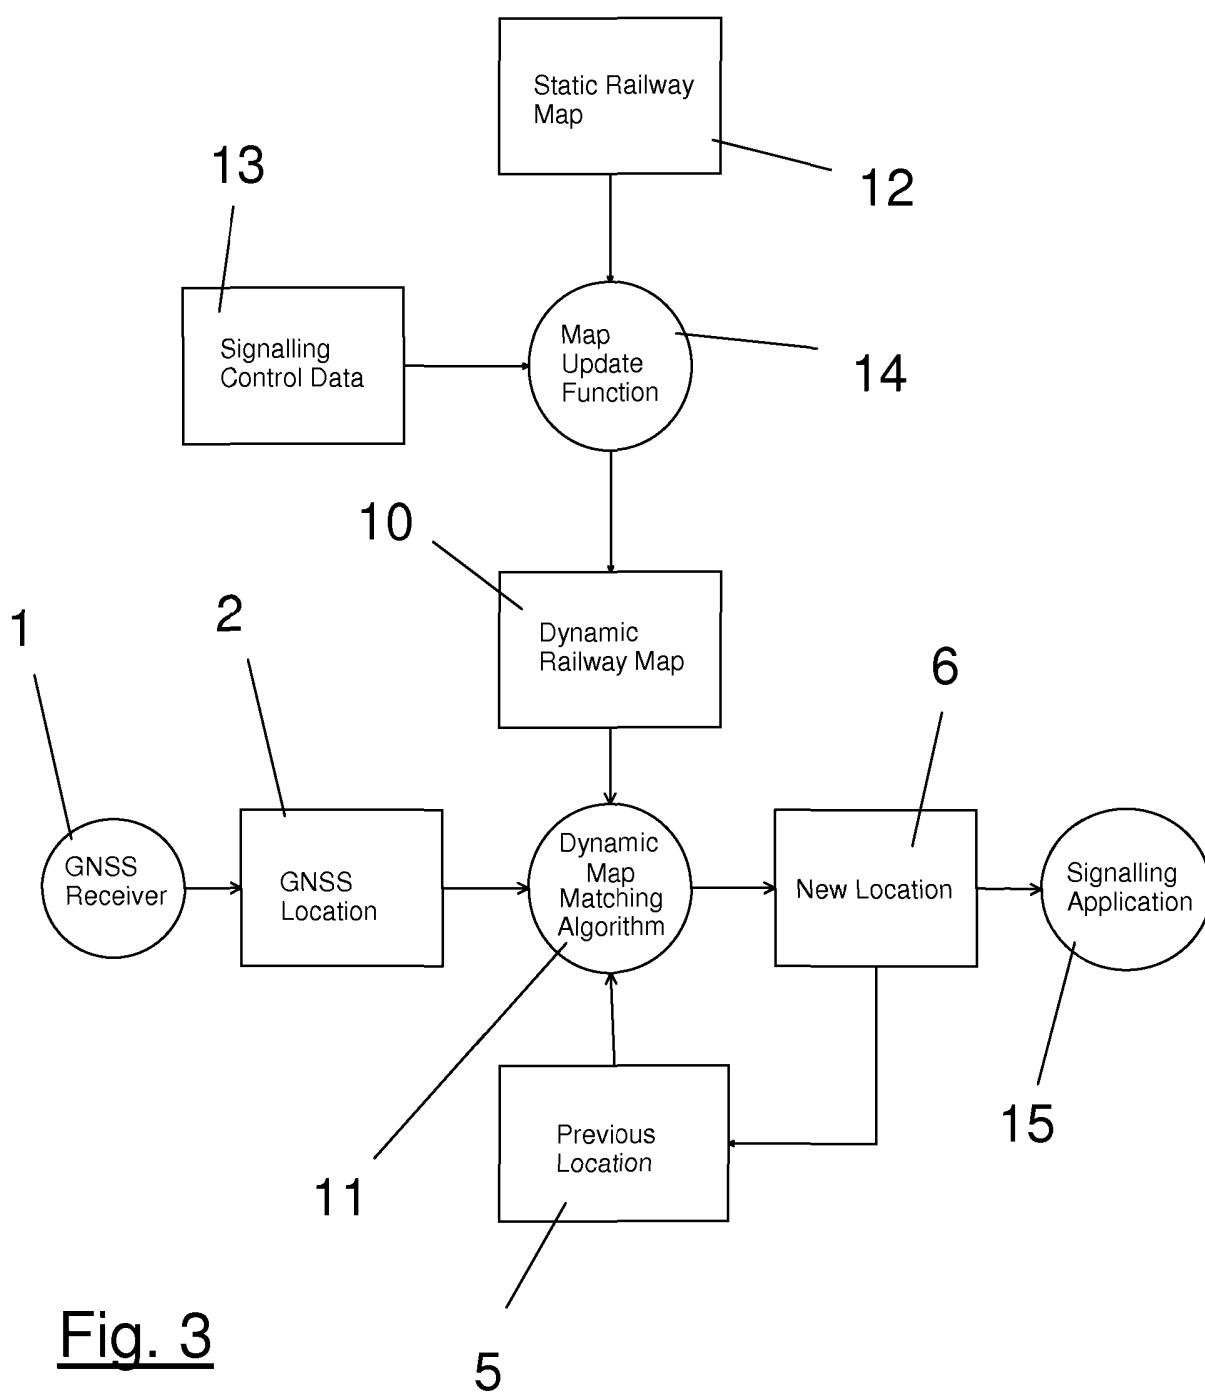


Fig. 3

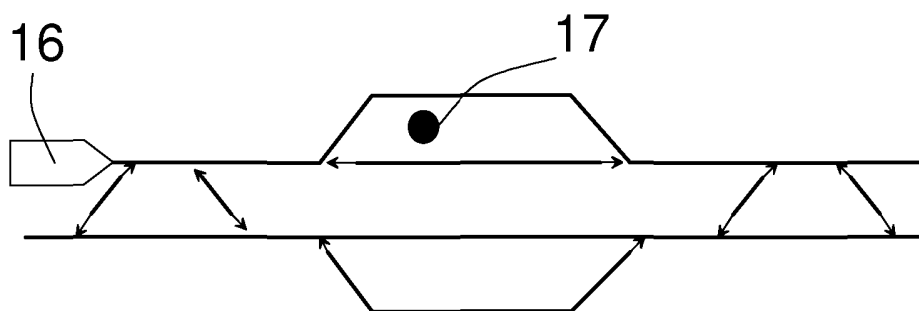


Fig. 4a



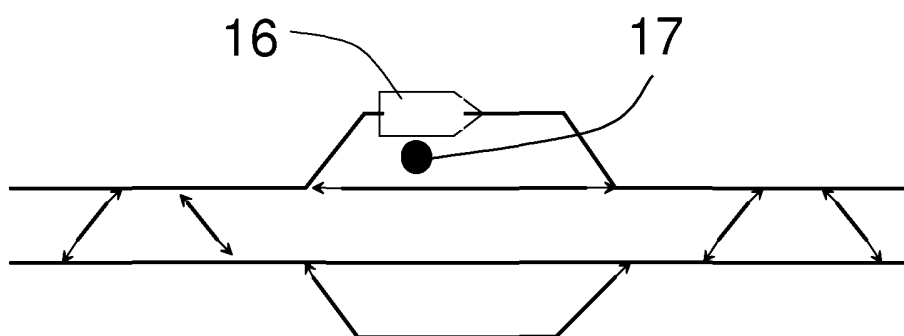


Fig. 4b

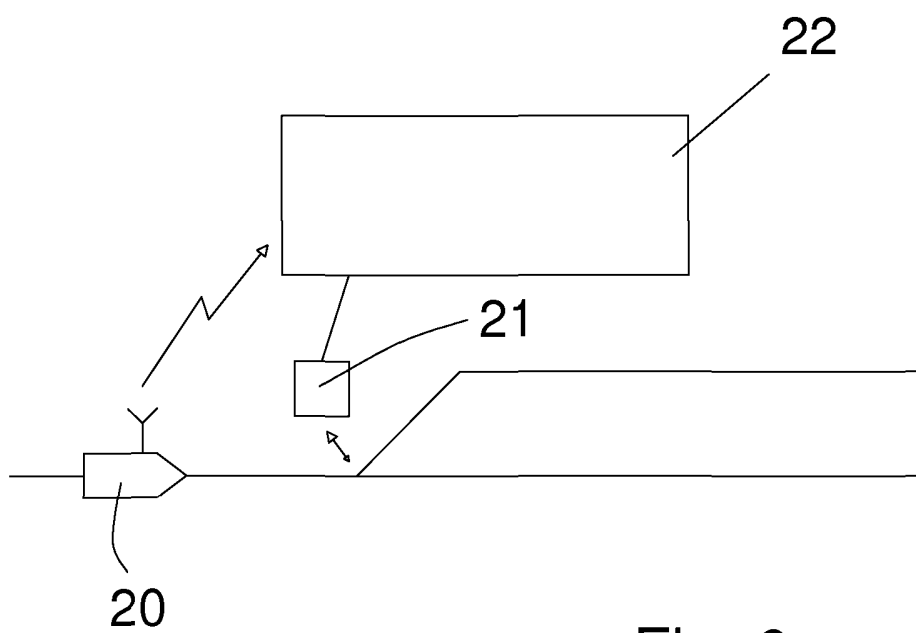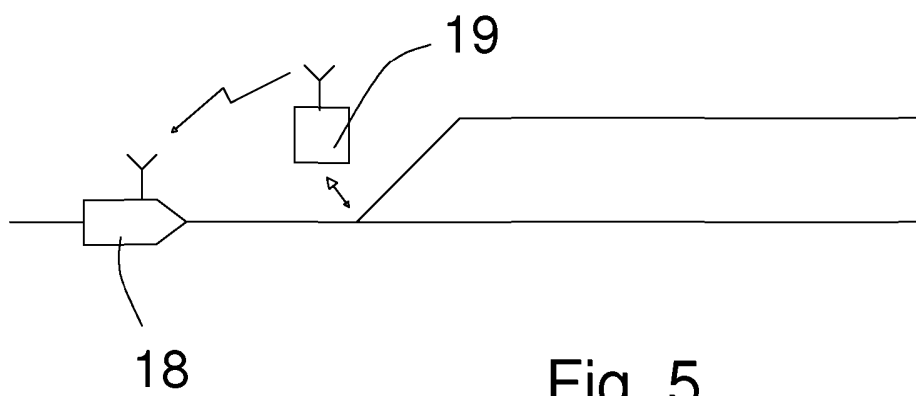

Train location system

This invention relates to a method for creating a dynamic railway map, a method for
5 determining the location of a train, and train location apparatus.

It is a desire within the field of railway signalling systems to use a global navigation
satellite system (GNSS) to provide train location. Such technology has been
developed for the automotive industry (for example "sat nav") already, however it is
10 also seen as beneficial within the rail industry, due to the high availability and
relatively low cost of such systems. However, such a system would require sufficient
accuracy to resolve between two adjacent tracks on a railway with high levels of
dependability, this level of accuracy being required for railway signalling, and this
has hitherto been difficult to achieve.

Conventional Map Matching

Within the automotive industry, the use of global position systems (GPS - a form of
GNSS) for navigation is widespread. Within such systems, there is a "map
20 matching" algorithm, which aims to ensure that vehicles are placed on roads within a
static map of the area. Such an algorithm is schematically shown in Fig. 1.

As shown, a map matching algorithm 4 has a number of data inputs, e.g. a GNSS
location 2 received from a GNSS receiver 1, a static map 3 which contains e.g. road
25 layout information, and a "previous location" 5. The algorithm 4 correlates as far as
possible the GNSS location with the static map, checked against the previous
location 5, to determine the location 6 of the vehicle. This location 6 is used to
provide the "previous location" input 5 for the next running of the algorithm. The new
location 6 is passed to the "Sat. Nav." application 7, for example an in-car device.

30 In practice, such map matching algorithms in use take account of current and
previous speed, and current and previous heading.

Of course, roads are generally quite widely spaced, and so such methods generally provide sufficient accuracy for their needs. In contrast, railway tracks may be very closely spaced together, especially near stations for example, and such methods are not usable.

5

It is an aim of the present invention to provide a method and system for achieving train location via GNSS systems with sufficient accuracy for rail signalling systems. This aim is achieved by combining GNSS data with additional information from within the railway signalling systems. In this way, the use of standard low cost GNSS
10 systems within the rail industry is permitted.

In accordance with a first aspect of the present invention there is provided a method for creating a dynamic railway map of a region of a railway system, comprising the steps of:

- 15 a) providing a static map of said region, showing railway lines present in that region;
b) providing information relating to the state of points within the railway region; and
c) combining said static map and said points information to create the dynamic
20 map.

In accordance with a second aspect of the present invention there is provided a method of determining a location of a train within a region of a railway system, comprising the steps of providing a dynamic railway map of said region and
25 providing GNSS information relating to the location of said train, and combining the map and the GNSS information.

In accordance with a third aspect of the present invention there is provided train location apparatus comprising:

- 30 signalling means for providing information relating to the state of points within the railway region;
dynamic map creation means for creating a dynamic map of a railway region using said points information;
GNSS means for determining the location of the train from a GNSS system; and

processing means for combining the dynamic map and the GNSS location to determine the location of the train.

The invention will now be described with reference to the accompanying drawings, in which:

Fig. 1 schematically shows a conventional static map matching system;

Figs. 2a-d schematically show a rail network at various stages of a dynamic mapping technique in accordance with an embodiment of the present invention;

Fig. 3 schematically shows a dynamic map matching algorithm in accordance with an embodiment of the present invention;

Figs. 4a, b schematically show a rail network at various stages of a location determination technique in accordance with an embodiment of the present invention;

Fig. 5 schematically shows a train-carried dynamic map matching arrangement in accordance with an embodiment of the present invention; and

Fig. 6 schematically shows a trackside dynamic map matching arrangement in accordance with an alternative embodiment of the present invention.

A first embodiment of the invention is schematically shown in Figs. 2a-e, in which a static rail map is converted to create a dynamic railway map.

A static railway map is shown in Fig. 2a, which here represents an area in the proximity of a station, with various tracks shown at 8. It can be seen that there are two main tracks running in the left-right direction, each of these tracks having a “loop” section. In addition, the main tracks are interconnected by four small lengths of track. Points (known as “switches” in the US for example) are located where the lines interconnect. Fig. 2a is a straight line drawing - in practice the lines will be within a geographical context, and will therefore probably be curved in three dimensions.

A dynamic map is created by implementing additional dynamic rules. Trains on a railway do not have as many degrees of freedom as automotive vehicles on a road. Essentially, a train can move forwards or backwards only, along a path determined

for the train by the signalling system. The signalling system controls the points, which in turn determine the paths for trains.

For any one point, at any one time, the signalling system will determine whether the point is:

“Normal” - i.e. controlled and detected to be in the “normal” sense for this point;

“Reverse” - i.e. controlled and detected to be in the “reverse” sense for this point; or

“Out of Correspondence” - essentially this is neither “Normal” nor “Reverse”. This could be because the point is moving between “Normal” and “Reverse”, or because there has been some failure.

Fig. 2b shows one possible dynamic state for the railway of Fig. 2a, i.e. where the topmost main track has its points set to divert along the loop section, and where the lower main track has its points set to maintain a straight-through path.

For a facing point, i.e. in the direction of divergence, it is a reasonable assumption that a train will follow the direction on the railway determined by the signalling system, so long as the point is controlled and detected in a particular position. This may be termed “Assumption 1” for the sake of example.

Fig. 2c shows the system once Assumption 1 has been applied, resulting in the bold lines as being possible paths for trains, given the states of the points.

For a trailing point, i.e. in the direction of convergence, it is a reasonable assumption that a train will follow the sense of convergence. This may be termed “Assumption 2” for the sake of example.

Given these two assumptions, the current sense of the points can be used to refine the railway map. If the state of the points is changed by the signalling control system, then this map will change. This map therefore represents a “dynamic railway map”.

The signalling system should prevent trains approaching points which are “out of correspondence”. However, for safety the dynamic railway map must be able to

handle such “out of correspondence” points, i.e. points which are not “normal” or “reverse”.

The safest assumption to make for points which are “out of correspondence” is that trains could follow either path at a divergence. This may be termed “Assumption 3” for the sake of example. Fig. 2d shows the system once Assumption 3 has been applied, and where “9” designates an out of correspondence point.

The next step is to provide dynamic map matching, by using the dynamic railway map with a map matching algorithm, as shown in Fig. 3. As far as possible, items similar to those in Fig. 1 have retained the same numbering in Fig. 3.

As explained above, the dynamic railway map 10 is produced from a static railway map 12 in conjunction or combination with signalling control data 13, providing information about the status of points in the region, used to update (at 14) the map. As such, the dynamic map 10 contains a representation of the railway with the dynamic point states, “Normal”, “Reverse” or “Out of Correspondence”. This is then used by the dynamic map matching algorithm 11 to determine the new location 6 for a train, based on the previous location 5. The new location 6 is then fed to a signalling application 15. The GNSS receiver 1, which provides a GNSS location 2 is generally similar to that shown in Fig. 1.

An exemplary system is shown in Fig. 4, where Fig. 4a shows a track layout similar to that of Fig. 2, with a train 16 having entered the region. Fig. 4a in effect shows the “previous location” 5 (see Fig. 3) of the train 16. A new “raw” GNSS location (corresponding to item 2 in Fig. 3) is shown at 17, which indicates that the train location is somewhere near the loop, but between two adjacent tracks. It can be seen that if this information were used with a simple static map algorithm, the location of the train could not be determined sufficiently accurately to place the train on the correct track.

Here, the new location 6 (see Fig. 3) of the train 16 can be calculated via the dynamic map matching algorithm 11 (see Fig. 3) to be on the track within the loop, as shown in Fig. 4b.

There are of course temporal aspects to be considered. The dynamic map matching algorithm will need to take account of the time at which that raw GNSS location was determined, and also the time at which the dynamic railway map was last updated.

- 5 If these are not within a threshold time of each other, then the train location should be recorded as “not determined”.

Physical Arrangements

- 10 The dynamic map matching algorithm can be applied within a train, or, in an alternative embodiment, within a trackside system, or with the processing shared between the two, or at an alternative location.

- A train-carried dynamic map matching system is schematically shown in Fig. 5.
- 15 Here, the status of points is transmitted, e.g. wirelessly, from trackside-located equipment 19 to a train 18. The train 18 stores a static map of the railway, which may for example be updated automatically as it enters a new locality. The dynamic railway map is created on the train, by onboard processing means. The dynamic map matching algorithm is implemented on the train, by onboard processing means.
 - 20 The train location may then be transmitted from the train to an external signalling application as required. With this embodiment, any one train only needs to know about the status of points in front of the train.

- An alternative embodiment, utilising trackside dynamic map matching is schematically shown in Fig. 6.
- 25 Here, a train 20 reports its GNSS location to signalling system 22, with the system's processing means located either at a trackside location 21 as shown, or elsewhere. As shown, the static map is stored trackside (21), and the dynamic map is created trackside (21). The map matching algorithm is also implemented trackside (21). With this embodiment, the signalling
 - 30 system will need to be able to process GNSS data from multiple trains at any one time.

The above-described embodiments are exemplary only, and other possibilities and alternatives within the scope of the invention will be apparent to those skilled in the

art. For example, in alternative embodiments, the dynamic map matching algorithm 11 can also take account of current and previous speed, and current and previous heading.

5

10

Claims

1. A method for creating a dynamic railway map of a region of a railway system, comprising the steps of:
 - 5 a) providing a static map of said region, showing railway lines present in that region;
 - b) providing information relating to the state of points within the railway region; and
 - c) combining said static map and said points information to create the dynamic
10 map.
2. A method according to claim 1, wherein the points information is obtained from a signalling system.
- 15 3. A method according to claim 2, comprising step of obtaining said points information from the signalling system.
4. A method of determining a location of a train within a region of a railway system, comprising the steps of providing a dynamic railway map of said region and
20 providing GNSS information relating to the location of said train, and combining the map and the GNSS information.
5. A method according to claim 4, comprising the initial step of creating the dynamic railway map using a method in accordance with any of claims 1 to 3.
25
6. A method according to either of claim 4 and 5, comprising the step of providing at least one of: a current speed of the train, a previous speed of the train, a current heading of the train, and a previous heading of the train.
- 30 7. A method according to any of claims 4 to 6, wherein the step of combining the dynamic map and the GNSS information comprises comparing the time at which the GNSS information was compiled with the time at which the dynamic map was created.

8. A method according to any preceding claim, wherein step c) is performed on a train.

5 9. A method according to any of claims 1-7, wherein step c) is performed at a trackside location.

10. Train location apparatus comprising:

signalling means for providing information relating to the state of points within the railway region;

10 dynamic map creation means for creating a dynamic map of a railway region using said points information;

GNSS means for determining the location of the train from a GNSS system; and processing means for combining the dynamic map and the GNSS location to determine the location of the train.

15

11. Apparatus according to claim 10, wherein the map creation means is provided on the train.

20 12. Apparatus according to claim 10, wherein the map creation means is provided at a trackside location.


13. Apparatus according to any of claims 10 to 12, wherein the processing means is provided on the train.

25 14. Apparatus according to any of claims 10 to 12, wherein the processing means is provided at a trackside location.

15. A method substantially as herein described with reference to the accompanying figures 2 - 6.

30

16. Train location apparatus substantially as herein described with reference to the accompanying figures 2 - 6.



Application No: GB1007659.4

Examiner: Mr David Maskery

Claims searched: 1 - 3, 8 and 9

Date of search: 31 August 2010

Patents Act 1977: Search Report under Section 17

Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
X	1 - 3, 8 and 9	EP 0407875 A (IVV INGENIEURESELLSCHAFT) See EPO abstract.
X	1 - 3, 8 and 9	GB 1532638 B (GENERAL SIGANL CORP) See page 1 lines 77 - 91, page 2, lines 111 - 119 and page 104 - 129.

Categories:

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC^X :

Worldwide search of patent documents classified in the following areas of the IPC


B61L

The following online and other databases have been used in the preparation of this search report

EPODOC, WPI.

International Classification:

Subclass	Subgroup	Valid From
B61L	0025/06	01/01/2006
B61L	0025/02	01/01/2006



Application No: GB1007659.4
Claims searched: 4 - 7 and 10 - 13

Examiner: Mr David Maskery
Date of search: 3 February 2011

Patents Act 1977
Further Search Report under Section 17

Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
X,Y	X 4, 6, 7 and 10 - 13 Y 5	US 2003/0236598 A (VILLARREAL ANTELO et AL) See paragraphs 18 and 32 - 42.
X,Y	X 4, 6, 7 and 10 - 13 Y 5	WO 2006/136783 A (GROENEWALD) See pages 4 and 5.
X,Y	X 4, 6, 7 and 10 - 13 Y 5	JP 2005247024 A (MITSUBISHI) See JPO abstract.
Y	5	EP 0407875 A (IVV INGENIEURESELLSCHAFT) See EPO abstract.
Y	5	GB 1532638 B (GENERAL SIGANL CORP) See pages 1 to 3.

Categories:

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC^X :

Worldwide search of patent documents classified in the following areas of the IPC


B61L

The following online and other databases have been used in the preparation of this search report

EPODOC, WPI.

International Classification:

Subclass	Subgroup	Valid From
B61L	0025/06	01/01/2006



Subclass	Subgroup	Valid From
B61L	0025/02	01/01/2006