

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 February 2006 (23.02.2006)

PCT

(10) International Publication Number
WO 2006/019705 A1

(51) International Patent Classification⁷: **A61B 8/14**,
G01S 15/89

(21) International Application Number:
PCT/US2005/024607

(22) International Filing Date: 11 July 2005 (11.07.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/896,104 20 July 2004 (20.07.2004) US

(71) Applicant (for all designated States except US): **SCIMED
LIFE SYSTEMS, INC.** [US/US]; One Scimed Place,
Maple Grove, Minnesota 55311-1566 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SATHYA-
NARAYANA, Shashidhar** [US/US]; 4420 Corto Mon-
terey, Union City, California 94587 (US).

(74) Agents: **ORRICK HERRINGTON & SUTCLIFFE
LLP** et al.; 4 Park Plaza, Suite 1600, Irvine, California
92614-2558 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ,
OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,
SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii)) for all designations
- as to the applicant's entitlement to claim the priority of the
earlier application (Rule 4.17(iii)) for all designations

Published:

- with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM FOR DETECTING AND PRESENTING TEXTURAL INFORMATION FROM MEDICAL IMAGES

(57) Abstract: The invention is directed to systems for detecting and presenting textural information from medical images. In one embodiment, a medical imaging system includes an imaging transducer assembly configured to emit one or more energy pulses and receive one or more echo signals, and a console, coupled to the imaging transducer assembly, configured to receive the one or more echo signals, generate an uncompressed image based on the one or more echo signals, generate a log compressed image based on the uncompressed image, and add auditory information to the image based on the magnitude levels of the image.



WO 2006/019705 A1

SYSTEM FOR DETECTING AND PRESENTING TEXTURAL INFORMATION FROM MEDICAL IMAGES

FIELD OF THE INVENTION

The field of the invention relates to medical imaging systems, and more particularly to systems and methods for detecting and presenting textural information from medical images.

BACKGROUND OF THE INVENTION

Intraluminal, intracavity, intravascular, and intracardiac treatments and diagnosis of medical conditions utilizing minimally invasive procedures are effective tools in many areas of medical practice. These procedures are typically performed using imaging and treatment catheters that are inserted percutaneously into the body and into an accessible vessel of the vascular system at a site remote from the vessel or organ to be diagnosed and/or treated, such as the femoral artery. The catheter is then advanced through the vessels of the vascular system to the region of the body to be treated. The catheter may be equipped with an imaging device, typically an ultrasound imaging device, which is used to locate and diagnose a diseased portion of the body, such as a stenosed region of an artery. For example, U.S. Pat. No. 5,368,035, issued to Hamm et al., the disclosure of which is incorporated herein by reference, describes a catheter having an intravascular ultrasound imaging transducer.

Fig. 1a shows an example of an imaging transducer assembly 1 known in the art. The imaging transducer 1 is typically within the lumen 10 of a guidewire (partially shown), having an outer tubular wall member 5. To obtain an image of a blood vessel, the imaging transducer assembly 1 may be inserted into the vessel. The transducer assembly 1 may then rotate while simultaneously emitting energy pulses, e.g., ultrasound waves, at portions of the vessel from within the vessel and receiving echo or reflected signals.

Turning to Fig 1b, it is known in the art that an imaging console 20 having a display screen, a processor and associated graphics hardware (not shown) may be coupled with the imaging transducer assembly 1 to form a medical imaging system 30. The imaging console 20 processes the received echo signals from the imaging transducer assembly 1 and forms images of the area being imaged. To form the images, the imaging console 20 draws multiple lines, known as "radial lines", (not shown) on the display screen that each correspond to an angular position of the transducer assembly 1. The processor of the imaging console 20 assigns brightness values to pixels of the lines based on magnitude levels of the echo signals received from the transducer assembly 1 at the angular positions corresponding to the lines. A drawing

that includes a large number of these radial lines results in an image such as an intravascular ultrasound (IVUS) image (not shown). Such an image may show, among other things, the texture of the area being imaged, such as the smoothness or the roughness of the surface of the area being imaged.

An example of an image 70 having a large range of magnitudes and a number of texturally distinct regions 80 is shown in Fig. 1c. Texture and the correct discrimination of the underlying surface are important in medical imaging. Such information is helpful to radiologists and other clinicians who seek to diagnose pathology. It is often the case in medical imagery that an abnormality is detectable only as a subtle variation in texture. Accordingly, an improved system and method for detecting and presenting such textural information would be desirable.

SUMMARY OF THE INVENTION

The invention is directed to systems and methods for detecting and presenting textural information from medical images. In one example embodiment, a medical imaging system includes an imaging transducer assembly configured to emit one or more energy pulses and receive one or more echo signals, and a console, coupled to the imaging transducer assembly, configured to receive the one or more echo signals, generate an uncompressed image based on the one or more echo signals, generate a compressed image based on the uncompressed image, generate a color overlay based on the uncompressed image, and apply the color overlay to the compressed image. In another example embodiment, the compressed image may be a log compressed image.

In yet another example embodiment, a medical imaging system includes an imaging transducer assembly configured to emit one or more energy pulses and receive one or more echo signals, each having a magnitude level, and a console, coupled to the imaging transducer assembly, configured to receive the one or more echo signals, generate an image based on the one or more echo signals, and add auditory information to the image based on the magnitude levels of the image.

Other systems, methods, features and advantages of the invention will be or will become apparent to one with skill in the art upon examination of the following figures and detailed description. It is intended that all such additional systems, methods, features and advantages be included within this description, be within the scope of the invention, and be protected by the accompanying claims.

BRIEF DESCRIPTION OF THE DRAWINGS

In order to better appreciate how the above-recited and other advantages and objects of the inventions are obtained, a more particular description of the embodiments briefly described above will be rendered by reference to specific embodiments thereof, which are illustrated in the accompanying drawings. It should be noted that the components in the figures are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the invention. Moreover, in the figures, like reference numerals designate corresponding parts throughout the different views. However, like parts do not always have like reference numerals. Moreover, all illustrations are intended to convey concepts, where relative sizes, shapes and other detailed attributes may be illustrated schematically rather than literally or precisely.

Fig. 1a is a cross-sectional side view of an imaging transducer assembly known in the art;

Fig. 1b is a block diagram of a medical imaging system known in the art;

Fig. 1c is an example of an image showing different magnitudes and textures;

Fig. 1d is an example of a log compressed image based on the image from Fig. 1c;

Fig. 2 is an example of an image generated in accordance with a preferred example embodiment of the invention; and

Fig. 3 is a diagram of the operation of a preferred example embodiment of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Turning to Fig. 1b, a typical imaging system 30 may include an imaging transducer assembly 1 and coupled to the imaging transducer assembly 1, an imaging console 20 having a display screen, a processor and associated graphics hardware (not shown). To form an image of body tissue by an intravascular ultrasound system (IVUS), the imaging transducer assembly 1 emits energy pulses, such as ultrasound pulses, and receives echo signals from those pulses after they are reflected by body tissue (tissue, fat, bone, vessel, plaque, etc., or other object). If desired, the imaging transducer may emit energy pulses while simultaneously rotating about a central axis or translate longitudinally along the central axis. The imaging console 20 receives the echo signals from the imaging transducer assembly 1 and draws lines on the display screen that each correspond to an angular position of the transducer assembly 1 as the transducer assembly 1 rotates. The processor of the imaging console 20 assigns brightness values to pixels of the lines based on the magnitude levels of echo signals received from the transducer assembly 1 at the corresponding angular positions. A drawing that includes a large number of

these lines (“radial lines”) results in an image, such as an IVUS image (not shown). Such an image may provide textural information about the area being imaged, such as the appearance of blood speckle.

The echo signals received are typically classified by records, or vectors, corresponding to a particular angular position. Each record, or vector, for a particular angular position contains oscillations covering a large range of magnitudes. The largest of the oscillations might be several tens of thousands stronger than the smallest of oscillations. However, a display device, such as a monitor (CRT, liquid crystal display, plasma, etc.), typically only recognizes a limited number (e.g., 256) of gray levels. Thus, the ability to differentiate between texturally distinct regions may be limited, and some of the regions may be too dim to be seen clearly in such a device, and may be hard to distinguish from adjacent regions.

An example of an image 70, which may be an image of received echo signals, containing a large range of magnitudes and a number of texturally distinct regions 80 is shown in Fig. 1c. The very dim textural regions are marked by arrows 85. One approach to effectively translate the range of magnitudes of the image is to use a logarithmic scale. The result is that the large range of magnitudes is compressed so that all the portions of the image may be represented on a gray scale having only a limited number of levels. The process of compressing the image using a logarithmic scale is known as a “log compression.” An example of a log compressed image 100 is shown on Fig. 1d. A disadvantage to applying log compression is that some of the potentially useful textural information present in the original echo signal may be lost or altered. For example, in Fig. 1d, some of the lines that displayed more texturally distinct characteristics in Fig. 1c now have lost their distinct appearances to the human eye, as marked by arrows 110. Thus, it would be useful to have an approach to enhance the textural information in such an image 100 so as to be readily apparent to a human observer, such as a physician, physician’s assistant, or nurse.

In one approach, an overlay that uses color, as opposed to a gray scale, may be generated based on the original uncompressed image. A distinct color may be assigned to a magnitude level, e.g., magnitude level of an echo signal, for a pre-determined number of levels. The color overlay may then be generated based on the original uncompressed image and the color assignments and then applied on the log compressed image 100 shown in Fig. 1c. An example result of an image 150 with such a color overlay is shown in Fig. 2. The arrows 110 of the image 100 in Fig. 1d mark texturally distinct regions 80 of which the textural

distinctness is not readily apparent. By applying a color overlay, as shown in Fig. 2, the arrows 160 show that those regions marked by arrows 110 of the image 100 in Fig. 1d are much more distinct to the human eye, i.e., one shows as blue/green, another as blue/light blue, and the last one as purple.

In one embodiment, a system having a processor, a display, and hardware and software to process graphics (not shown) may perform the method illustrated in Fig. 3. As one of ordinary skill in the art may appreciate, the system may be configured to receive echo signals from an imaging transducer assembly and then perform the following functions. First, the system may assign a distinct color to each pixel in the original image based on the original magnitude of the pixel (action block 200). Next, the system may assign a brightness level to each pixel based on the log compressed magnitude of the pixel (action block 210). Next, the system may generate a colorized image using the color assignments obtained in action block 200 and the brightness assignments obtained in action block 210 (action block 220). The colorized image may then be saved on a computer storage medium for further analysis.

In another embodiment, the appearance of the image may be controlled by a user-friendly interface, such as a spring-loaded knob, keyboard, mouse, and/or a software application having a graphical user interface. If a particular area of interest is being imaged, a user may adjust, e.g., turn the knob, to control the amount of colorization for closer or further inspection of textural information for the particular area of interest. If desired, the operator may be permitted through the user interface to change the colors that have been assigned to the magnitude levels. Such customization of color assignment may help make distinctions in levels more perceptible to the human operator, or a partially color blind human operator.

In yet another embodiment, instead of assigning different colors to the different magnitude levels for the echo signals, different sounds, e.g., different tones or different patterns, may be assigned to the different magnitude levels, allowing for textural information to be presented as auditory information. Further, instead of, or in addition to, assigning sounds at such a granular level, sounds may be assigned based on different combinations of magnitude levels within an image.

In still another embodiment, in addition to assigning different colors to the different magnitude levels for the echo signals, different sounds also may be assigned to the different magnitude levels, allowing for textural information to be presented as auditory and visual information. Further, instead of, or in addition to, assigning sounds at such a granular level, sounds may be assigned based on different combinations of magnitude levels within an image.

Another modification includes a mouse or pointing device. Thus, for example, when the operator uses the mouse or pointing device to point to a certain line of an image, the system will output the audible sound assigned to that magnitude level through a speaker. By moving the pointer to different lines, differences in the magnitude level may be audibly perceived by the human operator. Therefore, if the color or grey scale overlay does not permit the human operator to perceive readily whether one line has a different magnitude, and how much of a difference, the human operator can use the auditory assignments to listen to the tone for the lines at issue.

In the foregoing specification, the invention has been described with reference to specific embodiments thereof. It will, however, be evident that various modifications and changes may be made thereto without departing from the broader spirit and scope of the invention. For example, the reader is to understand that the specific ordering and combination of process actions described herein is merely illustrative, and the invention can be performed using different or additional process actions, or a different combination or ordering of process actions. For example, this invention is particularly suited for applications involving medical imaging devices, but can be used on any design involving imaging devices in general. As a further example, each feature of one embodiment can be mixed and matched with other features shown in other embodiments. Additionally and obviously, features may be added or subtracted as desired. Accordingly, the invention is not to be restricted except in light of the attached claims and their equivalents.

WHAT IS CLAIMED IS:

1. A medical imaging system comprising:
an imaging transducer assembly configured to emit one or more energy pulses and receive one or more echo signals, each having a magnitude level;
a console coupled to the imaging transducer assembly and configured to receive the one or more echo signals, generate one or more images based on the one or more echo signals, and add auditory information to the one or more images based on the magnitude levels of the one or more images.
2. The medical imaging system of claim 1, wherein the console compresses the one or more images.
3. The medical imaging system of claim 1, wherein the console log compresses the one or more images.
4. The medical imaging system of claim 1, wherein the imaging transducer assembly has an axis and is configured to rotate on its axis, and wherein the imaging transducer assembly emits energy pulses and receives one or more echo signals while rotating on its axis.
5. The medical imaging system of claim 1, wherein the imaging transducer assembly is an ultrasound transducer assembly.
6. The medical imaging system of claim 1, wherein the console is configured to add auditory information to the one or more images based on one or more combinations of magnitude levels of the one or more images.
7. The medical imaging system of claim 1, further comprising a control that permits the operator to change the auditory signal assigned to a magnitude level.

1/4

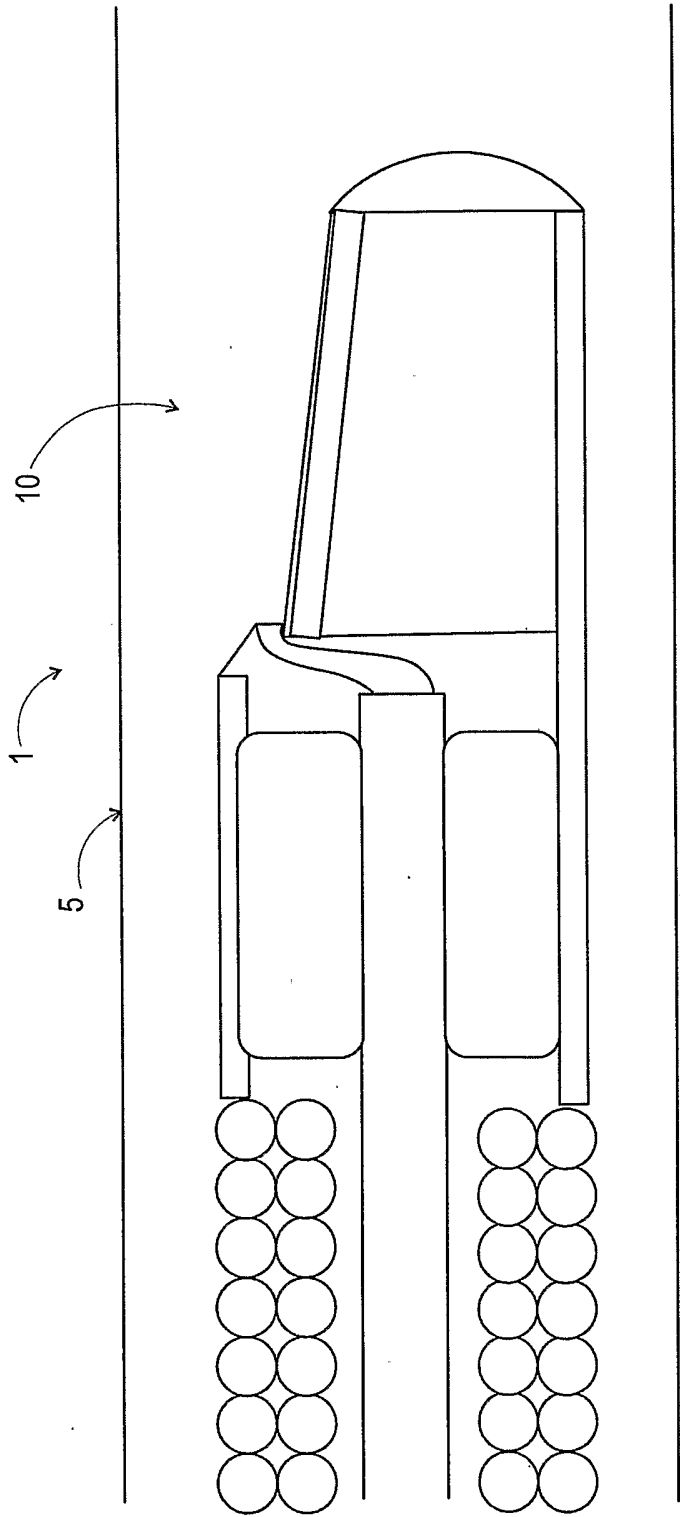


FIG. 1A
(PRIOR ART)

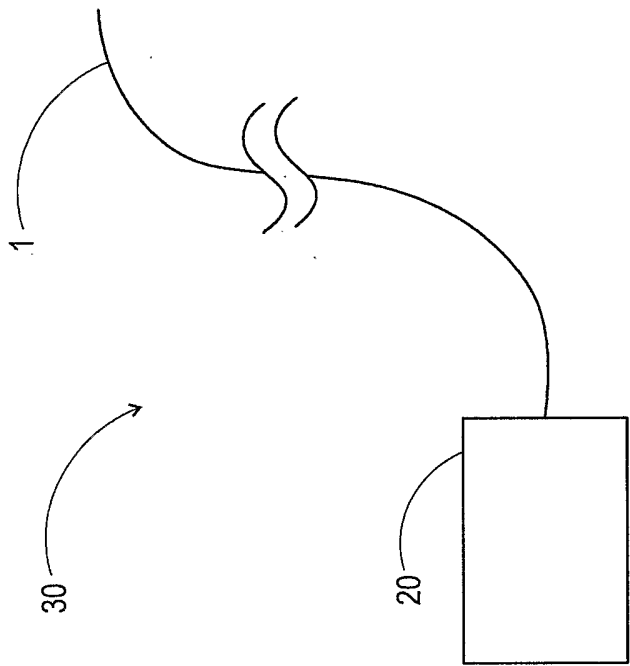


FIG. 1B
(PRIOR ART)

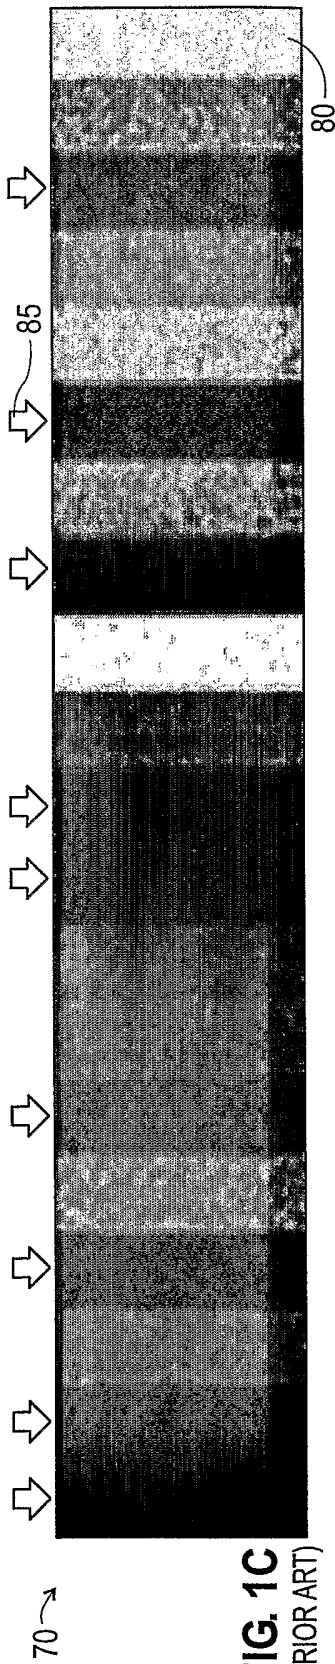


FIG. 1C
(PRIOR ART)

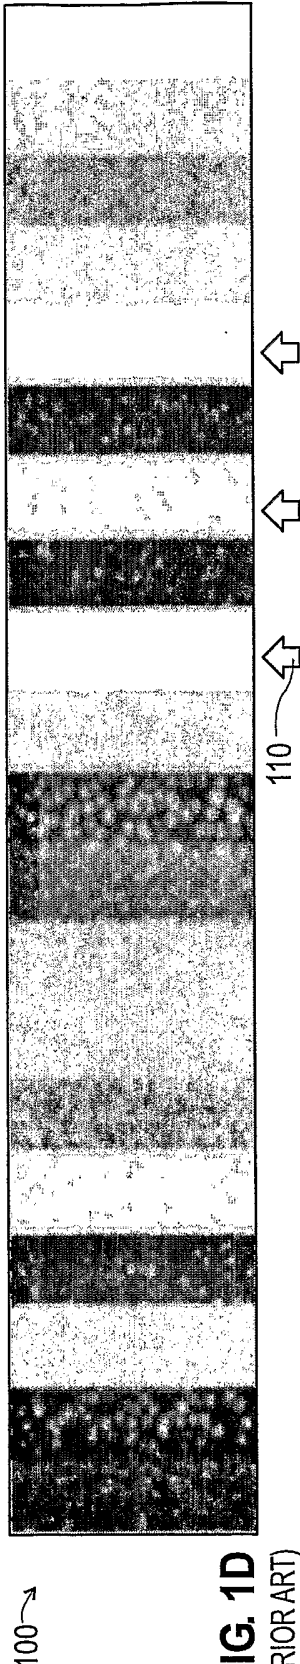


FIG. 1D
(PRIOR ART)

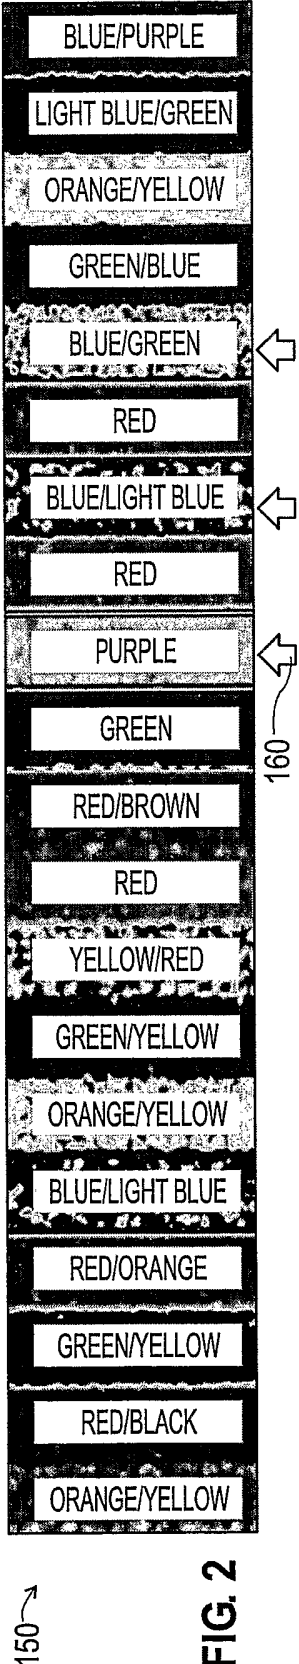


FIG. 2

4/4

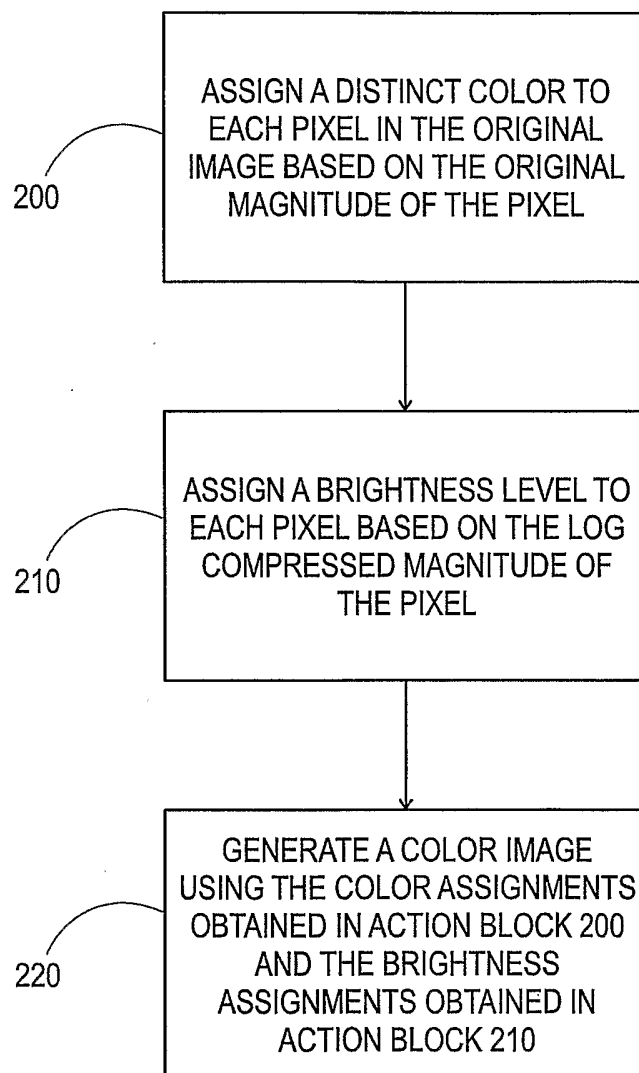


FIG. 3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US2005/024607

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61B8/14 G01S15/89

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B G01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 805 622 A (RIEDLINGER ET AL) 21 February 1989 (1989-02-21)	1,5-7
Y	the whole document	2-4
Y	US 5 368 035 A (HAMM ET AL) 29 November 1994 (1994-11-29) cited in the application abstract	4
Y	US 2003/073903 A1 (SATO TAKESHI) 17 April 2003 (2003-04-17)	2,3
A	paragraphs '0026!, '0048!, '0053! - '0090! ----- -/-	1,5,6



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

14 October 2005

Date of mailing of the international search report

07/11/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Willig, H

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/024607

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2004/059219 A1 (ASAFUSA KATSUNORI) 25 March 2004 (2004-03-25) abstract	1-3, 5, 6
A	US 5 622 172 A (LI ET AL) 22 April 1997 (1997-04-22) abstract	1, 5-7
A	US 5 743 266 A (LEVENE ET AL) 28 April 1998 (1998-04-28) abstract	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US2005/024607

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4805622	A	21-02-1989	DE 3612151 A1	23-12-1987
			FR 2596976 A1	16-10-1987
			GB 2189030 A	14-10-1987
			JP 1742304 C	15-03-1993
			JP 4030862 B	22-05-1992
			JP 62240033 A	20-10-1987
US 5368035	A	29-11-1994	NONE	
US 2003073903	A1	17-04-2003	JP 2003102726 A	08-04-2003
US 2004059219	A1	25-03-2004	CN 1487845 A	07-04-2004
			WO 02056957 A1	25-07-2002
			JP 2002209896 A	30-07-2002
US 5622172	A	22-04-1997	NONE	
US 5743266	A	28-04-1998	AU 5578196 A	18-11-1996
			CA 2217184 A1	31-10-1996
			EP 0822780 A1	11-02-1998
			JP 11504242 T	20-04-1999
			WO 9633655 A1	31-10-1996