



(22) Date de dépôt/Filing Date: 2003/04/14

(41) Mise à la disp. pub./Open to Public Insp.: 2003/11/01

(30) Priorités/Priorities: 2002/05/01 (60/376,955) US;
2003/02/13 (10/365,959) US

(51) Cl.Int.⁷/Int.Cl.⁷ B63B 43/06


(71) Demandeur/Applicant:
HARRIS ACOUSTIC PRODUCTS CORPORATION, US

(72) Inventeurs/Inventors:
CARLSON, ROBERT F., US;
BALDASARRE, THOMAS J., US;
TALUKDAR, KUSHAL K., US

(74) Agent: MACRAE & CO.

(54) Titre : SYSTEME SANS FIL DE SURVEILLANCE ET DE RAPPORT AYANT TRAIT A L'EAU DE BALLAST ET
SYSTEME ENREGISTREUR DE DONNEES SUR LES VOYAGES MARITIMES

(54) Title: A WIRELESS BALLAST WATER MONITORING AND REPORTING SYSTEM AND MARINE VOYAGE DATA
RECORDER SYSTEM

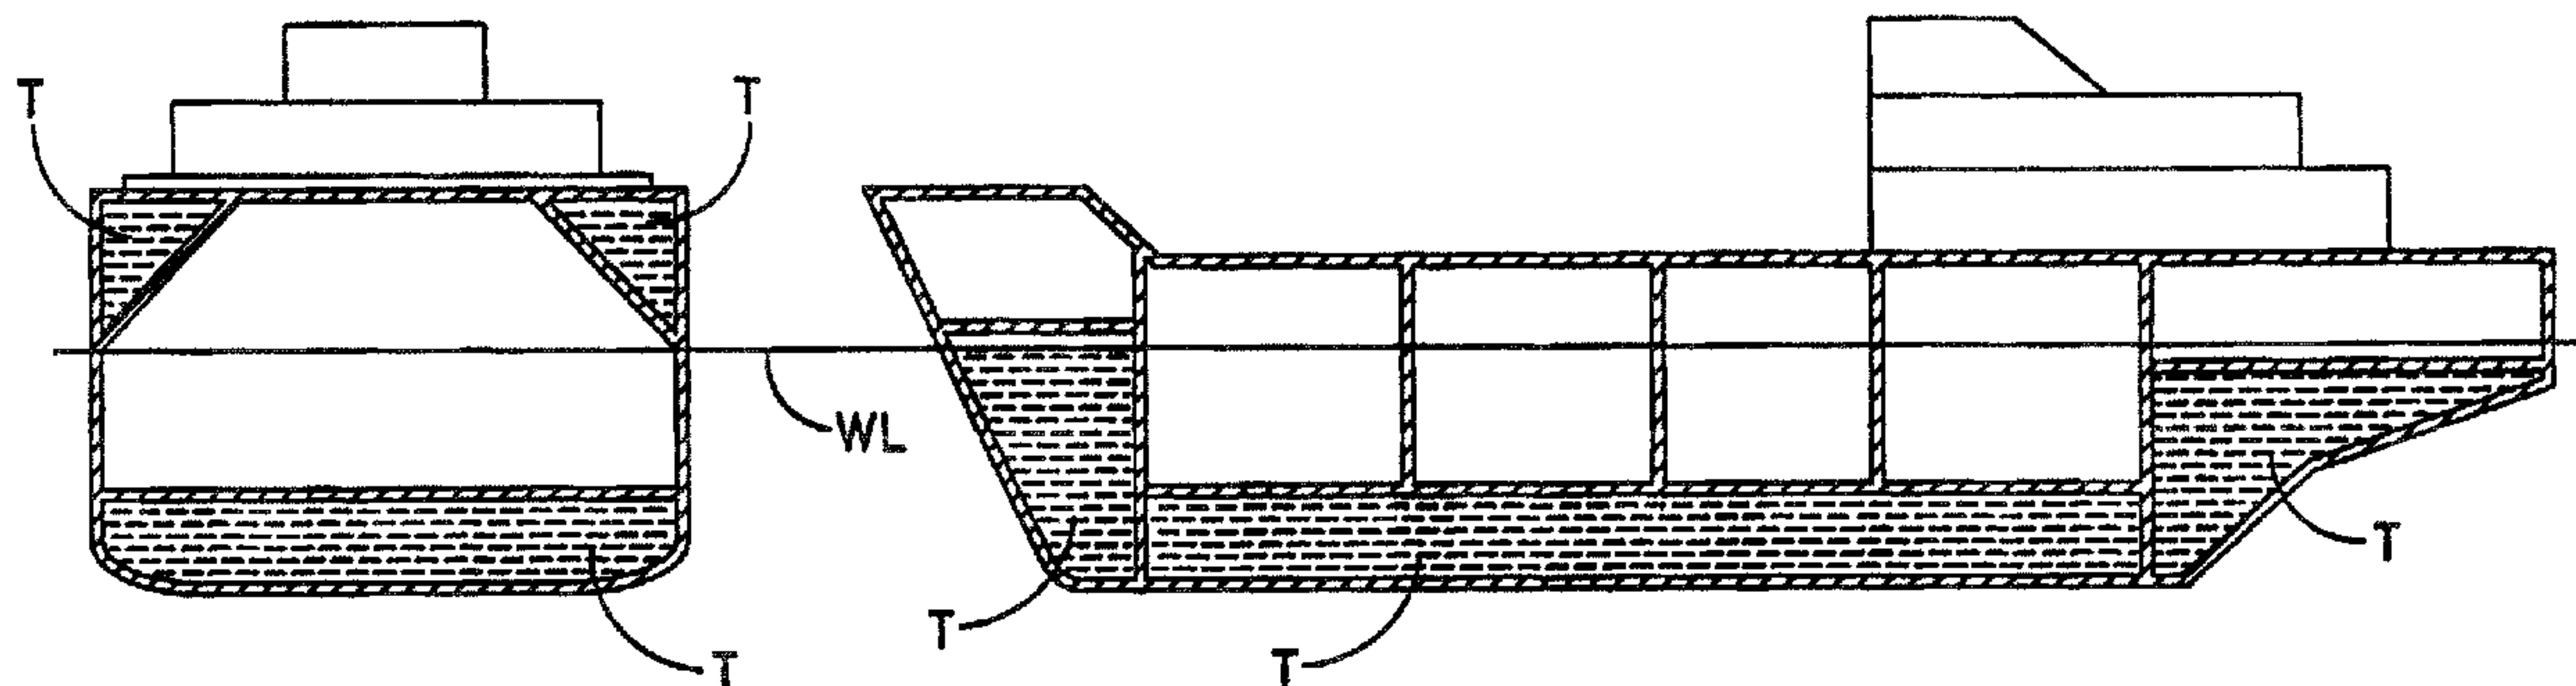

(57) Abrégé/Abstract:

A ballast water monitoring and reporting system for seagoing vessels includes a sensor for monitoring a selected parameter of a ballast water system component and transmitting an electronic signal indicative of a condition of the parameter, a distal acoustic modem for receiving the signal from the sensor and for transmitting an acoustic signal equivalent to the electronic signal received, a shipboard metal structure extending substantially throughout the vessel and adapted to carry the acoustic signal, a proximal acoustic modem adapted to receive the acoustic signal from the metal structure and to transmit an electronic equivalent thereof, and a shipboard data acquisition computer adapted to receive the electronic signal from the proximal acoustic modem and to generate at least one of a display, a report relative to the selected parameter, and a recording of data relative to the selected parameter.



1
2
3 A WIRELESS BALLAST WATER
4 MONITORING AND REPORTING SYSTEM AND
5 MARINE VOYAGE DATA RECORDER SYSTEM
6

7 ABSTRACT OF THE DISCLOSURE

8 A ballast water monitoring and reporting system for seagoing
9 vessels includes a sensor for monitoring a selected parameter of a
10 ballast water system component and transmitting an electronic
11 signal indicative of a condition of the parameter, a distal
12 acoustic modem for receiving the signal from the sensor and for
13 transmitting an acoustic signal equivalent to the electronic
14 signal received, a shipboard metal structure extending
15 substantially throughout the vessel and adapted to carry the
16 acoustic signal, a proximal acoustic modem adapted to receive the
17 acoustic signal from the metal structure and to transmit an
18 electronic equivalent thereof, and a shipboard data acquisition
19 computer adapted to receive the electronic signal from the
20 proximal acoustic modem and to generate at least one of a display,
21 a report relative to the selected parameter, and a recording of
22 data relative to the selected parameter.

1

2

3

A WIRELESS BALLAST WATER

4

MONITORING AND REPORTING SYSTEM AND

5

MARINE VOYAGE DATA RECORDER SYSTEM

6

7

CROSS-REFERENCE TO RELATED APPLICATION

8

This application claims the benefit of U.S. Provisional Patent Application Serial No. 60/376955, filed May 1, 2002 in the names of Robert F. Carlson, Thomas J. Baldassarre, and Kushal K. Talukdar.

12

13

BACKGROUND OF THE INVENTION

14

1. Field of the Invention

15

16

17

18

The invention relates to remote monitoring systems and is directed more particularly to a ballast water exchange monitoring and reporting system, to a substantially wireless monitoring and reporting system, and to a marine voyage data recorder system.

19

2. Description of the Prior Art

20

21

22

23

24

25

While the increase of sea borne commerce over the last century has contributed significantly to the economic development of almost all nations, it has also increased the vulnerability of native echosystems, as well as local economies, and public health associated with them. The threats come from the release of "Non-Indigenous Species" into the marine environments from ballast

1 water discharge of ships during loading of cargoes at various
2 ports.

3 Normally ships sail at a designated gross tonnage to reduce
4 stress on their hulls, and maintain safe stability and
5 maneuverability. However, the tonnage reduces when cargo is
6 unloaded or as water and fuel is consumed during a voyage.
7 Ballast water is taken in when cargo is unloaded or fuel tanks are
8 emptied, to maintain acceptable tonnage. Ballast water is thus
9 essential for the safe operation of ships. As cargo and fuel are
10 loaded in the next port of call, the ballast water taken in
11 earlier is discharged. Unfortunately, during the discharge
12 various marine micro-organisms taken in during ballast loading are
13 discharged into a new environment and can pose numerous threats.

14 There are a number of examples of such threats, including the
15 introduction of North Pacific Seastar (*Asterias amurentis*) in
16 Australia from ballast water taken in Japan. This predatory
17 species poses a threat to the local commercial shellfish industry.
18 Another example is the presence of the European Zebra Mussel,
19 (*Dreissena polymorpha*) in the United States. Introduced in the
20 Great Lakes in the 1980s, it is currently detected in 40% of
21 inland United States waterways, fouling water intake pipes, and
22 has cost over \$5 billion (estimated) in associated cleanups since
23 1989. Further, ballast water can be a potential bio hazard as
24 demonstrated by the discovery of the cholera bacterium in the

1 locations of ballast tanks T are shown in FIGS. 1 and 2, wherein
2 WL indicates the water line of a fully loaded vessel.

3 As seen in FIGS. 1 and 2, the ballast tanks can be located in
4 different parts of the ship, depending upon the design of the
5 specific class of ships. The primary purpose of the ballast tanks
6 is to provide stability in all possible cargo loading combinations
7 when the vessel is underway or is loading or discharging cargo at
8 ports. To support this need, a ballast piping system, consisting
9 of ballast pumps and distribution piping and valves, interconnects
10 the ballast tanks. For the ballast water exchange program, the
11 Coast Guard recommends two exchange methods, namely "empty-refill"
12 method and "flow-through" method. In the empty-refill method, a
13 ballast tank is emptied first and then filled with ocean water.
14 In the flow-through method, discharge and pumping of water is
15 executed simultaneously in a ballast tank and the process is
16 considered complete after a three-tank volume of water is
17 discharged. Of the two methods, generally the "empty-refill"
18 method is more risky for ship's stability, but the master of the
19 vessel has the final authority on how to conduct ballast exchange.

20 To ensure compliance with NISA, the United States Coast Guard
21 has introduced mandatory ballast water reporting for all vessels
22 entering the EEZ, although the overall ballast water management
23 program remains voluntary. Vessels are asked to perform voluntary
24 mid-ocean ballast exchange and report it when they enter the next
25 port. The reporting form requires a history of ballast tank

1 activities, such as where the tanks were filled and how much,
2 where in the ocean the exchange took place, the water temperature,
3 etc. There is also a provision requiring a statement as to the
4 reason if an exchange was not performed. The reports are sent to
5 the National Ballast Information Clearinghouse (NBIC), a
6 collaborative data management and analysis center, run by the
7 United States Coast Guard and the Smithsonian Environmental
8 Research Center. Over the first twelve months (July 1, 1999, to
9 June 30, 2000) of the rule, compliance with reporting was only
10 20.8%, as per NBIC interim report. As it stands now, even when
11 reports are provided, the authenticity of the geographical
12 location where the exchange has taken place cannot be verified.

13 It is clear that an automated system is needed which will be
14 able to produce the ballast water exchange reports more
15 comprehensively and accurately with automatic integration of
16 navigation. Some general requirements that the ballast water
17 exchange monitoring system should be able to satisfy are:

- 18 1. The system should be scaleable and be able to integrate into
19 the most basic ships, and to high-end vessels.
- 20 2. The system must be easy to install and operate.
- 21 3. The system should be versatile and be capable of providing
22 other information that may be needed, such as water temperature or
23 salinity in ballast tanks.

1 SUMMARY OF THE INVENTION

2 An object of the invention is, therefore, to provide a
3 ballast water monitoring and reporting system which is adaptable
4 to virtually all vessels, large and small, is relatively
5 inexpensive and easy to install and operate, and which is capable
6 of providing and recording other information, such as the status
7 of hull integrity, fire doors, watertight doors, and the like, and
8 which can be coordinated with navigational position systems to
9 provide a record of locations of events detected and recorded.

10 A further object of the invention is to provide for the
11 automatic generation of accurate ballast water reports acceptable
12 to the United States Coast Guard and similar governmental agencies
13 of other countries.

14 A still further object of the invention is to provide a
15 wireless system for monitoring conditions in large structures
16 having a metal structural component extending substantially
17 throughout the structure, the system being operable to monitor
18 conditions in sea-going vessels, as noted above, but also being
19 operable to monitor other structures, such as buildings, bridges,
20 cranes, aircraft, and the like.

21 With the above and other objects in view, a feature of the
22 present invention is the provision of a ballast water monitoring
23 and reporting system for seagoing vessels. The system includes a
24 sensor for monitoring a selected parameter of a ballast water
25 system component and for transmitting an electronic signal

1 indicative of a condition of the selected parameter, a distal
2 acoustic modem for receiving the signal from the sensor and for
3 creating and transmitting an acoustic signal equivalent to the
4 electronic signal received, a shipboard metal structure extending
5 substantially throughout the vessel and adapted to carry the
6 acoustic signal, a proximal acoustic modem adapted to receive from
7 the metal structure the acoustic signal created and transmitted by
8 the distal acoustic modem, and to transmit an electronic
9 equivalent thereof, and a shipboard data acquisition computer
10 adapted to receive the electronic signal from the proximal
11 acoustic modem and to generate at least one of a display, a report
12 relative to the selected parameter, and a recording of data
13 relative to the selected parameter.

14 In accordance with a further feature of the invention, there
15 is provided a system as described immediately above wherein the
16 data acquisition computer is adapted to receive inputs from a
17 position system unit and to include data therefrom in the display,
18 paper report, and recording.

19 In accordance with a still further feature of the invention,
20 there is provided a marine voyage data recorder system for
21 seagoing vessels. The system includes sensors disposed on the
22 vessel in selected locations for monitoring selected parameters
23 and for transmitting electronic signals indicative of conditions
24 of the selected parameters, distal acoustic modems for receiving
25 the signals from the sensors and for transmitting acoustic signals

1 equivalent to the electronic signals received, a shipboard metal
2 structure extending substantially throughout the vessel and
3 adapted to carry the acoustic signals, a proximal acoustic modem
4 adapted to receive the acoustic signals from the metal structure
5 and to transmit electronic equivalents thereof, and a voyage data
6 recorder adapted to receive electronic signals from the proximal
7 acoustic modem and to record data carried by the electronic
8 signals from the second acoustic modem.

9 In accordance with a still further feature of the invention,
10 there is provided in the system described immediately above a
11 navigation position system unit, and the voyage data recorder is
12 adapted to receive inputs from the position system unit and to
13 record the data therefrom in conjunction with recordal of the data
14 from the proximal acoustic modem.

15 In accordance with a still further feature of the invention,
16 there is provided a substantially wireless monitoring and
17 reporting system for structures having a metal structural
18 component extending substantially throughout the structure. The
19 system includes a sensor for monitoring a selected parameter in a
20 selected location in the structure and for transmitting an
21 electronic signal indicative of a condition of the selected
22 parameter in the selected location, a distal acoustic modem for
23 receiving the signal from the sensor and for transmitting an
24 acoustic signal equivalent to the electronic signal received, to
25 the metal structural component and through the metal structural

1 component, a proximal acoustic modem adapted to receive the
2 acoustic signal transmitted through the metal structural component
3 and to transmit an electronic equivalent thereof, and a data
4 acquisition computer adapted to receive the electronic signal from
5 the proximal acoustic modem and to generate at least one of a
6 display, a paper report relative to the selected parameter, and a
7 recording of data relative to the selected parameter.

8 The above and other features of the invention, including
9 various novel details of construction and combinations of parts,
10 will now be more particularly described with reference to the
11 accompanying drawings and pointed out in the claims. It will be
12 understood that the particular system embodying the invention is
13 shown by way of illustration only and not as a limitation of the
14 invention. The principles and features of this invention may be
15 employed in various and numerous embodiments without departing
16 from the scope of the invention.

17
18 BRIEF DESCRIPTION OF THE DRAWINGS

19 Reference is made to the accompanying drawings in which is
20 shown an illustrative embodiment of the invention, from which its
21 novel features and advantages will be apparent.

22 In the drawings:

23 FIG. 1 is a diagrammatic athwartships sectional view of a
24 seagoing vessel, showing common dispositions of ballast water
25 tanks;

1 FIG. 2 is a diagrammatic fore-and-aft sectional view of a
2 seagoing vessel showing common dispositions of ballast water
3 tanks;

4 FIG. 3 is a block diagram of one form of ballast water
5 monitoring and reporting system illustrative of an embodiment of
6 the invention; and

7 FIG. 4 is a diagrammatic illustration of acoustic modem
8 components of the system of FIG. 3.

9
10 DESCRIPTION OF THE PREFERRED EMBODIMENTS

11 Referring to FIG. 3, it will be seen that an illustrative
12 system for monitoring and recording ballast water exchange
13 includes sensors 10. Such sensors typically include tank level
14 sensors and/or flow meters and/or ballast pump switch sensors, but
15 may further include sensors for salinity, temperature, dissolved
16 oxygen, pH measurement, chlorine measurement, and other such
17 sensors, and the like.

18 Each of the sensors 10 is disposed in a ballast water system
19 component, such as a ballast water tank, a ballast water flow
20 conduit, a ballast water pump or pump switch, or the like, and is
21 in electrical communication, analog or digital, with a distal
22 acoustic modem 12.

23 The distal acoustic modems 12 are known in the art and serve
24 to convert an electronic signal to an acoustic signal. The distal
25 acoustic modems 12 may be powered by the vessel's power system

1 but, in addition, have an internal battery to maintain the system
2 in the event of a ship's power disruption. In some applications,
3 ship's power is not available, particularly at remote locations,
4 and the acoustic modems depend entirely upon their own power
5 supply.

6 Each of the distal acoustic modems 12 is in acoustic
7 communication with a metal structure 14 which extends
8 substantially throughout the vessel and is adapted to carry an
9 acoustic signal. The aforesaid metal structure 14 typically is
10 the ship's hull, but may be metal railings, beams, decks, or the
11 like, in place of, or in addition to, the ship's hull. The distal
12 acoustic modems 12 transmit the acoustic signal, along with an
13 identifier for the transmitting distal modem, to the metal
14 structure 14.

15 Each acoustic modem 12 comprises an electronics box 12a (FIG.
16 4) capable of receiving and sending information from and to a
17 sensor 10, store the information received from the sensor, attach
18 an identifier to a message from the sensor, create electronic
19 signals equivalent to the message received from the sensor and
20 provide the signals to an acoustic transducer 12b. The
21 electronics box 12a is also capable of receiving signals from the
22 acoustic transducer 12b. The acoustic transducer 12b receives the
23 electronic signals from the electronic box 12a and converts the
24 electronic signals to acoustic vibrations that are transmitted
25 into the hull or other metal structure 14. The acoustic

1 transducers 12b also may receive acoustic signals from the hull,
2 convert such signals into an electronic form, and send the
3 electronic signals to the electronics box 12a. The acoustic
4 transducers 12b may be attached to the hull by screwing to holes
5 drilled in the hull, or by clamping to a suitable section of the
6 hull, or by any other suitable means which enables transmission of
7 the acoustic vibrations generated by the transducer 12b into the
8 hull.

9 A proximal acoustic modem 16 receives the acoustic signals
10 from the metal structure 14 and converts the acoustic signals to
11 electronic signals which the proximal modem 16 sends to a data
12 acquisition computer 18, typically located on the flying bridge of
13 the vessel.

14 The data acquisition computer 18 is adapted to generate one
15 or all of (i) a data display, (ii) a paper report showing a
16 compilation of data, and (iii) a recording of the data received.

17 In operation, the sensors 10 monitor the components for which
18 they are configured, as for example, level of ballast water in the
19 vessel's ballast tanks. The data detected by the sensors 10 is
20 electronically passed on to the distal acoustic modems 12, which
21 convert the data to acoustic form and impart acoustic signals,
22 along with identifiers for the distal acoustic modems, to the
23 metal structure 14. In practice, the distal modems 12 send sound
24 pulses at selected intervals, such as pulses of about 20-200 kHz

1 for about one second at intervals of a selected fraction of a
2 second.

3 The system is adapted to function in reverse, as by
4 initiating an inquiry at the computer 18. The inquiry is
5 electronically directed to a proximal acoustic modem 16 which, in
6 turn, directs the signal acoustically to the metal structure 14
7 through which the signal is carried to the distal acoustic modems
8 12, which convert the acoustic signal to the electronic signal
9 sent to the sensors 10, to activate the sensors 10 which provide
10 data back through the system to the computer 18.

11 The acoustic modems 12, 16 are adapted to use virtually any
12 selected coding scheme, such as Frequency Shift Keying, Phase
13 Shift Keying, Constant False Alarm Rate, or different spread
14 spectrum techniques.

15 Inasmuch as a plurality of the distal acoustic modems 12 may
16 be in use simultaneously, and all may use the same acoustic path,
17 such as a ship's hull, the distal modems 12 can be programmed to
18 send any number of repetitions of the messages, to improve the
19 chances of the messages being heard at the receiving acoustic
20 modem, and can use different types of time periods, such as linear
21 increment, logarithmic increment, and others that are different
22 for each acoustic modem, between the repetitions to avoid the
23 problem of more than one message arriving at an instant of time.

24 The system is substantially wireless, in that the sensors 10
25 and distal modems 12 can be physically interconnected, and the

1 proximal modem 16 and computer 18 can be physically
2 interconnected. The usual extensive electrical wiring for
3 shipboard systems is obviated by using the structure of the vessel
4 itself as an acoustic transmission line with only the inputs
5 thereto and outputs therefrom being of an electrical nature.

6 Preferably, the system includes a navigation position system
7 unit 20, such as a Global Positioning Unit (GPS), or a Loran unit,
8 or any suitable positioning system, which provides the vessel's
9 position at any time to the computer 18. Most seagoing vessels
10 are provided with one or both of such units. This additional
11 input provides location data contemporary with the activity and
12 status data provided by the sensors 10.

13 In some high-end vessels, typically large and modern vessels,
14 there exists a tank gauging system 22, which provides data to the
15 bridge as to the level of liquids in various tanks. If a vessel
16 is provided with such a system, the data supplied thereby may be
17 supplied to the data acquisition computer 18 and used in
18 combination with, or in place of, tank level sensors, and the
19 like, described above with respect to the present system.

20 The data acquisition computer 18 may serve as a marine voyage
21 data recorder, similar to an aircraft "black box". In this
22 configuration, the computer 18 is provided with a recording
23 facility and the sensors are placed to monitor hull stress, hull
24 openings status, watertight door status, fire doors status, fire
25 alarm status, and the like.

1 The wireless feature of the above-described system
2 facilitates the mounting of a relatively inexpensive system for
3 data acquisition, a system which is easily installed without any
4 major renovations to the vessel.

5 The acquisition of data relative to ballast water exchange
6 and the automatic production of a record thereof in conjunction
7 with indications of time and place of production of such data,
8 provides the vessel with a ballast water exchange report which may
9 be filed at the next port of call. Aside from the United States,
10 Australia, Canada, Chile, New Zealand and Israel have already
11 introduced regulations that prevent ships arriving at their ports
12 from discharging ballast water containing non-native harmful life
13 forms. The ships' captains are expected to show they have taken
14 measures to prevent such discharges. The system described herein
15 reduces by far the need for paperwork and inspections, and
16 improves the accuracy and credibility of water ballast exchange
17 reports.

18 While the above-described system is designed primarily for
19 seagoing vessels, and is expected to find wide utility in that
20 area, it is recognized that the system shown in FIG. 3 is readily
21 adaptable to other structures. For example, the system may be
22 used in buildings having metal skeletal structures of columns and
23 beams, to provide data on the status of various doors, windows,
24 closets, furnaces, HVAC systems, and the like. The system may be
25 used on aircraft, bridges, construction cranes, and other metallic

1 structures. As in seagoing vessels, the system can be installed
2 in a substantially wireless manner at relatively little cost. The
3 data acquisition computer can be located in a selected security
4 office, chief operator's office, or driver's or pilot's station.
5 The system functions when power is lost.

6 It will be understood that many additional changes in the
7 details and arrangement of parts, which have been herein described
8 and illustrated in order to explain the nature of the invention,
9 may be made by those skilled in the art within the principles and
10 scope of the invention as expressed in the appended claims.

What is claimed is:

1. A ballast water monitoring and reporting system for seagoing vessels, the system comprising:

a sensor for monitoring a selected parameter of a ballast water system component and for transmitting an electronic signal indicative of a condition of the selected parameter;

a distal acoustic modem for receiving the signal from the sensor and for creating and transmitting an acoustic signal equivalent to the electronic signal received;

a shipboard metal structure extending substantially throughout the vessel and adapted to carry the acoustic signal;

a proximal acoustic modem adapted to receive from said metal structure the acoustic signal created and transmitted by said distal acoustic modem and to transmit an electronic equivalent thereof; and

a shipboard data acquisition computer adapted to receive the electronic signal from the proximal acoustic modem and

to generate at least one of a display, a report on paper relative to the selected parameter, a report in data base relative to the selected parameter, and a recording of data relative to the selected parameter.

2. The system in accordance with claim 1 wherein said data acquisition computer is adapted to receive inputs from a position system unit and to include data therefrom in the display, report, and recording.
3. The system in accordance with claim 1 wherein said sensor comprises a selected one of a salinity sensor, a ballast pump activity sensor, a tank level sensor, a flow meter, a temperature sensor, a dissolved oxygen sensor, a pH measuring sensor, and a chlorine measuring sensor.
4. The system in accordance with claim 1 wherein said shipboard metal structure comprises at least one of the vessel hull, railings, beams, and decks.
5. The system in accordance with claim 2 wherein the position system unit comprises a selected one of a Global Positioning System unit and a Loran System unit.

6. The system in accordance with claim 1 wherein said distal acoustic modem transmits acoustic signals by sending sound pulses of about 20-200kHz for about one second at intervals of a selected fraction of a second.

7. The system in accordance with claim 1 wherein said proximal acoustic modem is adapted to send an acoustic signal equivalent to a message generated by said data acquisition computer through said metal structure to said distal acoustic modem, and said distal acoustic modem is adapted to activate said sensor.

8. The system in accordance with claim 1 and further comprising additional sensors and distal acoustic modems for monitoring additional system components and transmitting electronic signals indicative of conditions of selected parameters of the components, and wherein each of said distal acoustic modems transmits an identifier for the transmitting distal acoustic modem.

9. The system in accordance with claim 1 wherein the ballast water system component comprises at least one of a ballast tank, a ballast pump, and a ballast transfer conduit.

10. A marine voyage data recorder system for seagoing vessels, the system comprising:

sensors disposed on the vessel in selected locations for monitoring selected parameters and for transmitting electronic signals indicative of conditions of the selected parameters;

first distal modems for receiving the signals from said sensors and for transmitting acoustic signals equivalent to the electronic signals received;

a shipboard metal structure extending substantially throughout the vessel and adapted to carry the acoustic signals transmitted by the distal acoustic modems;

a proximal acoustic modem adapted to receive the acoustic signals from the metal structure and to transmit electronic equivalents thereof; and

a voyage data recorder adapted to receive electronic signals from said proximal acoustic modem and to record data carried by the electronic signals from said proximal acoustic modem.

11. The system in accordance with claim 10 wherein said shipboard metal structure comprises at least one of the vessel hull, railings, beams, and decks.

12. The system in accordance with claim 11 wherein the selected parameters comprise selected ones of hull stress, hull openings status, watertight door status, fire door status, and ballast water status.

13. The system in accordance with claim 12 wherein the system further comprises a navigation position system unit, and said voyage data recorder is adapted to receive inputs from said position system unit and to record data therefrom in conjunction with recordal of the data from said proximal acoustic modem.

14. A substantially wireless monitoring and reporting system for structures having a metal structural component extending substantially throughout the structure, the system comprising:

a sensor for monitoring a selected parameter in a selected location in the structure and for transmitting an electronic signal indicative of a condition of the selected parameter in the selected location;

a distal acoustic modem for receiving the signal from the sensor and for transmitting an acoustic signal equivalent to the electronic signal received, along with an identifier for said distal acoustic modem, to

the metal structural component and through the metal structural component;

a proximal acoustic modem adapted to receive the acoustic signal transmitted through the metal structural component and to transmit an electronic equivalent thereof; and

a data acquisition computer adapted to receive the electronic signal from the proximal acoustic modem and to generate at least one of a display, a paper report relative to the selected parameter, an electronic report relative to the selected parameter, and a recording of data relative to the selected parameter.

15. The system in accordance with claim 14 wherein the structure comprises a seagoing vessel and the metal structural component comprises at least one of a hull portion of the vessel, railings, beams and decks.

16. The system in accordance with claim 15 wherein said sensor comprises a selected one of a hull stress monitor, a hull openings status monitor, a watertight door status monitor, and a fire door status monitor.

17. The system in accordance with claim 15 wherein said sensor comprises a selected one of a salinity sensor, a ballast pump activity sensor, a tank level sensor, a flow meter, and a temperature sensor.

18. The system in accordance with claim 15 wherein said system further comprises a navigational position system unit, and said data acquisition computer is adapted to receive inputs from said position system unit and to include data therefrom in the display, report, and recording.

19. The system in accordance with claim 14 wherein the structure comprises a building and the metal structural component comprises a metal skeletal structure.

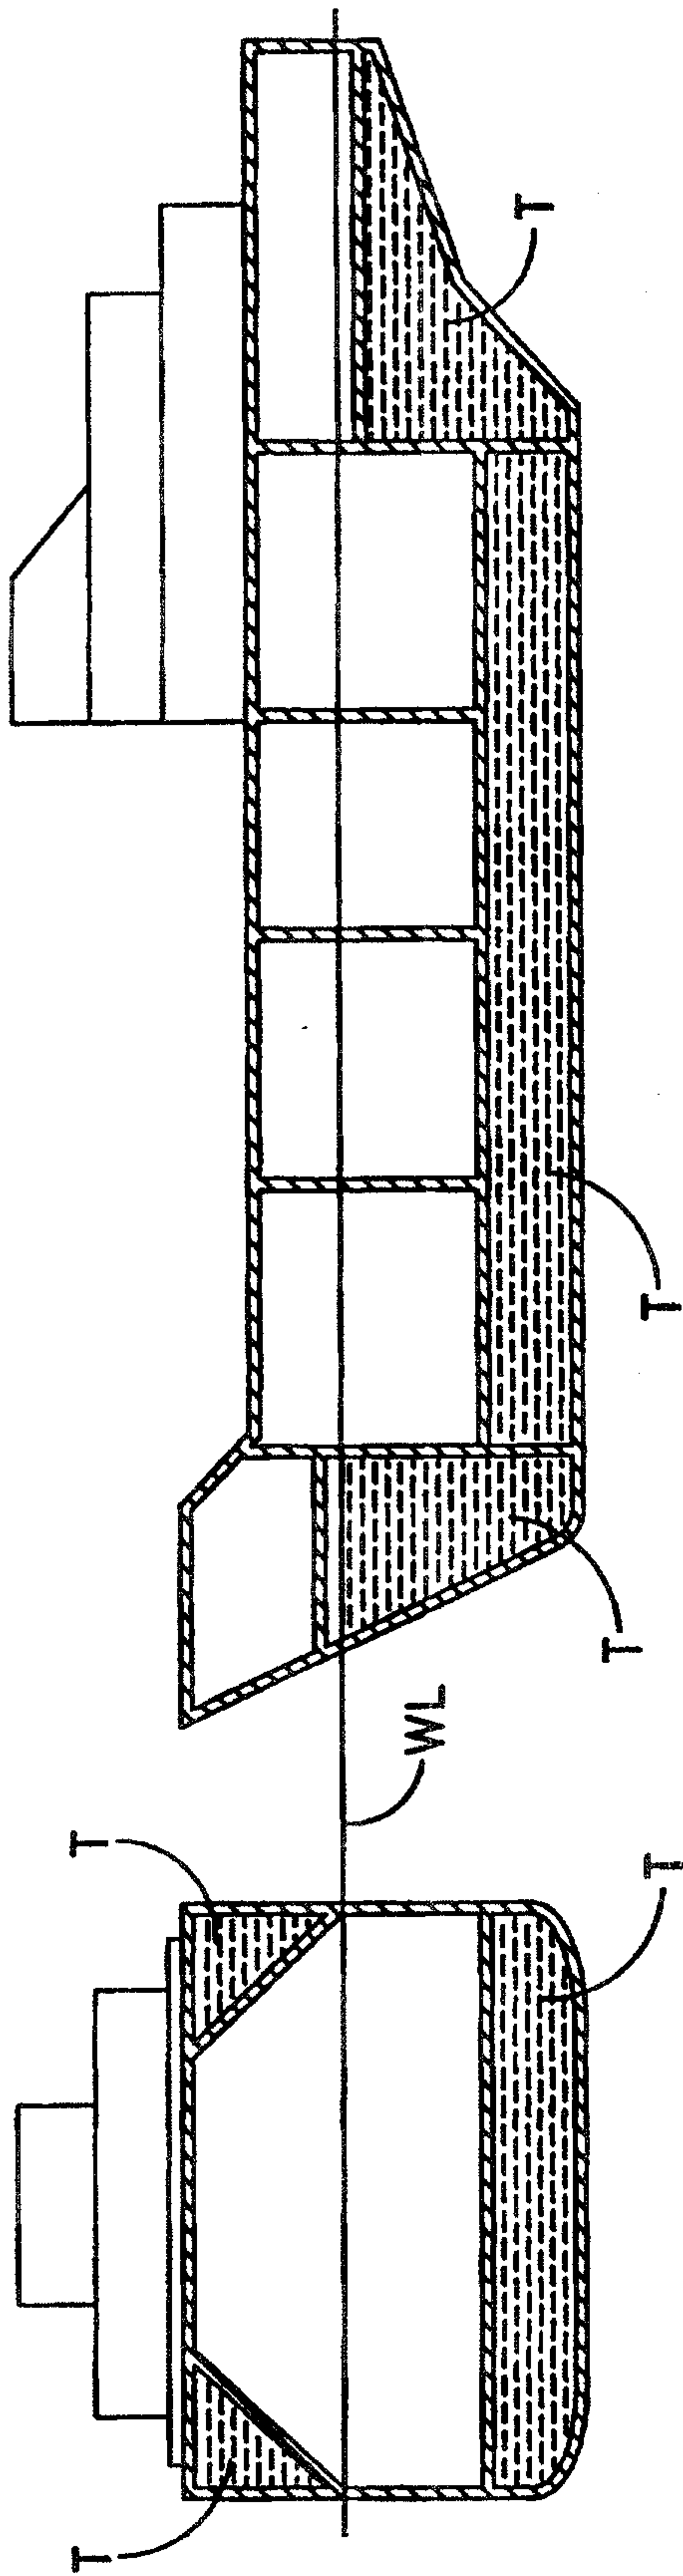


FIG. 2

FIG. 1

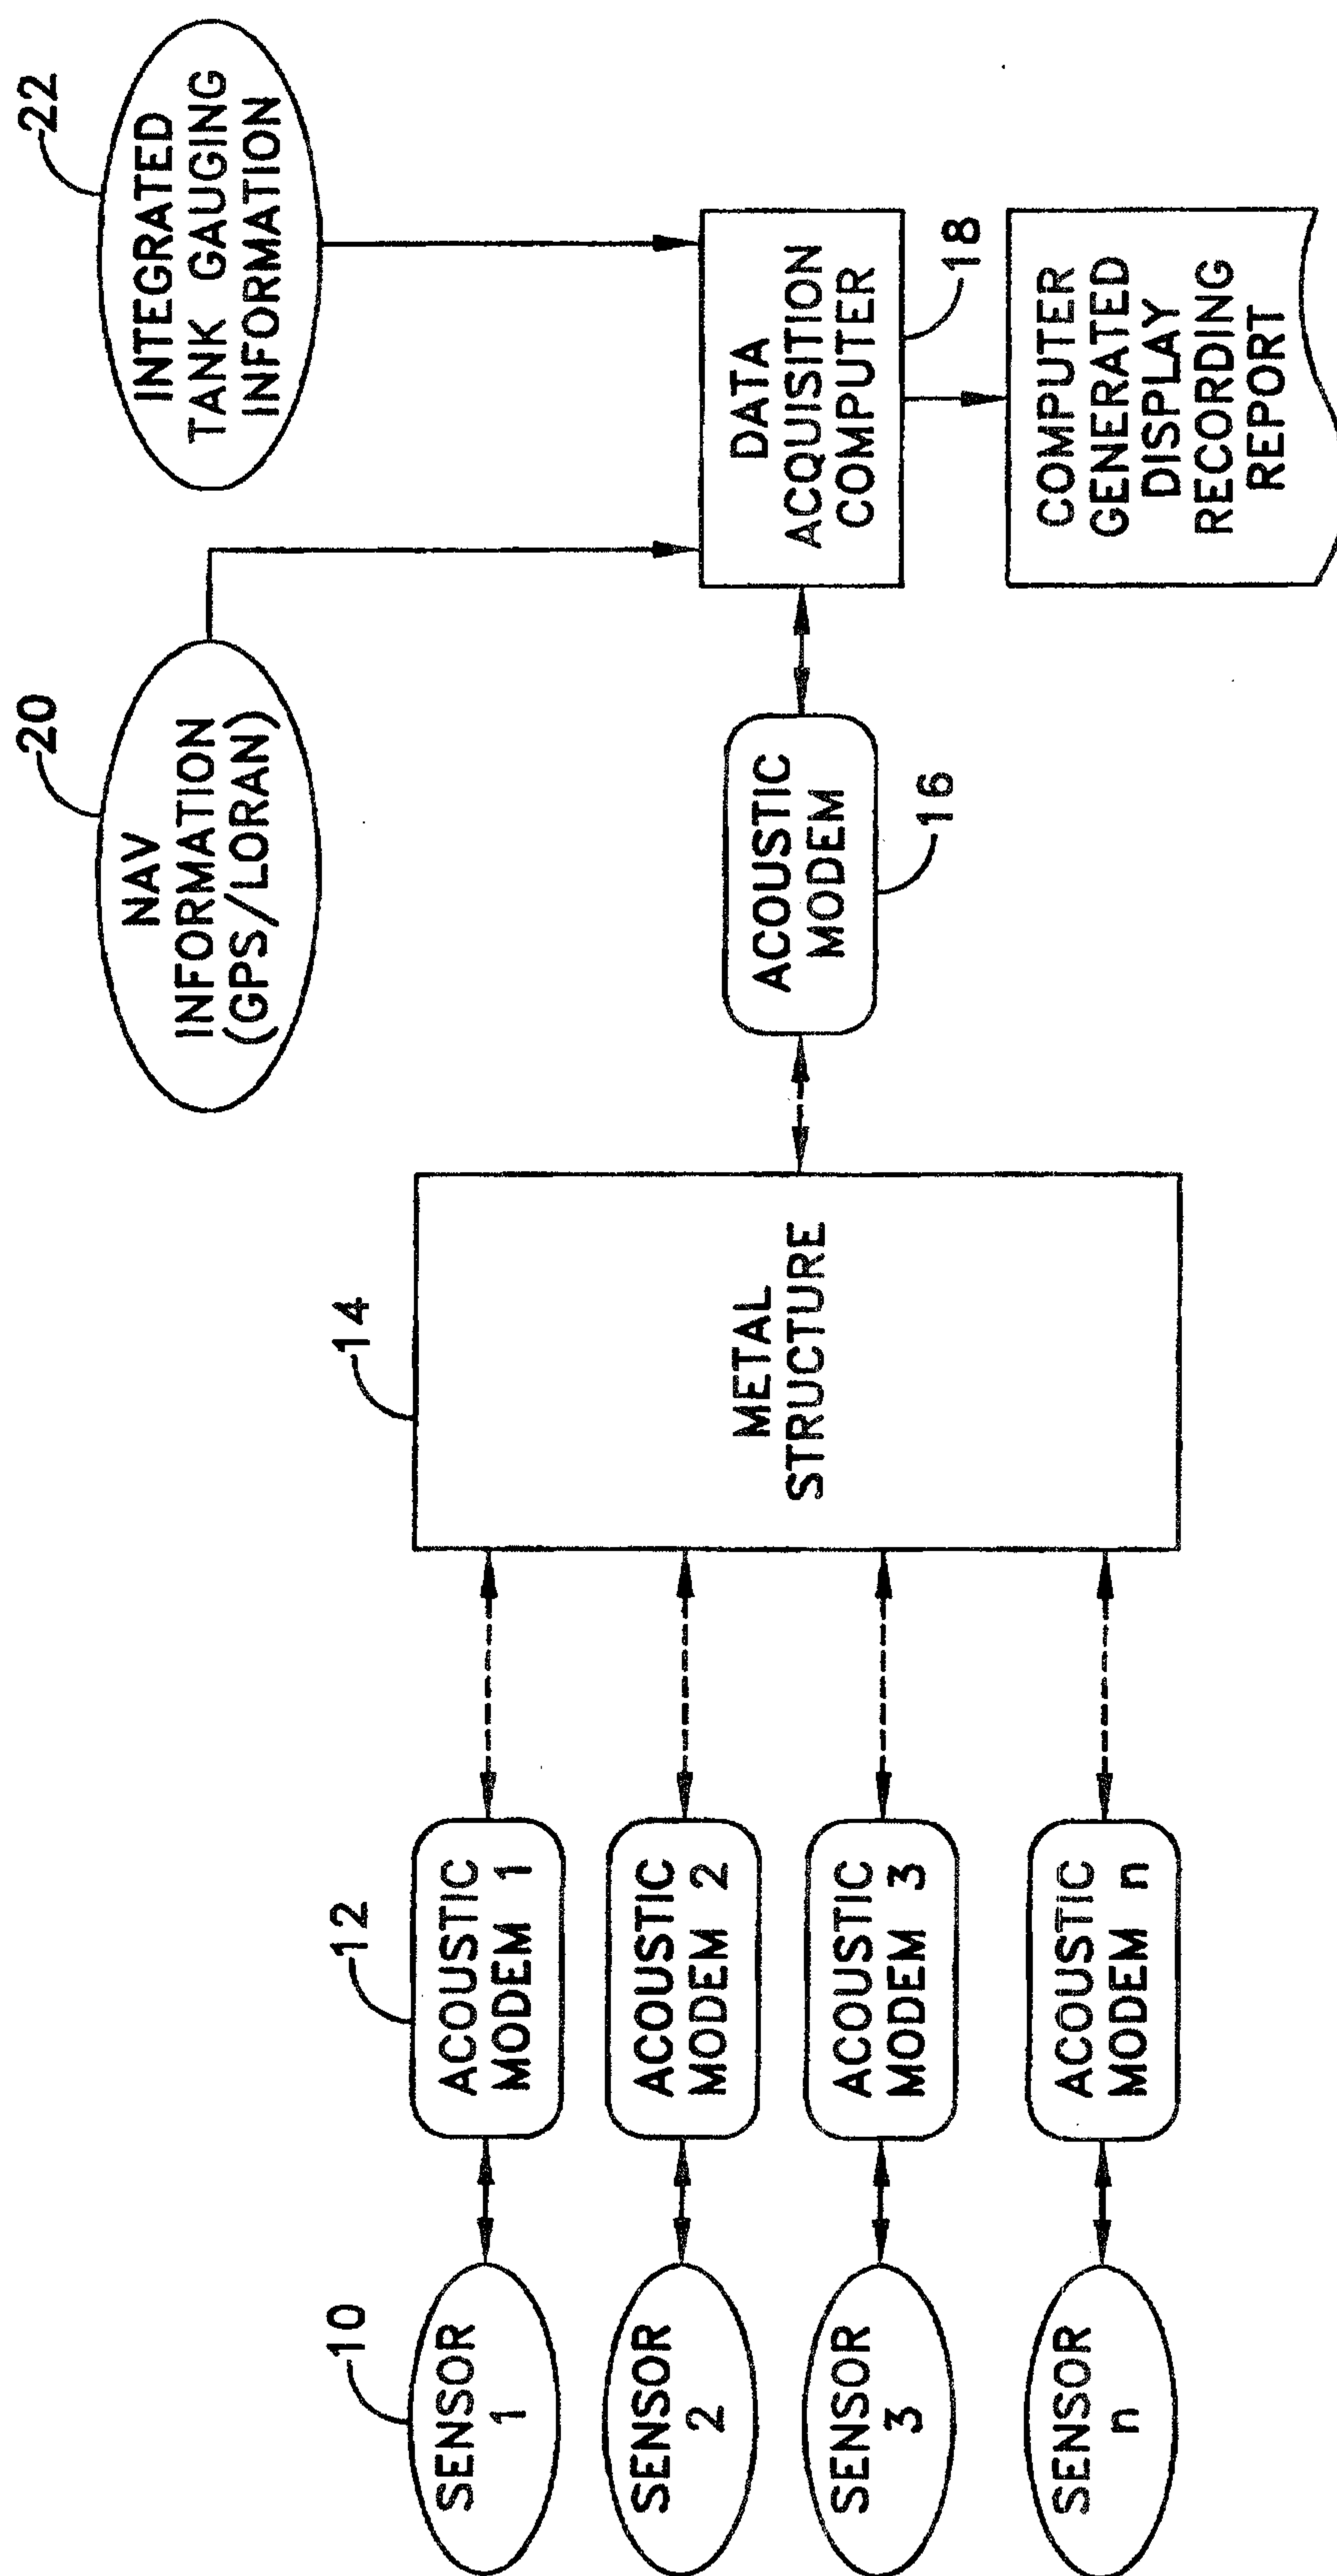


FIG. 3

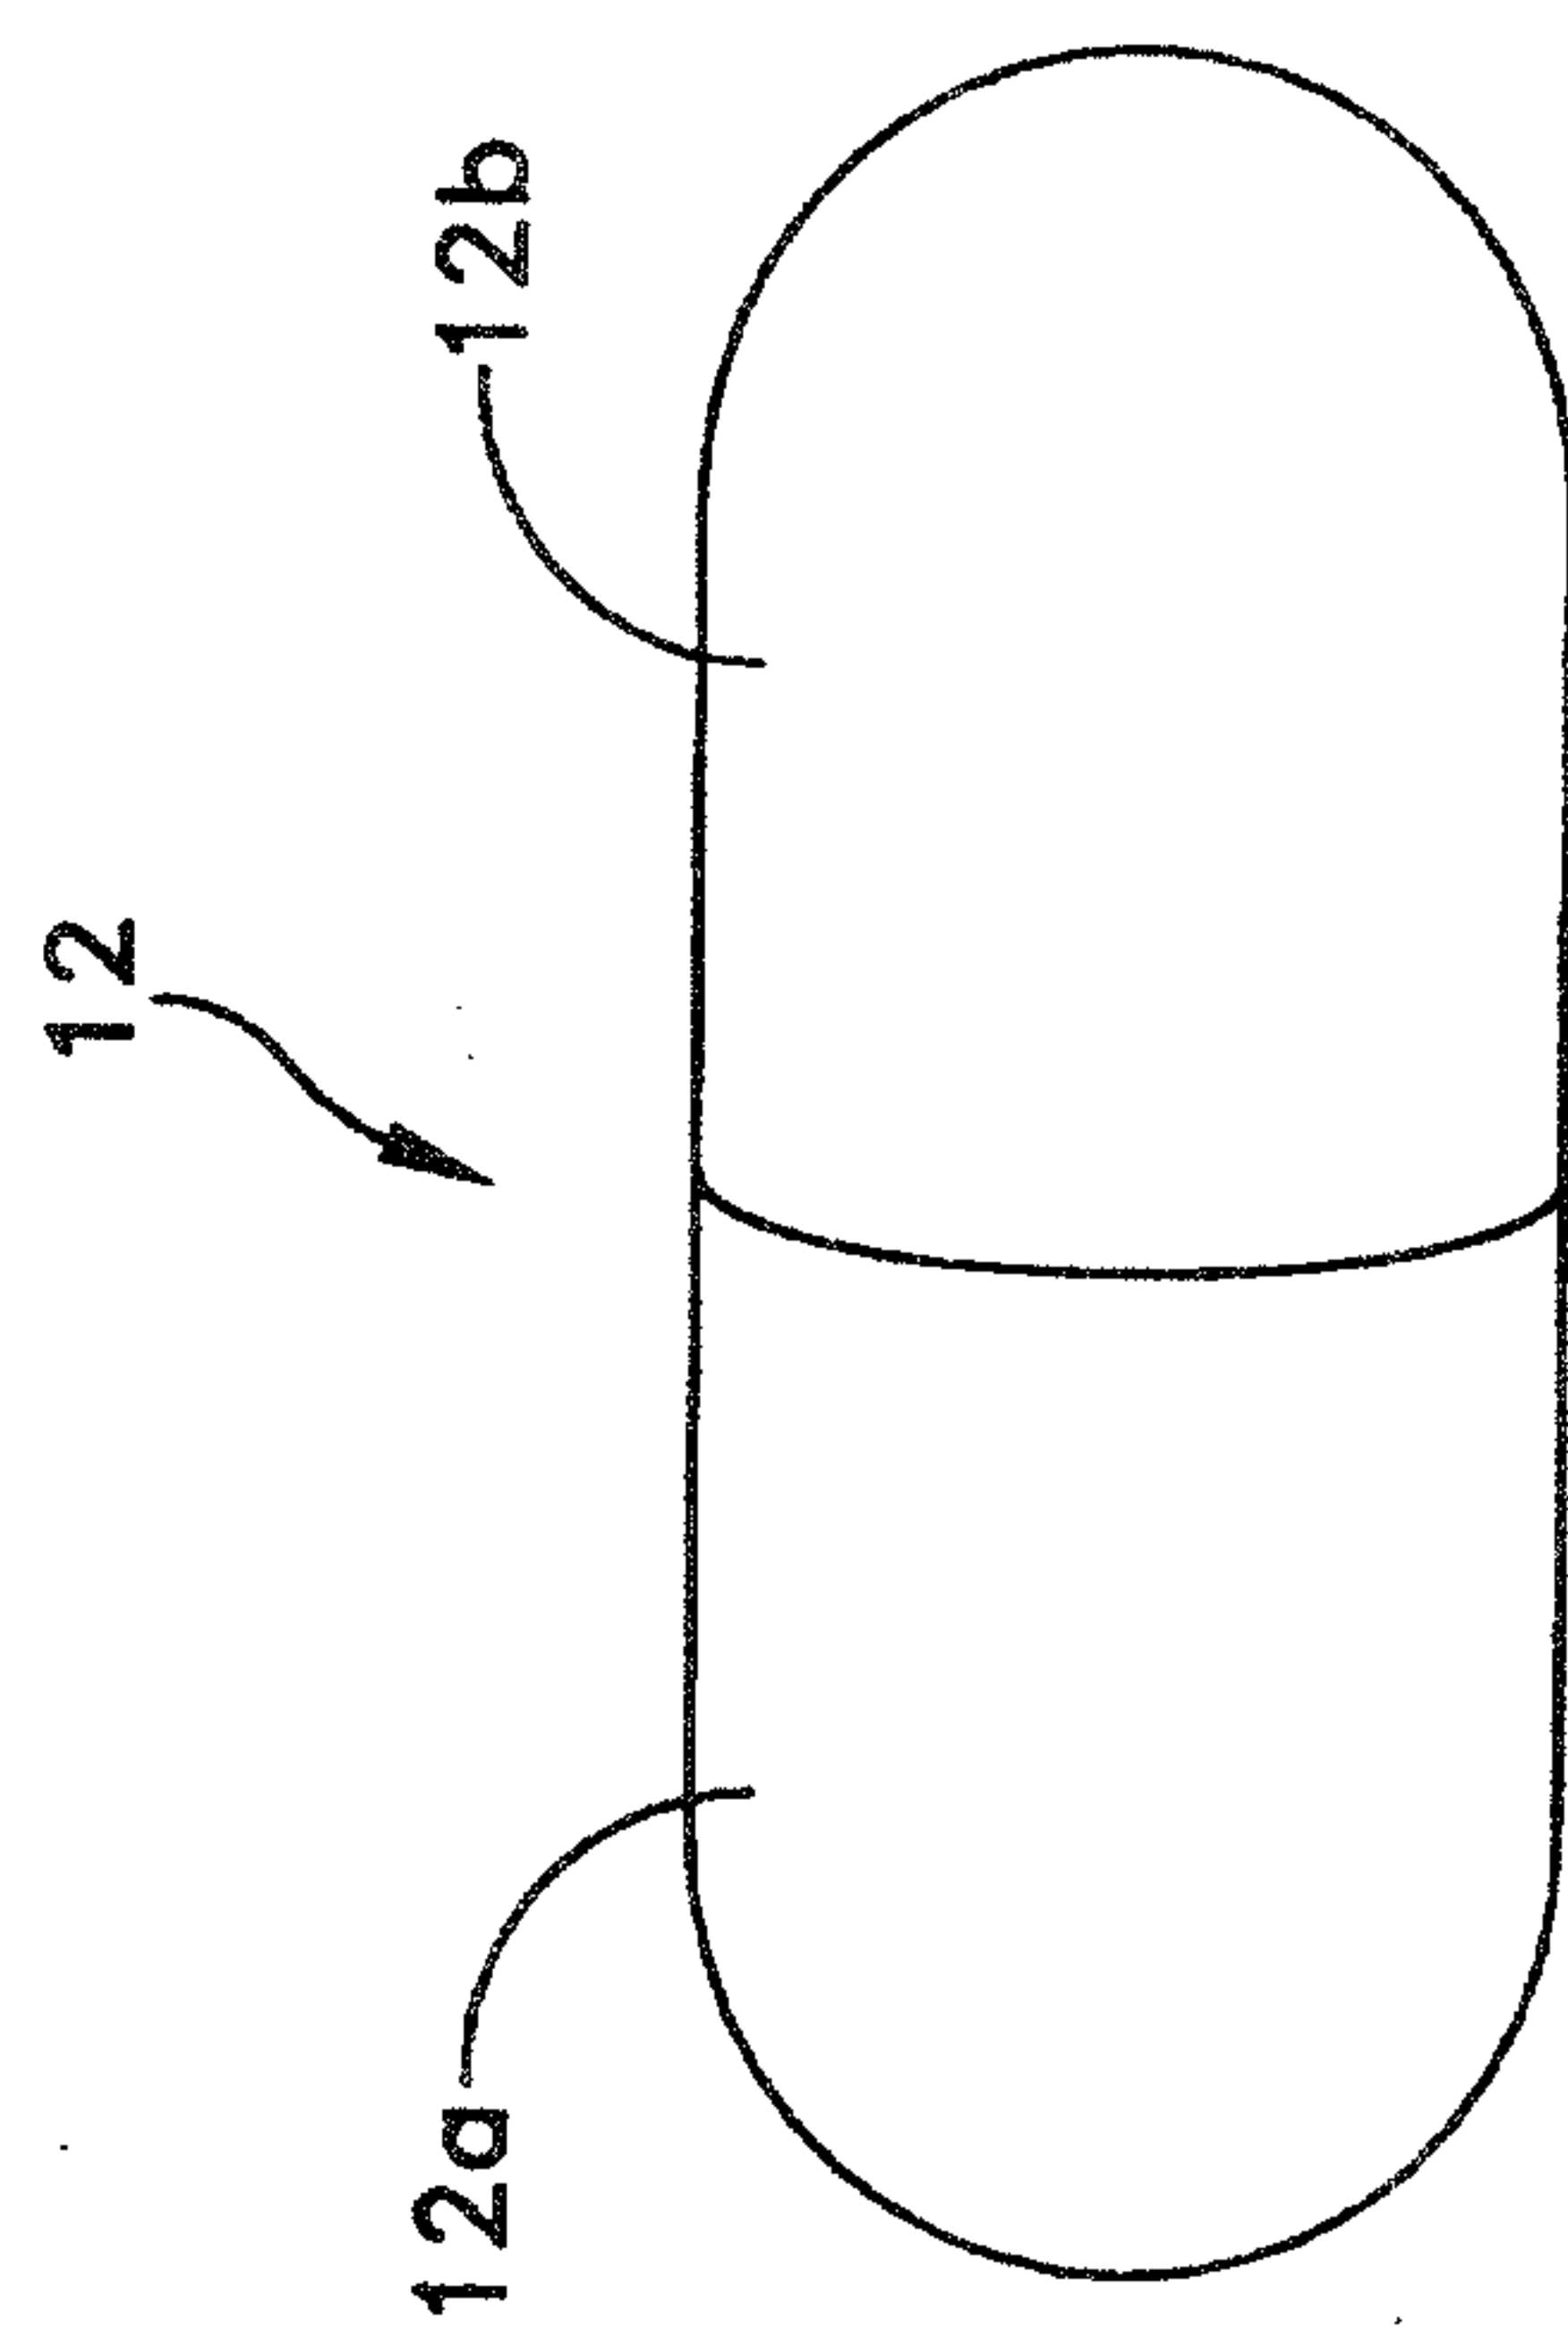


FIG. 4

