

(19) **DANMARK**



Patent- og
Varemærkestyrelsen

(10) **DK/EP 3121622 T3**

(12) **Oversættelse af
europæisk patentskrift**

-
- (51) Int.Cl.: **G 01 V 1/30 (2006.01)** **G 01 V 11/00 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2021-09-13**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2021-06-16**
- (86) Europæisk ansøgning nr.: **15002194.7**
- (86) Europæisk indleveringsdag: **2015-07-24**
- (87) Den europæiske ansøgnings publiceringsdag: **2017-01-25**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **Bergen Teknologioverføring AS, Thormohlensgate 51, 5006 Bergen, Norge**
- (72) Opfinder: **JOHANSEN, Tor Arne, Bergen Teknologioverføring AS, Thormohlensgate 51, 5006 Bergen, Norge**
JENSEN, Erling Hugo, Bergen Teknologioverføring AS, Thormohlensgate 51, 5006 Bergen, Norge
- (74) Fuldmægtig i Danmark: **Zacco Denmark A/S, Arne Jacobsens Allé 15, 2300 København S, Danmark**
- (54) Benævnelse: **Fremgangsmåde til forudsigelse af parametre af en geologisk formation**
- (56) Fremdragne publikationer:
TOR ARNE JOHANSEN ET AL: "Inverse rock physics modeling for reservoir quality prediction", GEOPHYSICS, SOCIETY OF EXPLORATION GEOPHYSICISTS, US, vol. 78, no. 2, 1 March 2013 (2013-03-01), pages M1-M18, XP001580861, ISSN: 0016-8033, DOI: 10.1190/GEO2012-0215.1 [retrieved on 2013-04-12]
MIGUEL BOSCH ET AL: "Seismic inversion for reservoir properties combining statistical rock physics and geostatistics: A review", GEOPHYSICS, SOCIETY OF EXPLORATION GEOPHYSICISTS, US, vol. 75, no. 5, 1 September 2010 (2010-09-01), pages 75A165-75A176, XP001557880, ISSN: 0016-8033, DOI: 10.1190/1.3478209
DARIO GRANA ET AL: "Probabilistic petrophysical-properties estimation integrating statistical rock physics with seismic inversion", GEOPHYSICS, SOCIETY OF EXPLORATION GEOPHYSICISTS, US, vol. 75, no. 3, 1 May 2010 (2010-05-01), pages O21-O37, XP001554638, ISSN: 0016-8033, DOI: 10.1190/1.3386676
T. Mukerij ET AL: "Statistical rock physics: Combining rock physics, information theory, and geostatistics to reduce uncertainty in seismic reservoir characterization", The Leading Edge, 1 March 2001 (2001-03-01), pages 313-319, XP055240609, Retrieved from the Internet: URL:<http://library.seg.org/doi/pdf/10.1190/1.1438938> [retrieved on 2016-01-12]

DESCRIPTION

Field of the invention

[0001] The present invention relates to a method of predicting parameters of a geological formation under investigation by inverse rock physics modelling (IRPM). Applications of the invention are available in the fields of investigating and characterizing geological formations, in particular geological reservoirs including hydrocarbons, like gas or oil.

Background of the invention

[0002] Predicting reservoir parameters of a geological formation by IRPM has been described by T. A. Johansen et al. in "Geophysics" (vol. 78 (2), 2010, p. M1 - M18) and in the dissertation of Erling Hugo Jensen "Methods for improved prediction of elastic, electrical and reservoir properties", University of Bergen, Norway, 2011. Generally, the reservoir parameters include observable data parameters, which can be derived from measurements, like seismically derived properties such as P- and S-wave velocities, acoustic impedances, elastic impedances, or other, and model parameters, which are to be predicted for a reservoir characterization, describing e. g. lithology or other reservoir conditions. For describing a relationship between the data parameters and the model parameters, rock physics models have been suggested as summarized by T. A. Johansen et al. In practice, the number of model parameters in a rock physics model is often higher than the number of available data parameters, resulting in an underdetermined problem with non-unique solutions.

[0003] IRPM provides a solution of the underdetermined problem by a numerical reformulation of rock physics models so that the seismic data parameters are input and model parameters, like porosity, lithology and fluid saturation, are output. Briefly summarized, IRPM includes calculating model constraints (so-called constraint cubes) of the model parameters by applying a rock physics model on the model parameters, wherein the model constraints include modelled data of the data parameters, and applying an inverse model solver process on observable input data of the data parameters. Predicted model parameters are calculated, which comprise values of the model parameters which provide a mutual matching of the input data and the modelled data.

[0004] In a practical example, the IRPM uses three model parameters to vary in the modelling, typically porosity, clay-to-quartz volume fraction (i.e. lithology) and fluid saturation (often referred to as PLF). One set of PLF values (i.e. a node in the constraint cube) will correspond to one data parameter value, e.g. one density, bulk and shear modulus value, and similar for other elastic and acoustic properties. All other model parameters are calibrated to static values, but various realizations of the same model can be created by providing new sets of these static model parameters.

[0005] The IRPM search described by T. A. Johansen et al. can be done for several rock physics models and model realizations. In the inverse model solver process, solutions for one input data parameter are identified through interpolation of the model space, wherein uncertainty in data and model is combined through specification of a global proximity factor. Although it provides quite robust data parameter combinations to use for either porosity, lithology and pore fluid prediction, limitations have been found in practical applications of the conventional IRPM method. In particular, there is no reliable measure for assessing the performance of the models. In other words, applying different rock physics models provides various (non-unique) solutions, which cannot be evaluated against each other. The handling of uncertainty through the use of the proximity factor is also quite unrefined and does not well reflect information about uncertainty in the various reservoir parameters.

Objective of the invention

[0006] The objective of the invention is to provide an improved method of predicting model parameters of a geological formation under investigation, in particular for the purpose of characterizing geological reservoirs containing hydrocarbons, which is capable of avoiding disadvantages of conventional techniques. In particular, the objective is to provide the method of predicting model parameters which better handles uncertainties without loss in modelling performance and enables evaluating modelling results and/or predicting model parameters with improved reliability and reproducibility.

Summary of the invention

[0007] The above objective is solved by a computer-implemented method of predicting values of model parameters of a geological formation under investigation, as defined in independent claim 1. Advantageous embodiments and applications of the invention are defined in the dependent claims.

[0008] According to a general teaching of the invention, a method of processing observable data parameters of a geological formation under investigation, in particular for predicting model parameters of the geological formation is suggested, wherein the geological formation is characterized by reservoir parameters including the observable data parameters and the model parameters to be predicted. The inventive method comprises a step of calculating model constraints of the model parameters by applying at least one rock physics model on the model parameters, wherein the model constraints include modelled data of at least one of the data parameters. Furthermore, the inventive method comprises a step of applying an inverse model solver process on the observable input data of the at least one of the data parameters, wherein predicted model parameters are calculated, which comprise values of the model parameters providing a mutual matching of the input data and the modelled data.

[0009] According to the invention, the modelled data are provided with probability distribution functions (PDFs). Accordingly, a plurality of input data and/or modelled data are created, in particular input and/or calculated in calculating the model constraints, resp., representing distribution functions of the input data and/or modelled data. Furthermore, according to the invention, the inverse model solver process is conducted based on the probability distribution functions. Multiple predicted model parameters are obtained comprising values of the model parameters which give a mutual matching of the input data and the modelled data. Furthermore, according to the invention, model probabilities of the predicted model parameters are calculated in dependency on the probability distribution functions of the data parameters. The model probabilities are used for evaluating the predicted model parameters and characterizing the geological formation. In particular, they can be used to calculate weighted means of model parameters which together with the standard deviation can be used for reservoir characterization.

[0010] The term "reservoir parameter" refers to any physical and/or chemical property of the geological formation, in particular the geological sections or layers thereof, like rock, sand or other facies. If not explicitly mentioned, the term parameter may refer in the following to the property considered, like porosity, or the particular quantity (value) thereof.

[0011] The reservoir parameters include a first group of data parameters comprising observable physical and/or chemical properties which can be derived from a measurement, e. g. directly measured or indirectly obtained from a measurement of another property of the geological formation. The quantities of the data parameters comprise input data (input data parameter values) which have been derived from the measurement and which are used as an input of the inverse model solver process. Furthermore, the data parameters comprise modelled data (modelled data parameter values), which are calculated for providing the model constraints.

[0012] Furthermore, the reservoir parameters include a second group of model parameters to be predicted. It depends on the particular application of the invention, whether a considered property of the geological formation is considered as a data or model parameter. Thus, the model parameter also could be a measurable property, or it is a property of the geological formation, which can be obtained by modelling only.

[0013] Practical model parameters and data parameters are described e. g. in the dissertation of Erling Hugo Jensen (cited above). With preferred examples, the model parameters and the data parameters comprise porosity, lithology, fluid saturation of the geological formation, density, elastic moduli, intercept features, temperature, pressure, velocity of seismic waves, seismic data, sonic data, controlled source electromagnetic data, electrical resistivity, gravitational data and/or parameters derivable therefrom.

[0014] The term "model constraint" (also called "constraint cube") refers to a model space, which preferably has one, two or three (or even more) dimensions, wherein the axes of the model space are spanned by model parameters and the model space includes the modelled

data of at least one of the data parameters associated to the model parameters by applying at least one rock physics model. Applying a rock physics model with a particular set of model parameter values represents a forward model resulting in the model constraint. In the inverse model solver process, the forward model is varied by varying the model parameter values until the modelled data of the model constraint match the observable input data. Preferably, the model constraint is built up by discrete quantities, and it comprises nodes of constrained model parameters being constrained by applying the at least one rock physics model. Accordingly, the model space is discretized so that applying the IRPM method is facilitated. The model constraint can be presented e. g. as a matrix or a diagram.

[0015] The term "inverse model solver process" refers to a numerical iterative process of varying model parameters, i. e. the quantities of the model parameters, until mutual matching of the modelled data to the input data is obtained. The particular type of inverse model solver process is selected from available methods, as mentioned e. g. by T. A. Johansen et al. or in the dissertation of Erling Hugo Jensen (cited above) in dependency on the requirements and conditions of applying the invention.

[0016] The term "predicting" refers to calculating values of model parameters by the inverse model solver process. Predicted model parameters are model parameter values yielding a matching of the modelled data with the input data. Model parameters to be predicted are those selected model parameter values which are obtained as a result of the inverse model solver process and evaluating the predicted model parameters using the model probabilities. The model parameters to be predicted are considered as the best representation of properties of the geological formation, which can be output as a final result of the inventive method or additionally processed for deriving further properties of the geological formation.

[0017] Advantageously, the inventors have extended the IRPM method by additionally providing model probabilities, thus allowing an improved evaluation of the performance of the models. The model probability (or: posteriori probability) is a measure of how well the predicted model parameters fit the data parameters, e. g. seismic inverted data used as input to the modelling, given the applied rock physics model. The model probabilities are associated with the solutions of the inverse model solver process, thus indicating how good the input data matches the rock physics model for a particular prediction of model parameters, e. g. rock properties, like porosity in reservoir rocks or kerogen content in source rocks. The invention allows to take model and data uncertainty into consideration as well as scrutinizing the non-unique solutions. To better compare the performance of e. g. two rock physics models for the different scenarios, the inventive extension to the IRPM method provides the possibility to compare the probability associated with the various predictions. Solutions for a model has implications for the other reservoir properties, geology, petrophysics, geophysics, etc, which in turn can be used to evaluate the various solutions up against each other.

[0018] As a further advantage of the invention, various methods of obtaining the model parameters to be predicted are available. According to a first variant, the model parameters to be predicted can be provided by one value of the multiple predicted model parameters having

maximum model probability. Those solutions are identified which have the highest model probability. This embodiment of the invention has advantages if the model probabilities of the solutions significantly differ from each other.

[0019] Alternatively, according to a second variant, the model parameters to be predicted can be provided by expected values of a measure of variance for the multiple predicted model parameters. This embodiment of the invention has advantages if the model probabilities have slight variations only. In this case, not only one maximum probability solution is considered but also the other solutions. Preferably, a weighted mean value is calculated, which will not always be the same as the solution with the highest probability, but can be shifted based on the probabilities of the other solutions.

[0020] According to a third variant, the model parameters to be predicted can be provided by averaged values of the multiple predicted model parameters.

[0021] According to a further preferred embodiment of the invention, an a priori probability of the model parameters is included in the inverse model solver process, and the model parameters to be predicted have a maximum a priori probability. The a priori probability is associated with the model parameters to be predicted. As an example, if it is expected that a rock layer within the geological formation has a low porosity, a probability distribution function can be obtained for the porosity. So when the porosity is predicted using IRPM, a model probability associated with the solution can be calculated, and additionally, the a priori probability for that solution as defined by the probability distribution function can be calculated. In addition, a third combined probability of the prior two can be calculated using Bayes' theorem. Thus, according to a further embodiment of the invention, a Bayesian probability can be further included in the inverse model solver process, wherein the Bayesian probability is calculated from the model probability and the a priori probability, and the model parameters to be predicted have a maximum Bayesian probability.

[0022] According to a further advantageous embodiment of the invention, calculating the model constraints comprises the steps of defining at least one subspace of the model constraints, calculating predicted subspace model parameters for the at least one subspace, and comparing the predicted subspace model parameters for the at least one subspace with the predicted model parameters of the overall model constraints. As an example, a subspace can represent a gas-filled, high porous sandstone, and it covers only parts of the whole model constraint. Having defined such a subspace makes it possible to compare the solutions within that subspace to the total (or to other subspaces). Preferably the model probabilities of all solutions within the subspace are summed up and divided by the sum of probabilities of all the solutions for providing a facies identifier. This quantifies whether a solution is more likely within or outside the subspace. Additionally, this number can be multiplied with the highest model probability within that subspace so that it can be evaluated not only if it is more likely to be within than outside the sub-space, but also to have a good match between data and model within the subspace. With the above example, it can be found as to whether it is more likely to be a high porous gas sandstone compared to something else defined by the model.

Accordingly, various facies of the geological formation can be defined, e.g. a gas sandstone can be specified to be high porous and clean sands with high gas saturation. The model probability can then be used to evaluate if the model gives a good match with the input data for a given facies, and how this compares to the other facies predictions. The facies identifier can be calculated having a value between 0 and 1 which represents a poor and good match, respectively. According to the invention, the probability distribution functions are provided for the modelled data of the data parameters.

Providing the PDF for the input data comprises assigning the PDF to the input data. To this end, the input data can be provided with a predetermined uncertainty, resulting e. g. from the error in measurement, or the uncertainty can be added to the input data based on theoretical assumptions. As an example, a 10% uncertainty can be assumed (i.e. density +/-10%), and a standard deviation can be calculated based on this, e.g. $\text{std} = (\text{density} * 0.1)/2$.

[0023] Providing the PDF for the modelled data comprises calculating multiple modelled data representing a distribution of modelled data values, e. g. based on Monte Carlo simulations for at least one specified model parameter. For calculating the model constraints, a distribution function is applied to the at least one specified model parameter. Using a rock physics model in the Monte Carlo simulation, a plurality of modelled data is calculated having the PDF.

[0024] If the probability distribution functions are provided for both of the input data and the modelled data, the model probabilities preferably are obtained by superimposing the input data probability distribution functions and the modelled data probability distribution functions. With this embodiment, the model parameters to be predicted are preferably provided by those values of the model parameters having a maximum overlap of the modelled data probability distribution functions and the input data probability distribution functions.

[0025] If the probability distribution functions are provided for one of the input data and the modelled data only, the model probabilities are obtained by superimposing the input data or the modelled data with the probability distribution functions of the modelled data or the input data, resp.

[0026] According to a particularly preferred embodiment of the invention, the input data are derived from measurements of multiple of the data parameters at the geological formation and multiple model constraints of the model parameters are calculated by applying multiple rock physics models on the model parameters, each of said model constraints including modelled data of one of the multiple data parameters. With this embodiment, a global model probability based on the model probabilities of the predicted model parameters is calculated, e. g. by calculating the product thereof. Advantageously, the reliability of the prediction is increased by the combination of multiple model constraints. With preferred examples, 2, 3 or more model constraints are considered.

[0027] According to a further advantageous embodiment of the invention, the inverse model solver process includes defining a cut-off threshold criterion for rejecting a range of values of the model parameters resulting in a model probability below a threshold probability. With this

embodiment, improbable results can be excluded.

Further independent subjects of the invention are a computer program product as defined in independent claim 14, and an apparatus as defined in independent claim 15.

[0028] In summary, the invention provides in particular the following advantages. The inventive inverse modelling is highly data and theory (geophysics, geology, petrophysics, etc.) driven. It integrates statistics, but it is not a statistically driven method. It handles uncertainty and probabilities; even Bayesian type of probability can be included. Each solution can be tracked back to the initial assumptions; which in turn can be used in evaluating the solutions. Data, solver and models are all separated; making it highly scalable: It can be used on various type of data, e. g. 1D (e.g. well log), 2D (e.g. seismic section), 3D (seismic cube), etc. Different solvers can be used, and new models can be easily added, and can either be distributed in a specified form for the user to model (e.g. using Rock.XML and a parser), or pregenerated constraint cubes. The model space can easily be inspected in advance (or after) any inverse modelling, either manually or automatically (e.g. running sensitivity analysis to evaluate which combinations of input data is favorable). The solution space can be inspected in various ways.

Brief description of the drawings

[0029] Further details and advantages of the invention are described in the following with reference to the attached drawings, which show in:

Figure 1:

a flow chart illustrating features of inventive model parameter prediction methods according to the invention;

Figure 2:

a schematic representation of calculating model constraints;

Figure 3:

a schematic representation of conducting the inverse model solver process;

Figures 4

and 5: flow chart illustrating further details of the inverse model solver process;

Figure 6:

schematic illustrations of a preferred embodiment of the model parameter prediction method according to the invention;

Figure 7:

a schematic illustration of defining a cut-off threshold criterion; and

Figure 8:

a schematic illustration of combining multiple model constraints according to the invention.

Description of the preferred embodiments

[0030] Features of preferred embodiments of the invention are described in the following with particular reference to the provision of the PDFs to the input and/or modelled data of the data parameters, the application of the inverse model solver process on the basis of the PDFs, and the provision of the model probabilities. Details of selecting appropriate data and model parameters, selecting rock physics models, calculating model constraints and iterative conducting the inverse model solver process are not described as far as they are known from conventional techniques, e. g. described by T. A. Johansen et al. or in the dissertation of Erling Hugo Jensen (cited above) and references cited therein. The numerical implementation of the invention is done with standard software tools, like e. g. MATLAB, using standard hardware, like a computer.

[0031] Particular reference is made to the model parameters porosity, clay content and fluid saturation (PLF parameters) to be predicted. The application of the invention is not restricted to these parameters but rather correspondingly possible with other parameters as exemplified above.

[0032] Figures 1 to 3 show an overview of the inventive model parameter prediction method including a general step S1 of forward modelling (further details in Figure 2) and a general step S2 of inverse modelling (further details in Figures 3 to 5). Exemplary reference is made to the application of the invention with multiple different data and model parameters and multiple different rock physics models used for calculating multiple model constraints. The invention is not restricted to this, but rather possible with one-dimensional data, i. e. processing one data parameter (see Figures 6A, 6B).

[0033] Forward modelling S1 (Figures 1 and 2) includes providing rock physics models f_1, f_2, f_3, \dots and reservoir parameters including model parameters R_1, R_2, R_3, \dots and data parameters SR_1, SR_2, SR_3, \dots to be used for applying a forward modelling procedure resulting in model constraints M_1, M_2, M_3, \dots . The data parameters SR_1, SR_2, SR_3, \dots comprise the types of observable properties the values of which being input to the inverse modelling S2. As the inverse modelling S2 is directed on finding the forward model resulting in a matching of the input and modelled data, the data parameters SR_1, SR_2, SR_3, \dots are considered as an input of the forward modelling as well.

Furthermore, forward modelling S1 includes calculating the model constraints M_1, M_2, M_3, \dots of the model parameters R_1, R_2, R_3, \dots by applying the rock physics models f_1, f_2, f_3, \dots on the model parameters R_1, R_2, R_3, \dots . The rock physics models use the model parameters as input to predict the modelled data of the data parameters. The derived relations between the model and data parameters provide the model constraints. The rock physics models are continuous functions, but for practical purposes when doing the calculations on a computer they are discretized through sampling; defining a set of nodes.

With a practical example, porosity, clay content and fluid saturation (gas-to-brine saturation) are chosen as model parameters. The forward modelling will then generate a 3D model constraint (constraint cube) where each axes is associated with a respective focused property

(see Figures 6A and 8). The values of the chosen model parameters are sampled over a range of values, e.g. the fluid saturation 0, 0.1, 0.2, ... 1.0. Density and seismic velocities of sound having different polarizations can be chosen as data parameters.

According to the invention, probability distribution functions (PDFs) are provided for the modelled data. To this end, calculating the modelled data d_{m1} , d_{m2} , ... d_{mi} of the model constraints is repeated a plurality of times based on Monte Carlo simulations for the model parameters. As an example, the Monte Carlo simulations include 50 iterations. A plurality of modelled data are obtained for each node of the model constraint in the form of a PDF, specified e. g. with a mean value and standard deviation. As a result, a plurality of modelled data (number N) matching one set of model parameters values (i.e. a node) are obtained with a plurality of nodes (number M).

[0034] With an example, the reservoir parameters effective density may comprise quartz density, clay density and lithology (i.e. volume fraction of quartz and clay). The effective density is the observable data parameter, while the others are model parameters. The lithology is the model parameter to be predicted, while the others are specified model parameters. A distribution function can be applied to both of the quartz and clay density, or one of them is fixed, e. g. the quartz density is fixed to 2.65 g/cm^3 , while the distribution function is applied for the clay density. A rock physics model is used in the Monte Carlo simulation. As a result the calculated modelled effective density (modelled data) will also have a PDF.

[0035] Because calculating the model constraints can be time consuming, preferably the model constraints are stored instead of calculating them every time. A node-template, like a matrix or a table of memory positions corresponding to the nodes, is used for storing them. If a higher (or lower) resolution of the nodes is required, a new set of functions can be created which interpolates between the initial nodes. These functions are referred to as model correlation functions by T. A. Johansen et al. as cited above.

[0036] Inverse modelling S2 (Figures 1 and 3) includes applying an inverse model solver process on observable input data d_1 , d_2 , d_3 , ... of the data parameters. Predicted model parameter values and associated model probabilities are calculated, having a mutual matching of the input data and the modelled data.

[0037] The inverse model solver process provides not only a single solution, e. g. a single porosity, for a given set of input data and a rock physics model. Instead, it gives a range of possible porosity predictions. A representative solution can be found by calculating the mean value and standard deviation. The same can be done for the other predicted model parameters. But now, using the model probability P_i associated with each of the possible solutions S_i , a weighted mean \bar{S}_w can instead be calculated according to

$$\bar{S}_w = \frac{\sum_{i=1}^N P_i S_i}{\sum_{i=1}^N P_i}$$

where i is an index running over the N possible solutions.

[0038] There are a number of different measures available for collecting the observable input data. Depending on the application of the invention, the input data can be derived from one single or from different sources. For example, density can be derived from well log measurements, seismic data and gravitational data. As a further example, electrical resistivity can be obtained with well log or controlled source electromagnetic (CSEM) measurements. Each input data can be given a specific value, e. g. obtained by measurement, or be defined through a PDF, e.g. density = 2 g/cm³, or have a mean value of 2 g/cm³ and a standard deviation of 0.02 g/cm³.

[0039] Optionally, an a priori probability can be input to the inverse model solver process. The a priori probability is used if it is known that certain solutions are more probable than others, based on other sources of information. The a priori probability can be defined as an additional PDF for the model parameters to be predicted. This information can be used as a direct input to the modelling, or it can be introduced after the solutions are found. It can be used alone, or in combination with the model probability; calculating a Bayesian probability.

[0040] As an example, based on a given depth in the geological formation, it might be known that it is very unlikely to find high porosities. However, it would be possible that a particular rock physics model with certain calibrated model parameters would give a good match with the input data and predicting a high porosity. Using the a priori probability in the inverse model solver process would not exclude solutions despite of a good match of input and modelled data.

[0041] The inverse model solver process includes the steps of initializing variables of the iterative matching procedure (step S21), applying the iterative matching procedure on each input data (step S22, see Figure 4) and combining the solutions obtained with each of the input data (step S23, see Figure 5). The inverse model solver process uses the node template when identifying the possible solutions. One of the inverse model solver processes used by T. A. Johansen et al. or Erling Hugo Jensen (cited above) applies the so-called Newton-Raphson based solver which uses the model correlation functions directly, instead of the nodes to identify solutions, wherein repeated calculations are performed minimizing an error-parameter until a specified threshold value.

[0042] The inverse model solver process applied on each input data results in a matching of the forward model and the model parameters included therein such that the modelled data in the model constraint matches the input data. Forward modelling is repeated for all combinations of sampled focused model parameter values (nodes). Thus, each application of the inverse model solver process results in a plurality of solutions corresponding to the number of modelled data (PDF) available at each node. According to the invention, a model probability related to the various solutions for a given model (and input data) is calculated. The model probability expresses how well the data fits the model.

[0043] Figures 4 and 5 show further details of the inverse model solver process. According to Figure 4, for each of the input data, the inverse model solver process includes an initial test S221, whether the input data are within the model constraint space (MCS), i.e. the domain correlating target reservoir values to input data values. In practice, the MCS is the model constraint cube. Advantageously, this is the fastest way to identify non-existing solutions. Then, there is a decision step S222 for optional applying a cut-off criterion (see Figure 7) on using the model constraints for finding solutions. If a cut-off is not being used, all possibilities within the constraint cube are considered solutions in S223, but with varying probability. If a cut-off is being used, then only solutions within the constraint cube with a probability above the assigned threshold will be considered a solution in S224. Associated model probabilities are calculated at step S225. Finally, the model probabilities are multiplied at step S226 for obtaining a global model probability.

[0044] According to Figure 5, combining the solutions obtained with each of the input data can include a calculation of a Bayesian probability of solutions at step 231. This embodiment is only significant if an a priori probability has been defined. Then, there is a test for specific solutions at step 232. If the solver is calculating specific solutions, then all identified solutions in the constraint cube are flagged and probabilities are calculated for them in step S223. If the solver is not calculating specific solutions, i.e. it is calculating general solutions, then all identified solutions are represented with various "averages" and subspace solutions in steps S234 and S235. The "averages" can be means and variances, weighted means, solutions with highest probabilities, etc. Finally, the solutions are output at step 236.

[0045] At least one subspace of the at least one model constraint can be defined for facilitating an identification of appropriate solutions. Predicted subspace model parameters are calculated for the at least one subspace using the inverse model solver process. The predicted subspace model parameters and associated model probabilities for the at least one sub-space are compared with the predicted model parameters of the overall model constraint. As an example, a hydrocarbon saturated sandstone, which might be one of the facies to be identified, is not represented by a single solution in the model space. A sub-space is defined containing the subset of solutions for this facies. Similarly, other facies can be defined. The model probabilities for this facies are calculated according to:

$$P_{\text{facies}} = P_{F,\text{max}} \frac{\sum_{j=1}^F P_j}{\sum_{i=1}^N P_i}$$

wherein $P_{F,\text{max}}$ is the highest model probability and j is an index running over the F possible solutions for the specified facies. The index i runs over all N possible solutions in the model constraint. Hence, the facies identifier P_{facies} is a scaled relative probability which will be high (close to one) when solutions within are more likely than those outside the facies specification, as well as there exists a solution for that facies which matches very well with the input data.

[0046] Advantageously, multiple sub-spaces can be handled in one execution, i.e. it is not necessary to repeat the modelling process for each of the sub-spaces (facies).

[0047] As a further advantage of the invention, the inverse model solver process can be applied with e. g. one-dimensional, two-dimensional, three- or even higher-dimensional model constraints, which are presented in Figure 6A. In the 1D case, modelled data values of one data parameter (presented by circles) are calculated by applying a rock physics model for the sampled model parameter. In the 2D, 3D and *ND* cases, the modelled data values are calculated for sets of the sampled model parameters. The three-dimensional model constraint is a constraint cube, which is spanned e. g. by the PLF values noted above, wherein e.g. a density value ρ is calculated for each PLF triple. Each node has as many values as repetitions in the Monte Carlo simulation per forward modelled data property; these values can e.g. be represented through a mean and standard deviation (assuming a normal distribution) as exemplified in Figure 6A.

[0048] Figure 6B illustrates the matching of input data (represented by arrows) with the PDF_{modelled} of the modelled data at the nodes of the 1D model constraint. The input data are provided with an uncertainty presented with a PDF_{input} , which is overlapped with the PDF_{modelled} of the modelled data at each node (Figure 6C). The integral of the overlapping PDFs is the model probability of the solution at the respective node.

The PDFs always have an overlap even in infinity. For improved performance, the inverse model solver process includes a cut-off threshold criterion for rejecting a range of values of the model parameters resulting in a model probability below a threshold probability. The cut-off threshold is defined to reject solutions that have very low model probability (poor match between data and model). This can for example be done by setting a threshold to the model probability (integral of overlapping pdfs) as shown in Figure 7 or as a factor times the standard deviation adjusted based on the change in mean value from node to node.

[0049] Figure 8A to 8C illustrate plots of model probability of solutions for various input data, namely P-wave acoustic impedance, ratio of P-wave and S-wave velocities and density. The probability is reflected in the dot size, wherein smaller dots represent less probable solutions. Finally the solutions are intersected to reject solutions outside the threshold and total model probability is found by taking the product of the individual model probabilities as presented in Figure 8D and Figure 8E, which is a rotated version of Figure 8D.

[0050] The scope of the present invention is defined by the appended claims.

REFERENCES CITED IN THE DESCRIPTION

Cited references

This list of references cited by the applicant is for the reader's convenience only. It does not

form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Non-patent literature cited in the description

- **T. A. JOHANSEN et al.** Geophysics, 2010, vol. 78, 2M1-M18 [0002]
- **ERLING HUGO JENSEN** Methods for improved prediction of elastic, electrical and reservoir properties University of Bergen 20110000 [0002]

Patentkrav

- 5 1. Computer-implementeret fremgangsmåde til forudsigelse af værdier af modelparametre (R_1, R_2, R_3, \dots) af en geologisk formation, der bliver undersøgt, hvor der kendes forskel på den geologiske formation ved hjælp af reservoirparametre indbefattende observerbare parametre og de modelparametre (R_1, R_2, R_3, \dots), der skal forudsiges, omfattende de følgende trin;
- 10 - i en fremadgående modelleringsproces at beregne mindst en modelbegrænsning (M_1, M_2, M_3, \dots) af modelparametrene (R_1, R_2, R_3, \dots) ved at anvende mindst en klippefysikmodel (f_1, f_2, f_3, \dots) på modelparametrene (R_1, R_2, R_3, \dots), hvor den mindst ene modelbegrænsning (M_1, M_2, M_3, \dots) indbefatter modellerede data af mindst en af dataparametrene, og
- 15 - at anvende en omvendt modelløsningsproces på observerede inputdata (d_1, d_2, d_3, \dots) af mindst en af dataparametrene, hvor de observerede inputdata stammer fra målinger, indbefattende beregning af forudsagte modelparametre, som omfatter værdier af modelparametrene (R_1, R_2, R_3, \dots) som giver en indbyrdes matching af inputdataene og de modellerede data, hvor fremgangsmåden er **kendetegnet ved** de følgende trin
- 20 - at tilvejebringe de modellerede data med sandsynlighedsfordelingsfunktioner,
- at udføre den omvendte modelløsningsproces på basis af sandsynlighedsfordelingsfunktionerne af de modellerede data, hvor der opnås flere forudsagte værdier af modelparametrene omfattende værdier af modelparametrene (R_1, R_2, R_3, \dots), som giver den indbyrdes matching af inputdataene og de modellerede data, og
- 25 - at beregne modelsandsynligheder af de forudsagte værdier af modelparametrene afhængigt af sandsynlighedsfordelingsfunktionerne af de modellerede data.
- 30 **2.** Fremgangsmåde ifølge krav 1, hvor
- værdierne af de modelparametre, der skal forudsiges, tilvejebringes ved hjælp af en værdi af de flere forudsagte modelparametre med maksimal modelsandsynlighed.
- 35 **3.** Fremgangsmåde ifølge krav 1, hvor

- værdierne af de modelparametre, der skal forudsiges, tilvejebringes ved hjælp af forventede værdier af en måling af varians for de flere forudsagte modelparametre.

5 **4.** Fremgangsmåde ifølge krav 1, hvor

- værdierne af de modelparametre, der skal forudsiges, tilvejebringes ved hjælp af gennemsnitlige værdier af de flere forudsagte modelparametre.

10 **5.** Fremgangsmåde ifølge et hvilket som helst af de foregående krav, hvor

- en a-priori-sandsynlighed af modelparametrene er inkluderet i den omvendte modelløsningsproces, og

- værdierne af de modelparametre, der skal forudsiges, har en maksimal a-priori-sandsynlighed.

15 **6.** Fremgangsmåde ifølge krav 5, hvor

- en bayesiansk sandsynlighed er inkluderet i den omvendte løsningsproces, hvor den bayesianske sandsynlighed beregnes ud fra modelsandsynligheden og a-priori-sandsynligheden, og

20 - værdierne af de modelparametre, der skal forudsiges, har en maksimal bayesiansk sandsynlighed.

7. Fremgangsmåde ifølge et af de foregående krav, yderligere omfattende følgende trin

25 - at definere mindst et underrum af den mindst ene modelbegrænsning,
- at kalkulere forudsagte underrooms-modelparametre for det mindst ene under-
derrum, og

30 - at sammenligne de forudsagte underrooms-modelparametre for det mindst ene under-
rum med de forudsagte værdier af modelparametrene af den over-
ordnede modelbegrænsning.

8. Fremgangsmåde ifølge et af de foregående krav, hvor

35 - den mindst ene modelbegrænsning (M_1, M_2, M_3, \dots) omfatter knuder af be-
grænsede modelparametre (R_1, R_2, R_3, \dots), der er begrænsede ved at anvende
mindst en klippefysikmodel (f_1, f_2, f_3, \dots).

9. Fremgangsmåde ifølge et af de foregående krav, hvor

- trinnet med at beregne den mindst ene modelbegrænsning (M_1, M_2, M_3, \dots) indbefatter Monte Carlo-simuleringer for modelparametrene (R_1, R_2, R_3, \dots), der resulterer i sandsynlighedsfordelingsfunktionerne af de modellerede data af dataparametrene.

5

10. Fremgangsmåde ifølge et af de foregående krav, hvor

- sandsynlighedsfordelingsfunktionerne tilvejebringes for både inputdataene og de modellerede data, og

10

- modelsandsynlighederne opnås ved at overlappende sandsynlighedsfordelingsfunktionerne af inputdataene og sandsynlighedsfordelingsfunktionerne af de modellerede data.

11. Fremgangsmåde ifølge krav 10, hvor

15

- værdierne af de modelparametre, der skal forudsiges, tilvejebringes af de værdier af modelparametrene, der har en maksimal overlappning af sandsynlighedsfordelingsfunktionerne af de modellerede data og sandsynlighedsfordelingsfunktionerne af inputdataene.

12. Fremgangsmåde ifølge et af de foregående krav, hvor

20

- inputdataene (d_1, d_2, d_3, \dots) tilvejebringes på basis af en måling af flere af dataparametrene ved den geologiske formation,

- flere modelbegrænsninger (M_1, M_2, M_3, \dots) af modelparametrene (R_1, R_2, R_3, \dots) beregnes ved at anvende flere klippefysikmodeller (f_1, f_2, f_3, \dots) på modelparametrene (R_1, R_2, R_3, \dots), hvor hver af modelbegrænsningerne (M_1, M_2, M_3, \dots) indbefatter modellerede data af mindst en af de flere dataparametre, og

25

- beregning af en global modelsandsynlighed på basis af modelsandsynlighederne af de forudsagte modelparametre.

30

13. Fremgangsmåde ifølge et af de foregående krav, hvor

- den omvendte modelløsningsproces indbefatter at definere et afbrydelsestærskel-kriterium til at afvise et område af værdier af de modelparametre, der resulterer i en modelsandsynlighed under en tærskelsandsynlighed.

35

14. Computerprogramprodukt, omfattende instruktioner, der, når programmet udføres af en computer, får computeren til at udføre fremgangsmåden ifølge

4

mindst et af kravene 1 til 13.

15. Indretning omfattende et computerlæsbart lagringsmedium omfattende programinstruktioner, der, når de udføres af en computer, får computeren til at udføre fremgangsmåden ifølge mindst et af kravene 1 til 13.

5

DRAWINGS

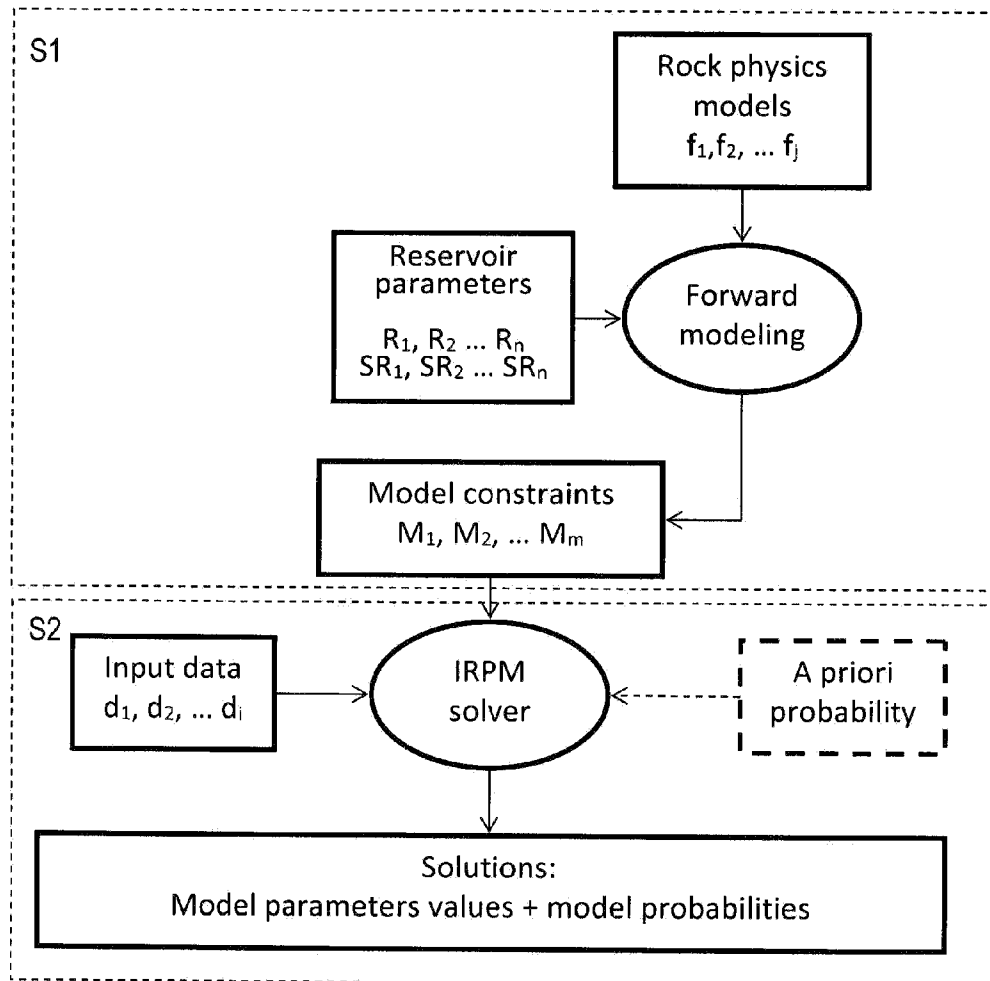


FIG. 1

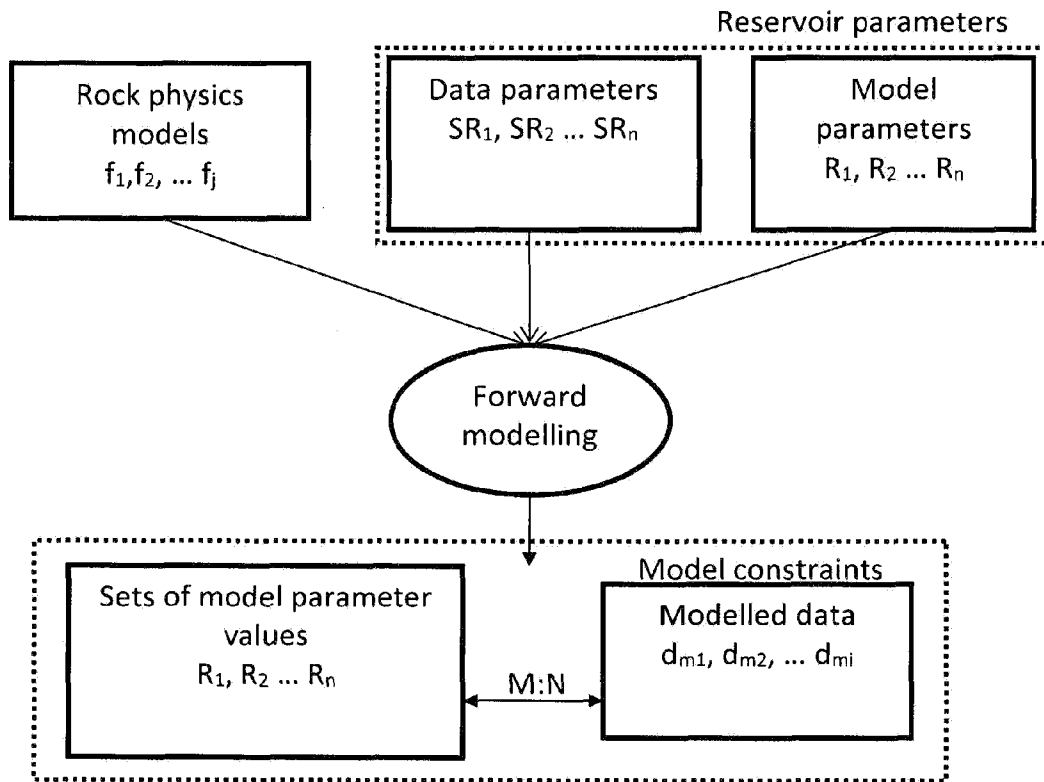


FIG. 2

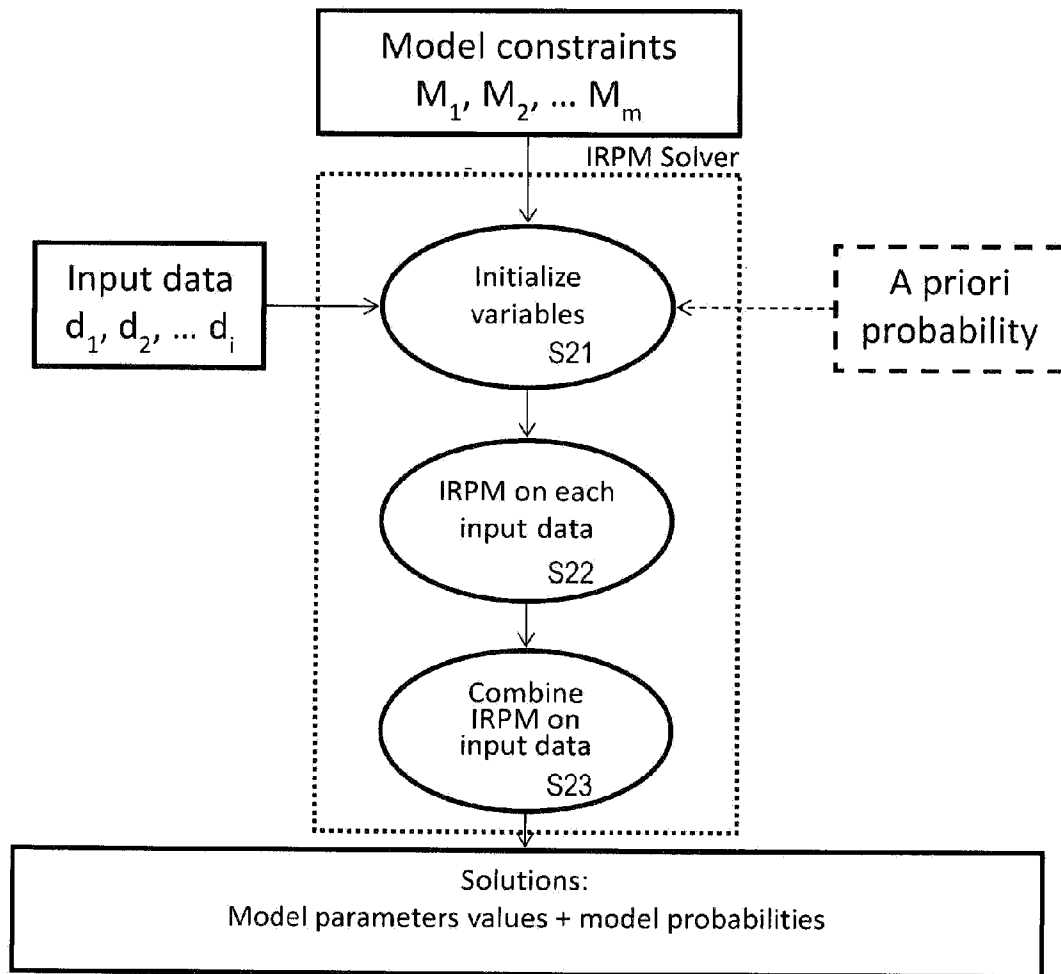


FIG. 3

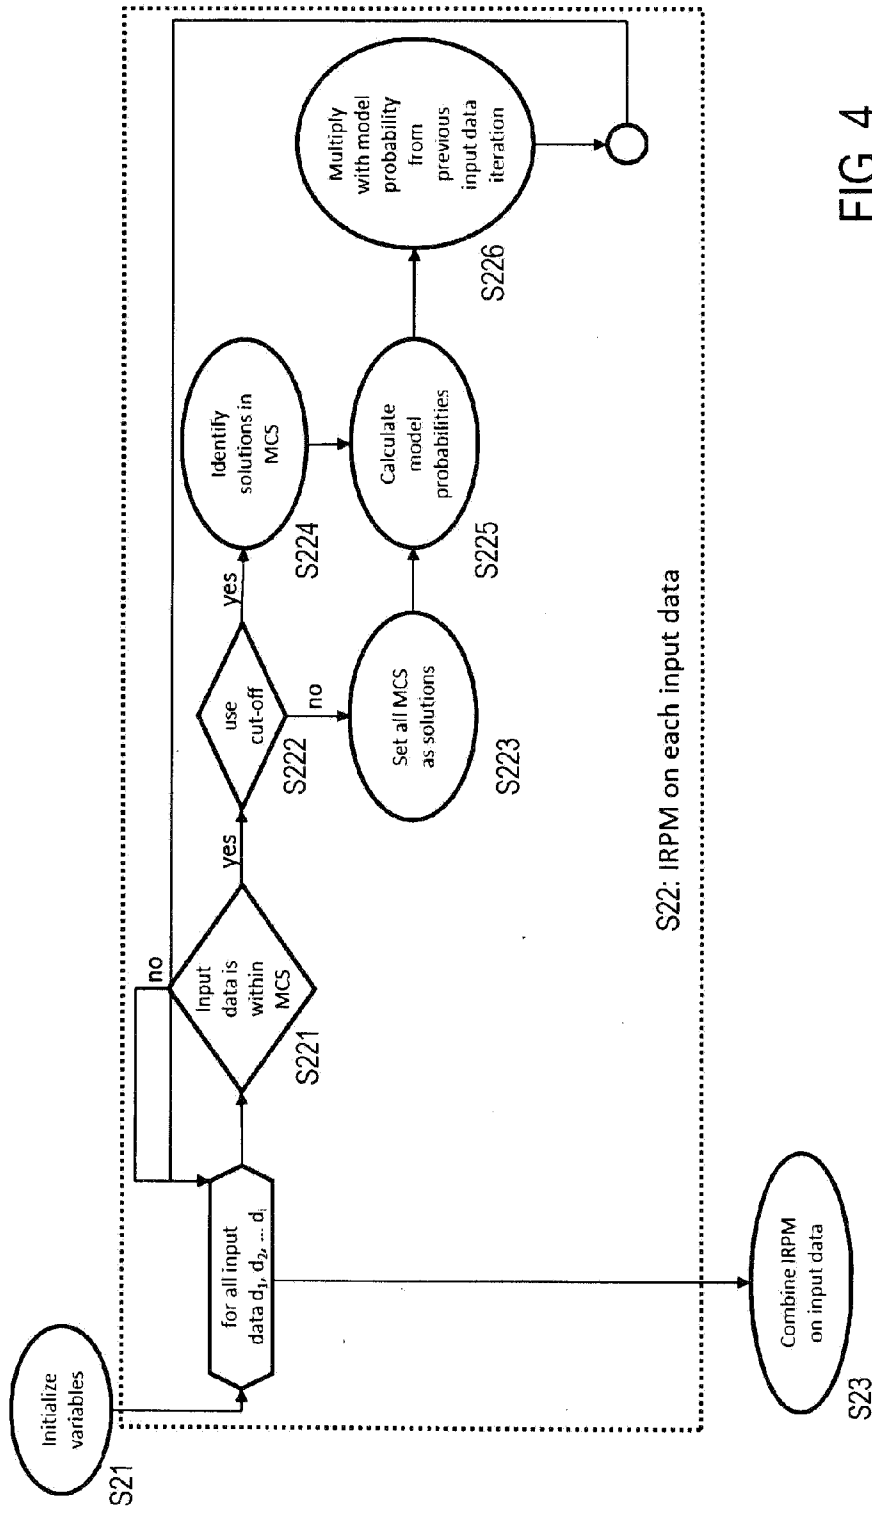


FIG. 4

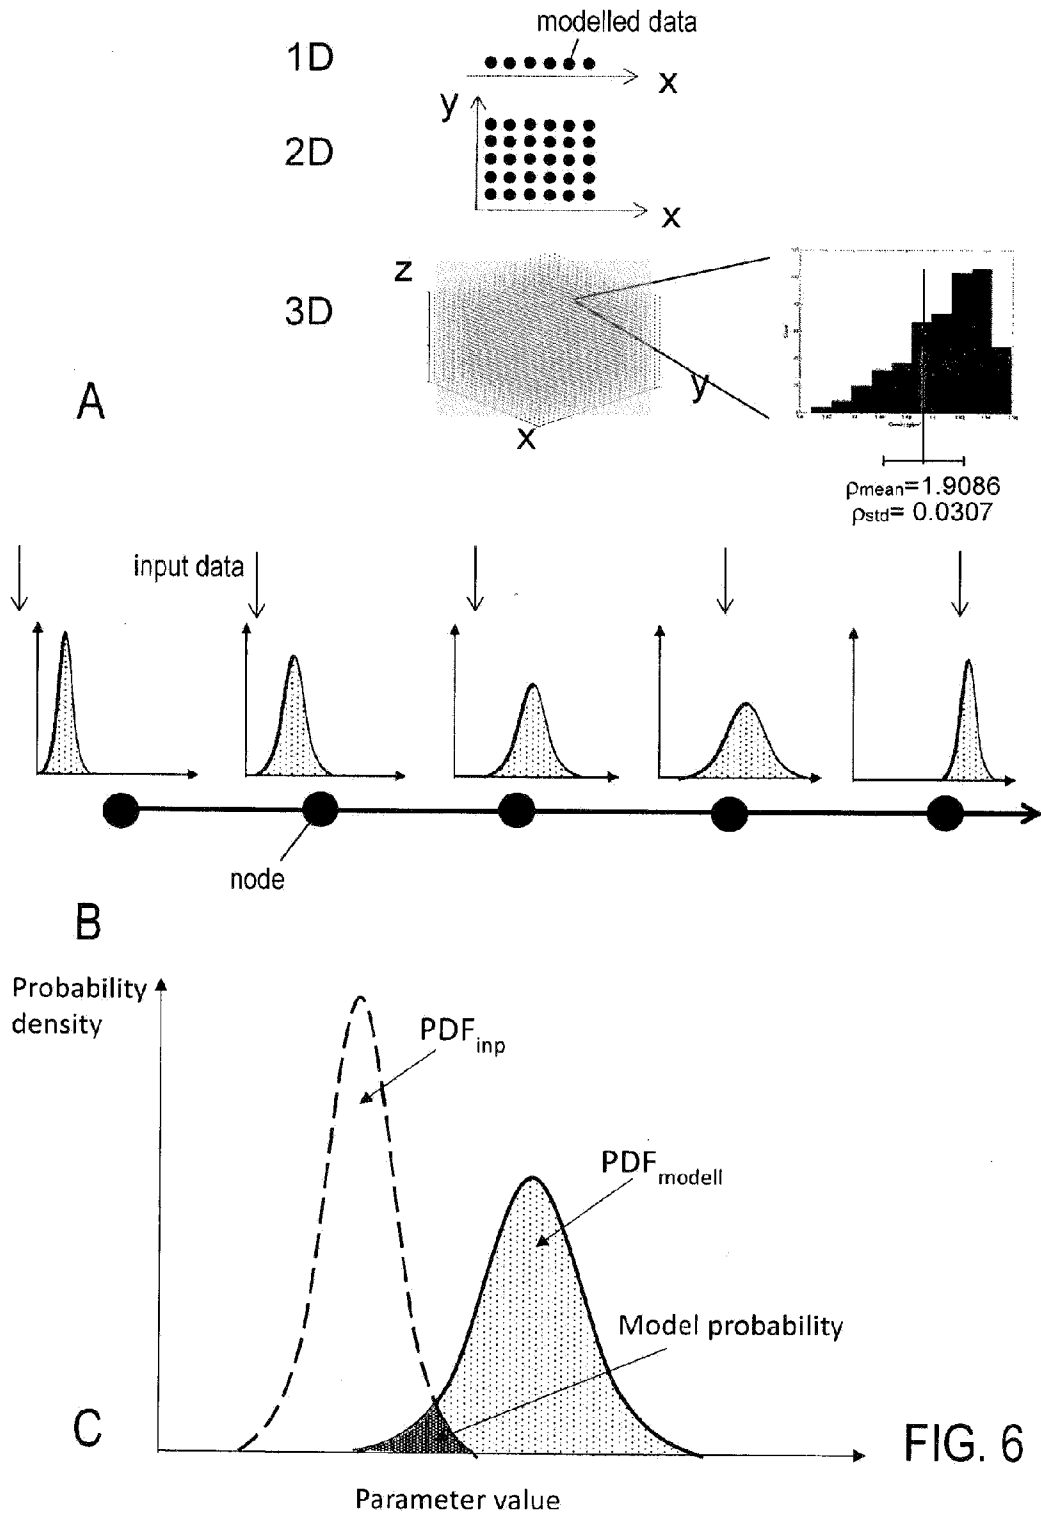


FIG. 6

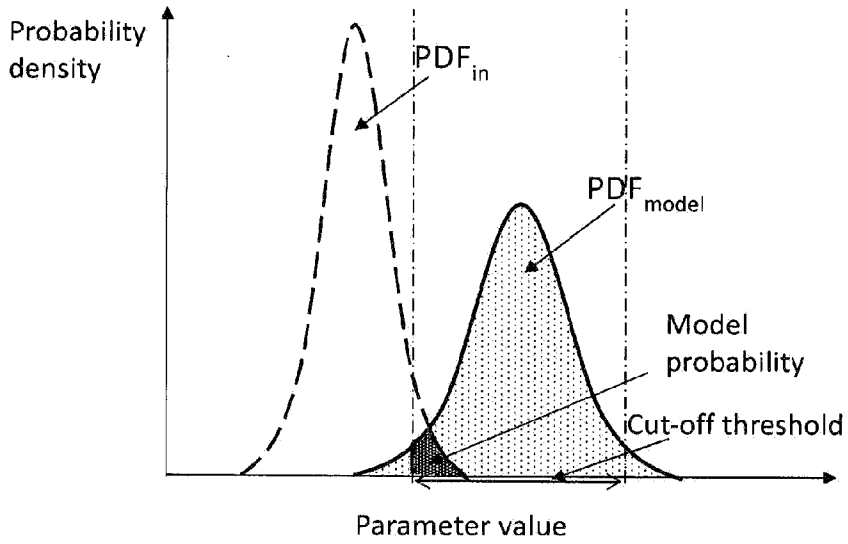


FIG. 7

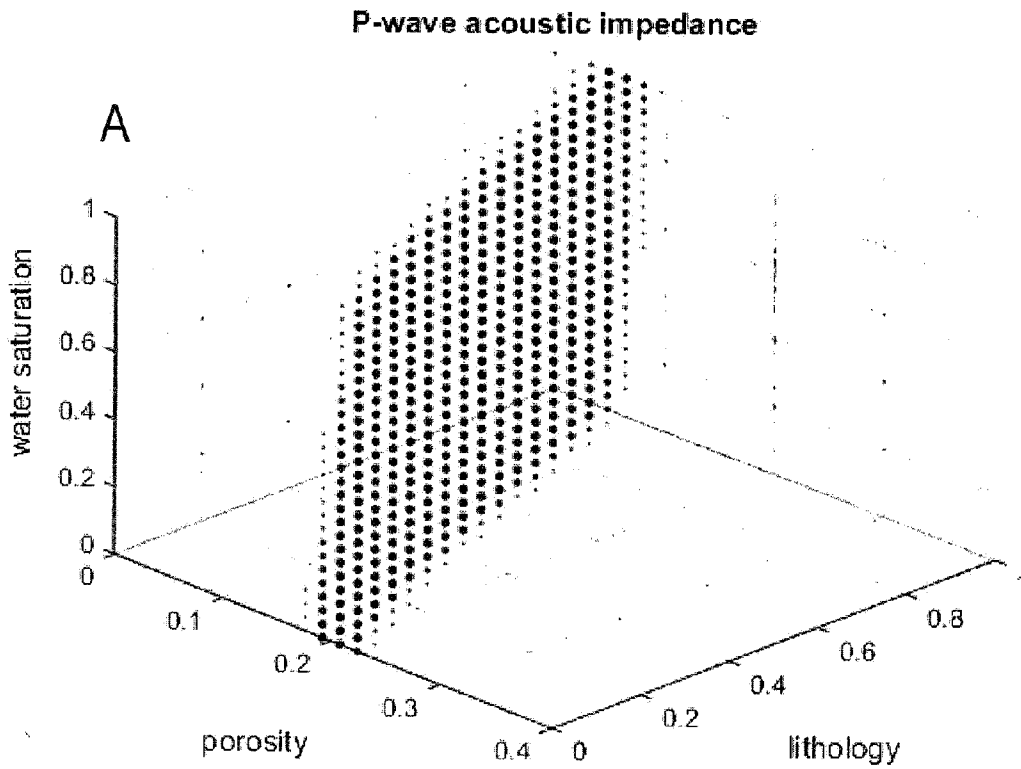


FIG. 8 (A)

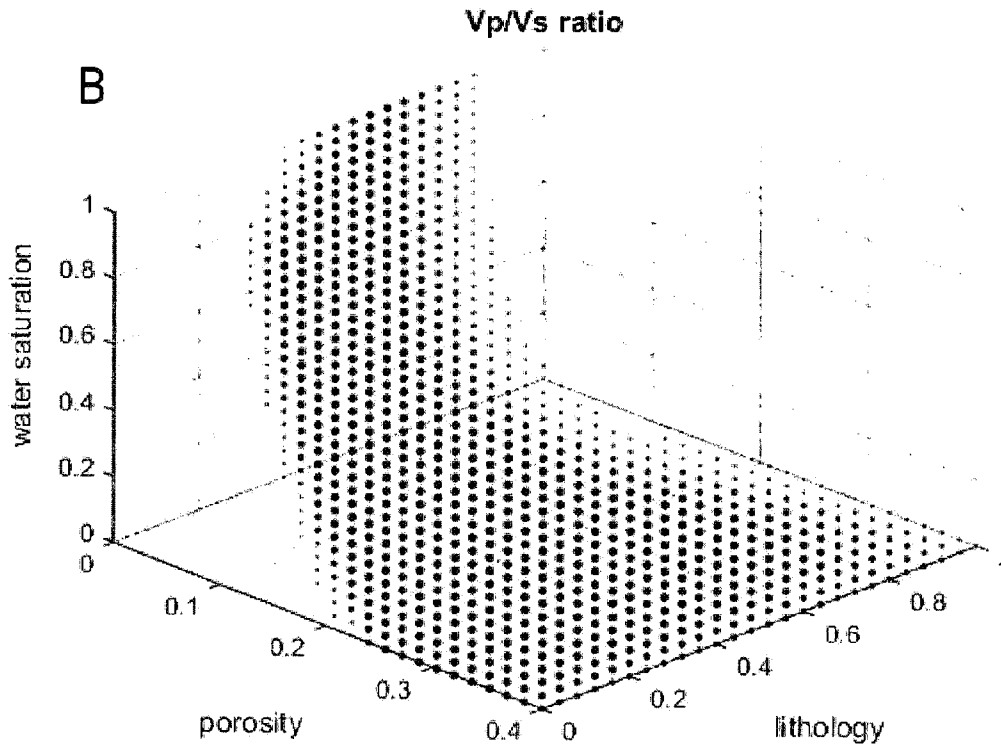
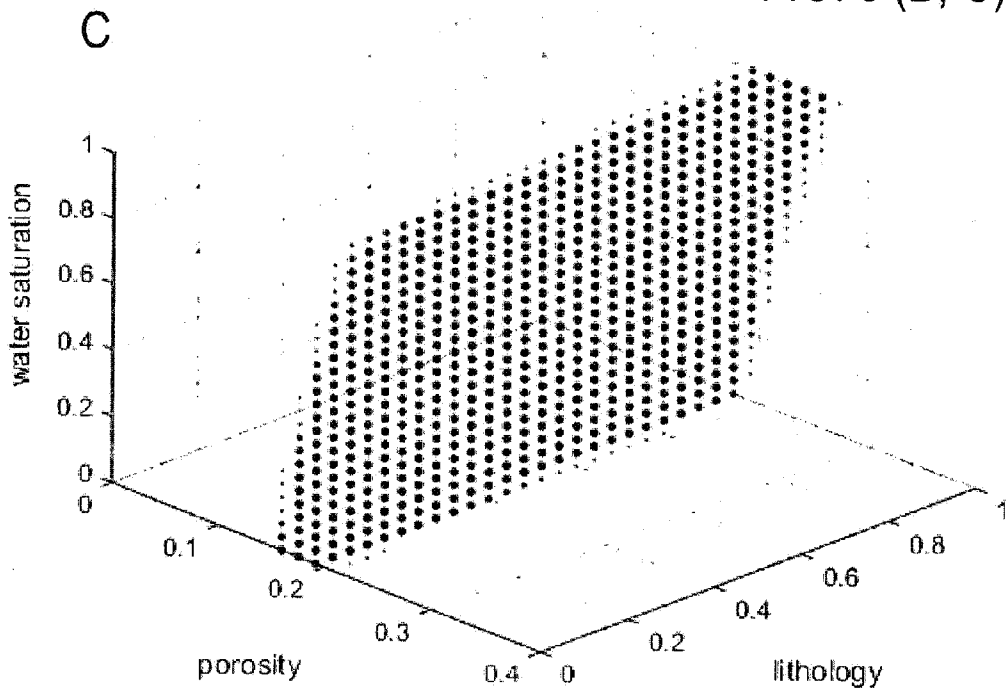


FIG. 8 (B, C)



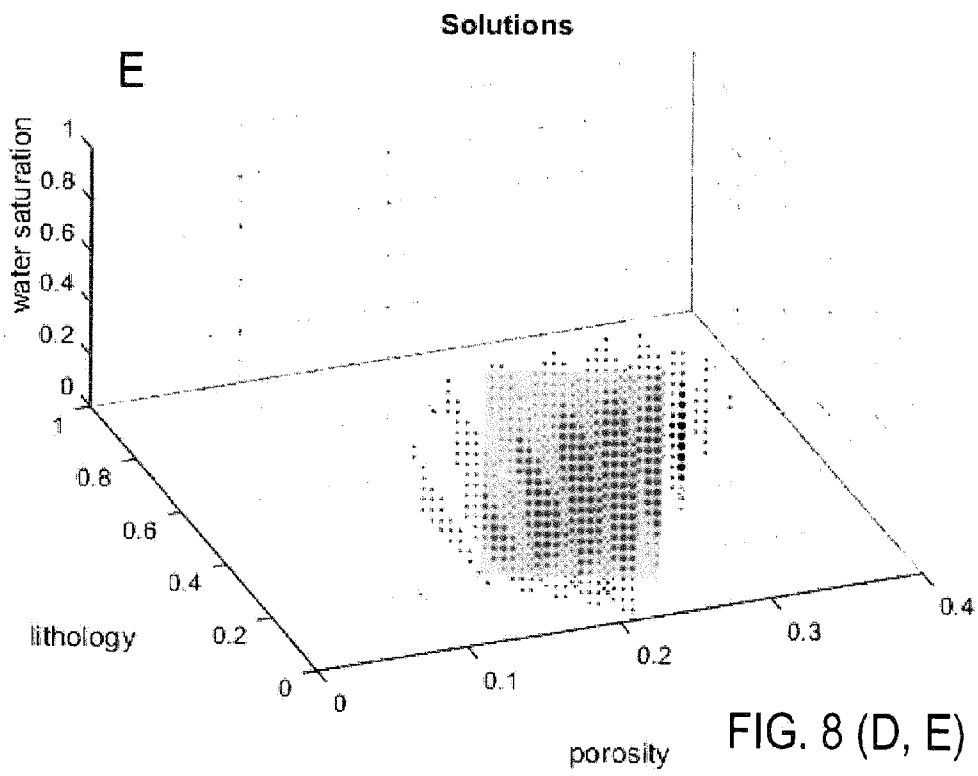
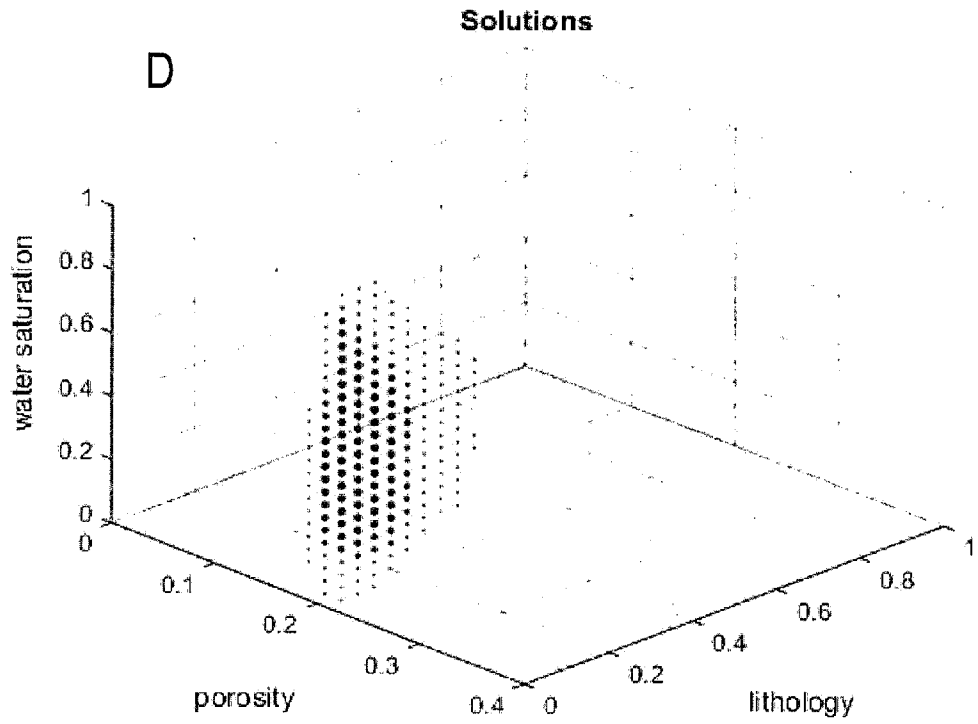


FIG. 8 (D, E)