



(51) International Patent Classification:
A61B 17/80 (2006.01)

(21) International Application Number:
PCT/EP2010/003433

(22) International Filing Date:
8 June 2010 (08.06.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/223,318 6 July 2009 (06.07.2009) US
12/794,951 7 June 2010 (07.06.2010) US

(71) Applicant (for all designated States except US): ZIMMER GMBH [CH/CH]; Sulzer Allee 8, CH-8404 Winterthur (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): KUSTER, Markus [CH/CH]; Peter-und-Paul-Strasse 4, CH-9000 St. Gallen (CH). VELIKOV, Jordan [CH/CH]; Töfweg 3, CH-8044 Gockhausen (CH).

(74) Agent: MANITZ, FINSTERWALD & PARTNER
GBR; Postfach 31 02 20, 80102 München (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: PERIPROSTHETIC BONE PLATES

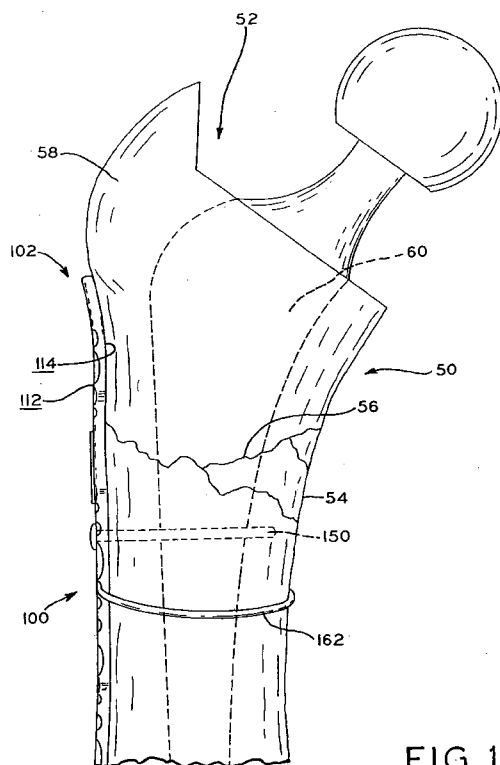


FIG. 1

(57) Abstract: The present disclosure relates to bone plates that are configured for use with bones having periprosthetic fractures. For example, in the event that a proximal femur is fractured in an area that is adjacent to a prosthetic component, such as a femoral stem used in a hip replacement, the periprosthetic bone plates of the present invention may be used. In one exemplary embodiment, the periprosthetic bone plates include a periprosthetic zone having a plurality of central apertures and a plurality of outer apertures that are offset from the central apertures. The periprosthetic zone may further include a plurality of indentations, each indentation extending longitudinally between adjacent outer apertures to narrow a width of the bone plate.



Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

PERIPROSTHETIC BONE PLATES

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority from U.S. Provisional Patent Application Serial No. 61/223,318, entitled "Periprosthetic Bone Plates," filed July 6, 2009, the disclosure of which is hereby expressly incorporated by reference herein in its entirety.

BACKGROUND

1. Field of the Invention.

[0002] The present invention relates to bone plates, and more particularly, to periprosthetic bone plates and methods for implanting the same.

2. Description of the Related Art.

[0003] Bone plates are commonly used to secure adjacent sections of a fractured bone together and to facilitate healing of the fractured bone. Such bone plates may be attached to the fractured bone using a plurality of bone screws. For example, a surgeon may position a bone plate to extend across a fracture line, and then the surgeon may secure the bone plate in place by inserting a plurality of bone screws through apertures in the bone plate and into the patient's bone. However, when fractures of the bone occur in areas adjacent to a prosthetic implant, such as a femoral stem, the prosthetic implant may block areas of the patient's bone intended for the bone screws.

[0004] Periprosthetic bone plates are available for stabilizing a fracture in an area adjacent to a prosthetic implant. Such bone plates may include offset apertures for guiding bone screws into the bone. However, known periprosthetic bone plates suffer from certain disadvantages. First, known periprosthetic bone plates may be configured to direct unicortical bone screws into areas of the bone adjacent to the prosthetic implant to avoid the prosthetic implant. Although

unicortical bone screws may stop short of the prosthetic implant to avoid interfering with and/or damaging the prosthetic implant, unicortical screw anchorage is not as strong as cancellous or bicortical screw anchorage, for example. Also, to accomplish a sufficient offset, known periprosthetic bone plates may include flanges that protrude from the bone plate, with the offset apertures extending through these flanges. However, the flanges may catch onto and strip the patient's muscle tissue while the bone plate is being implanted.

SUMMARY

[0005] The present invention provides bone plates that are configured for use with bones having periprosthetic fractures. For example, in the event that a proximal femur is fractured in an area that is adjacent to a prosthetic component, such as a femoral stem used in a hip replacement, the periprosthetic bone plates of the present invention may be used to accommodate the prosthetic component. In one exemplary embodiment, the periprosthetic bone plates include a periprosthetic zone having a plurality of central apertures and a plurality of outer apertures that are offset from the central apertures. The periprosthetic zone may further include a plurality of indentations, each indentation extending longitudinally between adjacent outer apertures to narrow a width of the bone plate.

[0006] According to an exemplary embodiment of the present invention, a bone plate is provided for use with a bone having a periprosthetic fracture. The bone plate has a longitudinal axis that extends from a first end to a second end of the bone plate. The bone plate includes: a bottom surface configured to face the bone; a top surface opposite the bottom surface; a first side wall and a second side wall joining the top and bottom surfaces; and a periprosthetic zone located at the first end of the bone plate. The periprosthetic zone includes a plurality of outer apertures that extend through the bone plate from the top surface to the bottom surface, the plurality of outer apertures offset from the longitudinal axis in a direction perpendicular to the longitudinal axis, the first and second side walls undulating in the periprosthetic zone such that, along a first length of the bone plate and in a direction from the first end toward the second end of the bone plate, the first side wall narrows inwardly toward the longitudinal axis as the second side wall widens outwardly from the longitudinal axis, and along a second length of the bone plate in the direction from the first end toward the second end of the bone plate, the first side

wall widens outwardly from the longitudinal axis as the second side wall narrows inwardly toward the longitudinal axis.

[0007] According to another exemplary embodiment of the present invention, a bone plate is provided for use with a bone having a periprosthetic fracture. The bone plate has a longitudinal axis that extends from a first end to a second end of the bone plate. The bone plate includes: a planar bottom surface configured to face the bone; a top surface opposite the bottom surface; a plurality of side walls joining the top and bottom surfaces; a plurality of outer apertures that extend through the bone plate from the top surface to the bottom surface, the plurality of outer apertures offset from the longitudinal axis in a direction perpendicular to the longitudinal axis; and a plurality of indentations in the side walls, each indentation extending longitudinally between adjacent outer apertures to narrow the bone plate in a direction perpendicular to the longitudinal axis of the bone plate.

[0008] According to yet another exemplary embodiment of the present invention, a method is provided for repairing a bone having a periprosthetic fracture, the bone including a prosthetic component implanted therein. The method includes the step of providing a bone plate having a longitudinal axis that extends from a first end to a second end, the bone plate including a periprosthetic zone located at the first end of the bone plate, the periprosthetic zone including a plurality of outer apertures offset from the longitudinal axis in a direction perpendicular to the longitudinal axis, the plurality of outer apertures extending through the bone plate substantially in parallel, the bone plate narrowing inwardly toward the longitudinal axis between adjacent outer apertures. The method also includes the step of securing the bone plate onto the bone by inserting a bone screw into one of the plurality of outer apertures while avoiding the prosthetic component.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] The above-mentioned and other features and advantages of this invention, and the manner of attaining them, will become more apparent and the invention itself will be better understood by reference to the following description of embodiments of the invention taken in conjunction with the accompanying drawings, wherein:

[0010] Figure 1 is an elevational view of a portion of an exemplary bone plate of the present invention secured onto a fractured proximal femur, the femur having a femoral hip stem implanted therein;

[0011] Figure 2 is a perspective view of the bone plate of Figure 1;

[0012] Figure 3 is a top plan view of the bone plate of Figure 1;

[0013] Figure 4 is an elevational view of the bone plate of Figure 1;

[0014] Figure 5 is an elevational view of a portion of the bone plate of Figure 1 secured onto the femur, the bone plate spaced apart from the femur with a spacer;

[0015] Figure 5A is a cross-sectional view of the encircled portion of Figure 5;

[0016] Figure 6 is a cross-sectional view of a portion of the bone plate of Figure 1 showing an aperture in the bone plate;

[0017] Figure 7 is a view similar to Figure 6 showing a bone screw in the aperture of the bone plate and a locking cap;

[0018] Figure 8 is a view similar to Figure 7 showing the locking cap in the aperture of the bone plate, the locking cap securing the bone screw in an angled arrangement;

[0019] Figure 8A is a cross-sectional view of the encircled portion of Figure 8;

[0020] Figure 9 is a view similar to Figure 8 showing the locking cap in the aperture of the bone plate, the locking cap securing the bone screw in a perpendicular arrangement;

[0021] Figure 9A is a cross-sectional view of the encircled portion of Figure 9;

[0022] Figure 10 is a perspective view of another exemplary bone plate of the present invention;

[0023] Figure 11 is a top plan view of the bone plate of Figure 10;

[0024] Figure 12 is an elevational view of the bone plate of Figure 10;

[0025] Figure 13 is a top plan view of yet another exemplary bone plate of the present invention;

[0026] Figure 14 is a top plan view of still yet another exemplary bone plate of the present invention;

[0027] Figure 15 is a perspective view of a portion of still yet another exemplary bone plate of the present invention having a modular trochanteric zone detached from the bone plate; and

[0028] Figure 16 is a perspective view of a portion of the bone plate of Figure 15, showing the modular trochanteric zone attached to the bone plate.

[0029] Corresponding reference characters indicate corresponding parts throughout the several views. The exemplifications set out herein illustrate exemplary embodiments of the invention and such exemplifications are not to be construed as limiting the scope of the invention in any manner.

DETAILED DESCRIPTION

[0030] Figure 1 depicts a patient's proximal femur 50 having proximal end 52, a distal end (not shown), and shaft 54 extending therebetween. Shaft 54 of femur 50 includes fracture 56. In the illustrated embodiment, a prosthetic component, specifically femoral stem 60 of a hip replacement system, is implanted into the patient's proximal femur 50. As shown in Figure 1, fracture 56 in femur 50 is located adjacent to femoral stem 60.

[0031] As shown in Figure 1, bone plate 100 is secured onto shaft 54 of femur 50 to extend across fracture 56. Although bone plate 100 is described and depicted herein as being secured onto a patient's femur 50, bone plate 100 may be sized for securement onto a patient's tibia, fibula, humerus, radius, ulna, or another long bone.

[0032] Referring to Figures 2-4, bone plate 100 of the present invention is provided for use on proximal end 52 of femur 50. Bone plate 100 is configured for use on a patient's left leg,

although a mirror image plate may be provided for use on a patient's right leg. Bone plate 100 includes proximal end 102 and distal end 104. Proximal end 102 of bone plate 100 is configured to rest against proximal end 52 of femur 50, with bone plate 100 extending distally along shaft 54 of femur 50 and across fracture 56 (Figure 1). Bone plate 100 also includes longitudinal axis 106 and side walls 108, 110, that extend from proximal end 102 to distal end 104 of bone plate 100. Rather than being a straight line, longitudinal axis 106 of bone plate 100 may have a slight bend to accommodate the shape of the patient's bone.

[0033] Bone plate 100 further includes a first, exposed surface 112 and a second, bone-facing surface 114 that span between side walls 108, 110. According to an exemplary embodiment of the present invention, and as shown in Figures 2 and 4, surfaces 112, 114, of bone plate 100 are generally planar to facilitate smooth insertion of the bone plate 100 beneath muscle tissue of the patient. For example, as disclosed in co-pending U.S. Patent Application Serial No. 12/683,962, entitled "A Plate for the Treatment of Bone Fractures," filed January 7, 2010, the disclosure of which is expressly incorporated by reference herein in its entirety, exposed surface 112 of bone plate 100 may have a central planar region near longitudinal axis 106 in a cross-section perpendicular to longitudinal axis 106, and bone-facing surface 114 of bone plate 100 may have outer planar regions near side walls 108, 110, in the same cross-section perpendicular to longitudinal axis 106. It is within the scope of the present invention that surfaces 112, 114, of bone plate 100 may be contoured to the shape of femur 50 (Figure 1). For example, as disclosed in the above-incorporated U.S. Patent Application Serial No. 12/683,962, bone-facing surface 114 of bone plate 100 may include a concave region between the outer planar regions that is configured to wrap around femur 50.

[0034] To accommodate bones of different sizes, bone plate 100 may be provided in various sizes. For example, bone plate 100 may vary in length L along longitudinal axis 106 from approximately 245 mm to approximately 401 mm. According to an exemplary embodiment of the present invention, a set of bone plates 100 may be provided in lengths of 245 mm, 285 mm, 324 mm, 363 mm, and 401 mm, for example.

[0035] Bone plate 100 includes periprosthetic zone 120, non-periprosthetic zone 122, and transition zone 124 located between periprosthetic zone 120 and non-periprosthetic zone 122.

As shown in Figure 3, periprosthetic zone 120 is located near proximal end 102 of bone plate 100 and non-periprosthetic zone 122 is located near distal end 104 of bone plate 100.

[0036] Bone plate 100 may progressively decrease in width W (between side walls 108, 110) from periprosthetic zone 120, to transition zone 124, to non-periprosthetic zone 122, as shown in Figure 3. For example, bone plate 100 may be about 25 mm wide in periprosthetic zone 120, about 16 mm wide in transition zone 124, and about 14.5 mm wide in non-periprosthetic zone 122.

[0037] Also, bone plate 100 may vary in thickness T (between exposed surface 112 and bone-facing surface 114) across periprosthetic zone 120, transition zone 124, and non-periprosthetic zone 122, as shown in Figure 4. In an exemplary embodiment, the thickness T of bone plate 100 may be greatest in transition zone 124, with the thickness T of bone plate 100 decreasing in both periprosthetic zone 120 and non-periprosthetic zone 122. For example, bone plate 100 may be about 5 mm thick in periprosthetic zone 120, about 5.7 mm thick in transition zone 124, and about 4.8 mm thick in non-periprosthetic zone 122. Due to the varied thickness T of bone plate 100, the strength of bone plate 100 may vary across its length L . For example, transition zone 124 of bone plate 100 may be stronger than periprosthetic zone 120 and/or non-periprosthetic zone 122 of bone plate 100.

[0038] As shown in Figure 3, exposed surface 112 of bone plate 100 includes a plurality of concave scallops 126, 127, 128, of various sizes. Scallops 126, 127, 128, are arranged along side walls 108, 110, of bone plate 100 to narrow the thickness T (Figure 4) of bone plate 100 and to control the mechanical resistance of bone plate 100. For example, bone plate 100 may be configured to bend along large scallops 128 to a greater extent than along small scallops 126. Each scallop 126, 127, 128, may have a maximum depth along its corresponding side wall 108, 110, of bone plate 100, with each scallop 126, 127, 128, gradually decreasing in depth inwardly toward longitudinal axis 106 of bone plate 100, as shown in Figure 2.

[0039] Within periprosthetic zone 120, bone plate 100 includes a plurality of central apertures 130 that are generally aligned along longitudinal axis 106 of bone plate 100, as shown in Figure

3. Bone plate 100 also includes a plurality of outer apertures 132, 134, positioned alongside central apertures 130.

[0040] As shown in Figure 3, outer apertures 132, 134, are horizontally offset (e.g., medially/laterally offset, anteriorly/posteriorly offset) from central apertures 130. For example, in the illustrated embodiment of Figure 3, outer apertures 132 are horizontally offset from adjacent central apertures 130 in the direction of arrow A, and outer apertures 134 are horizontally offset from adjacent central apertures 130 in the direction of arrow B. The center of each outer aperture 132, 134, may be horizontally offset from the center of the adjacent central aperture 130 by approximately 5 mm, 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, or more. In an exemplary embodiment, the center of each outer aperture 132, 134, is horizontally offset from the center of the adjacent central aperture 130 by approximately 7.5 mm, such that the centers of outer apertures 132, 134, are horizontally offset from one another by approximately 13 mm. In certain embodiments, outer apertures 132 may be arranged in a first row that is generally parallel to central apertures 130, and outer apertures 134 may be arranged in a second row that is also generally parallel to central apertures 130.

[0041] Also, as shown in Figure 3, outer apertures 132, 134 are vertically offset (e.g., proximally/distally offset) from central apertures 130 and each other. For example, in the illustrated embodiment of Figure 3, outer apertures 132 are vertically offset from adjacent central apertures 130 in the direction of arrow C, and outer apertures 134 are vertically offset from adjacent central apertures 130 in the direction of arrow D. The center of each outer aperture 132, 134, may be vertically offset from the center of the adjacent central aperture 130 by approximately 5 mm, 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, or more. By vertically offsetting outer apertures 132, 134, from central apertures 130 along arrows C, D, the width W of bone plate 100 may be reduced. If central apertures 130 and outer apertures 132, 134, were all aligned in a direction perpendicular to longitudinal axis 106, on the other hand, bone plate 100 would have to be sufficiently wide in this perpendicular direction to accommodate all three apertures 130, 132, 134.

[0042] According to an exemplary embodiment of the present invention, three apertures 130, 132, 134, may be organized in a subset 136 that extends diagonally across bone plate 100, as

shown in Figure 3. Bone plate 100 may include a plurality of spaced-apart subsets 136 across its length. In certain embodiments, the entire subset 136 of apertures 130, 132, 134, is vertically offset (e.g., proximally/distally offset) from the adjacent subset 136. Large scallops 128 may extend between adjacent subsets 136, with small scallops 126 and medium scallops 127 extending into each subset 136, as shown in Figure 3.

[0043] In certain embodiments, outer apertures 132, 134, may extend inwardly toward longitudinal axis 106 from exposed surface 112 to bone-facing surface 114 of bone plate 100, such that bone screws 150 (Figure 1) located in outer apertures 132, 134, will point toward one another beneath bone-facing surface 114 of bone plate 100. In other embodiments, outer apertures 132, 134, may extend substantially parallel to central apertures 130, or even slightly outwardly from longitudinal axis 106, from exposed surface 112 to bone-facing surface 114 of bone plate 100. With central apertures 130 and outer apertures 132, 134, extending in parallel, bone screws 150 may be able to extend around even a large implant, like hip stem 60, as shown in Figure 1. Thus, bone plate 100 may be secured in place using bicortical or cancellous bone screws 150 that extend around and beyond hip stem 60.

[0044] As shown in Figure 3, side walls 108, 110, may undulate within periprosthetic zone 120. For example, side walls 108, 110 of bone plate 100 may include concave indentations 140, with adjacent indentations 140 forming apex 142 therebetween. Each indentation 140 may follow an arcuate path between each apex 142, reaching a maximum depth in bone plate 100 at base 144. The undulating pattern may increase in intensity toward proximal end 102 of bone plate 100, with indentations 140 increasing in length and/or depth toward proximal end 102 of bone plate 100.

[0045] Along side wall 108 of bone plate 100, indentations 140 may extend between adjacent outer apertures 132, such that bone plate 100 widens enough at apex 142 to accommodate outer apertures 132 but narrows between adjacent outer apertures 132. Similarly, along side wall 110 of bone plate 100, indentations 140 may extend between adjacent outer apertures 134, such that bone plate 100 widens enough at apex 142 to accommodate outer apertures 134 but narrows between adjacent outer apertures 134.

[0046] By vertically offsetting outer apertures 132, 134, from central apertures 130, as discussed above, the width W of bone plate 100 may be reduced, because outer apertures 132, 134, may be bordered by at least one indentation on the opposite side wall 108, 110 (e.g., side wall 108, 110, opposite from apex 142). In an exemplary embodiment, the overall width W of bone plate 100 in periprosthetic zone 120, measured between apex 142 on side wall 108 and apex 142 on side wall 110, is about 25 mm. However, at any one point along longitudinal axis 106, such as between apex 142 on side wall 108 and base 144 on side wall 110, the width W of bone plate 100 in periprosthetic zone 120 may be about 3 mm, 4 mm, or 5 mm less, such as about 21 mm. The width W of bone plate 100 within periprosthetic zone 120 may reach a minimum along central apertures 130, because central apertures 130 may be bordered by indentations 140 along both side walls 108, 110. The smooth shape of side walls 108, 110, and the narrow width W of bone plate 100 within periprosthetic zone 120 facilitate smooth insertion of bone plate 100 beneath the muscle tissue of the patient.

[0047] According to an exemplary embodiment of the present invention, in a direction perpendicular to longitudinal axis 106, each apex 142 is aligned with an opposing base 144, as shown in Figure 3. Therefore, when one side wall 108 of bone plate 100 reaches a maximum width at apex 142, the other side wall 110 of bone plate 100 reaches a minimum width at base 144. In this embodiment, indentations 140 on opposing side walls 108, 110, may cooperate to maintain a substantially constant width W of bone plate 100 within periprosthetic zone 120. This simultaneous, opposite behavior of side walls 108, 110, further facilitates smooth insertion of bone plate 100 beneath the muscle tissue of the patient. When bone plate 100 is implanted, side walls 108, 110, will slide across the patient's muscle tissue. As side wall 108 gradually widens toward apex 142, side wall 108 will extend deeper and deeper into the muscle tissue along side wall 108. At the same time, side wall 110 will gradually narrow toward base 144 and gradually free itself from the muscle tissue along side wall 110. Resistance from muscle tissue along side wall 108 may force bone plate 100 back toward the muscle tissue along side wall 110, thereby reducing the risk of shredding the muscle tissue along side wall 108. This cooperation between side walls 108, 110, continues along the length of periprosthetic zone 120.

[0048] Like periprosthetic zone 120, non-periprosthetic zone 122 and transition zone 124 of bone plate 100 may include a plurality of central apertures 130 that are generally aligned along longitudinal axis 106 of bone plate 100. However, unlike periprosthetic zone 120, non-periprosthetic zone 122 and transition zone 124 may not require outer apertures 132, 134. For this reason, bone plate 100 may be narrower in non-periprosthetic zone 122 and transition zone 124 than in periprosthetic zone 120, as shown in Figure 3.

[0049] In operation, and as shown in Figures 1 and 2, a surgeon may secure bone plate 100 onto the patient's femur 50 using bone screws 150 without interfering with and/or damaging hip stem 60. In proximal end 52 of femur 50 adjacent to hip stem 60, the surgeon may offset bone screws 150 from hip stem 60 by inserting bone screws 150 into outer apertures 132, 134, rather than central apertures 130, in periprosthetic zone 120 of bone plate 100. For example, in the illustrated embodiment of Figure 1, bone screws 150 may be anteriorly and/or posteriorly offset from hip stem 60. Because bone screws 150 may be entirely offset from hip stem 60, bone plate 100 may be secured in place using bicortical or cancellous bone screws 150, as shown in Figure 1. Bicortical or cancellous bone screws 150 may strengthen the fixation between femur 50 and bone plate 100, while still avoiding hip stem 60. Rather than avoiding central apertures 130 in periprosthetic zone 120 of bone plate 100, it is also within the scope of the present invention that the surgeon may insert unicortical screws into those central apertures 130 that stop short of hip stem 60. In the distal end (not shown) of femur 50 beneath hip stem 60, the surgeon may insert bicortical, cancellous, or unicortical bone screws 150 centrally into femur 50 by inserting bone screws 150 into central apertures 130 in non-periprosthetic zone 122 and transition zone 124 of bone plate 100. In this distal region of femur 50, the surgeon will not risk interfering with and/or damaging hip stem 60. Suitable cancellous bone screws may be about 4 mm in length, and suitable bicortical bone screws may be about 5 mm in length.

[0050] According to an exemplary embodiment of the present invention, bone plate 100, and specifically periprosthetic zone 120 of bone plate 100, may be spaced apart from femur 50. For example, as shown in Figures 5 and 5A, the surgeon may insert spacers 160 into unoccupied central apertures 130 of bone plate 100 to elevate bone-facing surface 114 of bone plate 100 off of femur 50. Spacers 160 may be provided in various sizes, such as 1 mm, 2 mm, and 3 mm in

length, to alter the spacing between bone plate 100 and femur 50. Advantageously, spacing bone plate 100 apart from femur 50 may allow adequate blood flow to the periosteum of femur 50, thereby facilitating healing of femur 50.

[0051] According to another exemplary embodiment of the present invention, bone plate 100 may accommodate polyaxial bone screws 150 in central apertures 130, as well as in outer apertures 132, 134. Apertures 130, 132, 134, may be sized to receive bone screws 150 in a perpendicular arrangement, as shown in Figures 9 and 9A, or in an angled arrangement, as shown in Figures 8 and 8A. In the angled arrangement of Figure 8, bone screw 150 may be offset up to 15 degrees in any direction from the perpendicular arrangement of Figure 9. To maintain bone screw 150 in the desired position, the surgeon may insert locking cap 152 into the corresponding aperture 130, 132, 134, and onto bone screw 150. Advantageously, polyaxial bone screws 150 enable the surgeon to manipulate and position bone screws 150 in the desired portion of femur 50 while avoiding hip stem 60 (Figure 1), if necessary.

[0052] As shown in Figures 1 and 2, bone plate 100 may include wire apertures 164 that are sized for receipt of cerclage wire 162 therethrough. In operation, before inserting bone screws 150 into femur 50, the surgeon may initially secure bone plate 100 onto femur 50 by wrapping wire 162 through apertures 164 of bone plate 100 and around femur 50. Alternatively, if the surgeon determines that femur 50 is not in the proper condition to receive bone screws 150, the surgeon may secure bone plate 100 onto femur 50 using wire 162 instead of bone screws 150.

[0053] Referring next to Figures 10-12, bone plate 200 of the present invention is provided for use on a distal femur (not shown). Bone plate 200 is configured for use on a patient's right leg, although a mirror image plate may be provided for use on a patient's left leg. Bone plate 200 is similar to bone plate 100, with like reference numerals indicating like elements.

[0054] Bone plate 200 includes periprosthetic zone 220, non-periprosthetic zone 222, and transition zone 224 located between periprosthetic zone 220 and non-periprosthetic zone 222. As shown in Figure 11, periprosthetic zone 220 is located near distal end 204 of bone plate 200 and non-periprosthetic zone 222 is located near proximal end 202 of bone plate 200. Bone plate 200 also includes longitudinal axis 206 and side walls 208, 210, that extend from proximal end

202 to distal end 204 of bone plate 100. Rather than being a straight line, longitudinal axis 206 of bone plate 200 may have a slight bend to accommodate the shape of the patient's bone.

[0055] In operation, distal end 204 of bone plate 200 is configured to rest against the distal end (not shown) of femur 50, with bone plate 200 extending proximally along shaft 54 of femur 50 and across fracture 56 (Figure 1). With periprosthetic zone 220 of bone plate 200 located at distal end 204 of bone plate 200, the surgeon may avoid interfering with and/or damaging a prosthetic component implanted in the patient's distal femur, such as a femoral stem of a knee replacement system (not shown).

[0056] Bone plate 200 further includes a first, exposed surface 212 and a second, bone-facing surface 214 that span between side walls 208, 210. According to an exemplary embodiment of the present invention, and as shown in Figure 10, surfaces 212, 214, of bone plate 200 are generally planar to facilitate smooth insertion of the bone plate 200 beneath muscle tissue of the patient. For example, as disclosed in the above-incorporated U.S. Patent Application Serial No. 12/683,962, exposed surface 212 of bone plate 200 may have a central planar region near longitudinal axis 206 in a cross-section perpendicular to longitudinal axis 206, and bone-facing surface 214 of bone plate 200 may have outer planar regions near side walls 208, 210, in the same cross-section perpendicular to longitudinal axis 206. It is within the scope of the present invention that surfaces 212, 214, of bone plate 200 may be contoured to the shape of femur 50 (Figure 1). For example, as disclosed in the above-incorporated U.S. Patent Application Serial No. 12/683,962, bone-facing surface 214 of bone plate 200 may include a concave region between the outer planar regions that is configured to wrap around femur 50.

[0057] To accommodate bones of different sizes, bone plate 200 may be provided in various sizes. For example, bone plate 200 may vary in length L along longitudinal axis 206 from approximately 238 mm to approximately 393 mm. According to an exemplary embodiment of the present invention, a set of bone plates 200 may be provided in lengths of 238 mm, 278 mm, 316 mm, 355 mm, and 393 mm, for example.

[0058] As shown in Figure 11, exposed surface 212 of bone plate 200 includes a plurality of concave scallops 226, 227, 228, of various sizes. Scallops 226, 227, 228, are arranged along side

walls 208, 210, of bone plate 100 to narrow the thickness T (Figure 12) of bone plate 200 and to control the mechanical resistance of bone plate 200. For example, bone plate 200 may be configured to bend along large scallops 228 to a greater extent than along small scallops 226. Each scallop 226, 227, 228, may have a maximum depth along its corresponding side wall 208, 210, of bone plate 200, with each scallop 226, 227, 228, gradually decreasing in depth inwardly toward longitudinal axis 206 of bone plate 200, as shown in Figure 10.

[0059] Within periprosthetic zone 220, bone plate 200 includes a plurality of central apertures 230 that are generally aligned along longitudinal axis 206 of bone plate 200, as shown in Figure 11. Bone plate 200 also includes a plurality of outer apertures 232, 234, positioned alongside central apertures 230.

[0060] As shown in Figure 11, outer apertures 232, 234, are horizontally offset (e.g., medially/laterally offset, anteriorly/posteriorly offset) from central apertures 230. The center of each outer aperture 232, 234, may be horizontally offset from the center of the adjacent central aperture 230 by approximately 5 mm, 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, or more. In an exemplary embodiment, the center of each outer aperture 232, 234, is horizontally offset from the center of the adjacent central aperture 230 by approximately 7.5 mm, such that the centers of outer apertures 232, 234, are horizontally offset from one another by approximately 13 mm. In certain embodiments, outer apertures 232 may be arranged in a first row that is generally parallel to central apertures 230, and outer apertures 234 may be arranged in a second row that is also generally parallel to central apertures 230.

[0061] Also, as shown in Figure 11, outer apertures 232, 234 are vertically offset (e.g., proximally/distally offset) from central apertures 230 and each other. The center of each outer aperture 232, 234, may be vertically offset from the center of the adjacent central aperture 230 by approximately 5 mm, 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, or more. By vertically offsetting outer apertures 232, 234, from central apertures 230, the width W of bone plate 200 may be reduced. If central apertures 230 and outer apertures 232, 234, were all aligned in a direction perpendicular to longitudinal axis 206, on the other hand, bone plate 200 would have to be sufficiently wide in this perpendicular direction to accommodate all three apertures 230, 232, 234.

[0062] According to an exemplary embodiment of the present invention, three apertures 230, 232, 234, may be organized in a subset 236 that extends diagonally across bone plate 200, as shown in Figure 11. Bone plate 200 may include a plurality of spaced-apart subsets 236 across its length. In certain embodiments, the entire subset 236 of apertures 230, 232, 234, is vertically offset (e.g., proximally/distally offset) from the adjacent subset 236. Large scallops 228 may extend between adjacent subsets 236, with small scallops 226 and medium scallops 227 extending into each subset 236, as shown in Figure 11.

[0063] In certain embodiments, outer apertures 232, 234, may extend inwardly toward longitudinal axis 206 from exposed surface 212 to bone-facing surface 214 of bone plate 200, such that bone screws 150 (Figure 1) located in outer apertures 232, 234, will point toward one another beneath bone-facing surface 214 of bone plate 200. In other embodiments, outer apertures 232, 234, may extend substantially parallel to central apertures 230, or even slightly outwardly from longitudinal axis 206, from exposed surface 212 to bone-facing surface 214 of bone plate 200. With central apertures 230 and outer apertures 232, 234, extending in parallel, bone screws 150 may be able to extend around and beyond the knee implant. Thus, bone plate 200 may be secured in place using bicortical or cancellous bone screws 150, while still avoiding the knee implant.

[0064] As shown in Figure 11, side walls 208, 210, may undulate within periprosthetic zone 220. For example, side walls 208, 210 of bone plate 200 may include concave indentations 240, with adjacent indentations 240 forming apex 242 therebetween. Each indentation 240 may follow an arcuate path between each apex 242, reaching a maximum depth in bone plate 200 at base 244. The undulating pattern may increase in intensity toward proximal end 202 of bone plate 200, with indentations 240 increasing in length and/or depth toward proximal end 202 of bone plate 200.

[0065] Along side wall 208 of bone plate 200, indentations 240 may extend between adjacent outer apertures 232, such that bone plate 200 widens enough at apex 242 to accommodate outer apertures 232 but narrows between adjacent outer apertures 232. Similarly, along side wall 210 of bone plate 200, indentations 240 may extend between adjacent outer apertures 234, such that

bone plate 200 widens enough at apex 242 to accommodate outer apertures 234 but narrows between adjacent outer apertures 234.

[0066] By vertically offsetting outer apertures 232, 234, from central apertures 230, as discussed above, the width W of bone plate 200 may be reduced, because outer apertures 232, 234, may be bordered by at least one indentation on the opposite side wall 208, 210 (e.g., side wall 208, 210, opposite from apex 242). In an exemplary embodiment, the overall width W of bone plate 200 in periprosthetic zone 220, measured between apex 242 on side wall 208 and apex 242 on side wall 210, is about 28 mm. However, at any one point along longitudinal axis 206, such as between apex 242 on side wall 208 and base 244 on side wall 210, the width W of bone plate 200 in periprosthetic zone 220 may be about 3 mm, 4 mm, or 5 mm less, such as about 23 mm. The width W of bone plate 200 within periprosthetic zone 220 may reach a minimum along central apertures 230, because central apertures 230 may be bordered by indentations 240 along both side walls 208, 210. The smooth shape of side walls 208, 210, and the narrow width W of bone plate 200 within periprosthetic zone 220 facilitate smooth insertion of bone plate 200 beneath the muscle tissue of the patient.

[0067] According to an exemplary embodiment of the present invention, in a direction perpendicular to longitudinal axis 206, each apex 242 is aligned with an opposing base 244, as shown in Figure 11. Therefore, when one side wall 208 of bone plate 200 reaches a maximum width at apex 242, the other side wall 210 of bone plate 200 reaches a minimum width at base 244. In this embodiment, indentations 240 on opposing side walls 208, 210, may cooperate to maintain a substantially constant width W of bone plate 200 within periprosthetic zone 220. This simultaneous, opposite behavior of side walls 208, 210, further facilitates smooth insertion of bone plate 200 beneath the muscle tissue of the patient, as discussed above with respect to bone plate 100 (Figures 2-4).

[0068] Like periprosthetic zone 220, non-periprosthetic zone 222 and transition zone 224 of bone plate 200 may include a plurality of central apertures 230 that are generally aligned along longitudinal axis 206 of bone plate 200. However, unlike periprosthetic zone 220, non-periprosthetic zone 222 and transition zone 224 may not require outer apertures 232, 234. For

this reason, bone plate 200 may be narrower in non-periprosthetic zone 222 and transition zone 224 than in periprosthetic zone 220, as shown in Figure 11.

[0069] In operation, and as shown in Figure 11, a surgeon may secure bone plate 200 onto the patient's distal femur (not shown) using bone screws 150 (Figure 1) without interfering with and/or damaging a prosthetic component implanted in the patient's distal femur, such as a femoral stem of a knee replacement system (not shown). In the distal end of femur 50 adjacent to the knee implant, the surgeon may offset bone screws 150 from the knee implant by inserting bone screws 150 into outer apertures 232, 234, rather than central apertures 230, in periprosthetic zone 220 of bone plate 200. Because bone screws 150 may be entirely offset from the knee implant, bone plate 200 may be secured in place using bicortical or cancellous bone screws 150. Bicortical or cancellous bone screws 150 may strengthen the fixation between femur 50 and bone plate 200, while still avoiding the knee implant. Rather than avoiding central apertures 230 in periprosthetic zone 220 of bone plate 200, it is also within the scope of the present invention that the surgeon may insert unicortical screws into those central apertures 230 that stop short of the knee implant. Toward proximal end 52 of femur 50 above the knee implant, the surgeon may insert bicortical, cancellous, or unicortical bone screws 150 centrally into femur 50 by inserting bone screws 150 into central apertures 230 in non-periprosthetic zone 222 and transition zone 224 of bone plate 200. In this proximal region of femur 50, the surgeon will not risk interfering with and/or damaging the knee implant.

[0070] Like bone plate 100 (Figures 2-4), bone plate 200 may be configured to receive spacers 160 (Figures 5 and 5A), polyaxial bone screws 150 (Figures 6-9), and/or cerclage wire 162 (Figure 1) for securing bone plate 200 onto femur 50.

[0071] Referring next to Figures 13-16, bone plates 300, 400, 500, of the present invention are provided for use on proximal end 52 of femur 50 (Figure 1), much like bone plate 100 described above with reference to Figures 2-4. Bone plates 300, 400, 500, are similar to bone plate 100, with like reference numerals indicating like elements.

[0072] Each bone plate 300, 400, 500, includes periprosthetic zone 320, 420, 520, non-periprosthetic zone 322, 422, 522, and transition zone 324, 424, 524, located between

periprosthetic zone 320, 420, 520, and non-periprosthetic zone 322, 422, 522. Unlike bone plate 100 (Figure 2), each bone plate 300, 400, 500, further includes trochanteric zone 370, 470, 570, that extends proximally beyond periprosthetic zone 320, 420, 520. In operation, the surgeon is able to secure trochanteric zone 370, 470, 570, of the corresponding bone plate 300, 400, 500, onto greater trochanter 58 of femur 50 (Figure 1) for added stability. In the illustrated embodiments of Figures 13-16, each bone plate 300, 400, 500, is ring-shaped in the corresponding trochanteric zone 370, 470, 570, such that bone plate 300, 400, 500, is able to wrap around greater trochanter 58 of femur 50 with bone of femur 50 protruding therethrough, as necessary.

[0073] As shown in Figures 13 and 14, each trochanteric zone 370, 470, may be integrally formed with periprosthetic zone 320, 420, of the corresponding bone plate 300, 400. Alternatively, and as shown in Figures 15 and 16, trochanteric zone 570 may be removably coupled to periprosthetic zone 520 of the corresponding bone plate 500 using suitable fasteners, such as screws 572. In this modular embodiment of Figure 15 and 16, bone plate 500 may be used with or without trochanteric zone 570 attached thereto.

[0074] Additional information regarding the bone plates of the present invention may be found in the above-incorporated U.S. Patent Application Serial No. 12/683,962.

[0075] Additional information regarding methods and tools for implanting the bone plates of the present invention may be found in U.S. Patent Application Serial No. 12/683,953, entitled "Bone Plate Fixation System," filed January 7, 2010, the disclosure of which is hereby expressly incorporated by reference herein in its entirety.

[0076] While this invention has been described as having a preferred design, the present invention can be further modified within the spirit and scope of this disclosure. This application is therefore intended to cover any variations, uses, or adaptations of the invention using its general principles. Further, this application is intended to cover such departures from the present disclosure as come within known or customary practice in the art to which this invention pertains and which fall within the limits of the appended claims.

Claims

5

1. A bone plate for use with a bone having a periprosthetic fracture, the bone plate having a longitudinal axis that extends from a first end to a second end of the bone plate, the bone plate comprising:

10

a bottom surface configured to face the bone;
a top surface opposite the bottom surface;
a first side wall and a second side wall joining the top and bottom surfaces; and

15

a periprosthetic zone located at the first end of the bone plate, the periprosthetic zone comprising a plurality of outer apertures that extend through the bone plate from the top surface to the bottom surface, the plurality of outer apertures offset from the longitudinal axis in a direction perpendicular to the longitudinal axis, the first and

20

second side walls undulating in the periprosthetic zone such that, along a first length of the bone plate and in a direction from the first end toward the second end of the bone plate, the first side wall narrows inwardly toward the longitudinal axis as the second side wall widens outwardly from the longitudinal axis, and along a second

25

length of the bone plate in the direction from the first end toward the second end of the bone plate, the first side wall widens outwardly from the longitudinal axis as the second side wall narrows inwardly toward the longitudinal axis.

2. The bone plate of claim 1, further comprising a plurality of central apertures that extend through the bone plate from the top surface to the bottom surface, the plurality of central apertures located along the longitudinal axis of the bone plate.
- 5
3. The bone plate of claim 2, wherein the plurality of central apertures continue to the second end of the bone plate.
4. The bone plate of claim 2 or 3, wherein the plurality of outer apertures are offset from the central apertures in a direction parallel to the longitudinal axis of the bone plate.
- 10
5. The bone plate of any of claims 2 to 4, wherein the plurality of outer apertures are arranged in two longitudinal rows, a first longitudinal row extending along a first side of the central apertures and a second longitudinal row extending along a second side of the central apertures opposite the first side.
- 15
6. The bone plate of any of the preceding claims, wherein each of the first and second walls include a plurality of indentations in the periprosthetic zone, each indentation extending longitudinally between adjacent outer apertures to narrow the bone plate in a direction perpendicular to the longitudinal axis of the bone plate.
- 20
7. The bone plate of claim 6, further comprising an apex formed between adjacent indentations, the apex aligned with at least one of the plurality of outer apertures in a direction perpendicular to the longitudinal axis of the bone plate.
- 25

8. The bone plate of claim 7, wherein each indentation extends inwardly toward the longitudinal axis of the bone plate until reaching a maximum depth at a base, the base on a side of the bone plate aligned with the apex on an opposing side of the bone plate in a direction perpendicular to the longitudinal axis of the bone plate.
9. The bone plate of any of the preceding claims, wherein each of the plurality of outer apertures is sized to receive a polyaxial bone screw, the polyaxial bone screw adjustable between a perpendicular arrangement and an angled arrangement in the each of the plurality of outer apertures.
10. A bone plate for use with a bone having a periprosthetic fracture, the bone plate having a longitudinal axis that extends from a first end to a second end of the bone plate, the bone plate comprising:
- a planar bottom surface configured to face the bone;
 - a top surface opposite the bottom surface;
 - a plurality of side walls joining the top and bottom surfaces;
 - a plurality of outer apertures that extend through the bone plate from the top surface to the bottom surface, the plurality of outer apertures offset from the longitudinal axis in a direction perpendicular to the longitudinal axis; and
 - a plurality of indentations in the side walls, each indentation extending longitudinally between adjacent outer apertures to narrow the bone plate in a direction perpendicular to the longitudinal axis of the bone plate.

11. The bone plate of claim 10, wherein a thickness of the bone plate measured between the top and bottom surfaces decreases toward the first end of the bone plate.
- 5 12. The bone plate of claim 10 or 11, further comprising a plurality of central apertures that extend through the bone plate from the top surface to the bottom surface, the plurality of central apertures located along the longitudinal axis of the bone plate.
- 10 13. The bone plate of claim 12, wherein the plurality of central apertures extend from the first end to the second end of the bone plate.
14. The bone plate of claim 12 or 13, wherein the plurality of outer apertures are offset from the central apertures in a direction parallel to
15 the longitudinal axis of the bone plate.
15. The bone plate of any of claims 12 to 14, wherein the plurality of outer apertures are arranged in two longitudinal rows, a first longitudinal row extending along a first side of the central apertures and
20 a second longitudinal row extending along a second side of the central apertures opposite the first side.
16. The bone plate of any of claims 10 to 15, further comprising an apex formed between adjacent indentations, the apex aligned with at least
25 one of the plurality of outer apertures in a direction perpendicular to the longitudinal axis of the bone plate.
17. The bone plate of claim 16, wherein each indentation extends inwardly toward the longitudinal axis of the bone plate until reaching
30 a maximum depth at a base, the base on a side of the bone plate

aligned with the apex on an opposing side of the bone plate in a direction perpendicular to the longitudinal axis of the bone plate.

18. The bone plate of any of claims 10 to 17, wherein each of the plurality of outer apertures is sized to receive a polyaxial bone screw, the polyaxial bone screw adjustable between a perpendicular arrangement and an angled arrangement in the each of the plurality of outer apertures.

19. A method of repairing a bone having a periprosthetic fracture, the bone including a prosthetic component implanted therein, the method comprising the steps of:

providing a bone plate having a longitudinal axis that extends from a first end to a second end, the bone plate comprising a periprosthetic zone located at the first end of the bone plate, the periprosthetic zone comprising a plurality of outer apertures offset from the longitudinal axis in a direction perpendicular to the longitudinal axis, the plurality of outer apertures extending through the bone plate substantially in parallel, the bone plate narrowing inwardly toward the longitudinal axis between adjacent outer apertures; and

securing the bone plate onto the bone by inserting a bone screw into one of the plurality of outer apertures while avoiding the prosthetic component.


20. The method of claim 19, wherein the securing step comprises pivoting the bone screw in the outer aperture and securing a locking cap onto the bone screw to lock the bone screw in place.


21. The method of claim 19 or 20, wherein the bone plate further comprises a plurality of central apertures located along the longitudinal axis, the method further comprising the step of inserting a spacer into one of the plurality of central apertures to space the bone plate apart from the bone.



22. The method of claim 21, wherein the plurality of central apertures extend through the bone plate substantially in parallel with the plurality of outer apertures.

23. The method of any of claims 19 to 22, further comprising the step of coupling a detachable portion to one of the first and second ends of the bone plate to lengthen the bone plate.

24. The method of any of claims 19 to 23, wherein the securing step comprises inserting one of a cancellous bone screw and a bicortical bone screw around and beyond the prosthetic component.

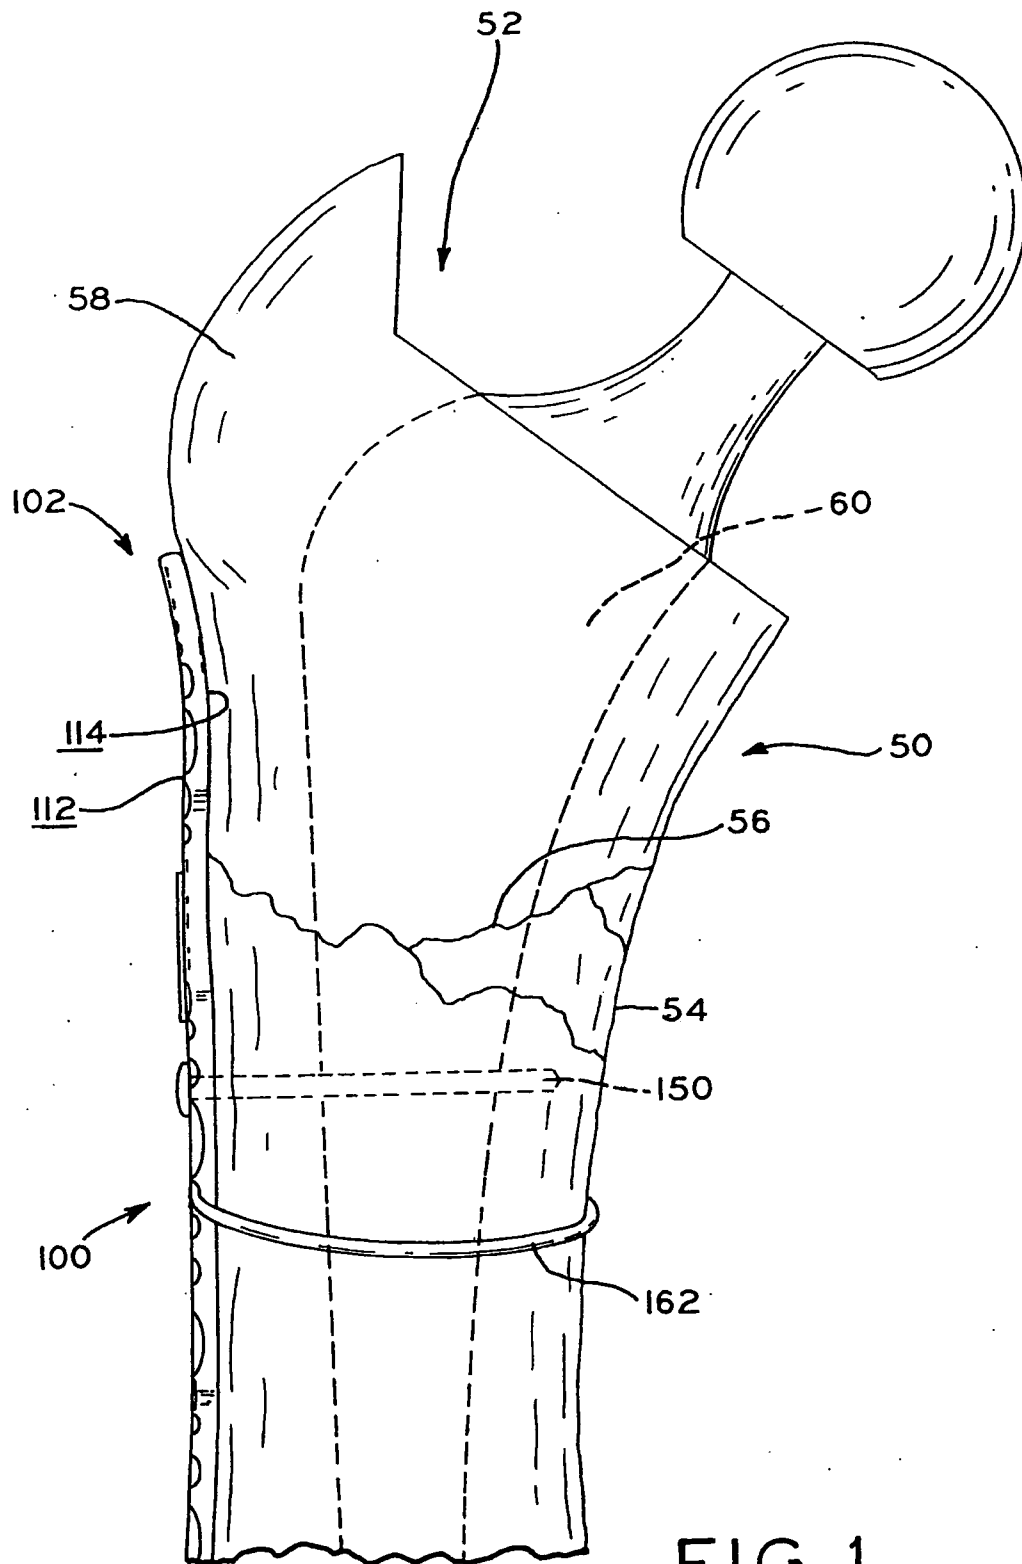

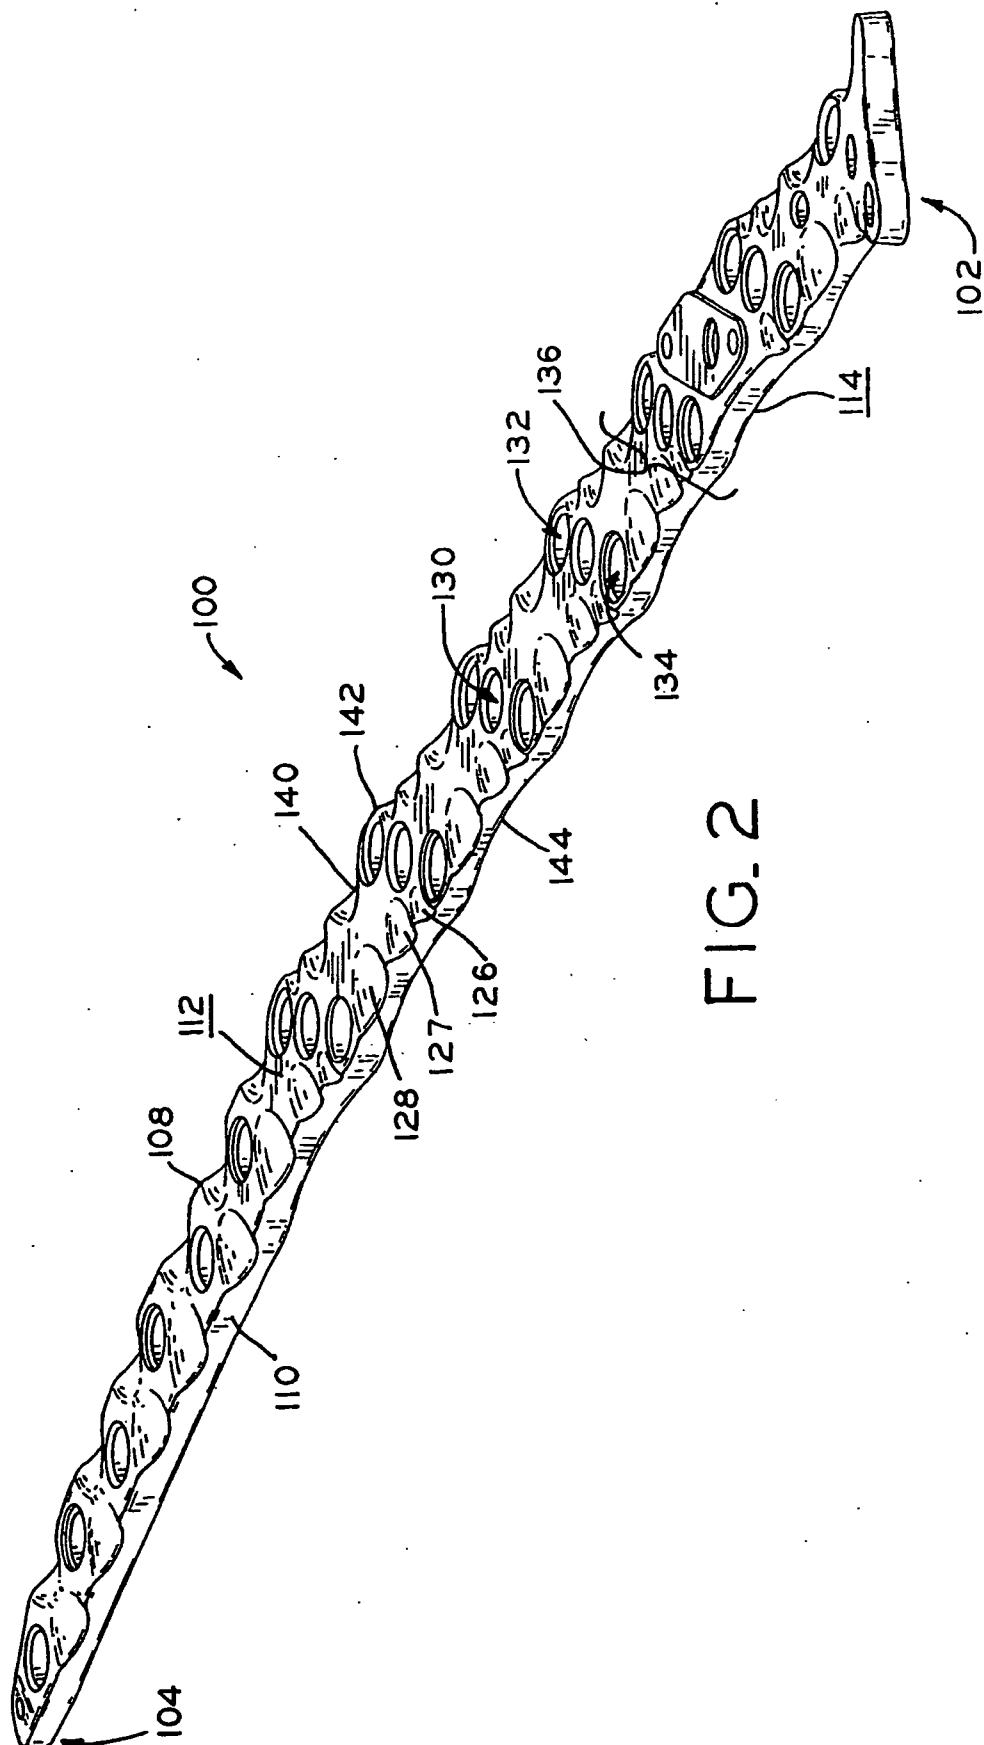

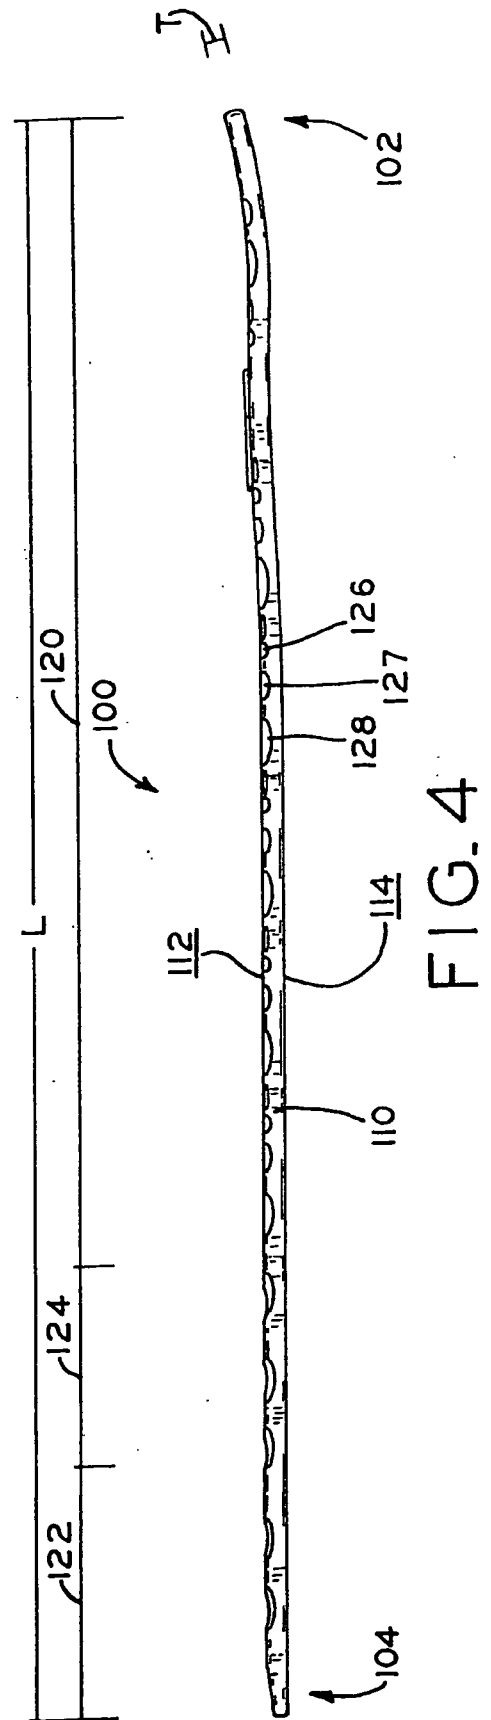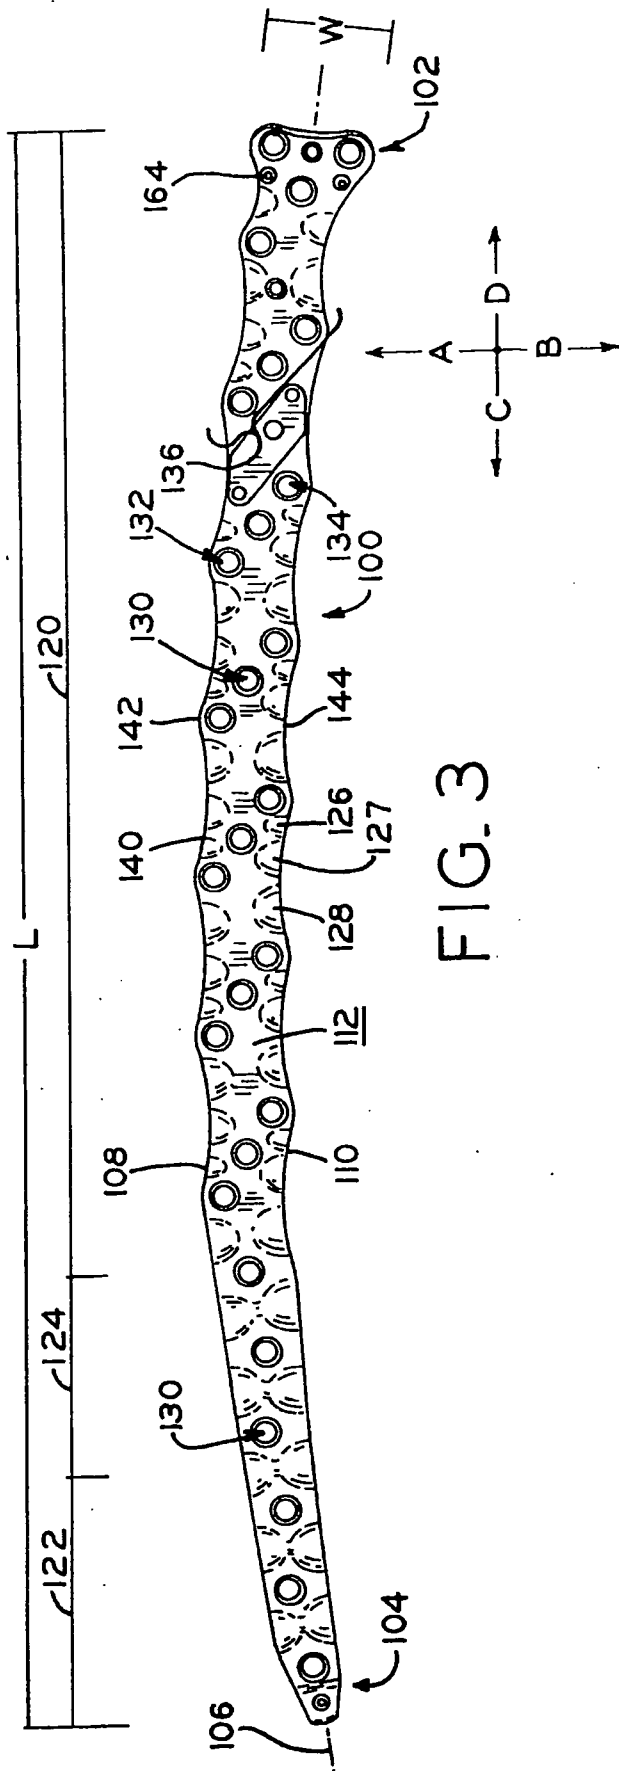

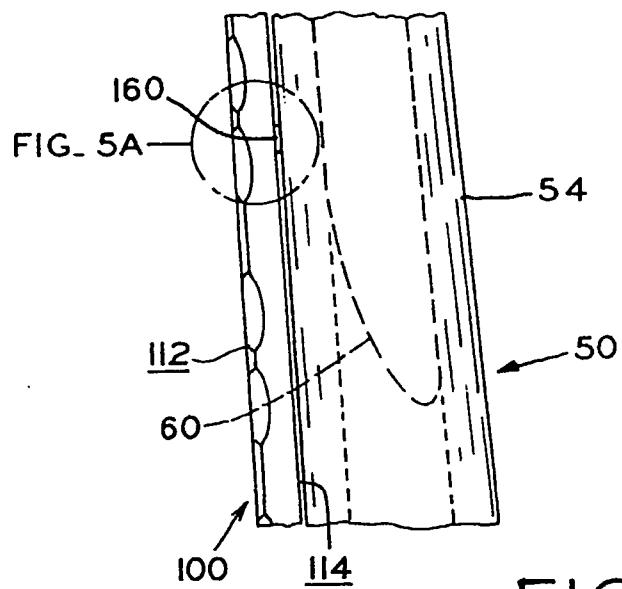


FIG. 5

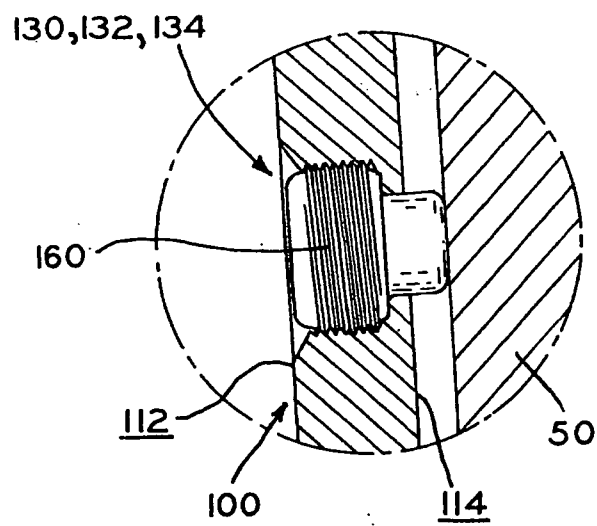


FIG. 5A



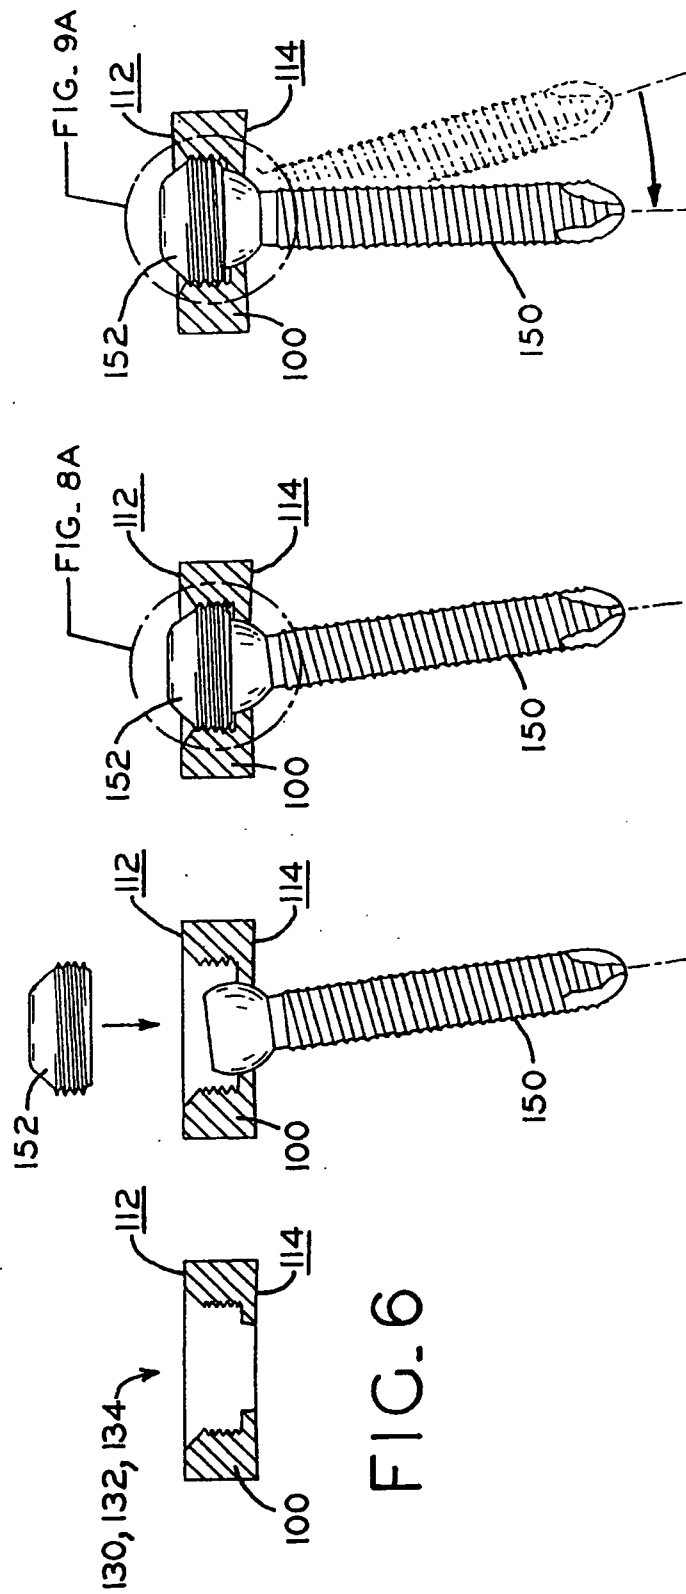




FIG. 9



FIG. 8



FIG. 7

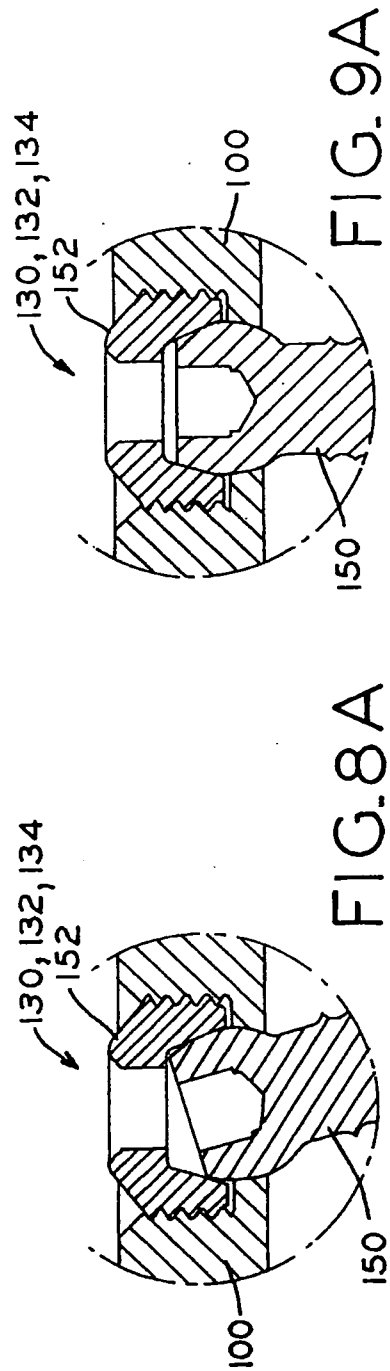

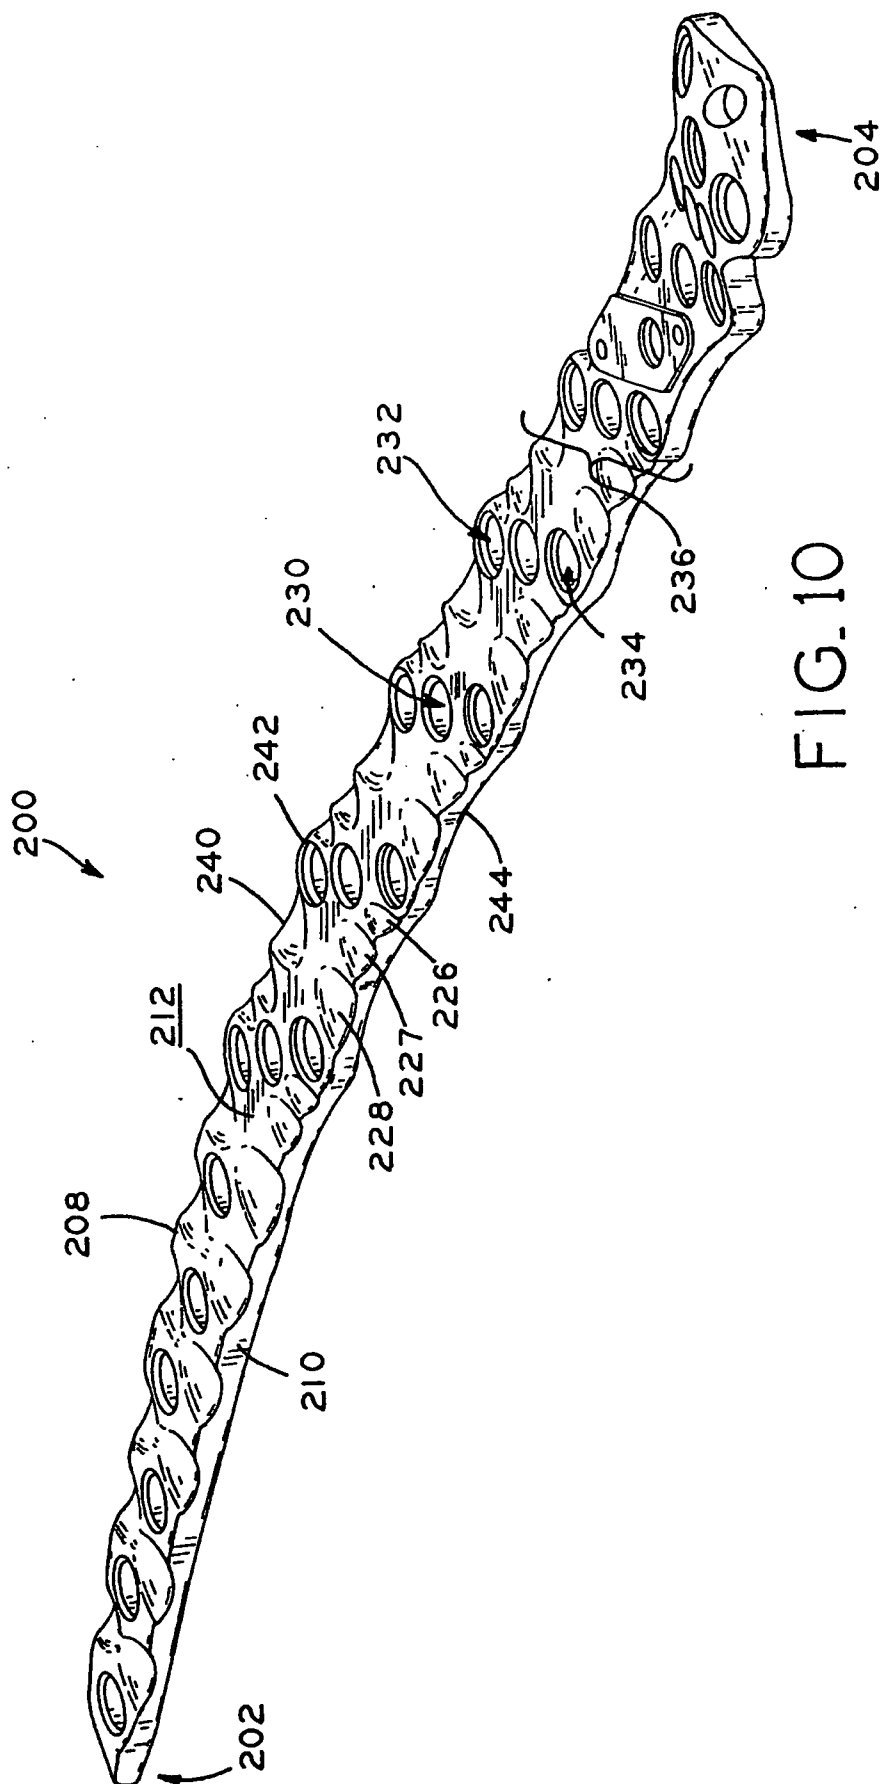

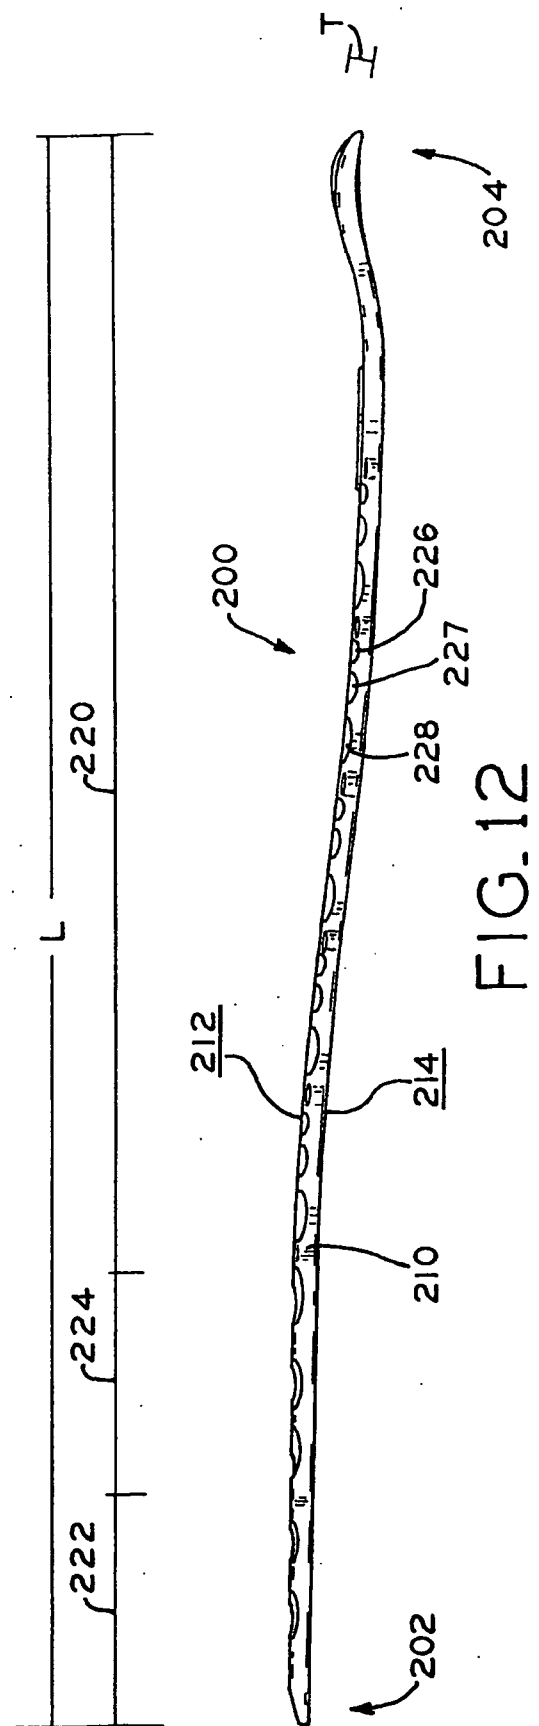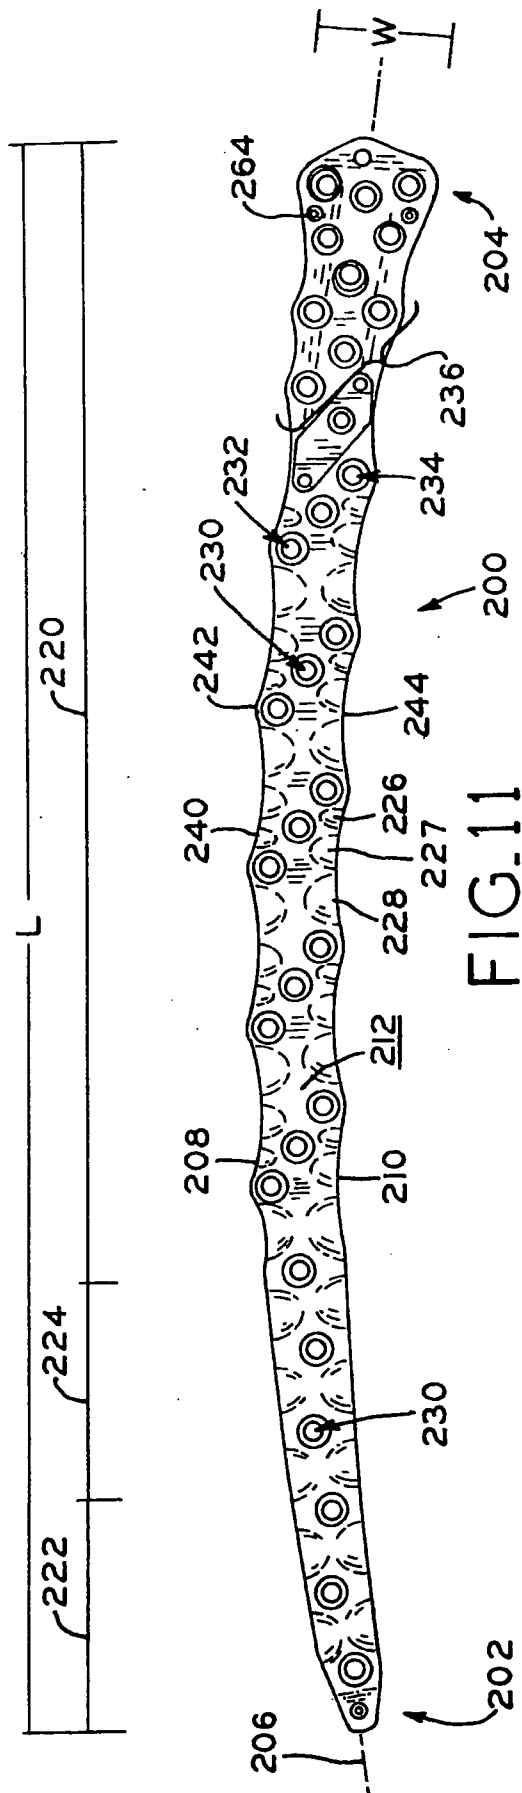

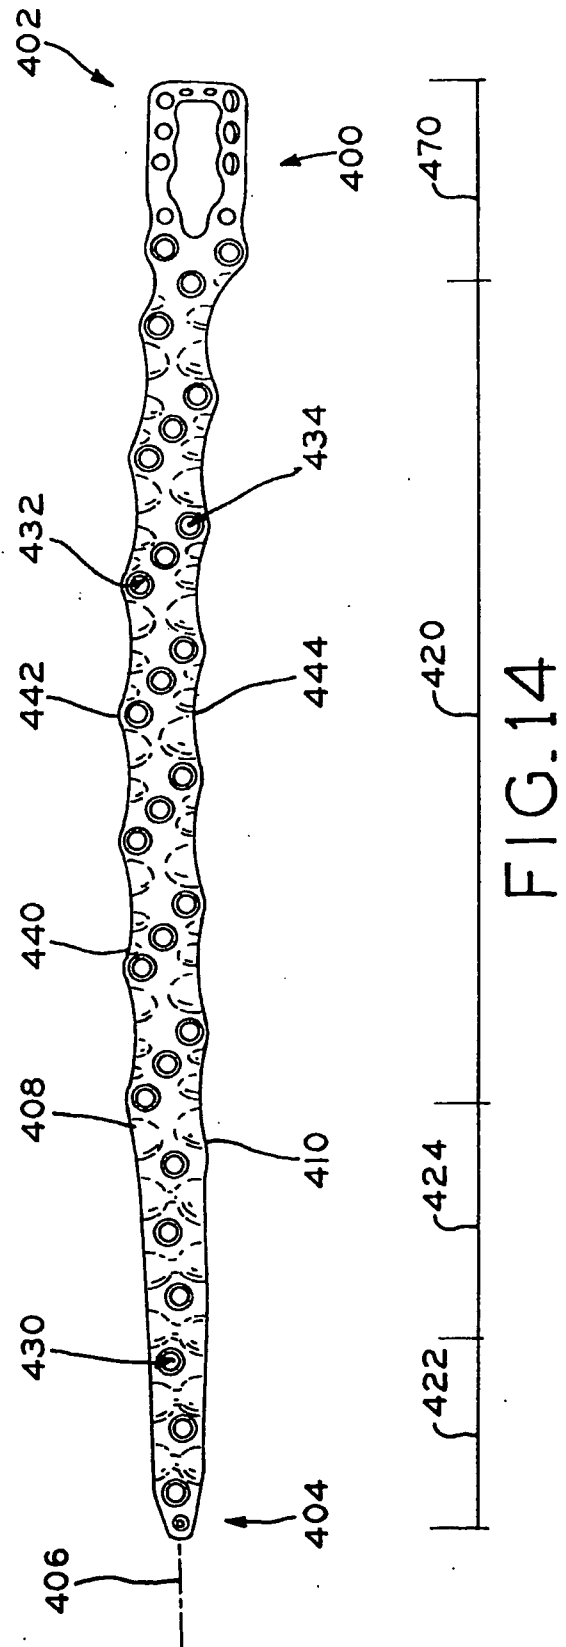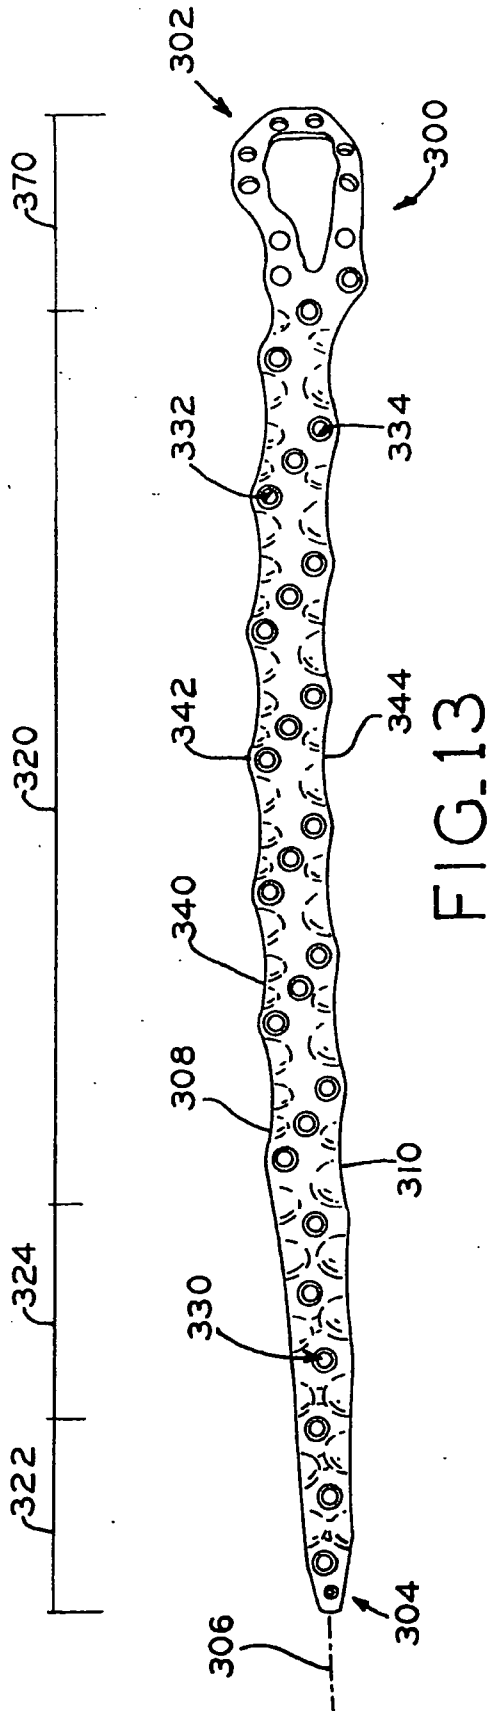

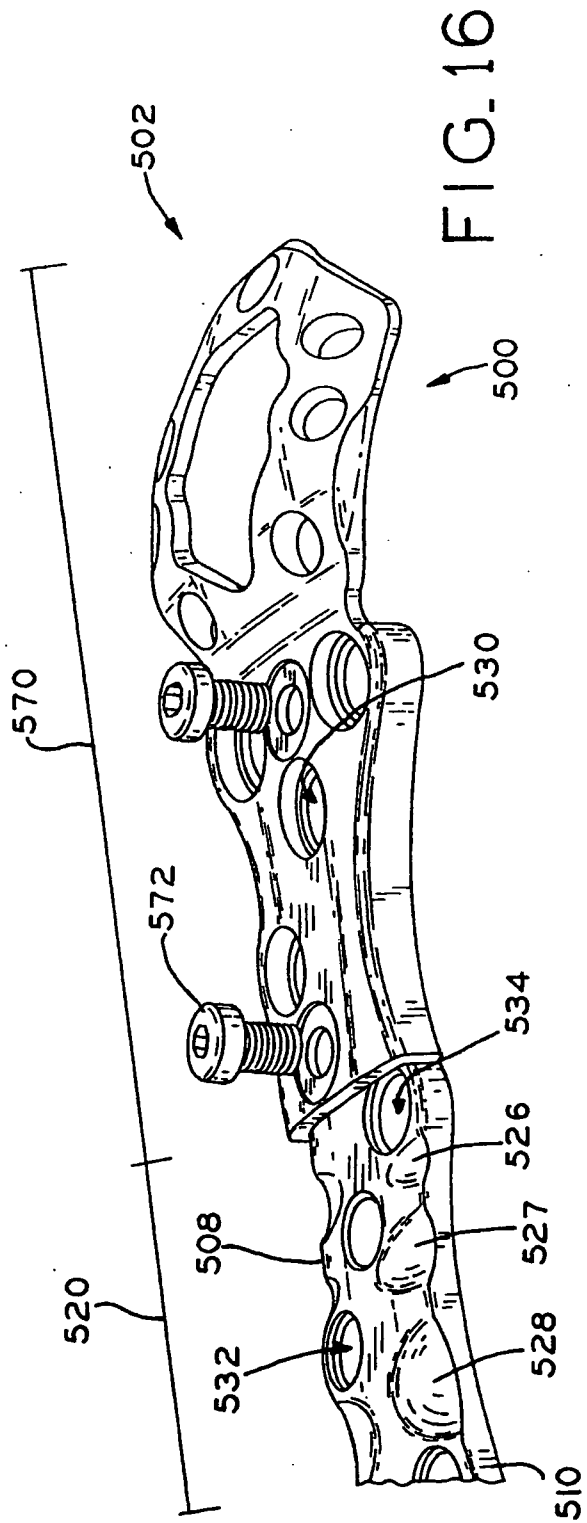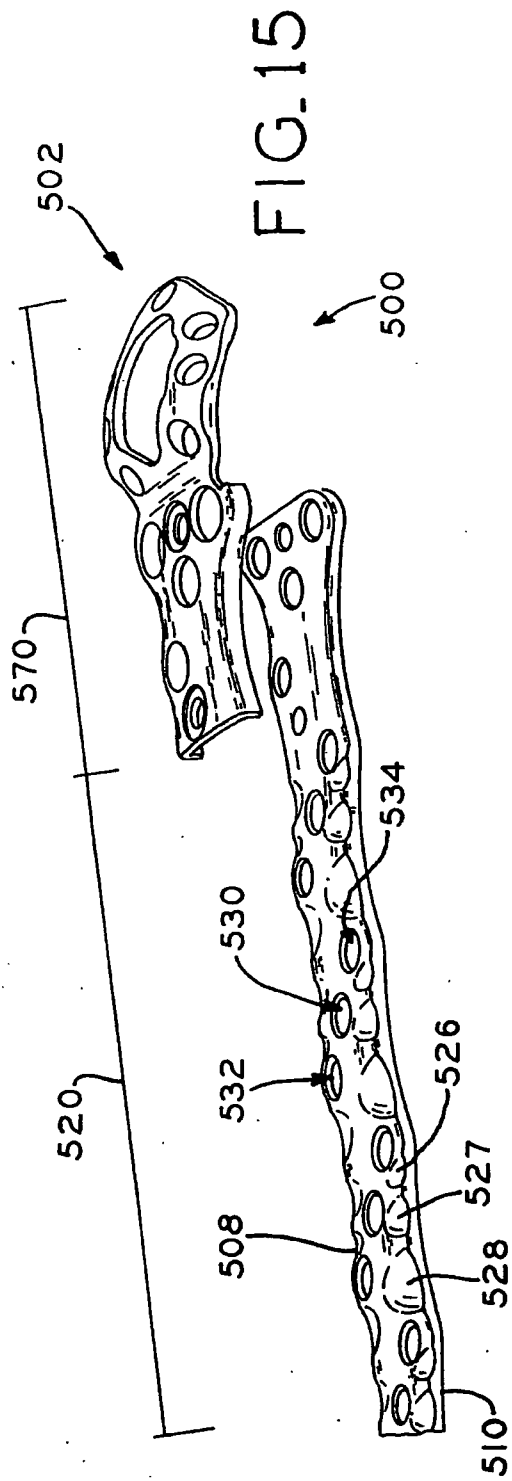

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2010/003433

A. CLASSIFICATION OF SUBJECT MATTER

INV. A61B17/80

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2004/102775 A1 (HUEBNER RANDALL J [US]) 27 May 2004 (2004-05-27) figure 11	1-18
X	WO 2004/045389 A2 (ACUMED LLC [US]; HUEBNER RANDALL J [US]; HORST STEVEN P [US]) 3 June 2004 (2004-06-03) figure 17	1-18
X	WO 01/30251 A1 (SEPITEC FOUNDATION [LI]; DRANSFELD CLEMENS [CH]; MAGERL FRITZ [CH]; TO) 3 May 2001 (2001-05-03) figure 1	1
X	DE 86 28 766 U1 (A) 11 December 1986 (1986-12-11) figure 1	1
	----- -/-- -----	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

6 October 2010

Date of mailing of the international search report

08/11/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Fernández Arillo, J

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2010/003433

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 573 458 A (LOWER JERRY L [US]) 4 March 1986 (1986-03-04) figure 2a -----	1

INTERNATIONAL SEARCH REPORT

International application No.
PCT/EP2010/003433

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 19-24
because they relate to subject matter not required to be searched by this Authority, namely:
Pursuant to Rule 39.1(iv) PCT, the subject-matter of claims 19-24 has not been searched, since it is directed to a method for treatment of the human body by surgery.
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2010/003433

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004102775	A1	27-05-2004	NONE
WO 2004045389	A2	03-06-2004	AU 2003295749 A1 15-06-2004
		EP 1567071 A2 31-08-2005	
		GB 2412590 A 05-10-2005	
		JP 4028552 B2 26-12-2007	
		JP 2006506197 T 23-02-2006	
		JP 2007275651 A 25-10-2007	
		KR 20050075440 A 20-07-2005	
		US 2007276405 A1 29-11-2007	
		US 2004102778 A1 27-05-2004	
		US 2004102776 A1 27-05-2004	
WO 0130251	A1	03-05-2001	AT 273662 T 15-09-2004
		AU 1144201 A 08-05-2001	
		CA 2388854 A1 03-05-2001	
		DE 19951760 A1 28-06-2001	
		EP 1233713 A1 28-08-2002	
		JP 4361709 B2 11-11-2009	
		JP 2003512125 T 02-04-2003	
		US 6786909 B1 07-09-2004	
DE 8628766	U1	11-12-1986	NONE
US 4573458	A	04-03-1986	NONE