


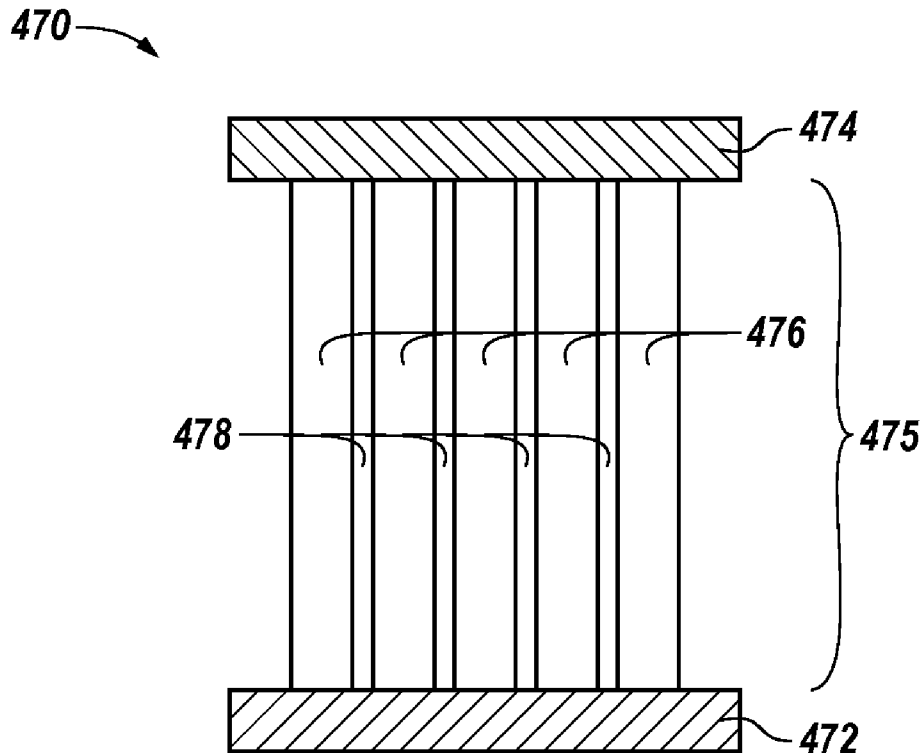

US 20150380646A1

(19) **United States**(12) **Patent Application Publication**
Rocklein et al.(10) **Pub. No.: US 2015/0380646 A1**(43) **Pub. Date: Dec. 31, 2015**(54) **RESISTIVE MEMORY CELL****Publication Classification**(71) Applicant: **Micron Technology, Inc.**, Boise, ID
(US)(51) **Int. Cl.**
H01L 45/00 (2006.01)
H01L 27/24 (2006.01)(72) Inventors: **Matthew N. Rocklein**, Boise, ID (US);
D.V. Nirmal Ramaswamy, Boise, ID
(US)(52) **U.S. Cl.**
CPC **H01L 45/146** (2013.01); **H01L 45/1608**
(2013.01); **H01L 27/2463** (2013.01); **H01L**
45/08 (2013.01); **H01L 45/1233** (2013.01);
H01L 45/1675 (2013.01); **H01L 45/147**
(2013.01)(21) Appl. No.: **14/849,715**(22) Filed: **Sep. 10, 2015****Related U.S. Application Data**(60) Continuation of application No. 14/473,400, filed on
Aug. 29, 2014, now Pat. No. 9,159,921, which is a
division of application No. 13/109,052, filed on May
17, 2011, now Pat. No. 8,847,196.(57) **ABSTRACT**

Semiconductor memory devices, resistive memory devices, memory cell structures, and methods of forming a resistive memory cell are provided. One example method of a resistive memory cell can include a number of dielectric regions formed between two electrodes, and a barrier dielectric region formed between each of the dielectric regions. The barrier dielectric region serves to reduce an oxygen diffusion rate associated with the dielectric regions.



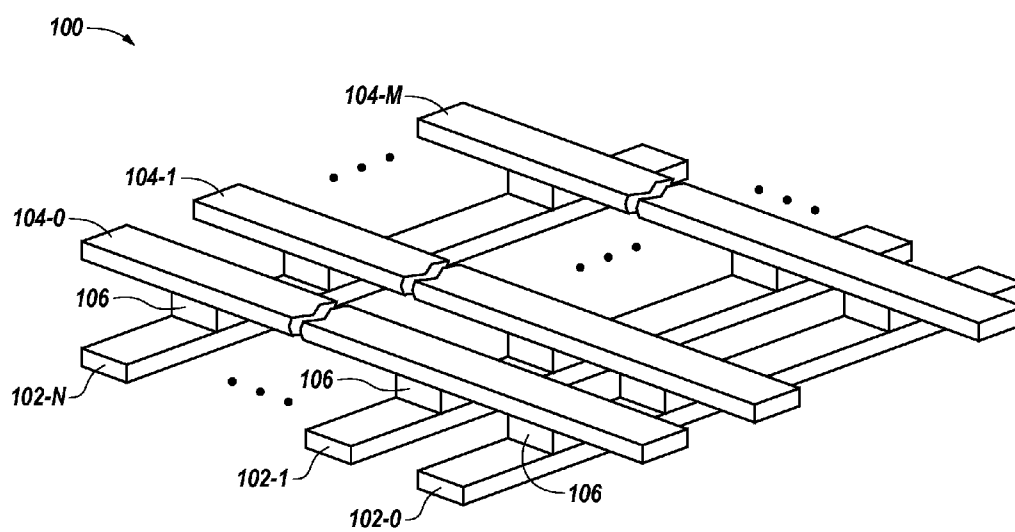


Fig. 1

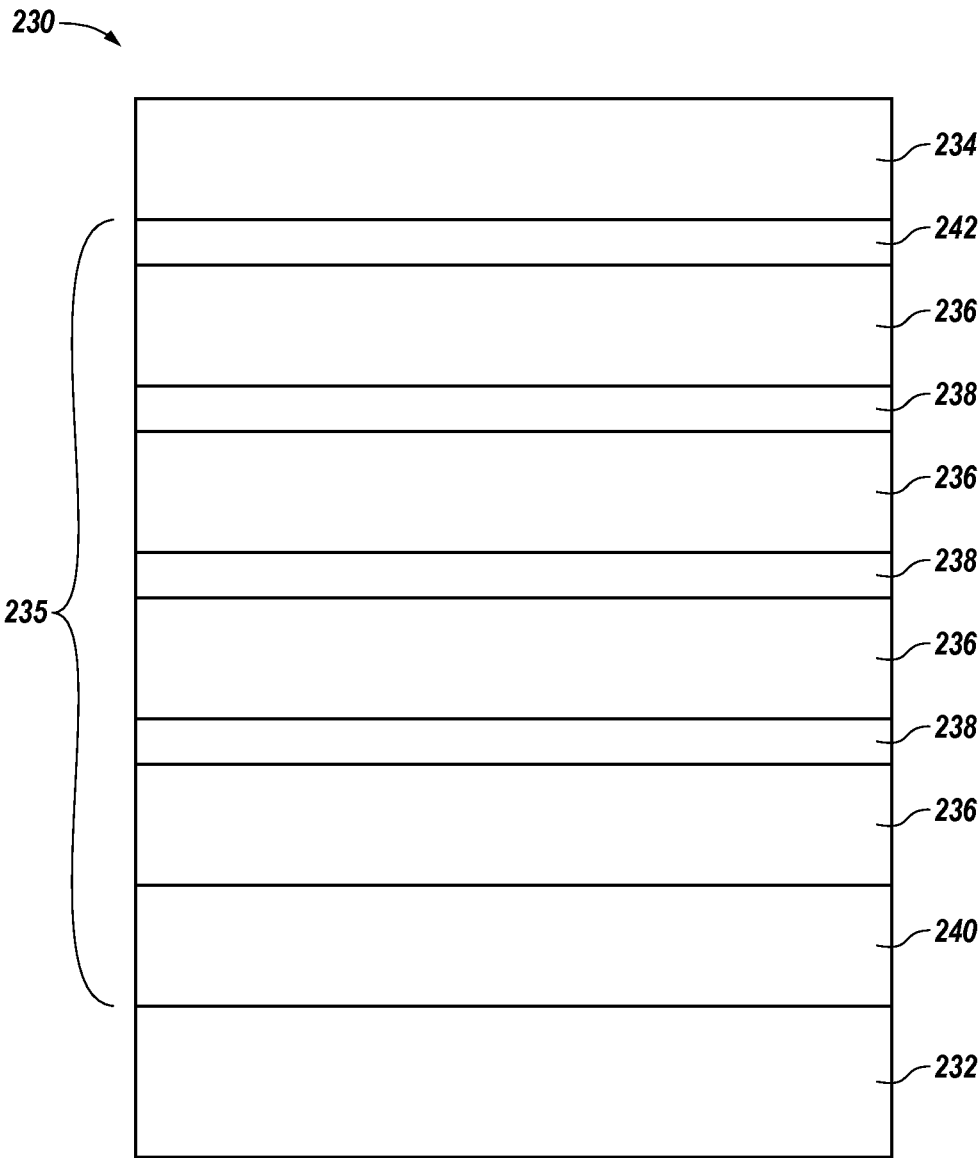


Fig. 2

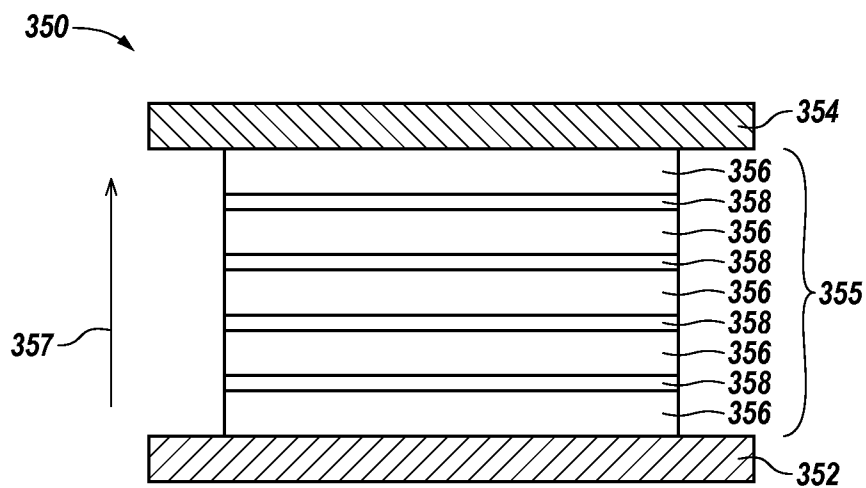


Fig. 3A

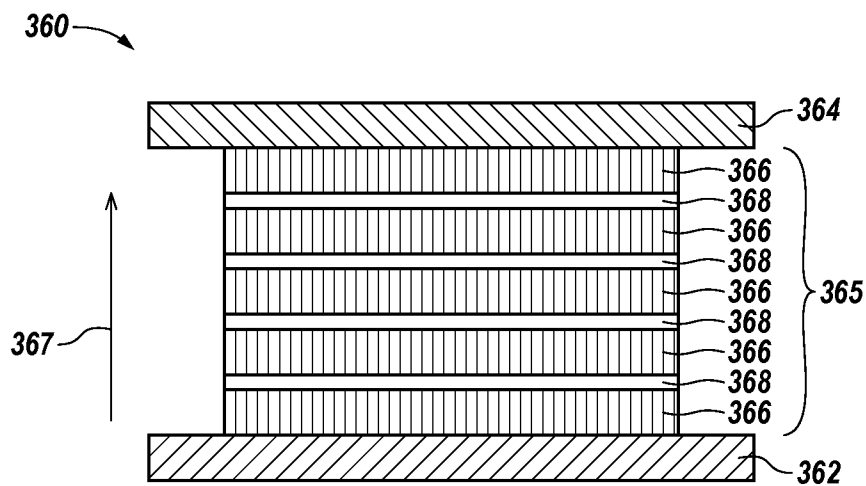


Fig. 3B

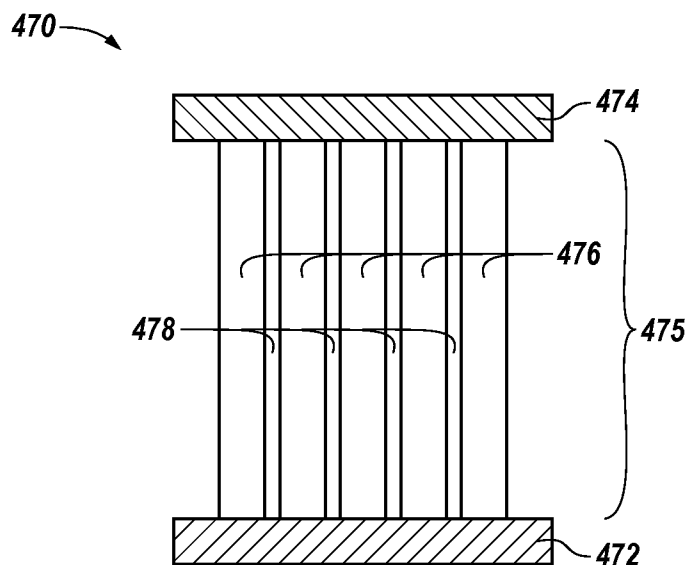


Fig. 4A

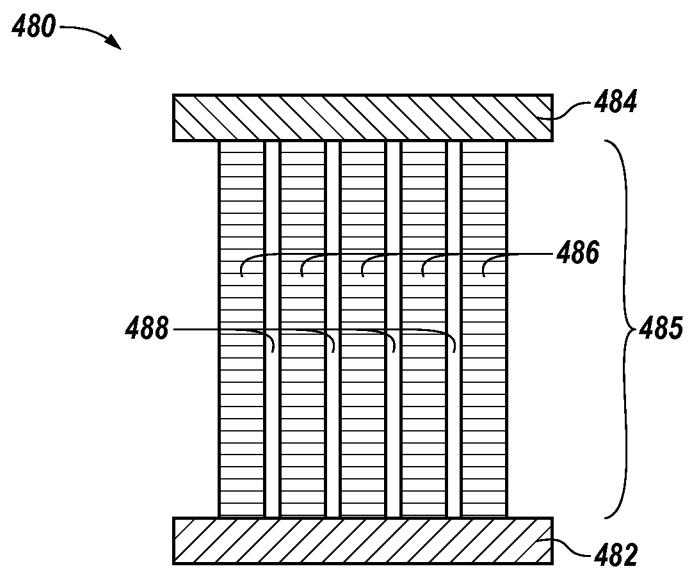


Fig. 4B

RESISTIVE MEMORY CELL

PRIORITY INFORMATION

[0001] This application is a Continuation of U.S. application Ser. No. 14/473,400 filed Aug. 29, 2014, which is a Divisional of U.S. application Ser. No. 13/109,052 filed May 17, 2011, now U.S. Pat. No. 8,847,196, the specification of which are incorporated herein by reference.

TECHNICAL FIELD

[0002] The present disclosure relates generally to semiconductor memory devices and methods, and more particularly, to resistive memory devices, cell structures and methods.

BACKGROUND

[0003] Memory devices are typically provided as internal, semiconductor, integrated circuits in computers or other electronic devices. There are many different types of memory, including random-access memory (RAM), read only memory (ROM), dynamic random access memory (DRAM), synchronous dynamic random access memory (SDRAM), resistive memory, and flash memory, among others. Types of resistive memory include programmable conductor memory, and resistive random access memory (RRAM), among others.

[0004] Memory devices are utilized as non-volatile memory for a wide range of electronic applications in need of high memory densities, high reliability, and data retention without power. Non-volatile memory may be used in, for example, personal computers, portable memory sticks, solid state drives (SSDs), digital cameras, cellular telephones, portable music players such as MP3 players, movie players, and other electronic devices.

[0005] RRAM devices include resistive memory cells that store data based on the resistance level of a storage element. The cells can be programmed to a desired state, e.g., corresponding to a particular resistance level, such as by applying sources of energy, such as positive or negative voltages to the cells for a particular duration. Some RRAM cells can be programmed to multiple states such that they can represent, e.g., store, two or more bits of data.

[0006] The programmed state of a resistive memory cell may be determined, e.g., read, for example, by sensing current through the selected resistive memory cell responsive to an applied interrogation voltage. The sensed current, which varies based on the resistance level of the memory cell, can indicate the programmed state of the resistive memory cell.

[0007] A two-state resistive memory cell can have a low resistance state and a high resistance state. Each respective resistance state can correspond with a logic state, e.g., "0" or "1." According to a previous resistive memory cells approach, the low resistance state can occur due to a non-volatile formation of one or more conductive filaments in a dielectric between electrodes, and the high resistance state can occur due to a non-volatile dissolution of the conductive filament(s) in the dielectric. Ions in the dielectric and/or electrode(s) can be re-located by the application of electrical energy to form or dissolve a conductive filament. A relatively smaller application of electrical energy can be used to ascertain the resistive state.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] FIG. 1 is a block diagram of a portion of an array of resistive memory cells in accordance with one or more embodiments of the present disclosure.

[0009] FIG. 2 illustrates a cross-sectional view of a portion of multi-state resistive memory cells in accordance with one or more embodiments of the present disclosure.

[0010] FIGS. 3A-3B illustrate cross-sectional views of a portion of a resistive memory cell having dielectric and barrier dielectric materials formed horizontally in accordance with one or more embodiments of the present disclosure.

[0011] FIGS. 4A-4B illustrate cross-sectional views of a portion of a resistive memory cell having dielectric and barrier dielectric materials formed vertically in accordance with one or more embodiments of the present disclosure.

DETAILED DESCRIPTION

[0012] Semiconductor memory devices, resistive memory devices, memory cell structures, and methods of forming a resistive memory cell are provided. One example method of a resistive memory cell can include a number of dielectric regions formed between two electrodes, and a barrier dielectric region formed between each of the dielectric regions. The barrier dielectric region serves to reduce an oxygen diffusion rate associated with the dielectric regions.

[0013] Embodiments of the present disclosure can provide benefits such as resistive memory cells having multiple states and/or improved switching characteristics as compared to previous resistive memory cells, among other benefits. As described further herein, forming a slow oxygen diffusion barrier and/or grain boundary disruptor between dielectric portions of a resistive memory cell can have various benefits, such as multiple states and/or improved switching characteristics. The dielectric and/or barrier dielectric regions can be formed, for example, via an atomic layer deposition (ALD) process, which is well-suited to deposit dielectric materials with sub-nanometer thickness control. The present disclosure provides dielectric laminates and alloys that support one or more of the following benefits: 1) controlled oxygen diffusion barriers, 2) grain-boundary disruption, 3) crystalline or amorphous control, and 4) reduced dielectric roughness by control of grain size, among other benefits.

[0014] In the following detailed description of the present disclosure, reference is made to the accompanying drawings that form a part hereof, and in which is shown by way of illustration how one or more embodiments of the disclosure may be practiced. These embodiments are described in sufficient detail to enable those of ordinary skill in the art to practice the embodiments of this disclosure, and it is to be understood that other embodiments may be utilized and that process, electrical, and/or structural changes may be made without departing from the scope of the present disclosure.

[0015] The figures herein follow a numbering convention in which the first digit or digits correspond to the drawing figure number and the remaining digits identify an element or component in the drawing. Similar elements or components between different figures may be identified by the use of similar digits. As will be appreciated, elements shown in the various embodiments herein can be added, exchanged, and/or eliminated so as to provide a number of additional embodiments of the present disclosure. In addition, the proportion and the relative scale of the elements provided in the figures

are intended to illustrate various embodiments of the present disclosure and are not to be used in a limiting sense.

[0016] FIG. 1 is a block diagram of a portion of an array 100 of memory cells 106 in accordance with one or more embodiments of the present disclosure. Memory devices may include a number of memory cells 106 arranged in a matrix, e.g., array, 100. A memory cell may include a storage element coupled to a select device, e.g., an access device. The storage element can include a programmable portion that may have a variable resistance, for example. The access device can be a diode, field effect transistor (FET), or bipolar junction transistor (BJT), among others. In the example illustrated in FIG. 1, the array 100 is an array including a first number of access conductive lines 102-0, 102-1, . . . , 102-N, e.g., access lines, which may be referred to herein as word lines, and a second number of data/sense conductive lines 104-0, 104-1, . . . , 104-M, e.g., data lines, which may be referred to herein as bit lines. As illustrated, the word lines 102-0, 102-1, . . . , 102-N are substantially parallel to each other and are substantially orthogonal to the bit lines 104-0, 104-1, . . . , 104-M, which are substantially parallel to each other; however, embodiments are not so limited.

[0017] As used herein, the term “substantially” intends that the modified characteristic need not be absolute, but is close enough so as to achieve the advantages of the characteristic. For example, “substantially parallel” is not limited to absolute parallelism, and can include structure orientations that are non-intersecting for a given application and at least closer to a parallel orientation than a perpendicular orientation.

[0018] In this example, a memory cell 106 is located at each of the intersections of the word lines 102-0, 102-1, . . . , 102-N and bit lines 104-0, 104-1, . . . , 104-M. The memory cells 106 can function in a two-terminal architecture e.g., with a particular word line 102-0, 102-1, . . . , 102-N and bit line 104-0, 104-1, . . . , 104-M serving as a bottom and top electrode. A memory cell may be coupled to a word line forming a “row” of the array. Each memory cell may be coupled to a bit line forming a “column” of the array.

[0019] According to one or more embodiments, the memory cells 106 of array 100 can be resistive memory cells such as those described in connection with FIGS. 2, 3A, 3B, 4A and 4B. More particularly, the memory cells 106 of array 100 can be configured as a resistive random access memory (RRAM).

[0020] As previously mentioned, the storage element can include a programmable portion. The programmable portion may be programmable to a number of different logic states. For instance, the programmable portion of a storage element can be programmed to particular levels corresponding to particular logic states responsive to applied programming voltage and/or current pulses. The programmable portion of a storage element can include, for example, one or more materials such as a transition metal oxide material or a perovskite including two or more metals, e.g., transition metals, alkaline earth metals, and/or rare earth metals. Embodiments are not limited to a particular material or materials associated with the programmable portion of a storage element of the memory cells 106. For instance, the programmable portion of a storage element can be formed of various doped or undoped materials. Other examples of materials that can be used to form the programmable portion of a storage element include binary metal oxide materials, colossal magnetoresistive materials, and/or various polymer-based resistive variable materials, among others.

[0021] In operation, the memory cells 106 of array 100 can be programmed by applying a voltage, e.g., a write voltage, across the memory cells 106 via selected word lines 102-0, 102-1, . . . , 102-N and bit lines 104-0, 104-1, . . . , 104-M. The width and/or magnitude of the voltage pulses across the memory cells 106 can be adjusted, e.g., varied, in order to program the memory cells 106 to particular logic states, e.g., by adjusting a resistance level of the storage element.

[0022] A sensing, e.g., read, operation can be used to determine the logic state of a memory cell 106 by a magnitude of sensing current, for example, on a bit line 104-0, 104-1, . . . , 104-M corresponding to the respective memory cell 106 responsive to a particular voltage applied to the selected word line 102-0, 102-1, . . . , 102-N to which the respective cell 106 is coupled. Sensing operations can also include biasing unselected word lines and bit lines at particular voltages in order to sense the logic state of a selected cell 106.

[0023] FIG. 2 illustrates a cross-sectional view of a portion of a resistive memory cell including a dielectric and barrier dielectric in accordance with one or more embodiments of the present disclosure. According to one or more embodiments of the present disclosure, one or more thin, discrete barrier dielectric materials can create local changes in ion diffusion rates, e.g., oxygen ion diffusion rates, through a bulk dielectric so that a conductive filament extending from cathode to anode can be avoided for certain programming energies. Discrete barrier dielectric materials within bulk dielectric materials can result in discrete regions of stoichiometric oxides and sub-oxides being created under programming, next to a highly oxygen-deficient and oxygen-loving electrode.

[0024] The resistive memory cell structure illustrated in FIG. 2, for example, can provide improved controllability and/or multiple write states over the art. Multiple write states in a resistive memory device can increase bit densities in memory devices such as RRAM. Additionally, for crystalline dielectrics, benefits can also be achieved by the discrete barrier dielectric materials causing grain-boundary disruption with respect to the bulk dielectric materials. Certain problems of resistive memory device performance, for example within an RRAM, such as cycling and/or bit-to-bit reproducibility, may arise if the switching mechanism is “filamentary” in nature. Crystalline grain-boundaries are often both leakage paths and oxygen diffusion paths. By disrupting the grains with one or more grain-boundaries, e.g., created at an interface of a barrier dielectric material and dielectric material, the pathways can be broken between electrodes such that filamentary switching will be prevented, or at least reduced and moderated, which can provide improved cell-to-cell performance consistency. For instance, cell-to-cell performance can be based on the average of many filamentary switching events, e.g., within a greater number of discrete dielectric material regions, rather than that of a single filamentary switching event, e.g., from cathode to anode.

[0025] FIG. 2 illustrates a cross-sectional view of a portion of multi-state resistive memory cells in accordance with one or more embodiments of the present disclosure. As described above with respect to a prior art resistive memory cell, a two-state resistive memory cell can have a low resistance state and a high resistance state, each respective resistance state being associated with a corresponding logic state, e.g., “0” and “1.” A multi-state resistive memory cell can have a number of intermediate resistance states between the lowest

resistance state and the highest resistance state. A respective intermediate resistance state can be associated with a corresponding logic state.

[0026] FIG. 2 shows a cross-sectional view of a portion of a resistive memory cell 230. Resistive memory cell 230 can include a thin film comprising a number of solid laminate dielectric materials 235 between electrodes, e.g., a cathode and an anode, as shown in FIG. 2. The laminate dielectric materials 235 can include alternating dielectric 236 regions and barrier dielectric 238 regions, e.g., layers. The laminate dielectric materials 235 can further include an optional buffer dielectric region 240 between the dielectric region 236 closest to electrode 232 and electrode 232. The laminate dielectric materials 235 can also include an additional barrier dielectric 242 region between the dielectric region 236 furthest away from an electrode 232, and the electrode 234. The electrode 232 can be a metal alloy anode, and an electrode 234 can be a metal cathode.

[0027] Although not shown in FIG. 2, the electrode 232, 234 can be coupled to a word line or bit line of a memory array, such as is shown in FIG. 1. A control transistor can also be associated with each resistive memory cell 230 for selection thereof. The electrodes 232 and 234 can be comprised of the same or different materials and can have the same or different physical sizes and/or shapes. The resistive memory cell 230 can be symmetric or asymmetric.

[0028] Example electrode materials include a metal or metal alloy, such as titanium, tungsten, and platinum, or combinations thereof, although embodiments are not limited to particular electrode materials. More particularly, one electrode 232 can be comprised of material that is relatively inert, e.g., titanium nitride (TiN) or platinum. Another electrode 234 can be a material that is electrochemically active, e.g., titanium. However, embodiments of the present disclosure are not so limited, and the electrode 234 may be nickel, strontium, hafnium, zirconium, tantalum, aluminum, and/or tungsten, among other metals and/or combinations thereof.

[0029] The number of laminate dielectric materials 235 can include alternating dielectric regions 236 and barrier dielectric regions 238, e.g., alternating layers of dielectric materials and barrier dielectric materials. An optional buffer dielectric material 240 may be located adjacent the electrode 232, e.g., between the electrode 232 and a nearest dielectric region 236. An optional barrier dielectric material 242 may be located adjacent electrode 234, e.g., between electrode 234 and a nearest dielectric region 236. According to one or more embodiments, a resistive memory cell 230 includes at least two dielectric regions 236 having a barrier dielectric region 238 therebetween. According to one or more embodiments, a resistive memory cell 230 includes a plurality of barrier dielectric materials 238, each barrier dielectric region 238 being located between dielectric regions 236, such that the barrier dielectric materials 238 and dielectric regions 236 alternate.

[0030] According to an example method of forming a resistive memory cell in accordance with one or more embodiments of the present disclosure, a dielectric region 236 is formed on an electrode 232, and a barrier dielectric region 238 is formed on the dielectric region 236. Another dielectric region 236 is formed on the barrier dielectric region 238, and then electrode 234 is formed on the another dielectric region 236. The barrier dielectric region 238 is a material having a slower oxygen diffusion rate and/or serves as a grain-boundary disruptor relative to the dielectric regions 236.

[0031] According to another example method of forming a resistive memory cell in accordance with one or more embodiments of the present disclosure, an optional buffer dielectric material 240 can be formed on electrode 232. One or more instances of a dielectric region 236 and a barrier dielectric region 238 are formed on the optional buffer dielectric material 240, with a dielectric region 236 being adjacent the optional buffer dielectric material 240. Another dielectric region 236 is formed on the one or more instances of the dielectric region 236 and the barrier dielectric region 238, such that it is located adjacent a barrier dielectric region 238 and furthest away from the electrode 232.

[0032] An optional barrier dielectric material 242 can be formed on the dielectric region 236 located furthest away from electrode 232, and electrode 234 can be formed on the optional barrier dielectric material 242 (if present). If the optional buffer dielectric 240 is not formed, the one or more instances of a dielectric region 236 and a barrier dielectric region 238 can be formed directly on electrode 232. Also, if the optional barrier dielectric material 242 is not included in the resistive memory cell, electrode 234 can be formed directly on the dielectric region 236 located furthest away from electrode 232.

[0033] The resistive memory cell 230 can be an oxide based RRAM cell, for example. An oxide based resistive memory cell 230 can refer to a cell that includes a resistive oxide material, e.g., an oxygen source as the dielectric region 236 and/or barrier dielectric region 238 between the two electrodes 232 and 234. Some oxide based memory cells can include one or more additional oxide materials and/or second electrodes along with the oxide material(s) between the two electrodes.

[0034] Examples of metal oxides (MO_x) that can be included in the dielectric region 236 include a near-stoichiometric, stoichiometric, and/or sub-stoichiometric metal oxide material. A near-stoichiometric oxide can be an oxide that has an oxygen percentage at or approximately at a stoichiometric ratio for the oxide. A sub-stoichiometric oxide can be an oxide that has an oxygen percentage below a stoichiometric ratio for the oxide.

[0035] According to one or more embodiments, the dielectric region 236 can include titanium dioxide (TiO_2). According to some embodiments, the dielectric region 236 can include other metal oxides such as lanthanum oxide (La_2O_3), lanthanum aluminate ($LaAlO_3$), gallium oxide (Ga_2O_3), zirconium oxide (ZrO_2), zirconium silicon oxide ($Zr_xSi_yO_z$), zirconium titanium oxide ($Zr_xTi_yO_z$), hafnium oxide (HfO_2), hafnium titanium oxide ($Hf_xTi_yO_z$), strontium titanate ($SrTiO_3$), lanthanum calcium manganese oxide (LCMO), magnesium oxide (MgO), aluminum oxide (Al_xO_y) such as Al_2O_3 , tin dioxide (SnO_2), zinc peroxide (ZnO_2), titanium silicon oxide ($Ti_xSi_yO_z$), and/or a hafnium silicon oxide ($Hf_xSi_yO_z$), among other metal oxide materials that are suitable oxygen sources. However, embodiments are not limited to the dielectric region 236 including metal oxides, and the dielectric region 236 can be formed using other resistive metal alloys. The dielectric regions 236 can be formed to be amorphous, crystalline, or combinations thereof. For example, one dielectric region 236 can be amorphous and another one dielectric region 236 can be crystalline.

[0036] The barrier dielectric region 238 is a slow oxygen diffusion barrier and/or grain-boundary disruptor material with respect to the dielectric regions 236. The resistive state of the resistive memory cell 230, fabricated in accordance with

the present disclosure, can change depending on the location of the oxygen ions within the laminate dielectric materials **235** between the two electrodes. The inclusion of barrier dielectric region **238** between instances of the bulk dielectric region **236** is intended to disrupt the formation of continuous filaments between the cathode and anode. As such, the barrier dielectric region **238** can have a bulk anion, e.g., oxygen, diffusion rate that differs from that of the dielectric region **236** alone.

[0037] Examples of materials that can be included in the barrier dielectric region **238** include zirconium oxide (ZrO_2), silicon dioxide (SiO_2), and aluminum oxide (Al_xO_y) such as Al_2O_3 , among others. Barrier dielectric region **238** can be formed to be amorphous or crystalline. Where multiple barrier dielectric regions **238** are formed, some may be amorphous and others may be crystalline. Also, a barrier dielectric region **238** may be amorphous adjacent an amorphous or crystalline dielectric region **236**, or may be crystalline adjacent an amorphous or crystalline dielectric region **236**.

[0038] Where the dielectric region **236**, e.g., TiO_2 , is formed to have a crystalline structure, the dielectric material anion, e.g., oxygen, can diffuse out more rapidly along boundaries of the dielectric region **236**. The barrier dielectric region **238** can serve to disrupt the grain boundaries of the dielectric region **236**, thereby helping to moderate the diffusion paths and reduce filamentary properties, for instance.

[0039] According to one or more embodiments, one or more portions of the dielectric region **236** may be formed from a different material than another portion of the dielectric region **236**. That is, the various dielectric regions **236** may be, but need not be, formed from a same, e.g., metal oxide, material. According to one or more embodiments, one or more portions of the barrier dielectric region **238** may be formed from a different material than another portion of the barrier dielectric region **238**.

[0040] According to one or more embodiments, the dielectric and/or barrier dielectric regions can be discrete regions with well-defined boundaries. However, embodiments of the present disclosure are not so limited, and the dielectric and/or barrier dielectric regions can be formed having less than discrete boundaries. For example, regions can be defined by a gradual transition from one material to another, e.g., a gradient, such as between dielectric and barrier dielectric materials rather than an abrupt and distinct transition. As previously mentioned, the dielectric and/or barrier dielectric regions can be formed, for example, via an atomic layer deposition (ALD) process, which is well-suited to deposit dielectric materials with sub-nanometer thickness control.

[0041] According to various embodiments of forming a resistive memory cell, a single bulk film of metal oxide, e.g., $\text{Zr}_x\text{Si}_y\text{O}_z$, $\text{Hf}_x\text{Si}_y\text{O}_z$, $\text{Ti}_x\text{Si}_y\text{O}_z$, is formed by ALD. During the ALD, an initial quantity of metal oxide material is deposited, after which the metal oxide is appropriately doped and/or augmented by a barrier dielectric material for some intermediate quantity of material deposition, after which another quantity of metal oxide material is deposited. The dielectric/barrier dielectric/dielectric structure can exist within a single bulk film. The barrier dielectric region can be a region intermediate to the surrounding metal oxide regions. As such, the barrier dielectric region can be a mixture including the metal oxide and/or having a gradient from metal oxide to doped/augmented metal oxide and/or barrier dielectric material, and back to metal oxide.

[0042] According to various embodiments, the optional buffer dielectric material **240**, located between the electrode **232** and the dielectric region **236** located closest to the electrode **232** may have non-reactive stable electrical properties. According to some embodiments, the optional buffer dielectric material **240** can have a lower dielectric constant (i.e., k) value, and thus a greater resistance, than the dielectric regions **236**, e.g., the dielectric region **236** located closest to electrode **232**. According to some embodiments, the optional buffer dielectric material **240** can have a greater dielectric constant (i.e., k) value, and thus a lesser resistance, than the dielectric regions **236**, e.g., the dielectric region **236** located closest to electrode **232**. The optional buffer dielectric material **240** can have a higher resistance than the dielectric regions **236** in order to function as a current limiting material in the resistive memory cell, e.g., especially when the resistive memory cell is in a low resistance state. Accordingly, the optional buffer dielectric material **240** can serve as a tunable material for the resistive memory cell with respect to the resistive and dielectric properties thereof. For example, the optional buffer dielectric material **240** can be a material having an appropriate resistance to limit current to a desired magnitude with respect to a particular memory cell structure.

[0043] The optional buffer dielectric material **240** can also be selected, in part, to have appropriate adhesion properties with respect to the electrode **232**. That is, the optional buffer dielectric material **240** can provide an adhesion interface between electrode **232** and a dielectric region **236** located closest to electrode **232**. According to some embodiments, the optional buffer dielectric material **240** doesn't deplete an anion element. The optional buffer dielectric material **240** can prevent or mitigate switching of the resistive memory cell from switching at electrode **232**. According to various embodiments, the optional barrier dielectric **242** can be formed as any other barrier dielectric region **238**, and include similar materials.

[0044] The dielectric region **236**, barrier dielectric region **238**, optional buffer dielectric material **240**, and optional barrier dielectric **242** can be formed, e.g., deposited, via an atomic layer deposition (ALD) process or other suitable deposition process. According to one or more embodiments, the dielectric region **236** and barrier dielectric region **238** are formed with sub-nanometer thickness control, to which ALD is well-suited. However, embodiments are not limited to a particular deposition process. In some embodiments, the dielectric region **236** can have a thickness of from about 10 to about 100 Angstroms, the barrier dielectric region **238** can have a thickness of less than about 20 Angstroms, e.g., from about 2 to about 20 Angstroms, and the thin film comprising a number of laminate dielectric materials **235** can have a thickness of less than about 1000 Angstroms, e.g., from about 50 to about 1000 Angstroms. However, embodiments are not limited to a particular thickness of dielectric region **236**, barrier dielectric region **238**, or the thin film comprising a number of laminate dielectric materials **235**.

[0045] The electrodes **232** and/or **234** can be formed via an ALD process, in situ using a CVD process, or other suitable deposition process. Additional materials, e.g., materials other than a metal associated with electrode **234**, such as additional materials associated with the metal precursor source, e.g., titanium chloride, titanium tetrachloride (TiCl_4), chlorine, as well as other precursor materials and/or reactants, e.g., hydrogen, argon, etc., associated with an in situ CVD process can react with previously formed dielectric region **236**, e.g., tita-

nium oxide, or optional barrier dielectric material **242** and contribute to the formation of the electrodes. Some examples of precursor materials include, but are not limited to, hydrogen, argon, e.g., argon plasma, and/or a titanium chloride material such as titanium tetrachloride, titanium trichloride, or titanium dichloride, for example.

[0046] The formation of electrode **234** onto a dielectric region **236** can result in a reaction that can create a “reacted” metal oxide (not shown in FIG. 2) at the interface between electrode **234** and a deposited metal oxide material **236**. The reacted metal oxide can include materials such as aluminum oxide (Al_xO_y), aluminum titanium oxide ($\text{Al}_x\text{Ti}_y\text{O}_z$), aluminum hafnium oxide ($\text{Al}_x\text{Hf}_y\text{O}_z$), silicon oxide (Si_xO_y), silicon oxynitride ($\text{Si}_x\text{O}_y\text{N}_z$), hafnium silicon oxide ($\text{Hf}_x\text{Si}_y\text{O}_z$), zirconium silicon oxide ($\text{Zr}_x\text{Si}_y\text{O}_z$), zirconium silicon oxynitride ($\text{Zr}_x\text{Si}_y\text{O}_z\text{N}_z$), hafnium oxide (Hf_xO_y), zirconium oxide (Zr_xO_y), titanium oxide (Ti_xO_y), hafnium zirconium oxide ($\text{Hf}_x\text{Zr}_y\text{O}_z$), hafnium titanium oxide ($\text{Hf}_x\text{Ti}_y\text{O}_z$), zirconium titanium oxide ($\text{Zr}_x\text{Ti}_y\text{O}_z$), and/or strontium oxide (Sr_xO_y), among other materials.

[0047] The resistivity of the metal oxide portion of the resistive memory cell **230** can be dependent on the location of oxygen ions and can change as the location of the oxygen ions change, either in dielectric regions **236** or the reacted metal oxide portion. For example, where dielectric region **236** located furthest away from electrode **232** is titanium dioxide (TiO_2), electrode **234** is titanium, and a plasma CVD (PECVD) process used to deposit materials includes a titanium tetrachloride (TiCl_4) metal precursor source along with hydrogen (H_2) and an argon plasma component, the metal oxide portion can be a sub-stoichiometric titanium oxide (TiO_{2-x}). Regardless, embodiments of the resistive memory cell of the present disclosure are not limited to those materials shown in FIG. 2, and may include other materials formed during the formation of the materials shown in FIG. 2.

[0048] The resistance (and therefore the logic state) of the resistive memory cell **230** can change depending on the location of the ions, e.g., oxygen. However, the presence of the barrier dielectric region **238** between dielectric regions **236** interferes with the formation of a conductive filament extending from the cathode to the anode. A resistive memory cell in which a conductive filament extending from the cathode to the anode in a continuous dielectric typically has only two resistive (and logic) states, a high resistance state (i.e., conductive filament present) and a low resistance state (i.e., conductive filament not present).

[0049] The state of resistive memory cell **230** can be read by applying a read voltage across the resistive memory cell **230** via electrodes **232**, **234**. The state of resistive memory cell **230** can be programmed by applying a programming voltage across the resistive memory cell **230** via electrodes **232**, **234** sufficient to cause ion, e.g., oxygen ion for metal oxide materials, vacancy movement. When an electric field is applied, the ion vacancies drift, which is reversible by changing the direction of the current through the resistive memory cell. The migration of ion vacancies in resistive memory cell can occur due to application of pulsed voltages and/or voltages of different magnitudes. The resistance, and corresponding logic state, of resistive memory cell **230** can be set to a desired value by applying an appropriate voltage pulse/magnitude.

[0050] According to one or more embodiments of the present disclosure, a resistive memory cell **230** formed having at least one instance of barrier dielectric region **238** between

dielectric regions **236** can be operated to have more than two resistance (logic) states. Resistance of resistive memory cell **230** does not switch from a highest resistance state to a lowest resistance state (or from a lowest resistance state to a highest resistance state) all at once, thereby providing one or more stable, non-volatile resistive states (and corresponding logic states) in between the lowest and highest resistance states, as well as improved switching control. Rather than switching rapidly to/from a highest resistive state directly to a lowest resistive state, conductivity of resistive memory cell **230** increases (i.e., resistance decreases) to a greater extent in those dielectric regions **236** located closest to electrode **234** for a given applied programming voltage. That is, as a result of an applied programming voltage the two dielectric regions **236** shown in FIG. 2 located closest to the second electrode may be most conductive, the dielectric region **236** located next closest to electrode **234** may be somewhat conductive, and the dielectric region **236** located closest to electrode **232** may be mostly insulative, resulting in a cumulative resistance between electrode **232** and electrode **234** intermediate between a low resistance state and a high resistance state.

[0051] With appropriate application of programming voltage in excess of a threshold voltage/duration for a given resistance state, an increased number of dielectric regions **236** can be controlled to be conductive, the level of conductivity for each particular dielectric region decreases based on distance from electrode **234** towards electrode **232**. A plurality of programming voltage magnitude/durations can correspond to a plurality of discreet total resistance levels for the resistive memory cell. Conversely, with appropriate application of a reverse polarity of programming voltage, an increased number of dielectric regions **236** can be controlled to be more insulative based on distance from electrode **232** towards electrode **234**.

[0052] The resistive switching characteristics can vary depending on factors such as the particular dielectric and barrier dielectric materials involved, the number and arrangement of instances of a dielectric region **236** and a barrier dielectric region **238**, use of the optional buffer dielectric material **240** and/or optional barrier dielectric material **242**, among other factors. Increasing the number of instances of dielectric **236**/barrier dielectric **238** regions can provide an increasing quantity of stable resistance states (and corresponding logic states). Additionally, an increasing number of instances of dielectric **236**/barrier dielectric **238** regions can provide increasing granularity of resistance control, and thus generally improving switching characteristics.

[0053] FIGS. 3A-3B illustrate cross-sectional views of a portion of a resistive memory cell having dielectric and barrier dielectric regions formed horizontally in accordance with one or more embodiments of the present disclosure. FIG. 3A shows a resistive memory cell **350** comprising a number of laminate dielectric regions **355** between two electrodes **352** and **354**. The number of laminate dielectric regions **355** comprise alternating instances of dielectric regions **356** and barrier dielectric regions **358**, with dielectric regions **356** being located adjacent each electrode. The resistive memory cell **350** is fabricated using horizontal laminates. That is, each successive material is deposited on previously deposited materials such that the materials are “grown” from the bottom-up, as indicated in FIG. 3A at **357**. FIG. 3A shows that the instances of dielectric regions **356** and barrier dielectric regions **358** are formed substantially parallel to the electrode **352**.

[0054] According to an example method of forming a resistive memory cell 350 in accordance with one or more embodiments of the present disclosure, a dielectric region 356 is formed on an electrode 352, and a barrier dielectric region 358 is formed on the dielectric region 356. Additional instances of alternating dielectric region 356 and barrier dielectric region 358 are formed until electrode 354 is formed on last dielectric region 356, e.g., located furthest away from the electrode 352. The barrier dielectric region 358 is a slow oxygen diffusion barrier and/or grain-boundary disruptor material with respect to the dielectric regions 356.

[0055] The resistive memory cell 360 can also be fabricated using horizontal laminates. That is, each successive material can be deposited on previously deposited materials such that the materials are “grown” from the bottom-up, as indicated in FIG. 3B at 367.

[0056] According to one or more embodiments, each of the dielectric regions 356 and barrier dielectric regions 358 are formed to be amorphous, such that the boundary between the dielectric regions 356 and barrier dielectric regions 358 are an amorphous/amorphous boundary. That is, resistive memory cell 350 includes amorphous/amorphous laminates.

[0057] FIG. 3B shows a resistive memory cell 360 having a thin film comprising a number of solid laminate dielectric regions 365 between two electrodes 362 and 364. The number of laminate dielectric regions 365 comprise alternating instances of dielectric regions 366 and barrier dielectric regions 368, with dielectric regions 366 being located adjacent each electrode. The resistive memory cell 360 is fabricated using horizontal formation of the various materials, as described with respect to the resistive memory cell illustrated in FIGS. 3 and 4A. FIG. 3B shows that the instances of dielectric regions 366 and barrier dielectric regions 368 are formed substantially parallel to the electrode 362.

[0058] According to one or more embodiments, each of the barrier dielectric regions 368 of resistive memory cell 360 are formed to be amorphous; however, each of the dielectric regions 366 of resistive memory cell 360 are formed to be crystalline, as may be achieved by annealing, for example. Therefore, the boundary between the dielectric regions 366 and barrier dielectric regions 368 are a crystalline/amorphous boundary. That is, resistive memory cell 360 includes crystalline/amorphous laminates.

[0059] FIGS. 4A-4B illustrate cross-sectional views of a portion of a resistive memory cell having dielectric and barrier dielectric regions formed vertically in accordance with one or more embodiments of the present disclosure. FIG. 4A shows a resistive memory cell 470 comprising a number of laminate dielectric regions 475 between two electrodes 472 and 474. The number of laminate dielectric regions 475 comprise alternating instances of dielectric regions 476 and barrier dielectric regions 478. However, the instances of dielectric regions 476 and barrier dielectric regions 478 are formed using vertical laminates. That is, the instances of dielectric regions 476 and barrier dielectric regions 478 are formed substantially perpendicular to the electrode 472.

[0060] As used herein, the term “substantially” intends that the modified characteristic need not be absolute, but is close enough to the characteristic so as to achieve the advantages of the characteristic. For example, “substantially perpendicular” is not limited to absolute perpendicularity, and can include structure orientations that are oriented sufficiently close to being at a right angle to one another so as to achieve the advantages associated with a perpendicular orientation. For

example, “substantially perpendicular” intends at least being closer to an orthogonal orientation than to a parallel orientation.

[0061] According to an example method of forming a resistive memory cell 470 in accordance with one or more embodiments of the present disclosure, electrode 472 is formed. Bulk dielectric material 476 is formed, e.g., deposited, on the electrode 472. The bulk dielectric material 476 is patterned, etched, and filled with barrier dielectric material 478. Chemical mechanical polishing (CMP), or other suitable processing, may be used to remove barrier dielectric material 478 outside the etched trenches, e.g., from the portions of the dielectric material 476 and barrier dielectric material 478, on which electrode 474 is to be formed. Electrode 474 can be formed on the instances of dielectric materials 476 and barrier dielectric materials 478, oriented as shown in FIG. 4A, e.g., parallel to electrode 472 and perpendicular to the instances of dielectric materials 476 and barrier dielectric materials 478.

[0062] The barrier dielectric material 478 has a slower oxygen diffusion rate and/or is a grain-boundary disruptor with respect to the dielectric materials 476. However, as will be appreciated, the electric field between the electrodes 472 and 474 is oriented parallel to the boundaries between the dielectric materials 476 and barrier dielectric materials 478. As such, the instances of barrier dielectric materials 478 do not interrupt the formation of continuous filaments in the dielectric materials 476, as is the case for a lateral construction, e.g., FIGS. 2, 3A, and 3B, where barrier dielectric materials are formed to be perpendicular to the electric field between the electrodes, e.g., anode and cathode.

[0063] According to another example method of forming a resistive memory cell 470 in accordance with one or more embodiments of the present disclosure, electrode 472 is formed. A vertical instance of dielectric region 476 is formed, e.g., deposited, on the electrode 472 such that the dielectric region 476 is perpendicular to the electrode 472. Additional alternating instances of barrier dielectric region 478 and dielectric region 476 can be formed using sidewall deposition techniques and a contact punch, for instance. The direction of growth using sidewall deposition techniques can be as shown in FIG. 4A using vertical laminates. The barrier dielectric region 478 for this configuration of a resistive memory cell 470 is a slow oxygen diffusion barrier and/or grain-boundary disruptor material with respect to the dielectric regions 476.

[0064] Once the intended number of instances of dielectric regions 476 and barrier dielectric regions 478 are deposited and appropriately formed, CMP, or other suitable processing, may be used to remove dielectric region 476 and barrier dielectric region 478 from the build-up of dielectric region 476 and barrier dielectric region 478 on which electrode 474 is to be formed. Subsequently, electrode 474 can be formed on the instances of dielectric regions 476 and barrier dielectric regions 478, oriented as shown in FIG. 4A, e.g., parallel to electrode 472 and perpendicular to the instances of dielectric regions 476 and barrier dielectric regions 478.

[0065] Despite barrier dielectric region 478 not being located across a path for conductive filaments, vertically oriented laminates can still provide some unique switching control as the number of channels (and channel width) within which conductive filaments can form can be precisely controlled, which may be beneficial for oxygen diffusion moderation mechanisms. Controlling the number of channels (and channel width), such as by limiting the number and geometry of discrete filamentary electrical paths available,

can limit radial and/or control lateral, e.g., from cathode to anode, growth of conductive filaments.

[0066] For example, vertically-oriented barrier dielectric regions **478**, e.g., Al_2O_3 , located between vertically-oriented dielectric regions **476** can maintain amorphous dielectric regions **476**, e.g., TiO_2 , as-deposited by reducing the volume of individual dielectric regions **476**, particularly with respect to the horizontal thickness thereof. Thick dielectric regions **476**, e.g., TiO_2 , can crystallize as-deposited by ALD. The barrier dielectric regions **478** can provide a large decrease in as-deposited roughness. Roughness is generally unwanted as it tends to concentrate electric fields near an electrode interface, thereby degrading resistive memory cell performance due to enhanced filament formation.

[0067] According to one or more embodiments, each of the dielectric regions **476** and barrier dielectric regions **478** shown in FIG. 4A can be formed to be amorphous, such that the boundary between the dielectric regions **476** and barrier dielectric regions **478** are amorphous/amorphous boundaries. That is, resistive memory cell **470** can be fabricated to include amorphous/amorphous laminates.

[0068] After annealing, Al_2O_3 - TiO_2 laminates, e.g., instances of barrier dielectric regions **478** and dielectric regions **476** respectively, can become crystalline. However, the full-width at half-maximum (FWHM) of a peak intensity for a diffraction measurement, e.g., plotted with respect to the diffraction angle, theta, is larger than for ZrO_2 - TiO_2 laminates, indicating the grain size is smaller for Al_2O_3 - TiO_2 laminates due to disruption.

[0069] According to one or more example embodiments of the present disclosure, a resistive memory cell can be configured to have one or multiple SrTiO_3 - LaAlO_3 interfaces that can be activated/deactivated under one or more auxiliary electric fields. For example, the one or more auxiliary electric fields can be provided from field-effects at small feature size for the two-electrode system shown in FIG. 4A, for example, or can be associated with a third electrode, e.g., auxiliary electrode, positioned parallel to the vertically oriented laminates and acting as a control gate, for instance.

[0070] FIG. 4B shows a resistive memory cell **480** comprising a number of laminate dielectric regions **485** between two electrodes **482** and **484**. The number of laminate dielectric regions **485** comprise alternating instances of dielectric regions **486** and barrier dielectric regions **488**. As described above with respect to FIG. 4A, the instances of dielectric regions **486** and barrier dielectric regions **488** are formed using vertically-oriented laminates. That is, the instances of dielectric regions **486** and barrier dielectric regions **488** are formed substantially perpendicular to the electrode **482**. Resistive memory cell **480** can be fabricated in accordance with the deposition techniques described above with respect to FIG. 4A, resulting in a lateral growth direction for the laminates.

[0071] In contrast to FIG. 4A, FIG. 4B depicts dielectric regions **486** formed to be crystalline, as may be achieved by annealing, for example. Therefore, the boundaries between the dielectric regions **486** and barrier dielectric regions **488** are crystalline/crystalline boundaries. That is, resistive memory cell **480** can be fabricated to include crystalline/crystalline vertical laminates.

[0072] Although specific embodiments have been illustrated and described herein, those of ordinary skill in the art will appreciate that an arrangement calculated to achieve the same results can be substituted for the specific embodiments

shown. This disclosure is intended to cover adaptations or variations of various embodiments of the present disclosure. It is to be understood that the above description has been made in an illustrative fashion, and not a restrictive one. Combination of the above embodiments, and other embodiments not specifically described herein will be apparent to those of skill in the art upon reviewing the above description. The scope of the various embodiments of the present disclosure includes other applications in which the above structures and methods are used. Therefore, the scope of various embodiments of the present disclosure should be determined with reference to the appended claims, along with the full range of Equivalents to which such claims are entitled.

[0073] In the foregoing Detailed Description, various features are grouped together in a single embodiment for the purpose of streamlining the disclosure. This method of disclosure is not to be interpreted as reflecting an intention that the disclosed embodiments of the present disclosure have to use more features than are expressly recited in each claim. Rather, as the following claims reflect, inventive subject matter lies in less than all features of a single disclosed embodiment. Thus, the following claims are hereby incorporated into the Detailed Description, with each claim standing on its own as a separate embodiment.

1-20. (canceled)

21. A method of forming a resistive memory cell, comprising:

- forming a first dielectric region between two electrodes;
- forming a barrier dielectric region on the first dielectric region; and
- forming a second dielectric region on the barrier dielectric region,

wherein forming the barrier dielectric region includes forming a crystalline barrier dielectric region adjacent an amorphous first or second dielectric region, and wherein forming the barrier dielectric region includes forming an amorphous barrier dielectric region adjacent a crystalline first or second dielectric region.

22. The method of claim **21**, further comprising forming one or more additional instances of barrier dielectric regions and dielectric regions, wherein dielectric regions and additional instances of barrier dielectric regions alternate, and each additional instances of barrier dielectric region is located between dielectric regions.

23. The method of claim **21**, wherein forming the barrier dielectric region includes forming to a thickness of less than about 20 Angstroms.

24. The method of claim **21**, wherein forming the first and second dielectric regions includes forming the first and second dielectric regions to a thickness of between from about 10 to about 100 Angstroms.

25. The method of claim **21**, wherein the thickness of the first and second dielectric regions and the barrier dielectric region is between from about 50 to about 1000 Angstroms.

26. The method of claim **21**, wherein forming the first and second dielectric regions includes forming a first and second metal oxide region.

27. The method of claim **26**, wherein forming the first and second metal oxide regions includes forming a first and second amorphous metal oxide region.

28. The method of claim **26**, wherein forming the first and second metal oxide regions includes forming a first and second crystalline metal oxide region.

29. The method of claim **26**, wherein forming the first and second metal oxide regions includes forming at least one amorphous metal oxide region and at least one crystalline metal oxide region.

30. The method of claim **26**, wherein forming the first and second metal oxide regions includes forming at least one of a titanium dioxide (TiO_2) region, a lanthanum oxide (La_2O_3) region, a gallium oxide (Ga_2O_3) region, a zirconium oxide (ZrO_2) region, a zirconium silicon oxide ($\text{Zr}_x\text{Si}_y\text{O}_z$) region, a hafnium oxide (HfO_2) region, a hafnium silicon oxide ($\text{Hf}_x\text{Si}_y\text{O}_z$) region, and a strontium titanate (SrTiO_3) region.

31. The method of claim **21**, wherein forming the barrier dielectric region includes forming at least one of a silicon dioxide (SiO_2) region; an aluminum oxide (Al_2O_3) region; a zirconium oxide (ZrO_2) region; and an amorphous doped silicon region.

32. The method of claim **21**, wherein forming the barrier dielectric region includes forming a material having a smaller grain size relative to a grain size of the first and second dielectric regions, the first and second dielectric regions being crystalline metal oxide materials.

33. The method of claim **21**, further comprising forming a buffer dielectric region between the electrode and the first dielectric region, wherein the buffer dielectric region has non-reactive stable electrical properties, and a lower k value and higher resistance than the first dielectric region.

34. The method of claim **21**, further comprising forming a buffer dielectric region between the electrode and the first dielectric region, wherein the buffer dielectric region has non-reactive stable electrical properties, and a higher k value and lower resistance than the first dielectric region.

35. A method of forming a resistive memory cell, comprising:

- forming a first electrode of the resistive memory cell;
- forming an alternating plurality of dielectric regions and plurality of barrier dielectric regions on the first electrode such that each is arranged to be substantially perpendicular to the first electrode, wherein each of the plurality of barrier dielectric regions is respectively located between dielectric regions; and

- forming a second electrode of the resistive memory cell on, and subsequent to forming, the alternating plurality of dielectric regions and plurality of barrier dielectric regions, wherein the second electrode is arranged to be substantially parallel to the first electrode and each of the alternating plurality of dielectric regions and plurality of barrier dielectric regions formed between the first electrode of the resistive memory cell and the second electrode of the resistive memory cell are everywhere substantially perpendicular to the first electrode of the resistive memory cell and the second electrode of the resistive memory cell.

36. The method of claim **35**, wherein forming alternating dielectric region and barrier dielectric region on the first electrode of the resistive memory cell includes:

- forming a first dielectric region on the first electrode of the resistive memory cell such that the first dielectric region is arranged to have a substantially vertical orientation perpendicular to the first electrode of the resistive memory cell;

- depositing a silicon dioxide barrier dielectric region on a sidewall of the first dielectric region;

- forming the silicon dioxide barrier dielectric region to have a substantially vertical orientation perpendicular to the first electrode of the resistive memory cell;

- depositing a second dielectric region on the formed silicon dioxide barrier dielectric region;

- forming the second dielectric region to have a substantially vertical orientation perpendicular to the first electrode of the resistive memory cell.

37. The method of claim **35**, wherein forming alternating dielectric region and barrier dielectric region on the first electrode of the resistive memory cell includes:

- forming dielectric material on the first electrode of the resistive memory cell;

- etching the dielectric material to form at least one trench substantially perpendicular to the first electrode of the resistive memory cell;

- depositing a silicon dioxide barrier dielectric material into the at least one trench; and chemical-mechanical polishing (CMP) the dielectric and silicon dioxide barrier dielectric materials opposite the first electrode of the resistive memory cell.

38. A method of forming a resistive memory cell, comprising:

- forming a number of dielectric regions formed between two electrodes; and

- forming a barrier dielectric region between each of the dielectric regions, wherein the barrier dielectric region is:

- amorphous where the number of dielectric regions are crystalline;

- crystalline where the number of dielectric regions are amorphous; and

- wherein the barrier dielectric region is a grain-boundary disruptor relative to the number of dielectric regions.

39. The method of claim **38**, wherein forming the number of dielectric regions includes forming the number of dielectric regions to be amorphous.

40. The method of claim **38**, wherein the barrier dielectric region between each of the dielectric regions to has a slower oxygen diffusion rate relative to the number of dielectric regions.

* * * * *