



(51) International Patent Classification:
A22C 25/16 (2006.01)

(21) International Application Number:
PCT/DK2011/050429

(22) International Filing Date:
11 November 2011 (11.11.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PA 2010 01035 12 November 2010 (12.11.2010) DK

(71) Applicant (for all designated States except US): **MAREL SALMON A/S** [DK/DK]; Bøgildsmindevej 3, DK-9440 Nørresundby (DK).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **JACOBSEN, Preben Holm** [DK/DK]; Understedvej 166, DK-9300 Sæby (DK). **JAKOBSEN, Bjarne Kjeld** [DK/DK]; Mo-sevænge 2, Bislev, DK-9240 Nibe (DK).

(74) Agent: **PATRADE A/S**; Fredens Torv 3A, DK-8000 Aarhus C (DK).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A FISH FILLETING MACHINE

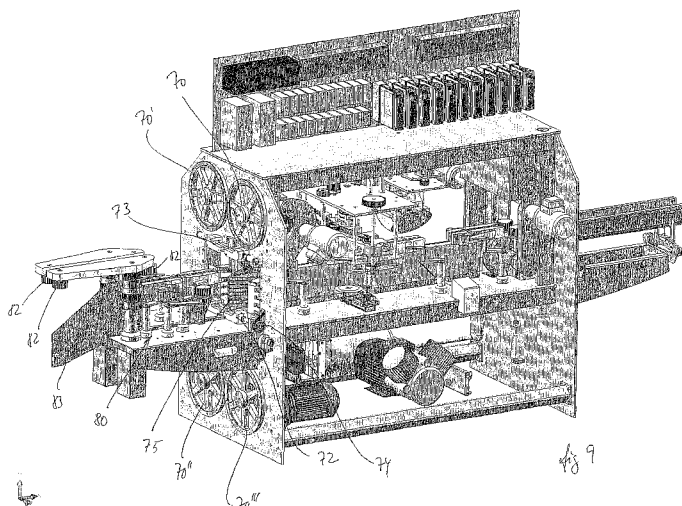

(57) Abstract: Fish filleting machine comprising a number of stations arranged in sequence for continuous filleting of fish, where the de-capitated and gutted fish is placed right side up, i.e. the back of the fish upwards and front end foremost in an in-feed channel where the machine further comprises: - a first station comprising means for engaging the fish and centering said fish relative to a vertical plane of the machine, such that lower sides of the fish are arranged on opposite sides of said plane; - a second station comprising means for detecting and registering the vertical extent of the lower edges of the fish and the back of the fish; - a third station comprising means for fixating the back of the fish, and cutting means for cutting slits in the back of the fish, said slits having an extent at least along either side of the protruding back fin; - a fourth station comprising articulated cutting means, where said articulated cutting means are arranged on either side of the vertical plane, suitable for cutting/trimming at least a part of the lowermost sides and/or edges of the fish; - a fifth station where upper cutting means are positioned along the vertical plane for cutting the fish meat free from the vertebrae of the fish; - a sixth station comprising means for cutting vertically on either side of the vertebrae; - a seventh station for directing the bone-free fillets to further processing.



A fish filleting machine

Field of the invention

- 5 The present invention relates to a machine for filleting fish, in particular to a machine for cutting fillets from the backbones of fish.

Background of the invention

- 10 Fish processing operations typically include removal of the heads and the fish entrails. Subsequently, the fish is split longitudinally and vertically into three pieces, two side-pieces, fish fillets, and one intermediate "carcass" piece containing the backbone or vertebrae.

- 15 In the following context, the anatomy of the fish will be referred to as follows: The spine part of the fish is the part extending upwardly from the backbone to the upper back of the fish. The abdomen part of the fish is the part extending downward from the backbone to the abdomen or belly. The centre plan is a longitudinally extending vertical plane intersecting through the middle of the backbone in the middle in between the two fillets. The fillets are the pieces of meat arising when the fish is split as described above, i.e. longitudinally and vertically along each sides of the backbone thus splitting the fish into two fillets (side-pieces) and one carcass part comprising the backbone. The carcass
20 is merely used for industrial purposes, e.g. for making fishmeal etc. while the two side-pieces represent the valuable part of the fish and may be further processed, e.g. by smoking.

- 25 In general, the process of filleting fish is widely automated. In existing machines, one or more knife arrangements cut the fish into fillets either by cutting from one side of the fish throughout the fish or by cutting partly from the abdomen side and partly from the spinal side of the fish. Most frequently, filleting machines are provided with one or more sets of two adjacent circular rotating saw blades. Obviously, the rotating saw blades perform a plane cut into the fish. In order not to loose too much fish meat, some machines are provided with a set of disks being arranged to form an angle therein be-

tween, so that the blades in one end defines a relatively open gap therein between and in a diametrically opposite end a relatively narrow gap therein between. In that way, the set of two blades can cut a triangular carcass part out of the fish relatively narrow to the backbone. However, mainly due to the fact that each blade performs a plane cut, relatively large amounts of the meat, especially in the abdomen part of the fish (the part extending downward from the backbone), is cut off from the valuable fillets and removed with the valueless carcass part.

New developments have generated machines using relatively flexible rotating band saws, i.e. closed-loop belts with a very sharp front edge. These belts are characterised by allowing cutting in slightly curved shapes. During the cutting, a fish is advanced in between two band saws. When the backbone has entered in between the two band saws, the two bands are pressed towards each other, e.g. by means of squeezing nippers. Due to a combination of the stiffness of the backbone and the angle of the knife edges of the bands, each of the bands will follow the backbone smoothly. The widest gap between the bands exists where the bands are held separated by the backbone. From this point, the bands, both upwards towards the spine part and downwards towards the abdomen part, follow a curve so that the gap between the bands, near the back of the fish and near the belly of the fish, is almost eliminated. The squeezing nippers are typically arranged above and below the fish (in close vicinity to the fish). Due to the curved configuration of the cutting bands, the cutting may be performed closely around the backbone and in a curve towards the centre plane of the fish. Accordingly, it is possibly with a band-saw machine to fillet the fish with a larger amount of the meat on the fillets.

However, even with the band-saw machines, a fair amount of meat is disposed with the carcass, the main reason being that the two band saws cannot be pressed closer together than the width of the spine of the fish.

GB 973.213 describes a method and an apparatus for filleting fish, wherein the fish, in particular herrings, is filleted by using firstly a rotating knife for cutting an incision in the spine part of the fish. Then the side fillets are cut away from the carcass by use of two oppositely arranged band saws. However, this single knife can only be used for fish having hair-like fishbone in the spine part. The way of using only one knife does

not allow for cutting the fillets free on both side of fishbone in the spine part, which is necessary when filleting fish with large, thick and stiff fishbone in the spine part, such as Salmonidae or Gadidae. Further, it is not possible to cut away the dorsal fin from the spine part by using one knife, as the bone of fin extending into the spine part must be
5 cut on each side in order to remove it from the fillet.

US 4,534,085, US 3,596,308 and WO 94/17670 all relate to apparatuses, wherein the fish is filleted by use of two oppositely arranged band saws cutting the fillets on each side of the carcass.

US 2,479,010 discloses a filleting machine, wherein the head and tail is removed first,
10 and the fillets are then cut away by use of two rotating knives.

GB 811.199 discloses an apparatus, wherein the fillets are removed from the carcass by use of two rotating knives positioned just above the fish, which is transported on a conveyor.

15 In the applicant's own, earlier published PCT-application, WO 2004/014140, is described a fish filleting machine for cutting fillets from the backbone of a fish, the machine comprising a fish supporter feed line for feeding fish through the machine and through mutually adjacent band saws arranged along said feed line. The band saws' function is to cut on respective sides of the backbone of a fish for filleting the abdomen
20 bone part of the fish and separating the fish into two fish fillets and a carcass. This machine greatly improved the yield over prior art machines in that the saw blades are urged together thereby being curved, such that the saw blades better conforms to the shape of the bones of the fish, and thereby achieves a closer cut, leaving less valuable meat on the carcass.

25

Spine cutting means are arranged along the feed line, and before the band saws in a feeding direction of the feed line where the spine cutting means comprise two mutually adjacent cutting blades for cutting of incisions in the spine part of the fish.

This apparatus, although going a long way towards providing an automatic fish filleting machine due to the special arrangement of the band saws, still leaves a substantial amount of meat on the carcass.

5 **Object of the invention**

It is an object of the present invention to provide a filleting machine that fillets fish with a minimum of waste meat, in particular fish with large and robust fishbones in the spine part, such as Salmonidae and Gadidae.

10 It is a further object of the present invention to provide a filleting machine which is easy to maintain and clean.

Description of the invention

The present invention overcomes the above-described disadvantages of the known fish-cutting machines by providing a fish-filleting machine comprising:

- 15 - a first station comprising means for engaging the fish and centring said fish relative to a vertical plane of the machine, such that lower sides of the fish are arranged on opposite sides of said plane;
- 20 - a second station comprising means for detecting and registering the vertical extent of the lower edges of the fish and the fish back;
- 25 - a third station comprising means for fixating the fish back, and cutting means for cutting slits in the fish back, said slits having an extent at least along either side of the protruding back fin;
- a fourth station comprising articulated cutting means, where said articulated cutting means are arranged on either side of the vertical plane, suitable for cutting/trimming at least a part of the lowermost sides and/or edges of the fish;

- a fifth station where upper cutting means are positioned along the vertical plane for cutting the fish meat free from the vertebrae of the fish;
- a sixth station comprising means for cutting vertically on either side of the ver-
tebrae
- a seventh station for directing the bone-free fillets to further processing

The seven stations of the inventive fish filleting machine ensure that an effective fillet-
ing process, i.e. a filleting process where a minimum of waste meat is left on the
fishbone/carcass, is accomplished.

Furthermore, as part of the further processing, once the fillets have been separated
from the carcass/fish bones of the prior art devices and in particular where the fish is
salmon, is to trim the lower extremities of the fillets in order to remove excessive fat.
By the present invention the second and fourth station carries out this trimming during
the advancement of the fish through the fish filleting machine.

Consequently, the fish fillets being filleted by the inventive machine are more or less
completely finished by the time they leave the machine.

It shall also be noted that the inventive machine according to the invention process the
fish with the right side up, i.e. the back fin is arranged up.

In a further advantageous embodiment the means in the first station are two guiding
members having facing curved surfaces, substantially corresponding to the shape of an
upper part of a fish' back, where said members are biased towards each other, and
where a vertically arranged and moveable plate member is arranged, which plate mem-
ber, as a fish is introduced between the guiding members, is elevated inside the fish,
thereby forcing and fixating the fish at a determined height.

By this arrangement it is achieved that the fish is more or less fixated in the machine
such that it is possible with great certainty to establish the geometric configuration of

the fish to be filleted in order for the cutting actions and trimming in the further stations to be carried out as optimal as possible. In this connection “fixated” means that the vertical position of the fish relative to the machine and thereby the various tools, as will be discussed below, is fixed. The fish will however move in a direction through the machine. In other words the Y-position is determined, whereas the X-position will change as the fish progresses through the machine.

By maintaining the fish in a fixated position very precise cutting may be carried out.

Fish, for example salmon and other similar fish, will normally have a more or less standardized size such that a three kilo fish will have certain exterior dimensions which are almost constant for all three kilo fish of the species deriving from the same location. Naturally, fish from different locations may have different geometry and yet have the same weight. As most of this is known beforehand, it is possible to programme the machine to very precisely cut in the right places and trim very precisely as well.

Alternatively the width of the fish may be used to determine the input parameters to the various cutting means. The width is registered in the first station as the fish enters the machine. The computer software will hereafter automatically adjust all relevant positions of the cutting means in the machine accordingly. Although weight for a certain species from the same location is a good indicator as to geometrical dimensions of the fish there are still variations.

By measuring the width, and the length (as explained below) the important input data relating to a specific fish are obtained, and may be used as input for the rest of the procedure.

In a still further advantageous embodiment of the invention the second station comprises means for registering the vertical extent of the fish’s lower edges relative to the fish back, where said registering means comprises pivotal members, where the first pivotal member is arranged above the fish, in the vertical plane, where the member is biased to be in contact with the fish back, and where second pivotal members are arranged adjacent the lower edges of the fish, such that the second pivotal members may

pivot about a substantially horizontal axis in order to register the vertical extent of the lower extent of the fish.

5 In this embodiment the registration of the extent of the lower edges of the fish as well as the back and their mutual placement are registered by pivotal members which are biased to come into contact with the lower respectively the upper extremities of the fish and due to the pivotable feature variations will be registered as a turning of the axis to which the pivotal members are fastened.

10 Although a mechanical solution as described above with reference to the embodiment has a number of advantages and is very reliable in use, it is also contemplated within the scope of the invention that non-contact means such as for example lasers or vision-based means may be used in order to determine the actual geometrical size of the sides of the fish relative to the back in order to use this information as input for the trimming
15 knives in the fourth station (see below).

In this manner, as the fish is about to exit the second station, geometrical data relating to that particular fish have been detected and registered and furthermore the fish is fixated both in a vertical plane and in a horizontal plane such that any cutting operations
20 in the following stations may be carried out with a high degree of certainty that a cutting/trimming in desired positions is achieved.

In a still further advantageous embodiment of the invention the cutting means in the third station is two rotating knives arranged at an adjustable oblique angle, where fin
25 guiding means are provided immediately upstream from the rotating knives.

In this configuration it is possible to fixate the back of the fish such that the back fin due to the means for fixing the fin are arranged in a position where it is possible for the rotating knives to cut the fin from the fish. At the same time the angle between the two
30 rotating knives may be adjusted depending on the particular species of fish.

For most salmon types the angle will be maintained at approx. 90° whereby a consistent and reliable cut is made in order to remove the fin. The tissue immediately adjacent

the fin is typically fat or other undesirable tissue, and as such by cutting at a 90° angle most of this undesired tissue is removed together with the fin.

5 In a further advantageous embodiment of the invention the cutting means are arranged on a unit which unit may be elevated/lowered relative to the cutting position.

10 With this configuration it is possible to precisely position the cutting means such that they create the optimal cut irrespective of the size of the fish being processed in the fish filleting machine. For various fish sizes the vertical distance between the fish fin and the interior of the back bone may vary and by being able to adjust the elevation of the cutting means and thereby the cutting position a more optimum cut (i.e. cutting the undesired matter away and leaving valuable meat) may be performed along the fish fin, and as such a better productivity is achieved.

15 In a still further advantageous embodiment of the invention the articulated cutting means in the fourth station are independently controllable, where input from the detecting means in the second station is used to control the cutting line of the articulated cutting means.

20 The trimming of the lower part of the fish fillet is the most difficult one in that the cutting line undulates up and down and as such the control of the articulated cutting means must be very precise. At the same time the cutting line may be different from the right side respectively left side of the fish such that it is necessary to independently control the articulated cutting means. This is achieved in this embodiment by using the input from the detection means in the second station to independently control the articulated cutting means along the projected cutting line derived by the use of input from the detecting means in the second station.

25 The articulated cutting means may however be controlled by the same parameters, i.e. they will follow the same cutting profile on each side.

30

In addition to the input from the second station the control parameters to the articulated cutting means and thereby the determination of the optimal cutting line may also be influenced by data relating to that particular fish species, weight category and em-

piric data derived from measuring a multitude of the same type of fish, i.e. the same species arriving from the same destination in the same weight category.

5 In a still further advantageous embodiment of the invention the articulated cutting means is controllable in three dimensions and the cutters are rotating disc cutters, where the plane of the disc is controllable in response to input from the detection means.

The cutting means may also be adjusted in a constant height/level, such that all fish are provided with the same cut. This is especially advantageous when the machine is running at high processing speeds.

15 This is a further enhancement of the embodiment discussed above in that with articulated cutting means being controllable in three dimensions it is possible to angle the cut slightly whereby only undesired fat/meat is cut away without sacrificing any other valuable meat.

In at still further embodiment of the invention, the fifth station is the upper cutting means in the shape of two rotating knives, their planes arranged in parallel, where the distance between the planes of the knives substantially corresponds to the width of the vertebra/spine, and where the upper knives are guided by input from the detecting means in the second station in order to determine their cutting depth.

25 These cutting means cut very close on either side of the vertebrae such that the meat close to the vertebrae, as the fish fillet in a further station is separated from the fish bones, will comprise as much meat as possible, in that substantially no meat will be left on the vertebrae due to the cutting of the knives. By determining the cutting depth, again by the detecting means in the second station it is possible to cut very closely to the softer bones surrounding the abdomen of the fish and in this manner create an optimal filleting of the fish.

30

In order to cut the fillet free from the bone structure the sixth station is provided with two mutually adjacent band-saws which are arranged on either side of a vertical plane,

their cutting edges facing the fifth station, and where means are provided for urging the band saws towards each other.

5 The arrangement with the vertical band-saws corresponds to the applicant's prior published PCT-application PCT/DK2004/000020 which is hereby incorporated by reference. As is evident from the prior application the band-saws facilitate a very clean cut due to the pressure and curvature of the band-saw on the fish bone structure. In this manner the fish fillet, after having travelled through six stations of the inventive apparatus has been separated from the bones with a minimum of wasted valuable meat.

10

In a still further advantageous embodiment one or more biased horizontal ribs are arranged on either side of the vertical plane for urging the fish against the vertical plane.

15

In order to achieve a precise processing through the fish filleting machine operating the various cutting means as discussed above, it is important that the fish is as fixated as possible relative to the vertical plane which is the plane relative to which most of the cutting operations are adjusted. On the other hand it is not desirable to put too much pressure on the fish meat in that this pressure may damage the meat and as such devalue the fish. The biased horizontal ribs are therefore arranged with such a biasing force, for example created by a spring, that the fish is substantially fixated, but will still be able to move forward through the machine without damaging the meat.

20

25

In a still further advantageous embodiment of the invention two endless belts are arranged symmetrically about said vertical plane, i.e. one on either side, where each endless belt is arranged for rotation around two substantially vertical axles, such that the endless belt in use comes into engagement with the side of the fish and urges the fish against the vertical plane, and as the belts are rotated, the fish moves through the filleting machine.

30

The endless belts are provided in order to have a steady progress through the fish filleting machine. At the same time, by knowing the precise position of the belt and thereby the fish the input used for the various stations is determined very accurately.

In a still further advantageous embodiment a computing unit is provided, where said computing unit is pre-programmed with data relating to typical fish shapes, i.e. data relating to length, height, width, dependent on fish weight, where an operator may select a certain weight class for a batch of fish to be treated, whereby the different stations are pre-positioned accordingly, and where input from the detection and registering unit is used as input in order to output correct control and operating parameters for the various means in the various stations.

Alternatively in a second mode, the width of the fish to be treated is registered and automatically entered as input in the software controlling the different stations, whereby the stations are controlled according to specific parameters relating to the present fish to be treated.

In a still further advantageous embodiment a further mechanism is provided downstream from the sixth station, which mechanism comprises an endless belt which is arranged to engage the fillets as they leave the sixth station, and mirror-image fillet guiding structure below said endless belt, such that each fillet is guided to further processing skin side down.

In this manner the fish fillets substantially free of bones and with a trimmed lower edge are placed for example on a further endless conveyor transporting the fish fillets for further processing is placed in the endless conveyor with their skin sides down.

Description of the drawing

The invention will now be explained with reference to a filleting machine as depicted in the accompanying drawing wherein

Figure 1, 2 and 9 illustrates isometric illustrations of a machine according to the invention;

Fig. 3 illustrates a detail of the first station;

Fig. 4 and 5 illustrates a detail of the second station;

Fig. 6 and 7 illustrates a cross section through the machine in the third and fourth stations;

Fig. 8 illustrates a detail of the articulated cutting means;

Fig. 10 illustrates a detail of the sixth station;

5

Detailed description of the invention

10 In figure 1 and 2 are illustrated a fish fillet machine according to a preferred embodiment. The machine 1 is depicted without a substantial number of parts which could interfere with the understanding of how the machine works. Below the important parts will be explained with reference to the drawing.

15 Basically the machine comprises a chassis 2 where the chassis serves to elevate the work level such that it will be possible to fit the fillet machine into a normal production line and at the same time the elevation gives room beneath the work line for various motors 3 etc. necessary for powering the fish filleting machine as will be described below.

20 Above the chassis 2 is arranged the necessary electronic equipment 4 which is used to control the entire process of filleting the fish. In use this equipment is protected by covers, doors and the like.

25 The machine comprises an in-feed channel 10 arranged in a first end of the machine. In this embodiment the in-feed channel is in the shape of a U-shaped profile, where the fish to be filleted are arranged such that the back fin is upwards and the front of the fish without the head portion which has been removed prior to being introduced into the machine 1 is facing the machine.

30 As the fish progresses through the machine 1 it will pass a number of stations 20, 30, 40 50, 60, 70, 80 and eventually the fish fillets free from bones will be delivered to an endless conveyor belt for further processing.

Below the different stations will be described with reference to the relevant figures.

Turning to figure 3 a view of the first station 20 is depicted. In the lower right hand corner of the picture the in-feed channel may be seen by which the fish is introduced
5 into the first station. The first station comprises means for engaging the fish, here in the shape of two plastic shoes 21 which shoes 21 may be moved up and down by the mechanism 22 and where means are provided for biasing the shoes 21 towards each other in order to fixate the fish relative to a vertical plane. The shoes 21 are both provided with a curved cross section 23 having a plane which plane is shaped and thereby
10 the curve is formed such that the inner side of the shoe 23 will be more or less shaped as the contour of the fish. In this manner the shoes 21 will fixate the back part of the fish relative to the filleting machine 1.

Furthermore a vertical guide plate 24 arranged movably up and down is provided between the shoes 21. This plate will move up once a fish body is detected where said
15 plate will move up where the abdomen is positioned. The plate 24 pushes the fish body slightly upwards such that a firm contact is established between the shoes 21 and fish. As the fish moves on, the fish body is transferred to a vertical plane 31 see figure 5. The fish will ride on this vertical plane throughout the processing in the filleting machine.
20

Turning to figure 4 a first part of the second station is illustrated. The second station comprises means for detecting and registering the vertical extent of the fish, the lower edges as well as the back of the fish. In figure 4 is illustrated the means 30 for registering
25 the position of the back of the fish. In this embodiment the fish is illustrated by a member 100. The means 30 comprises two members 30 which are pivotally mounted and biased towards the fish 100 whereby the rotational movement of the pivoting means 32 is used to calculate the vertical extent of the back of the fish.

30 Furthermore the shoes 21 from the first station are visible.

Additionally, endless belts 71, 72 are provided on either side of the path 100 of the fish through the machine whereby the endless belts will engage the side of the fish. Due to

the rotation of the endless belts 71, 72 the fish will be transported through the different processes in the filleting machine. Furthermore it is easy to control and determine the fish' position in the process, by registering the progress of the endless belt.

- 5 The endless belts 71, 72 are provided with biasing means 73 which urges the endless belt into a firm contact with the fish to be processed. Also the surface of the endless belts 71, 72 is provided with spikes 74 in order to ensure a firm grip on the fish.

10 In figure 5 are illustrated the corresponding means for detecting and registering the lower edges of the fish. Again the means 30 comprise a pivotable member 33 arranged on an axis 34 such that the rotational movement of the axis 34 is translated into a contour of the lower extremities of the fish. In this embodiment the fish is illustrated by the member 100. In the example illustrated in figure 5 the lower edge of the fish 100 is provided with an exaggerated curvature in order to demonstrate that the pivotable
15 member 33 will be influenced by the lower extremity 101 of the fish in order to pivot the axle 34 and thereby register the vertical extent of the fish.

20 Furthermore, biasing means 90 are provided in order to urge the fish 100 against the vertical plane 31. The biasing means comprise a number of horizontal stainless steel members 91 substantially arranged in parallel which members in one end are pivotably mounted about a vertical axis and in the opposite end is mounted to a biasing arrangement 92. Each biasing arrangement comprises an axle connected to the horizontal member 91 and interposed with a loaded spring 93 such that a substantially constant
25 spring force will urge the horizontal member 91 towards the vertical plane 31.

30 In figure 6 is illustrated a cross section through the third station 40. The cutting means 41 in the third station is made up of two rotating knives arranged such that they intersect 42 at an angle. In this embodiment the rotating knives 41 are arranged in a hub 43 such that the angle between the two rotating knives 41 may not be altered. In other embodiments the hub 43 facilitates the possibility of adjusting the angle between the rotating knives 41 such that a wider or steeper angle may be provided depending on the fish species and/or sizes. A lifting mechanism 44 is also provided such that the hub and

thereby the cutting planes may be vertically adjusted depending on the position of the back of the fish registered by the means explained with reference to figure 4.

5 In order to fixate the fish relative to the rotating cutting means 41 secondary shoes 45 are arranged immediately adjacent the cutting site such that the back of the fish is fixated as the cutting by the cutting means 41 is carried out. The secondary cutting shoes 45 are constructed in substantially the same manner as is described with respect to the shoes 21 discussed in connection with figure 3.

10 In figure 7 is illustrated a cross section through the fourth station where the articulated trimming knives 50 are illustrated in a position where the plane of the rotating knives 50 are horizontal. In order to illustrate the function of the trimming knives 50 the attention is directed towards figure 8.

15 Figure 8 illustrates the left hand side knife arrangement seen in a downstream direction. The rotating knife 50 is arranged on a shoe 51 which shoe may pivot about an axis 52 in response to the movement of a manipulating arm 53 fastened off-centre on the shoe 51. Furthermore, the shoe 51 is mounted on a vertically adjustable piston 54 such that the shoe and thereby the knife 50 may be elevated or lowered as desired.

20

In the embodiment illustrated in figure 8 a theoretical fish side 100 is arranged in the filleting machine. The fish 100 has a desired cutting curve 101 which is determined by the data relating to the actual fish size and type and as determined by the detection means 30 in the second station. In this manner it is possible by means of the vertically adjustable piston rod 54 to arrange the shoe 51 in a horizontal position and pivot the shoe about the axis 52 such that the rotating knife 50 will be cutting along the optimal cutting curve 101.

25

Furthermore, the biasing means 91 and the endless belt 71 is visible in the illustration.

30

Turning to figure 9 the sixth station is visible. The fish progresses along the vertical plane and is guided by the biasing means 71 through the sixth station. Band-saws (not illustrated) are arranged between the band-saw wheels 70, 70', 70'', 70''' such that

one endless band-saw will be arranged around the wheels 70, 70''' and another endless band-saw belt will be arranged between the wheels 70', 70''. Two substantially parallel band-saws will therefore be arranged in the cutting zone at the down-stream end of the biasing means 71. Secondary urging means 72, 73 are arranged in order to engage the
5 endless band-saw belts and urge these towards each other such that the fish interposed between the secondary biasing means 72, 73 will not be completely parallel, but will be deformed due to the presence of the fish bone. These urging means 72, 73 are adjusted by means 74 such that an optimum cut and separation of the filet from the backbone is achieved. The arrangement is further explained in applicant's own earlier published
10 PCT-application WO 2004/014140 and will not be further elaborated on at this point.

In fig. 9 is furthermore illustrated a clearer view of the cutting means 26 in the first station. In this embodiment the cutting means 26 are in the shape of two rotating knives. The knives are arranged such that they cut from the anus through the tail fin,
15 and upwards towards the main backbone/spine. The two knives therefore cuts on either side of the bones projecting downwards from the backbone/spine.

After the sixth station the seventh station 80 is arranged. The seventh station serves to handle the liberated and trimmed filets onto a further endless belt or further processing
20 and at the same time to handle the liberated fishbone carcass. The filets will be guided up to further processing by means of the endless conveyor belt 71 (not illustrated in figure 9, but see figures 4, 5, 8). The endless belt will pull the fish filets onto a slide 81 whereby the fish filets will be gently turned such that their meat-sides will be facing upwards. Superposed the endless belt 71 is a further endless belt 82 (belt not illustrated
25 in figure 9) which belt is arranged around drive wheels 82 such that the endless belt will create transportation in the same direction as the first endless belt 71. As the filets and the carcass are transported by the first endless belt 71 through the sixth and seventh stations a further vertical plane 83 will be disposed between the fish-bones and the fish back. The vertical plane 83 has an inclined upper edge such that the fish-bone will
30 travel upwards and eventually be caught by the second endless belt suspended between the drive wheels 82. In this manner the fish-bone freed from fish-meat will be separated from the filets, and it may be possible to collect and discard the fish-bones separately from the rest of the process.

Above the invention has been explained with reference to a particular embodiment including specific devices for carrying out the independent method steps, but it should be contemplated that other cutting means, for example water jets, lasers and the like, may
5 be substituted from rotating knives should a further machine arrangement within the scope of the appended claims find this to be optimal.

The embodiment described above is only for illustrative purposes, and the scope of the present invention shall only be limited by the appended claims.

CLAIMS

1. Fish filleting machine comprising a number of stations arranged in sequence for continuous filleting of fish, where the de-capitated and gutted fish is placed right side up,
5 i.e. the back of the fish upwards and front end foremost in an in-feed channel where the machine further comprises:

- 10 - a first station comprising means for engaging the fish and centering said fish relative to a vertical plane of the machine, such that lower sides of the fish are arranged on opposite sides of said plane, and where cutting means are provided for cutting along the underside of the fish from the abdomen to the tail section;
- a second station comprising means for detecting and registering the vertical extent of the lower edges of the fish and the back of the fish;
- 15 - a third station comprising means for fixating the back of the fish, and cutting means for cutting slits in the back of the fish, said slits having an extent at least along either side of the protruding back fin;
- a fourth station comprising articulated cutting means, where said articulated cutting means are arranged on either side of the vertical plane, suitable for cutting/trimming at least a part of the lowermost sides and/or edges of the fish;
- 20 - a fifth station where upper cutting means are positioned along the vertical plane for cutting the fish meat free from the vertebrae of the fish;
- a sixth station comprising means for cutting vertically on either side of the vertebrae
- a seventh station for directing the bone-free fillets to further processing.

25

2. Fish filleting machine according to claim 1, characterised in that the means in the first station are two guiding members having facing curved surfaces, substantially corresponding to the shape of an upper part of a fish' back, where said members are biased towards each other, and that a vertically arranged and moveable plate member is
30 arranged, which plate member as a fish is introduced between the guiding members, is elevated inside the fish, thereby forcing and fixating the fish at a determined height.

3. Fish filleting machine according to claim 1, characterised in that in the second station the means for registering the vertical extent of the lower edges of the fish relative to the fish back comprises pivotal members, where the first pivotal member is arranged above the fish, in the vertical plane, where the member is biased to be in contact with the back of the fish, and where second pivotal members are arranged adjacent the lower edges of the fish, such that the second pivotal members may pivot about a substantially horizontal axis in order to register the vertical extent of the lower extent of the fish.
4. Fish filleting machine according to claim 1, characterised in that in the third station the cutting means are two rotating knives, arranged at an adjustable oblique angle, and where fin guiding means are provided immediately upstream from the rotating knives.
5. Fish filleting machine according to claim 4, characterised in that the cutting means are arranged on a unit which unit may be elevated/lowered relative to the cutting position.
6. Fish filleting machine according to claim 1, characterised in that in the fourth station the articulated cutting means are independently controllable, where input from the detecting means in the second station is used to control the cutting line of the articulated cutting means.
7. Fish filleting machine according to claim 6, characterised in that the articulated cutting means is controllable in three dimensions, and where the cutters are rotating disc cutters, where the plane of the disc is controllable in response to input from the detection means.
8. Fish filleting machine according to claim 1, characterised in that in the fifth station the upper cutting means is in the shape of two rotating knives, their planes arranged in parallel, where the distance between the planes of the knives substantially corresponds to the width of the vertebrae/spine, and where the upper knives are guided by input from the detecting means in the second station in order to determine their cutting depth.

9. Fish filleting machine according to claim 1, characterised in that in the sixth station two mutually adjacent band saws are arranged on either side of the vertical plane, their cutting edges facing the fifth station, and where means are provided for urging the band
5 saws towards each other.

10. Fish filleting machine according to any of claims 3 to 9, characterised in that one or more biased horizontal ribs are arranged on either side of the vertical plane for urging the fish against the vertical plane.



10

11. Fish filleting machine according to any preceding claim, characterised in that two endless belts are arranged symmetrically about said vertical plane, i.e. one on either side, where each endless belt is arranged for rotation around two substantially vertical axles, such that the endless belt in use comes into engagement with the side of the fish,
15 and urges the fish against the vertical plane, and as the belts are rotated the fish moves through the filleting machine.

12. Fish filleting machine according to any preceding claim, characterised in that a computing unit is provided, where said computing unit is pre-programmed with data
20 relating to typical fish shapes, i.e. data relating to length, height, width, dependent on fish weight, where in a first mode an operator may select a certain weight class for a batch of fish to be treated, whereby the different stations are pre-positioned accordingly, and where input from the detection and registering unit is used as input in order to output correct control and operating parameters for the various means in the various
25 stations or alternatively in a second mode, the width of the fish to be treated is registered and automatically entered as input in the software controlling the different stations, whereby the stations are controlled according to specific parameters relating to the present fish to be treated.

30 13. Fish filleting machine according to claim 1, characterised in that a further mechanism is provided downstream from the sixth station, which mechanism comprises an endless belt which is arranged to engage the fillets as they leave the sixth station, and

mirror-image fillet guiding structure below said endless belt, such that each fillet is guided to further processing skin side down.

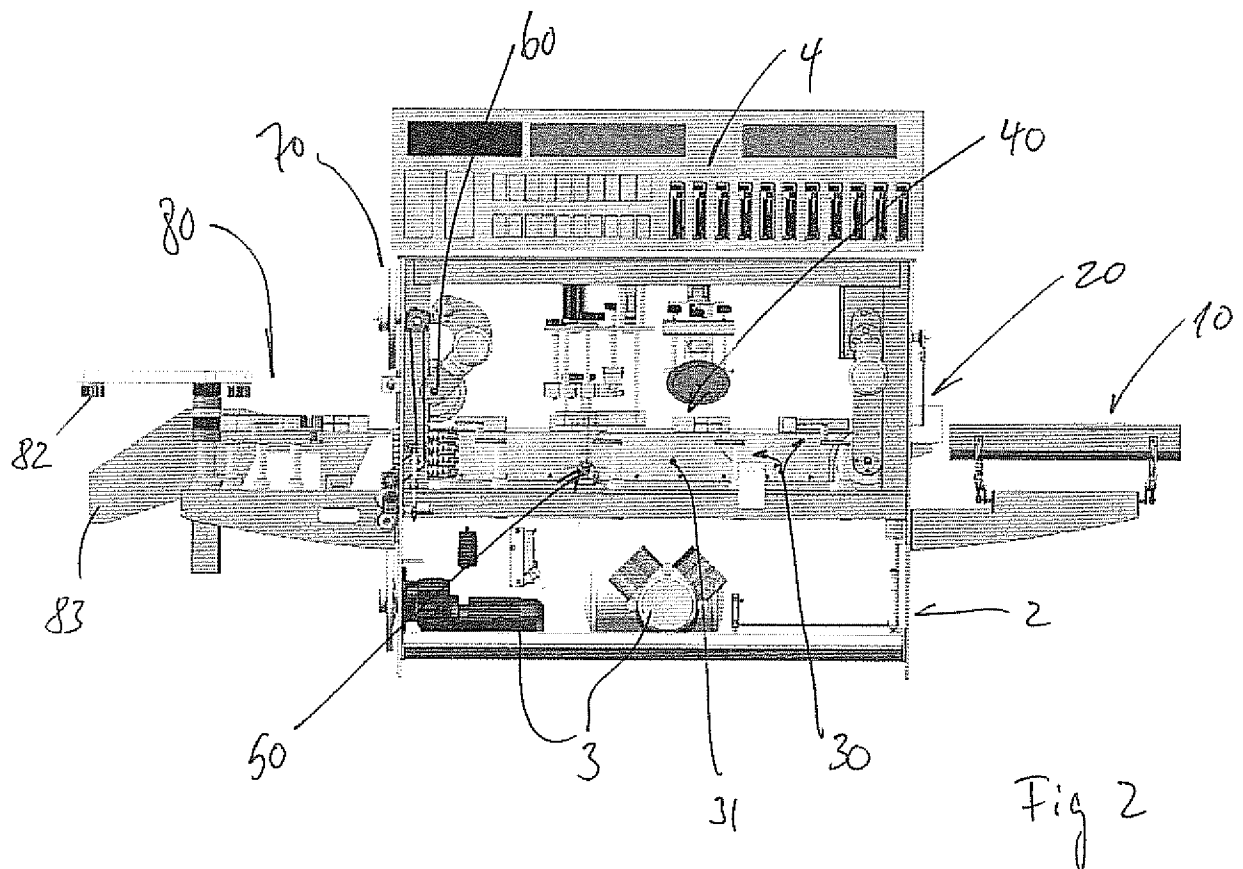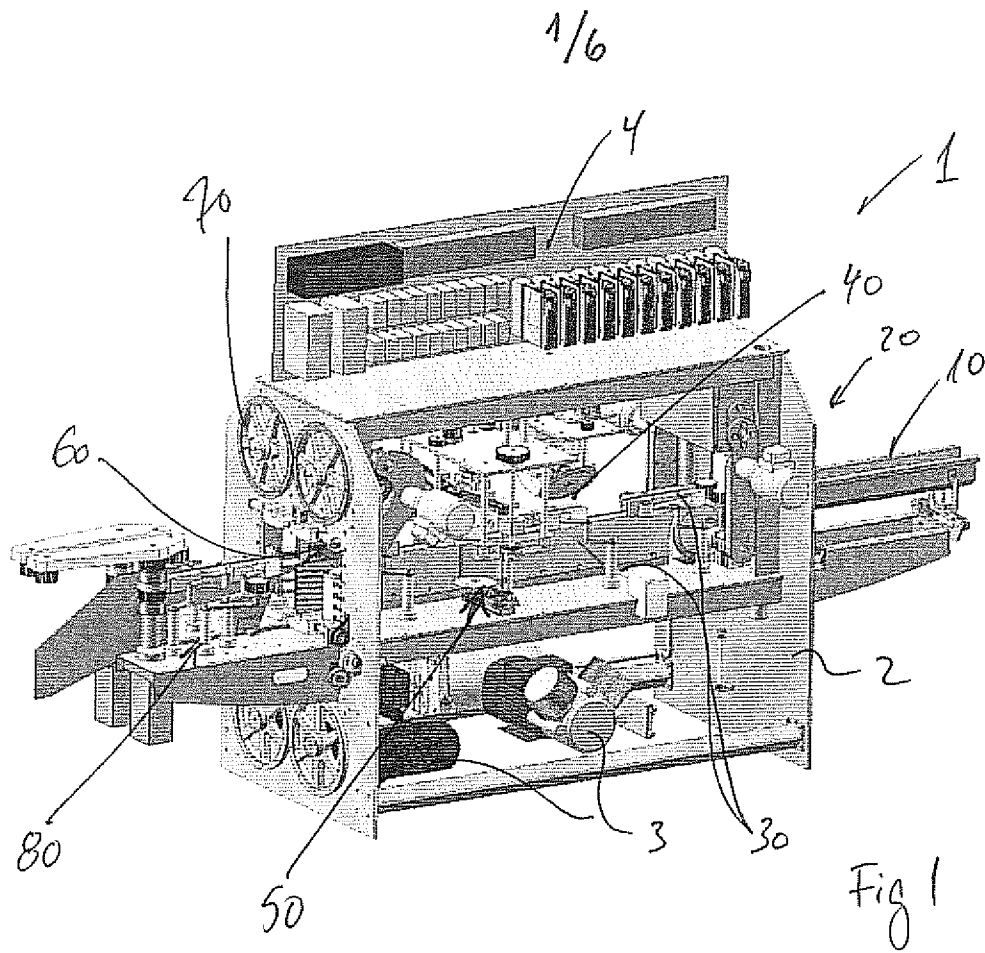

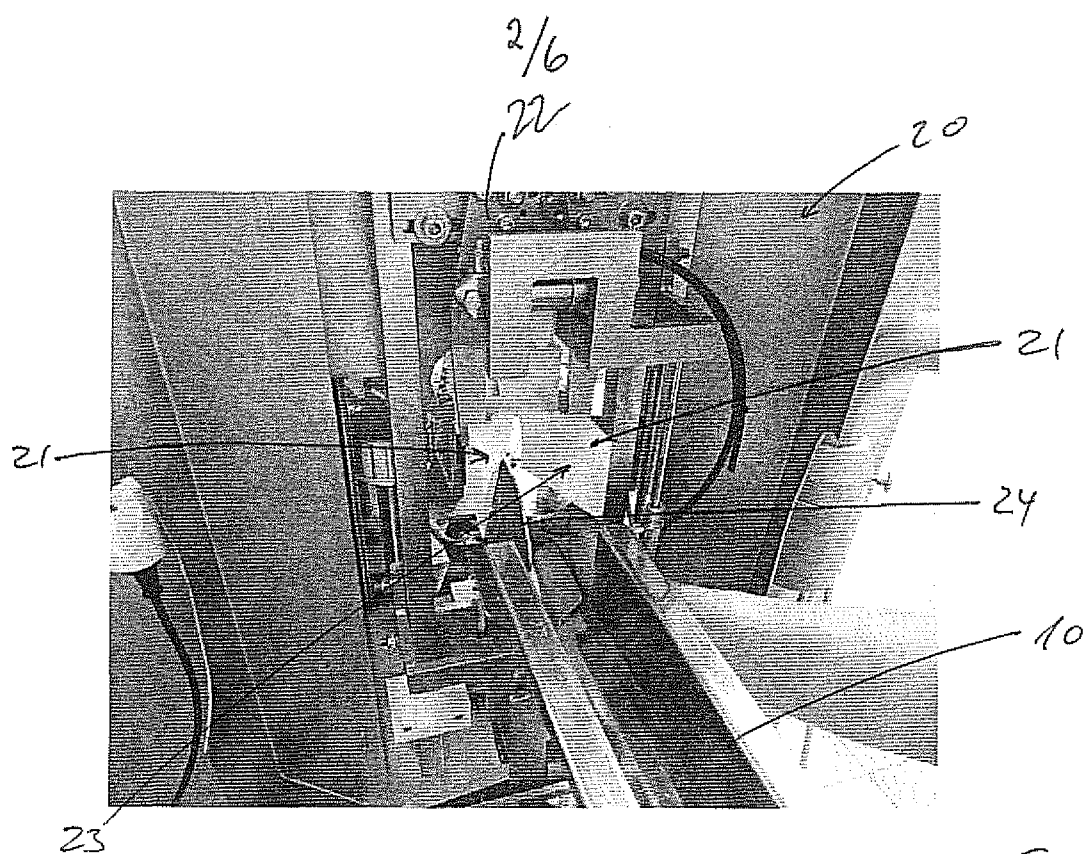


Fig 3

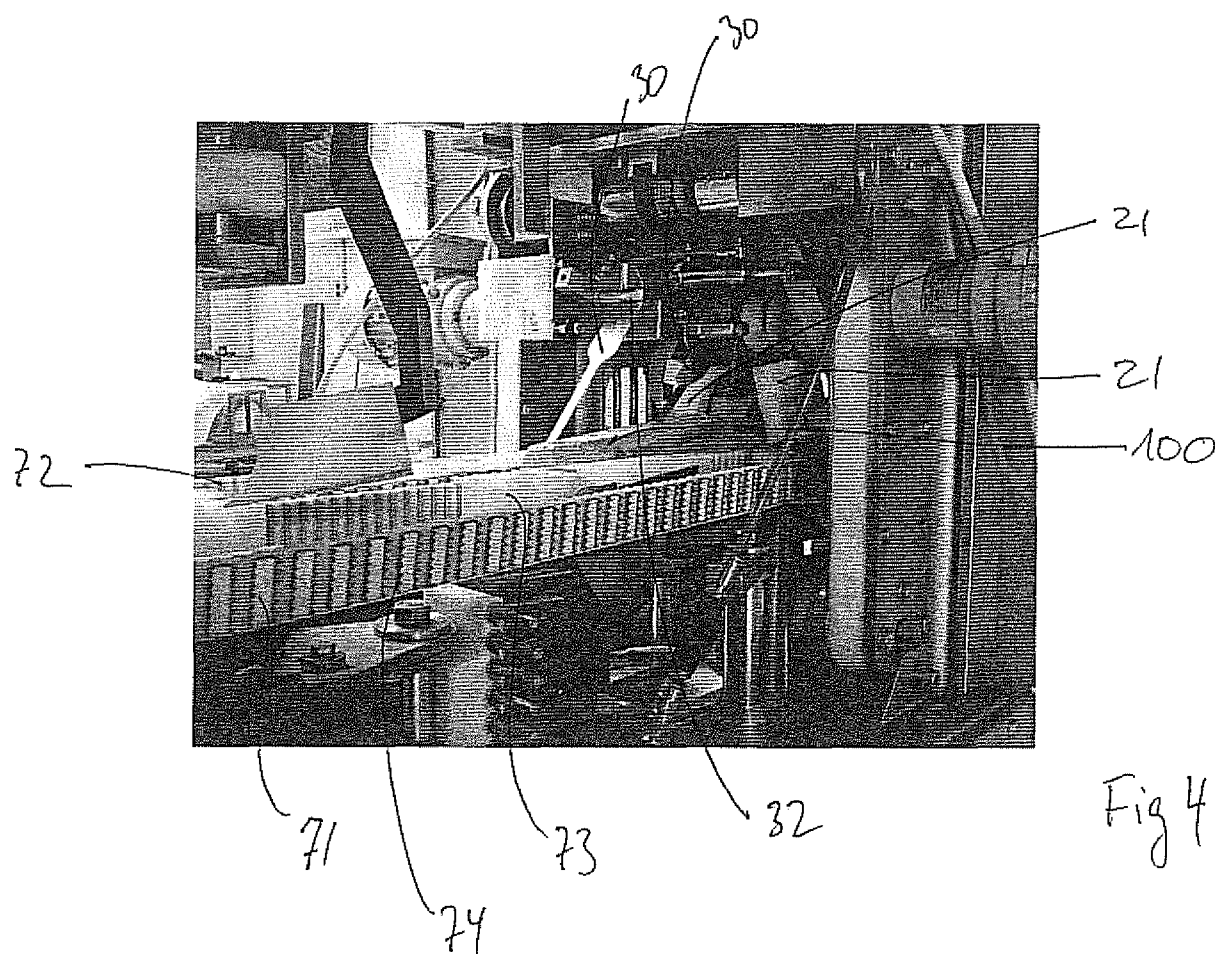


Fig 4

3/6

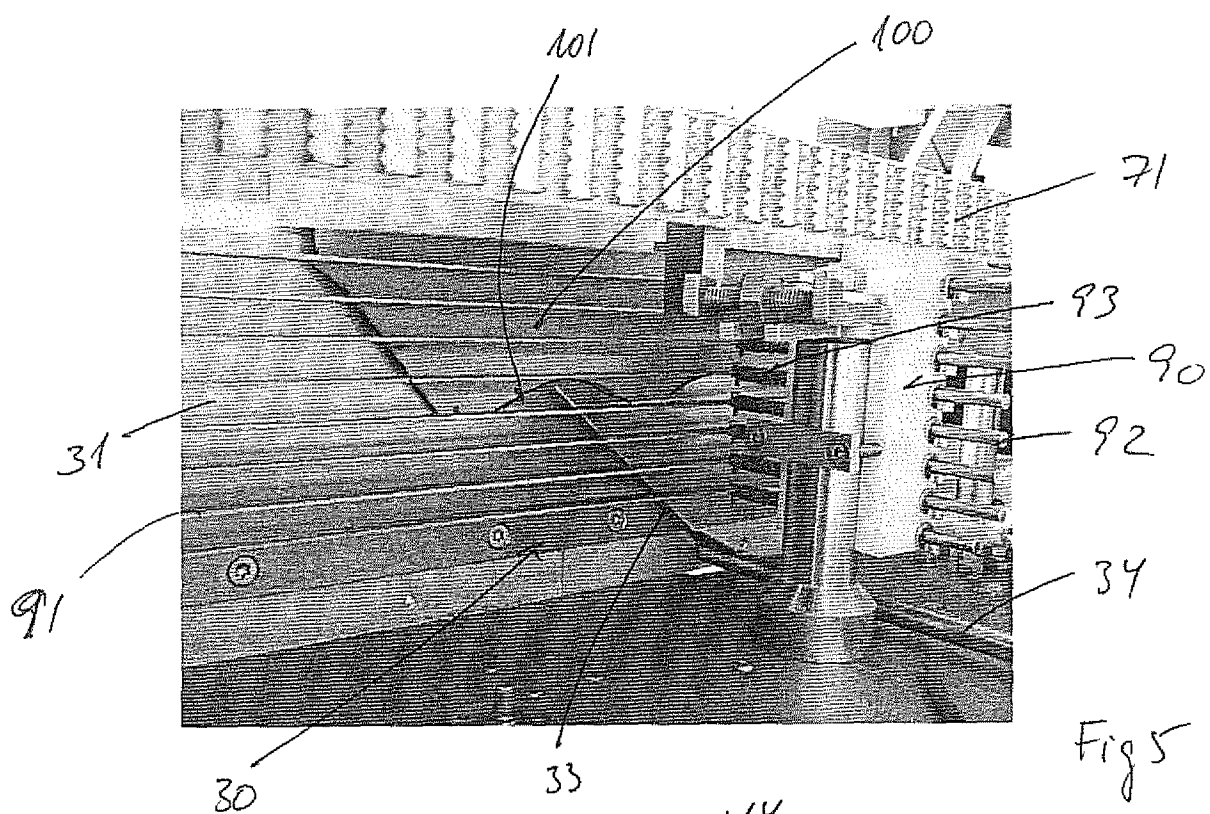


Fig 5

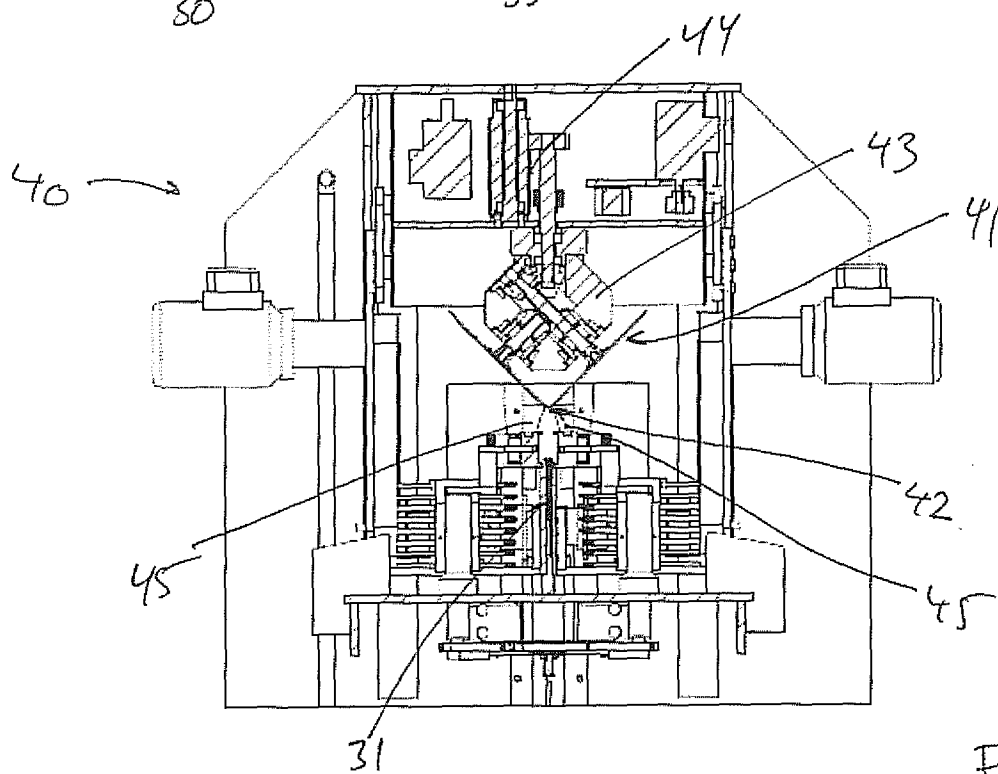


Fig 6

4/6

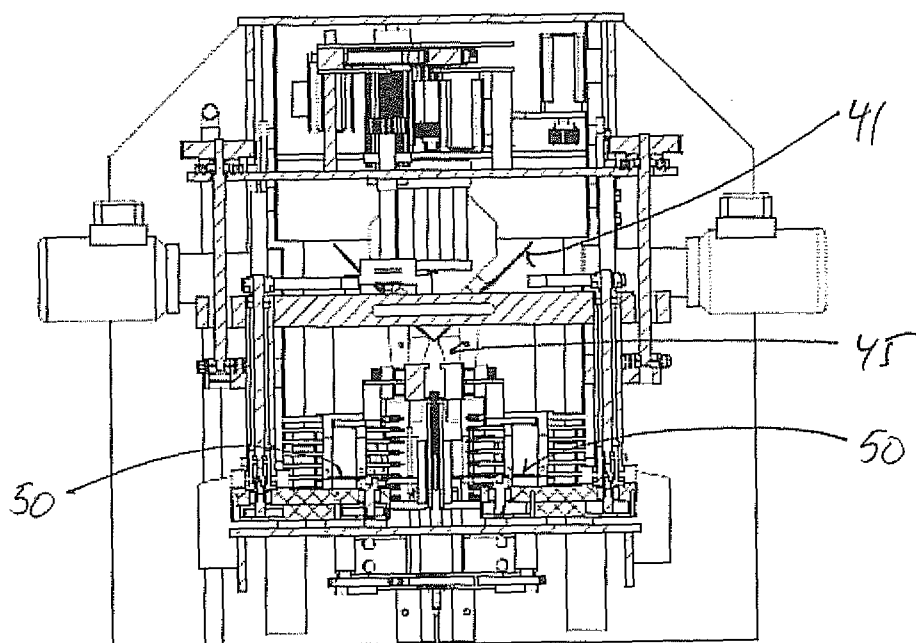


Fig 7



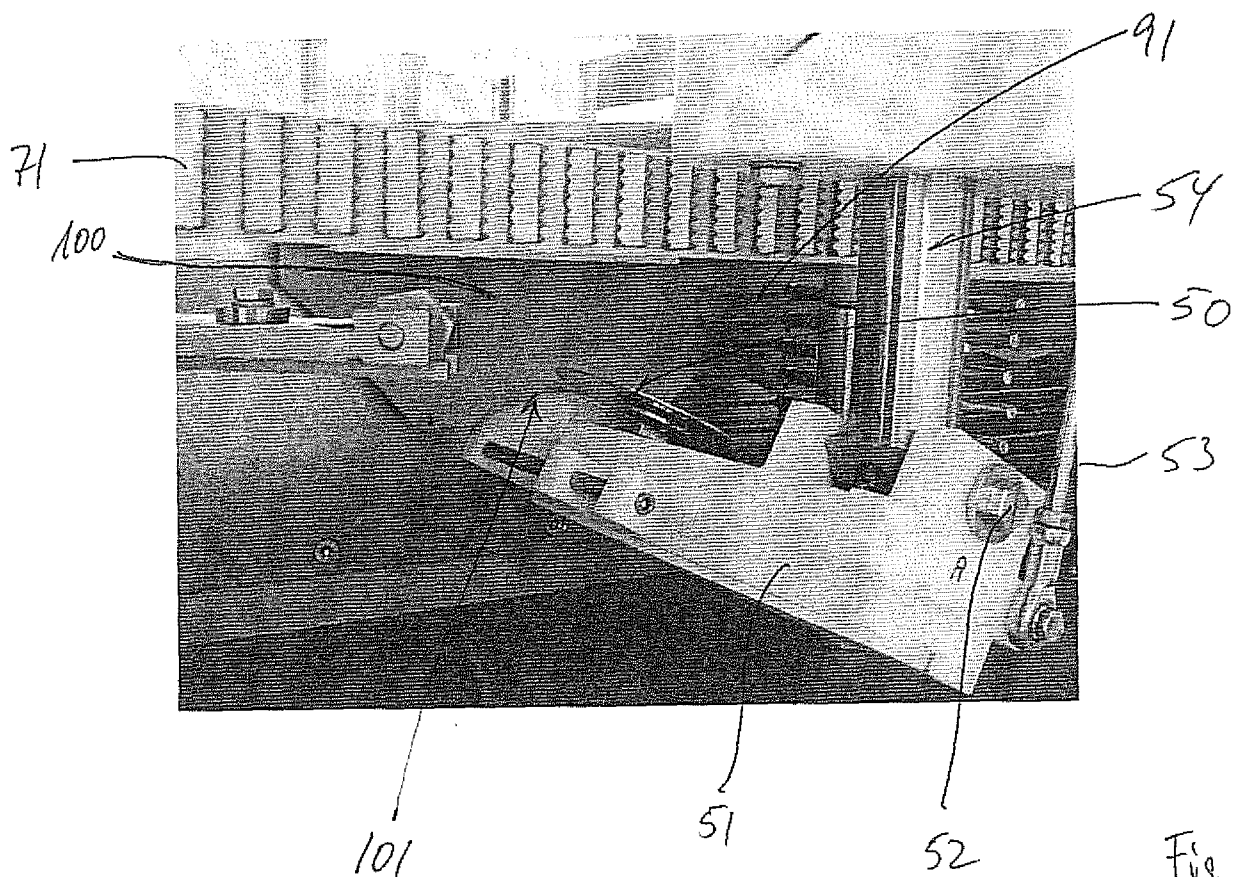


Fig 8

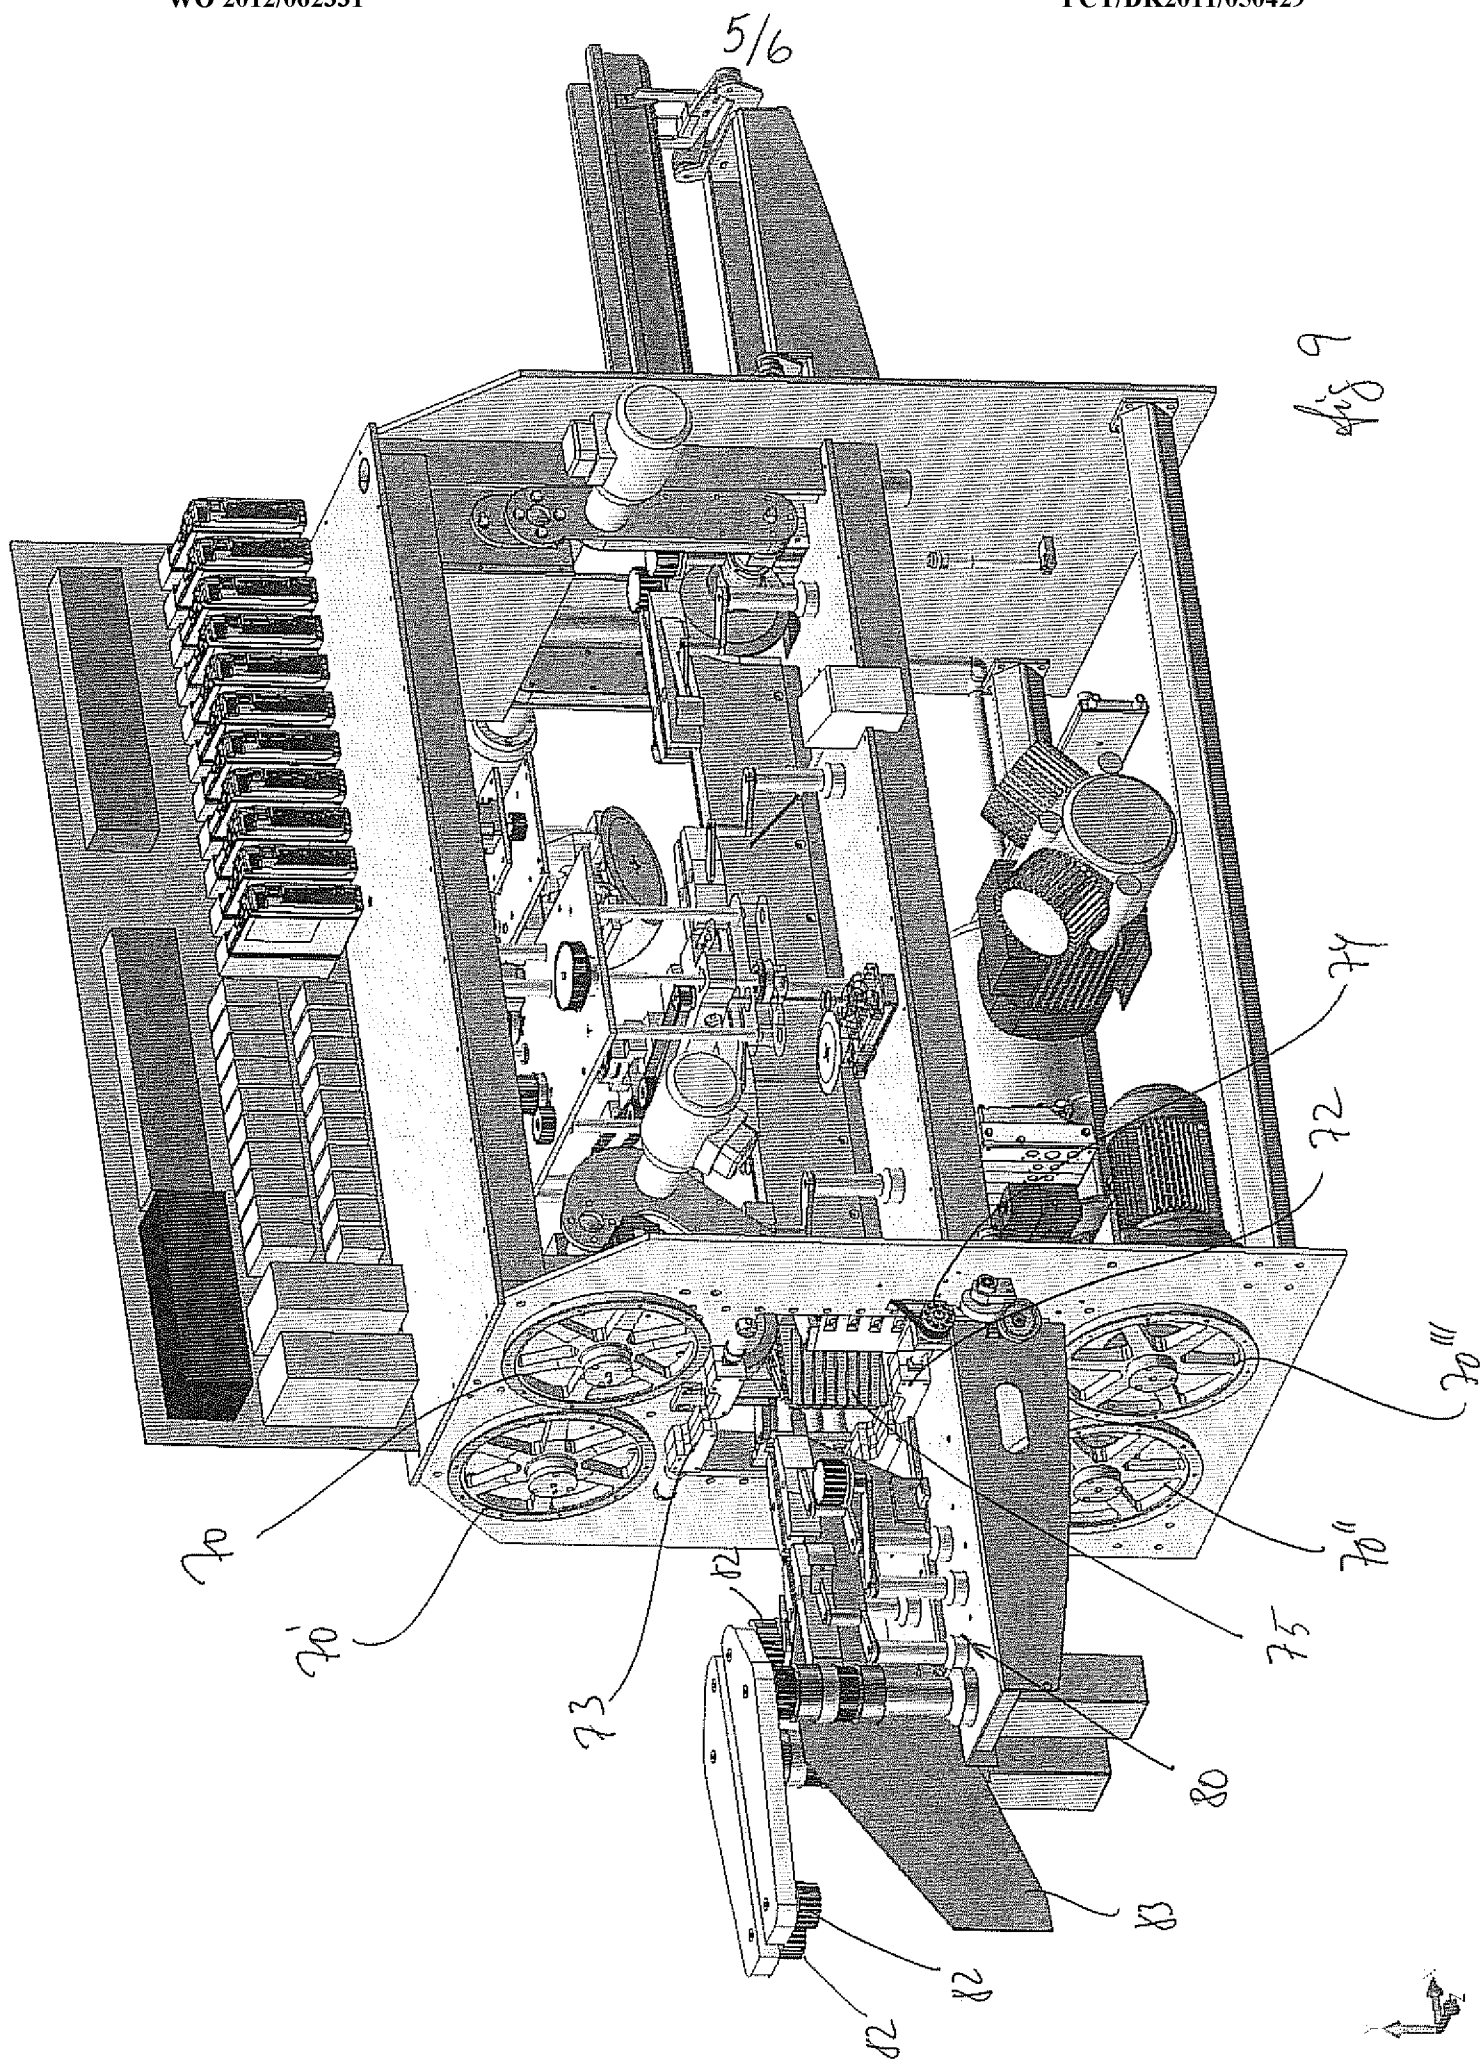

6/6

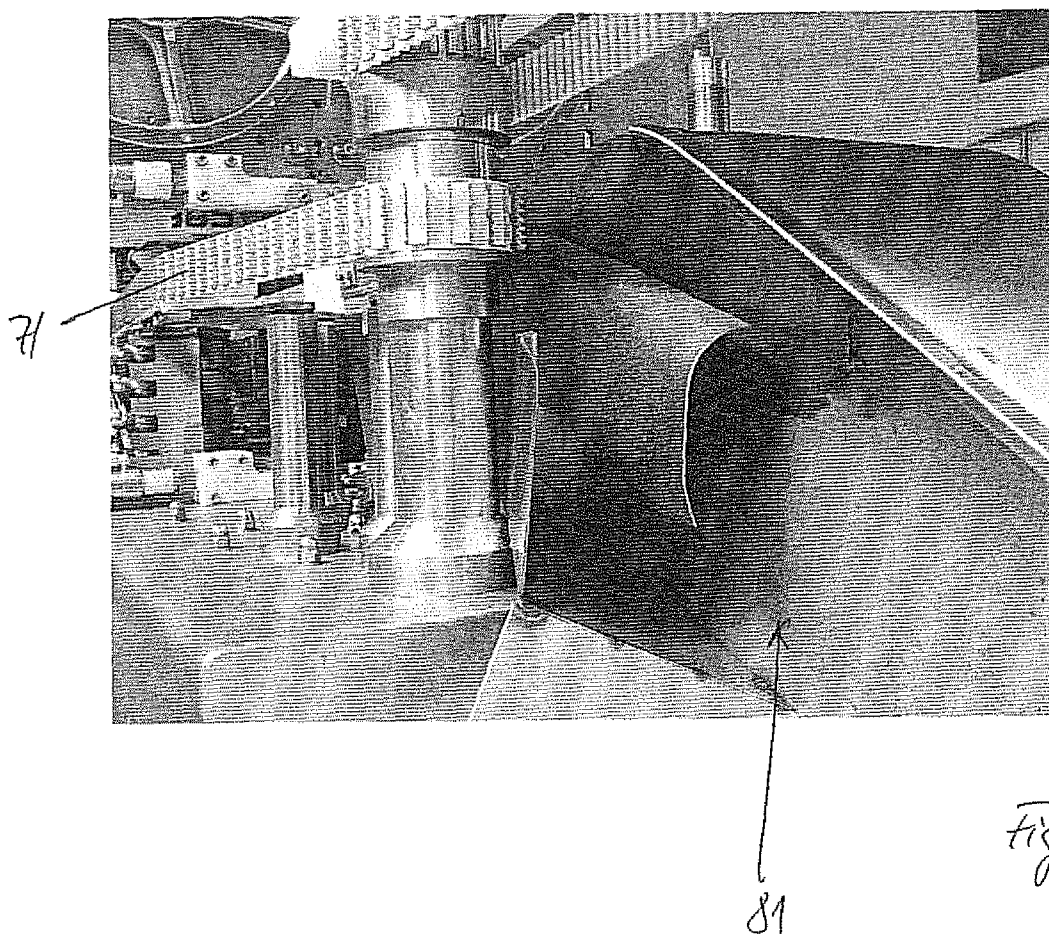

INTERNATIONAL SEARCH REPORT

International application No
PCT/DK2011/050429

A. CLASSIFICATION OF SUBJECT MATTER
INV. A22C25/16
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A22C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 200 211 B1 (BRAEGER HORST [DE] ET AL) 13 March 2001 (2001-03-13) column 2, line 65 - column 7, line 20; figures 1-7	1
A	GB 2 089 642 A (NORDISCHER MASCHINENBAU) 30 June 1982 (1982-06-30) page 2, right-hand column, line 73 - page 3, right-hand column, line 72; figures 1-4	1

☐

Further documents are listed in the continuation of Box C.

☒

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

9 January 2012

Date of mailing of the international search report

20/01/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Rojano, Borja

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/DK2011/050429

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6200211	B1	13-03-2001	NONE

GB 2089642	A	30-06-1982	CA 1171313 A1 24-07-1984
			DD 208071 A5 28-03-1984
			DE 3048194 A1 08-07-1982
			DK 505281 A 21-06-1982
			FR 2496407 A1 25-06-1982
			GB 2089642 A 30-06-1982
			IS 2692 A7 21-06-1982
			NO 814314 A 21-06-1982
			SE 432514 B 09-04-1984
			SE 8106852 A 21-06-1982
