

(22) Date de dépôt/Filing Date: 2016/12/12

(41) Mise à la disp. pub./Open to Public Insp.: 2017/06/15

(45) Date de délivrance/Issue Date: 2018/09/11

(30) **Priorité/Priority:** 2015/12/15 (US14/968,962)

(51) Cl.Int./Int.Cl. *F16K 17/04* (2006.01),
F16K 27/02 (2006.01), *F16K 43/00* (2006.01)


(72) Inventeurs/Inventors:
DRISCOLL, STEVEN, US;
STRAIT, BRIAN, US;
NOVAK, MARK A., US;
MARQUARDT, JASON, US

(73) Propriétaire/Owner:
INTERNATIONAL VALVE CORPORATION DBA CHECK-
ALL VALVE MFG. CO., US

(74) **Agent:** OYEN WIGGS GREEN & MUTALA LLP

(54) Titre : CLAPET ANTIRETOUR COMPORTANT UN DISPOSITIF ANTIRETOUR D'INSERTION DE CLAPET REMPLACABLE EXEMPT DE FRICTION

(54) Title: CHECK VALVE HAVING A FRICTION FREE REPLACEABLE VALVE INSERT CHECK ASSEMBLY

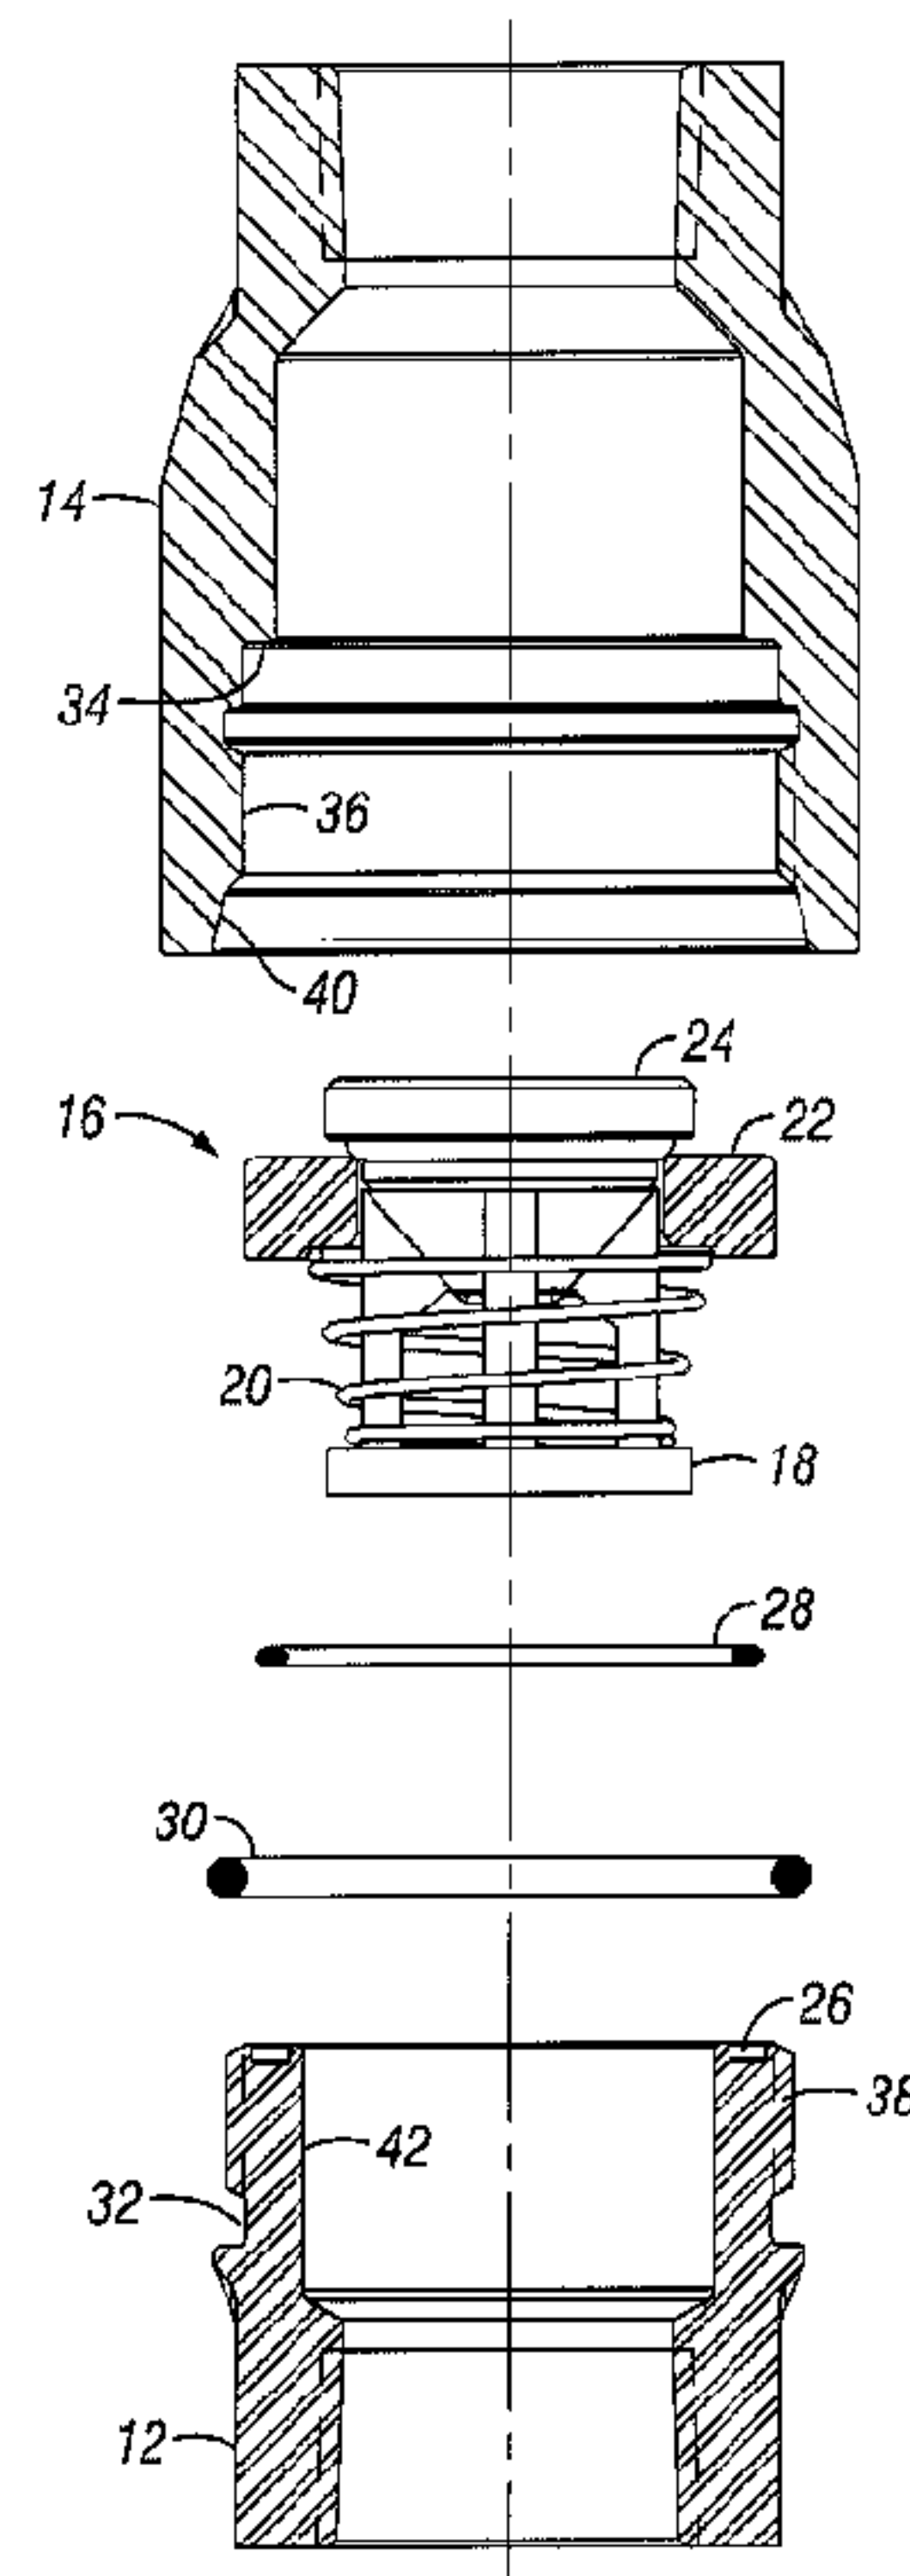

(57) **Abrégé/Abstract:**

A check valve has a friction-free replaceable valve insert check assembly. The check assembly includes a poppet on which a spring is mounted engaging an axially moveable seat which in turn engages a seat on the inner end of the poppet biased into engagement by the spring. Upon separation of the inner and outer valve bodies the insert check assembly will freely separate from the valve body for inspection or replacement.

ABSTRACT

A check valve has a friction-free replaceable valve insert check assembly. The check assembly includes a poppet on which a spring is mounted engaging an axially moveable seat which in turn engages a seat on the inner end of the poppet biased into engagement by the spring. Upon separation of the inner and outer valve bodies the insert check assembly will freely separate from the valve body for inspection or replacement.

**TITLE: CHECK VALVE HAVING A FRICTION FREE REPLACEABLE
VALVE INSERT CHECK ASSEMBLY**

BACKGROUND OF THE INVENTION

5 The check valve having a replaceable valve assembly of patent 4,532,958 is representative of the prior art over which the present check valve is an improvement in that the insert check assembly may be readily inserted or removed without the need to overcome friction between the valve assembly and seals within the valve body.

10 **SUMMARY OF THE INVENTION**

The insert check assembly is spaced from the inside wall surface of the inlet body such that it may be freely inserted or removed from the inlet body for inspection or if appropriate replacement. The insert check assembly includes a first seat on a poppet having a coil spring engaging the bottom side of a second seat allowing the first seat to
15 move axially within the passageway of the valve bodies between open and closed positions.

The second seat is positioned on an annular axial inner end edge of the inlet body against a first seal received in an annular recess in the inner end of the inlet body.

A second seal is positioned on the inlet body for engagement with the inner end of
20 the outlet body. The inner ends of the inlet body and the outlet body are threadably engaged.

The insert check assembly thus is insertable in and removable from the inlet body inner end without the need to overcome friction with the passageway side wall of the inlet body. This allows fast inspection or replacement of insert check assemblies without the
25 need of special tools other than a wrench to separate the inlet body from the outlet body. The insert check assembly is self-aligning upon field installation.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is an exploded view of the check valve.

30 Figure 2 is an exploded perspective view of the valve body showing the insert check assembly.

Figure 3 is a top outlet end view of the valve assembly of Figure 2.

Figure 4 is a cross sectional view taken along line 4-4 and Figure 3.

Figure 5 is an axial exploded view of the valve assembly.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

5 The valve assembly of this invention is referred to generally by the reference numeral 10 in Figure 2 and includes an inlet body 12 and an outlet body 14. An insert check assembly 16 is positioned in the inlet body 12 as seen in Figure 4.

10 The insert check assembly 16 as seen in Figure 5 includes a poppet 18 on which a spring 20 is mounted which engages a seat element 22 biased into engagement with a seat element 24. The poppet 18 is axially moveable relative to the seat element 22. The inlet body 12 includes an annular recess 26 which receives an insert seal 28. A body seal 30 is received in an annular recess 32 on the outer wall surface of the inlet body 12. The outlet body 14 includes an annular shoulder 34 which engages the seat 22 pressing it into engagement with the insert seal 28 in the annular recess 26 when the valve is fully
15 assembled as seen in Figure 4.

 The outlet body 14 is threadably attached to the inlet body 12 through threading 36 on the outlet body and 38 on the inlet body with the inner end of outlet body 14 having an annular shoulder 40 engaging the body seal 30 received in the annular groove 32.

20 When attention to the valve assembly is required in the field of use the outlet body 14 is easily removed from the inlet body 12 and the insert check assembly 16 will likely fall out for easy inspection and if appropriate, replacement of the insert check assembly 16. It is particularly noted that removal of the insert check assembly does not require tools or overcoming any friction with either the inlet body 12 sidewall 42 or any part of the outlet body 14. If necessary the insert seal 28 and body seal 30 which are O-rings may also be
25 easily replaced in the field.

 It can be readily seen from Figures 4 and 5 that there is no need for lubricant for installing the O-rings 28 and 30 or the insert check assembly 16 so there is no potential for contamination associated with the replaceable seals 28 and 30 and insert check assembly 16. It is also seen that the check assembly 16 is self-aligning upon field installation.

30

What is claimed is:

1. A valve assembly comprising:
inlet and outlet bodies having inner and outer ends releaseably interconnected at said inner ends and having a passageway extending therethrough;
an insert check assembly positioned in said passageway of said inlet body, said insert check assembly having a poppet having inner and outer ends, said poppet inner end having a first seat being positioned at the inner end of said outlet body, a second seat loosely positioned on said poppet between said first seat and a spring biasing said first and second seats into engagement;
said second seat being positioned on the inner end of the inlet body radially outwardly of said passageway;
said interconnection of said inlet and outlet bodies includes said inner end of said outlet body engaging said second seat allowing said first seat to move between open and closed positions; and
said inlet body having an inner passageway wall spaced from said insert check assembly allowing for friction free insertion into and removal from said inlet body passageway.
2. The valve assembly of claim 1 wherein said inlet body inner end radially outwardly of said passageway includes a first seal engaging said second seat.
3. The valve assembly of claim 2 wherein said inlet body has an outer wall side and said outlet body has an inner wall side, and a second seal is positioned therebetween.
4. The valve assembly of claim 3 wherein said first and second seals are O-rings.
5. The valve assembly of claim 3 wherein said first seal is positioned in an annular recess in the inlet body inner end radially outwardly of said passageway with said first seal engaging said second seat.
6. The valve assembly of claim 5 wherein said second seal is positioned on said inlet body adjacent the inner end of the outlet body.

7. The valve assembly of claim 6 wherein said outlet body includes threading axially inwardly of said second seal.

8. The valve assembly according to any one of claims 1 to 7, wherein said second seat is positioned entirely above said inner end of said inlet body.

1/5

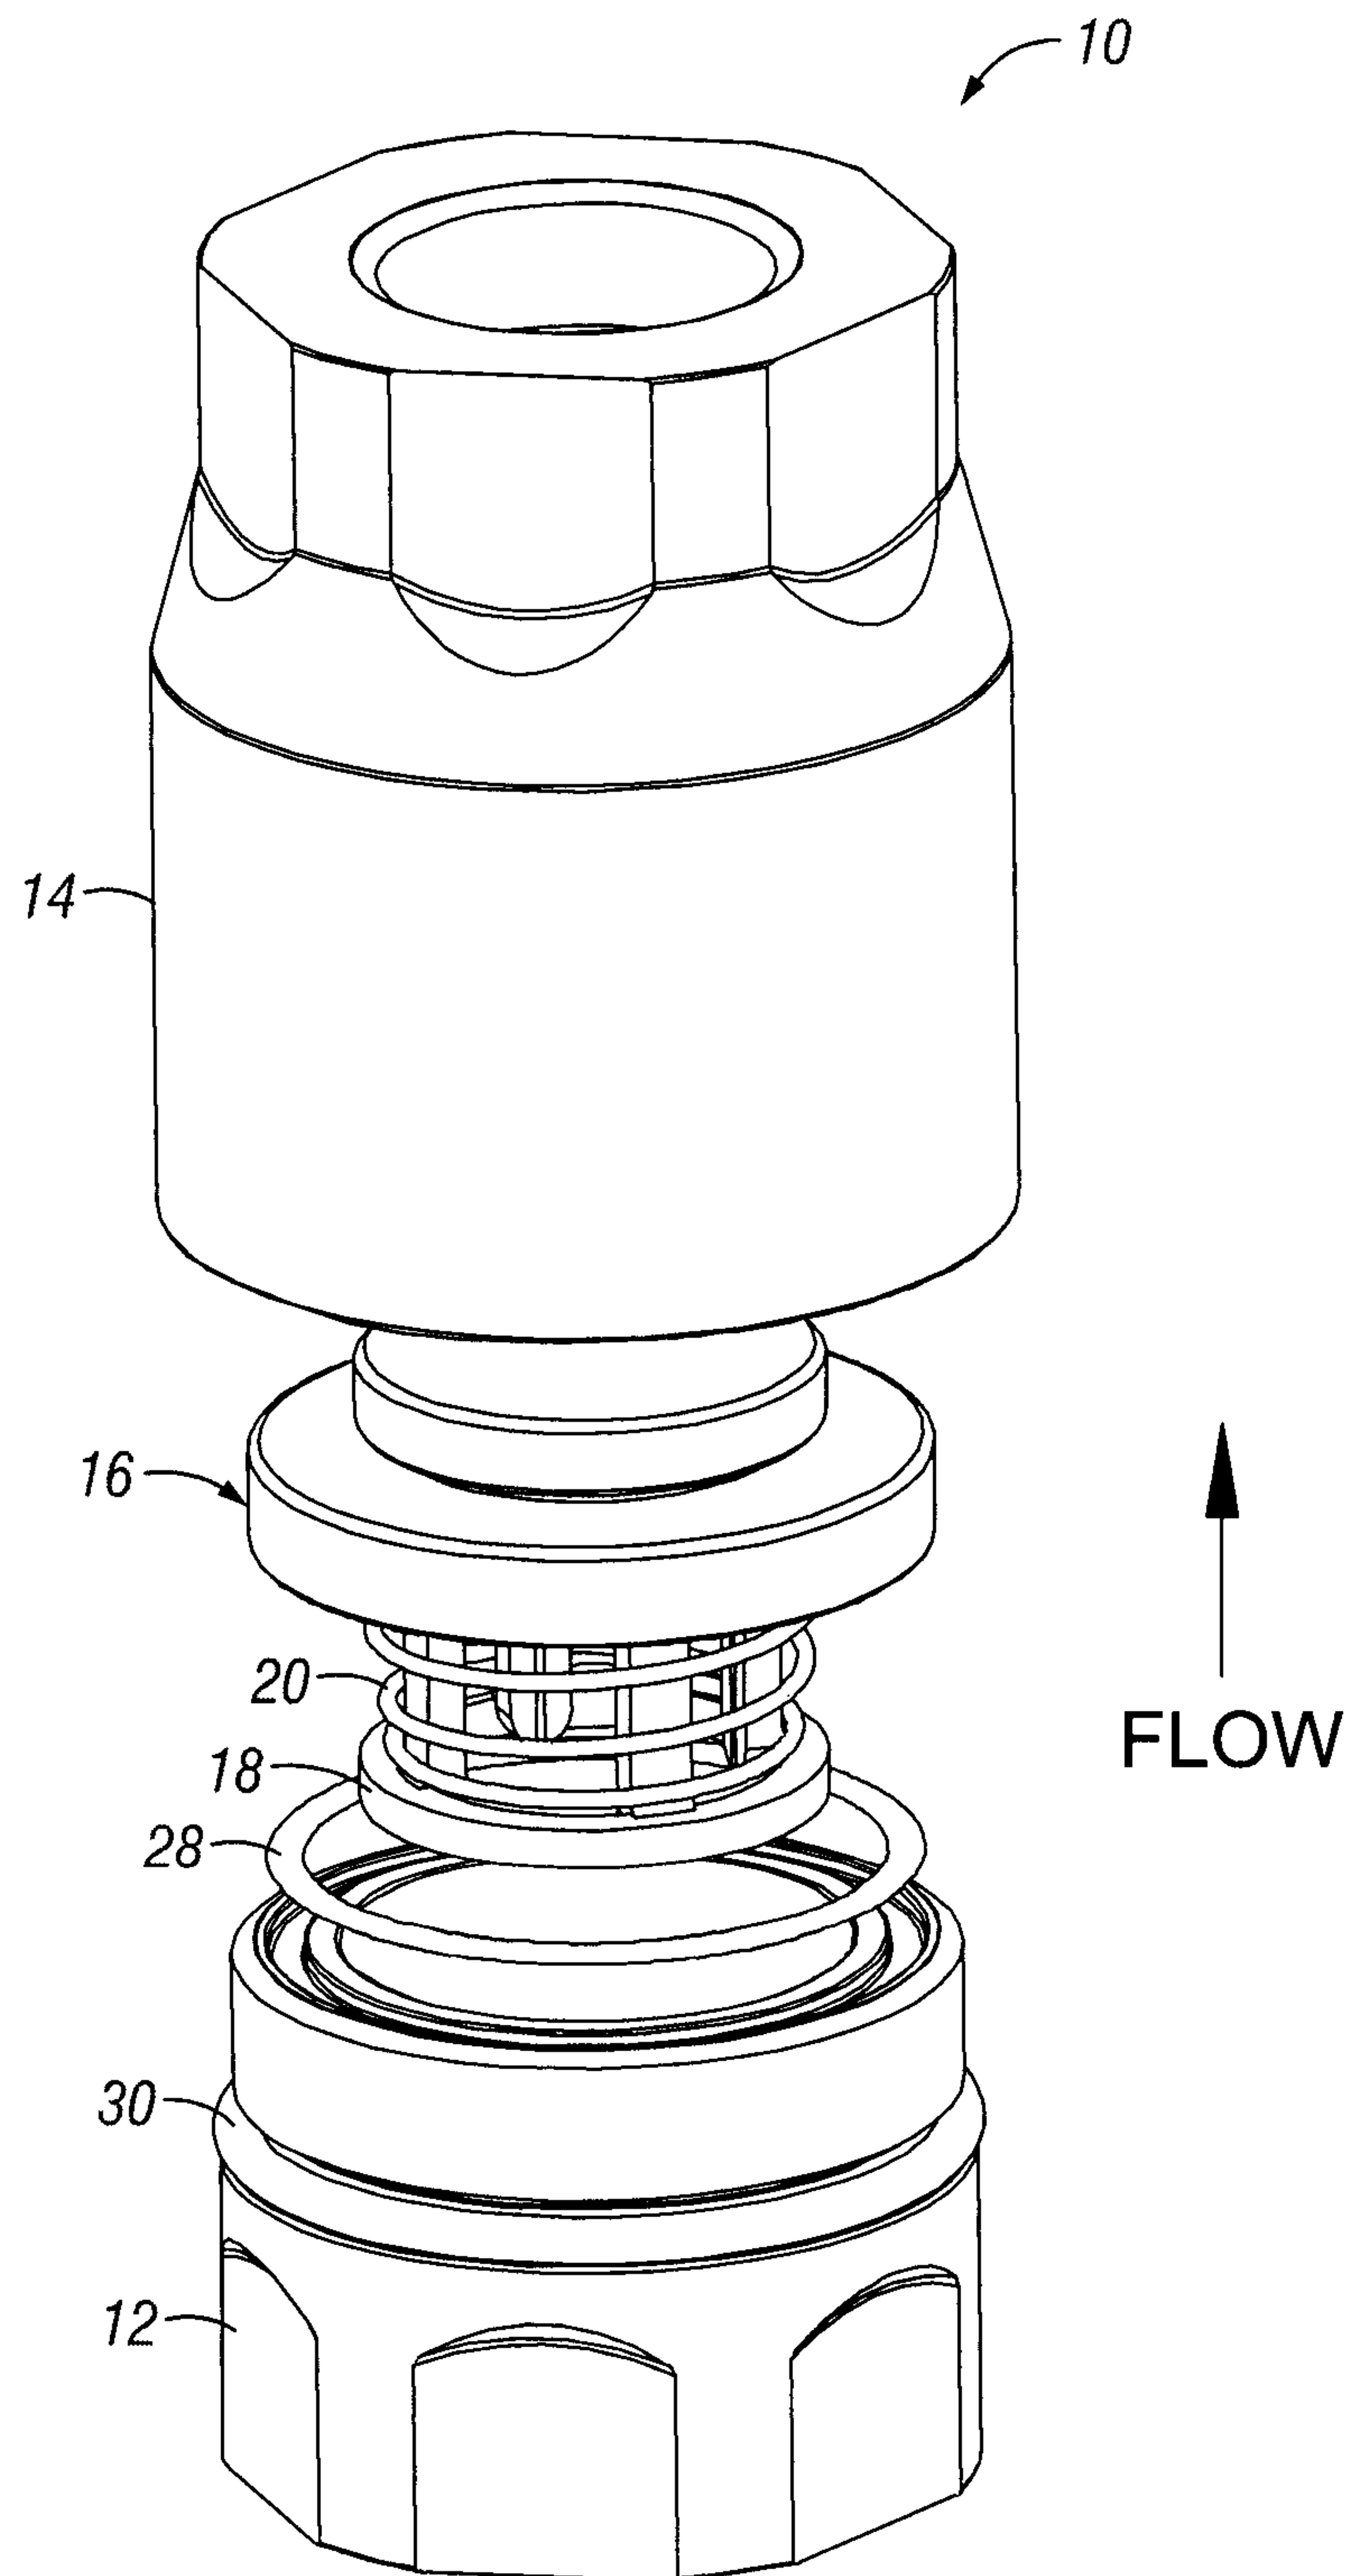


FIG. 1

2/5

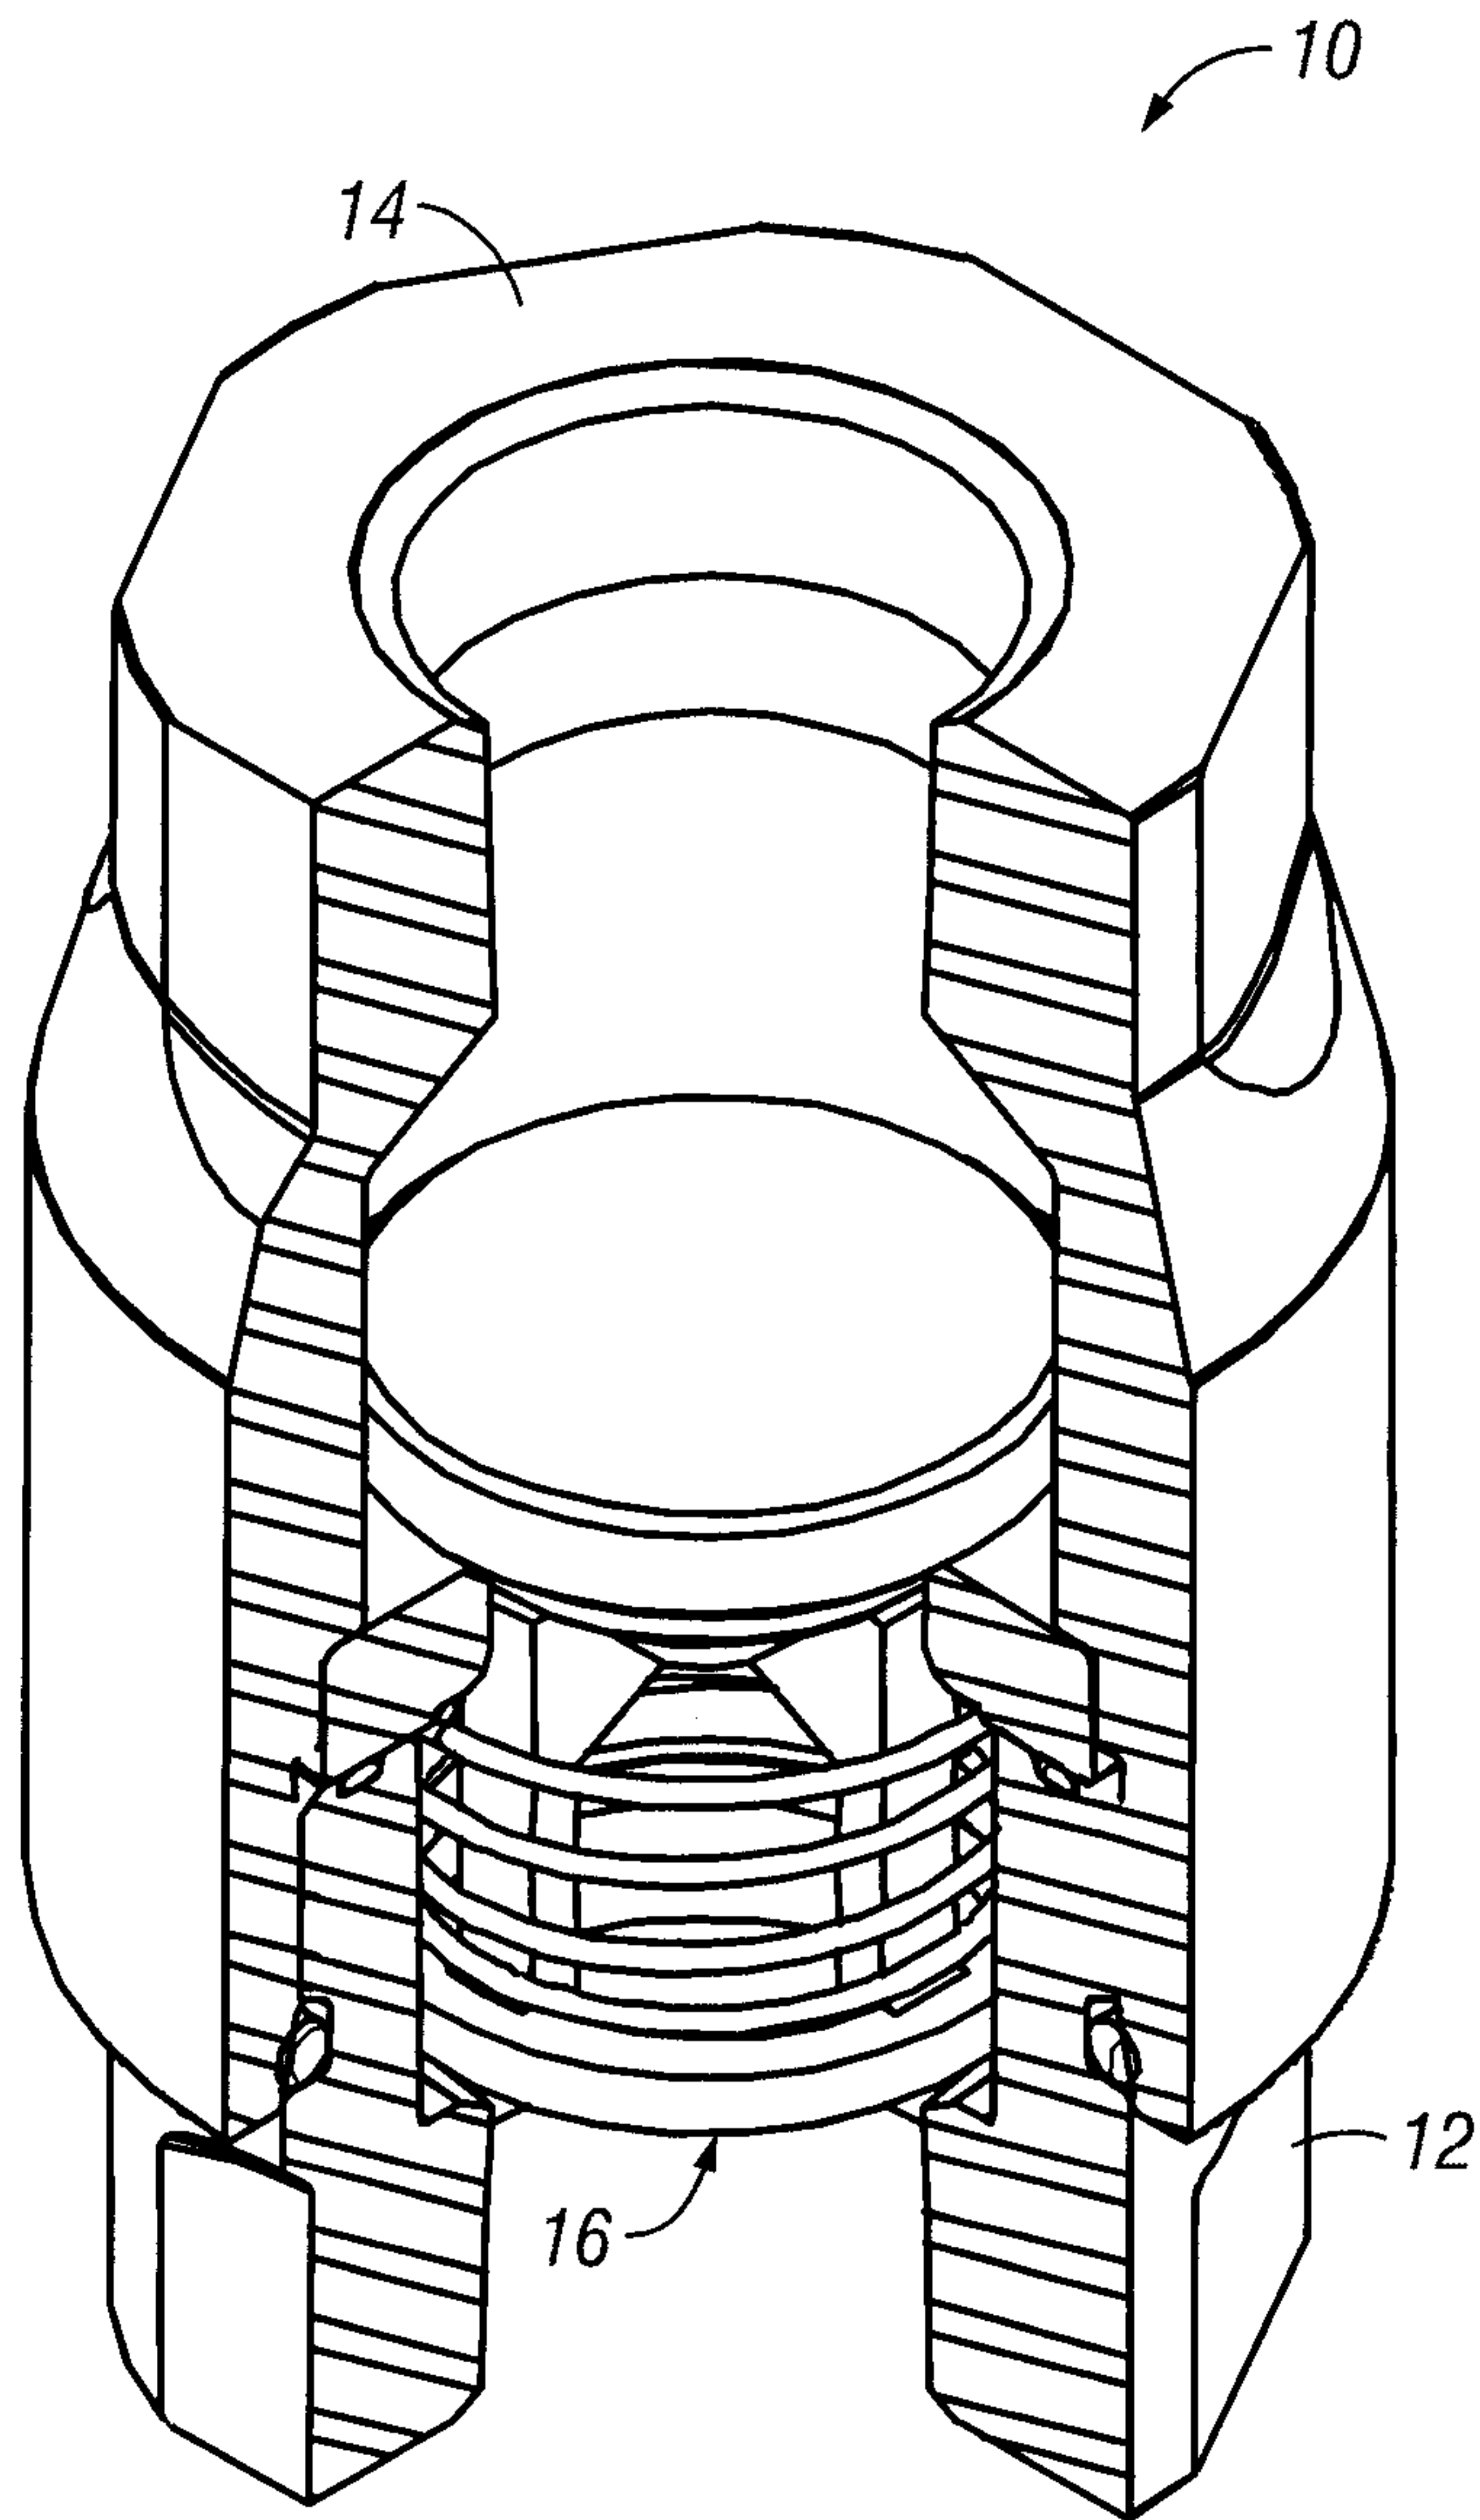


FIG. 2

3/5

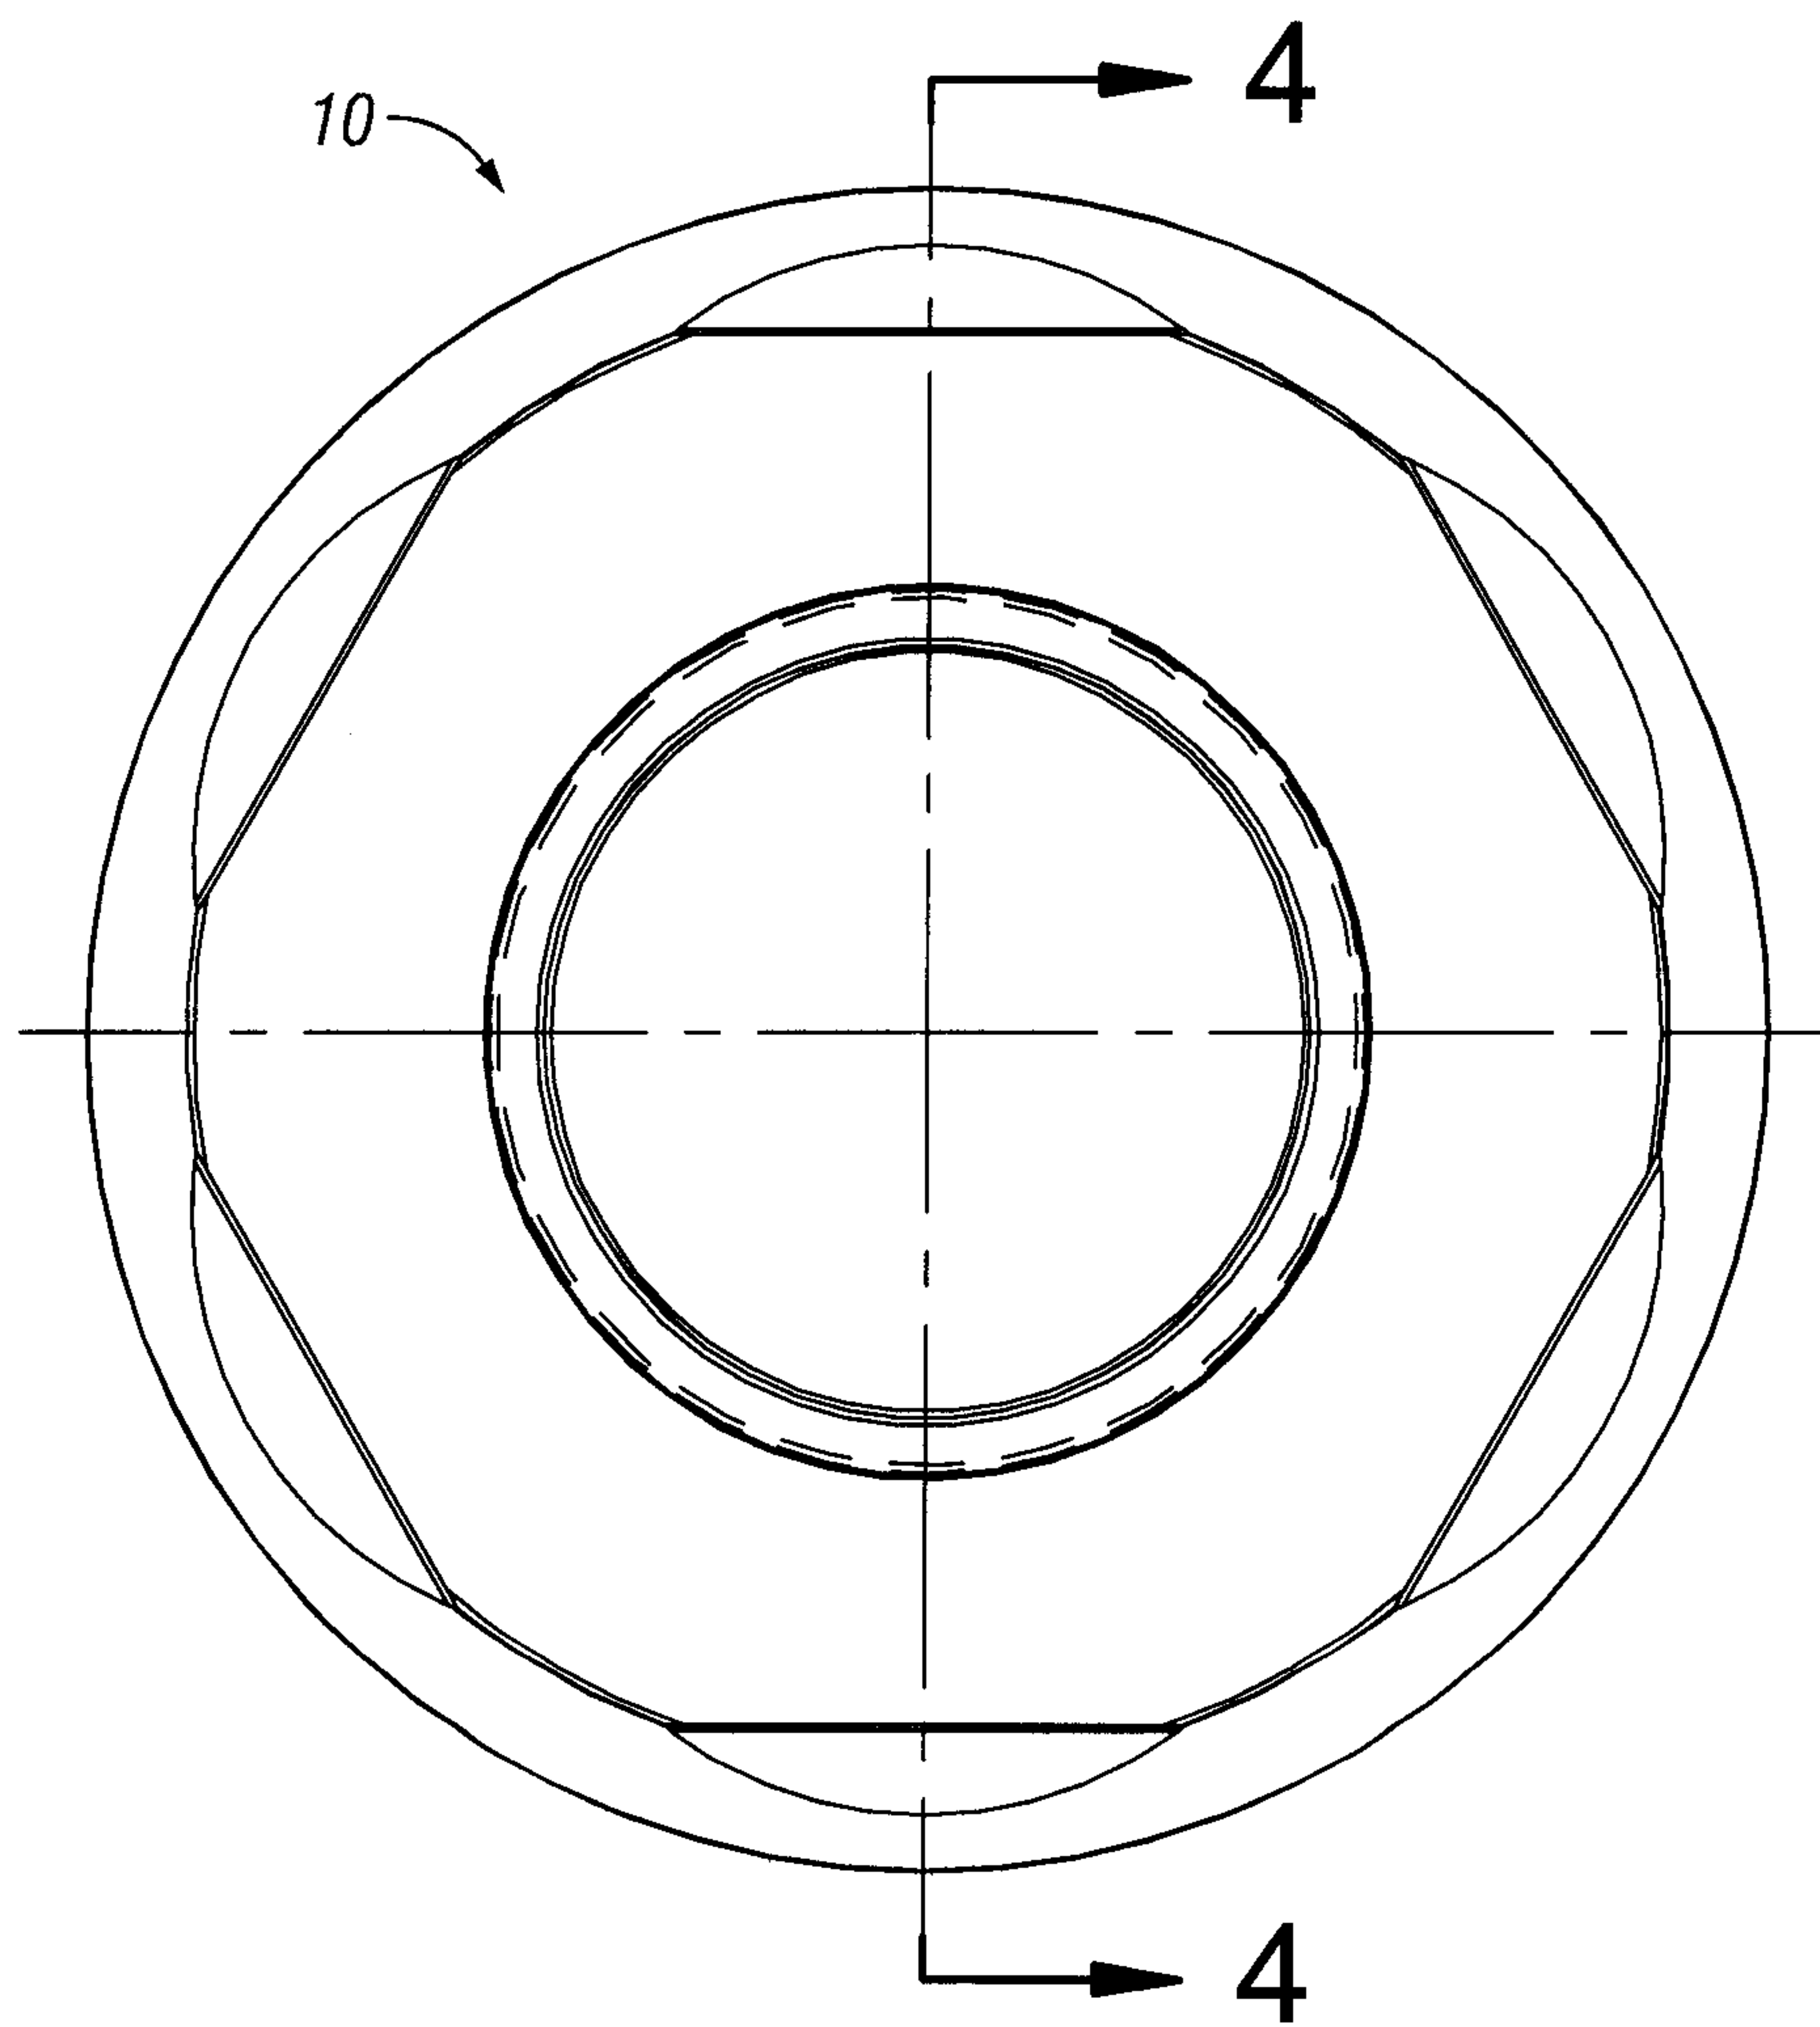


FIG. 3

4/5

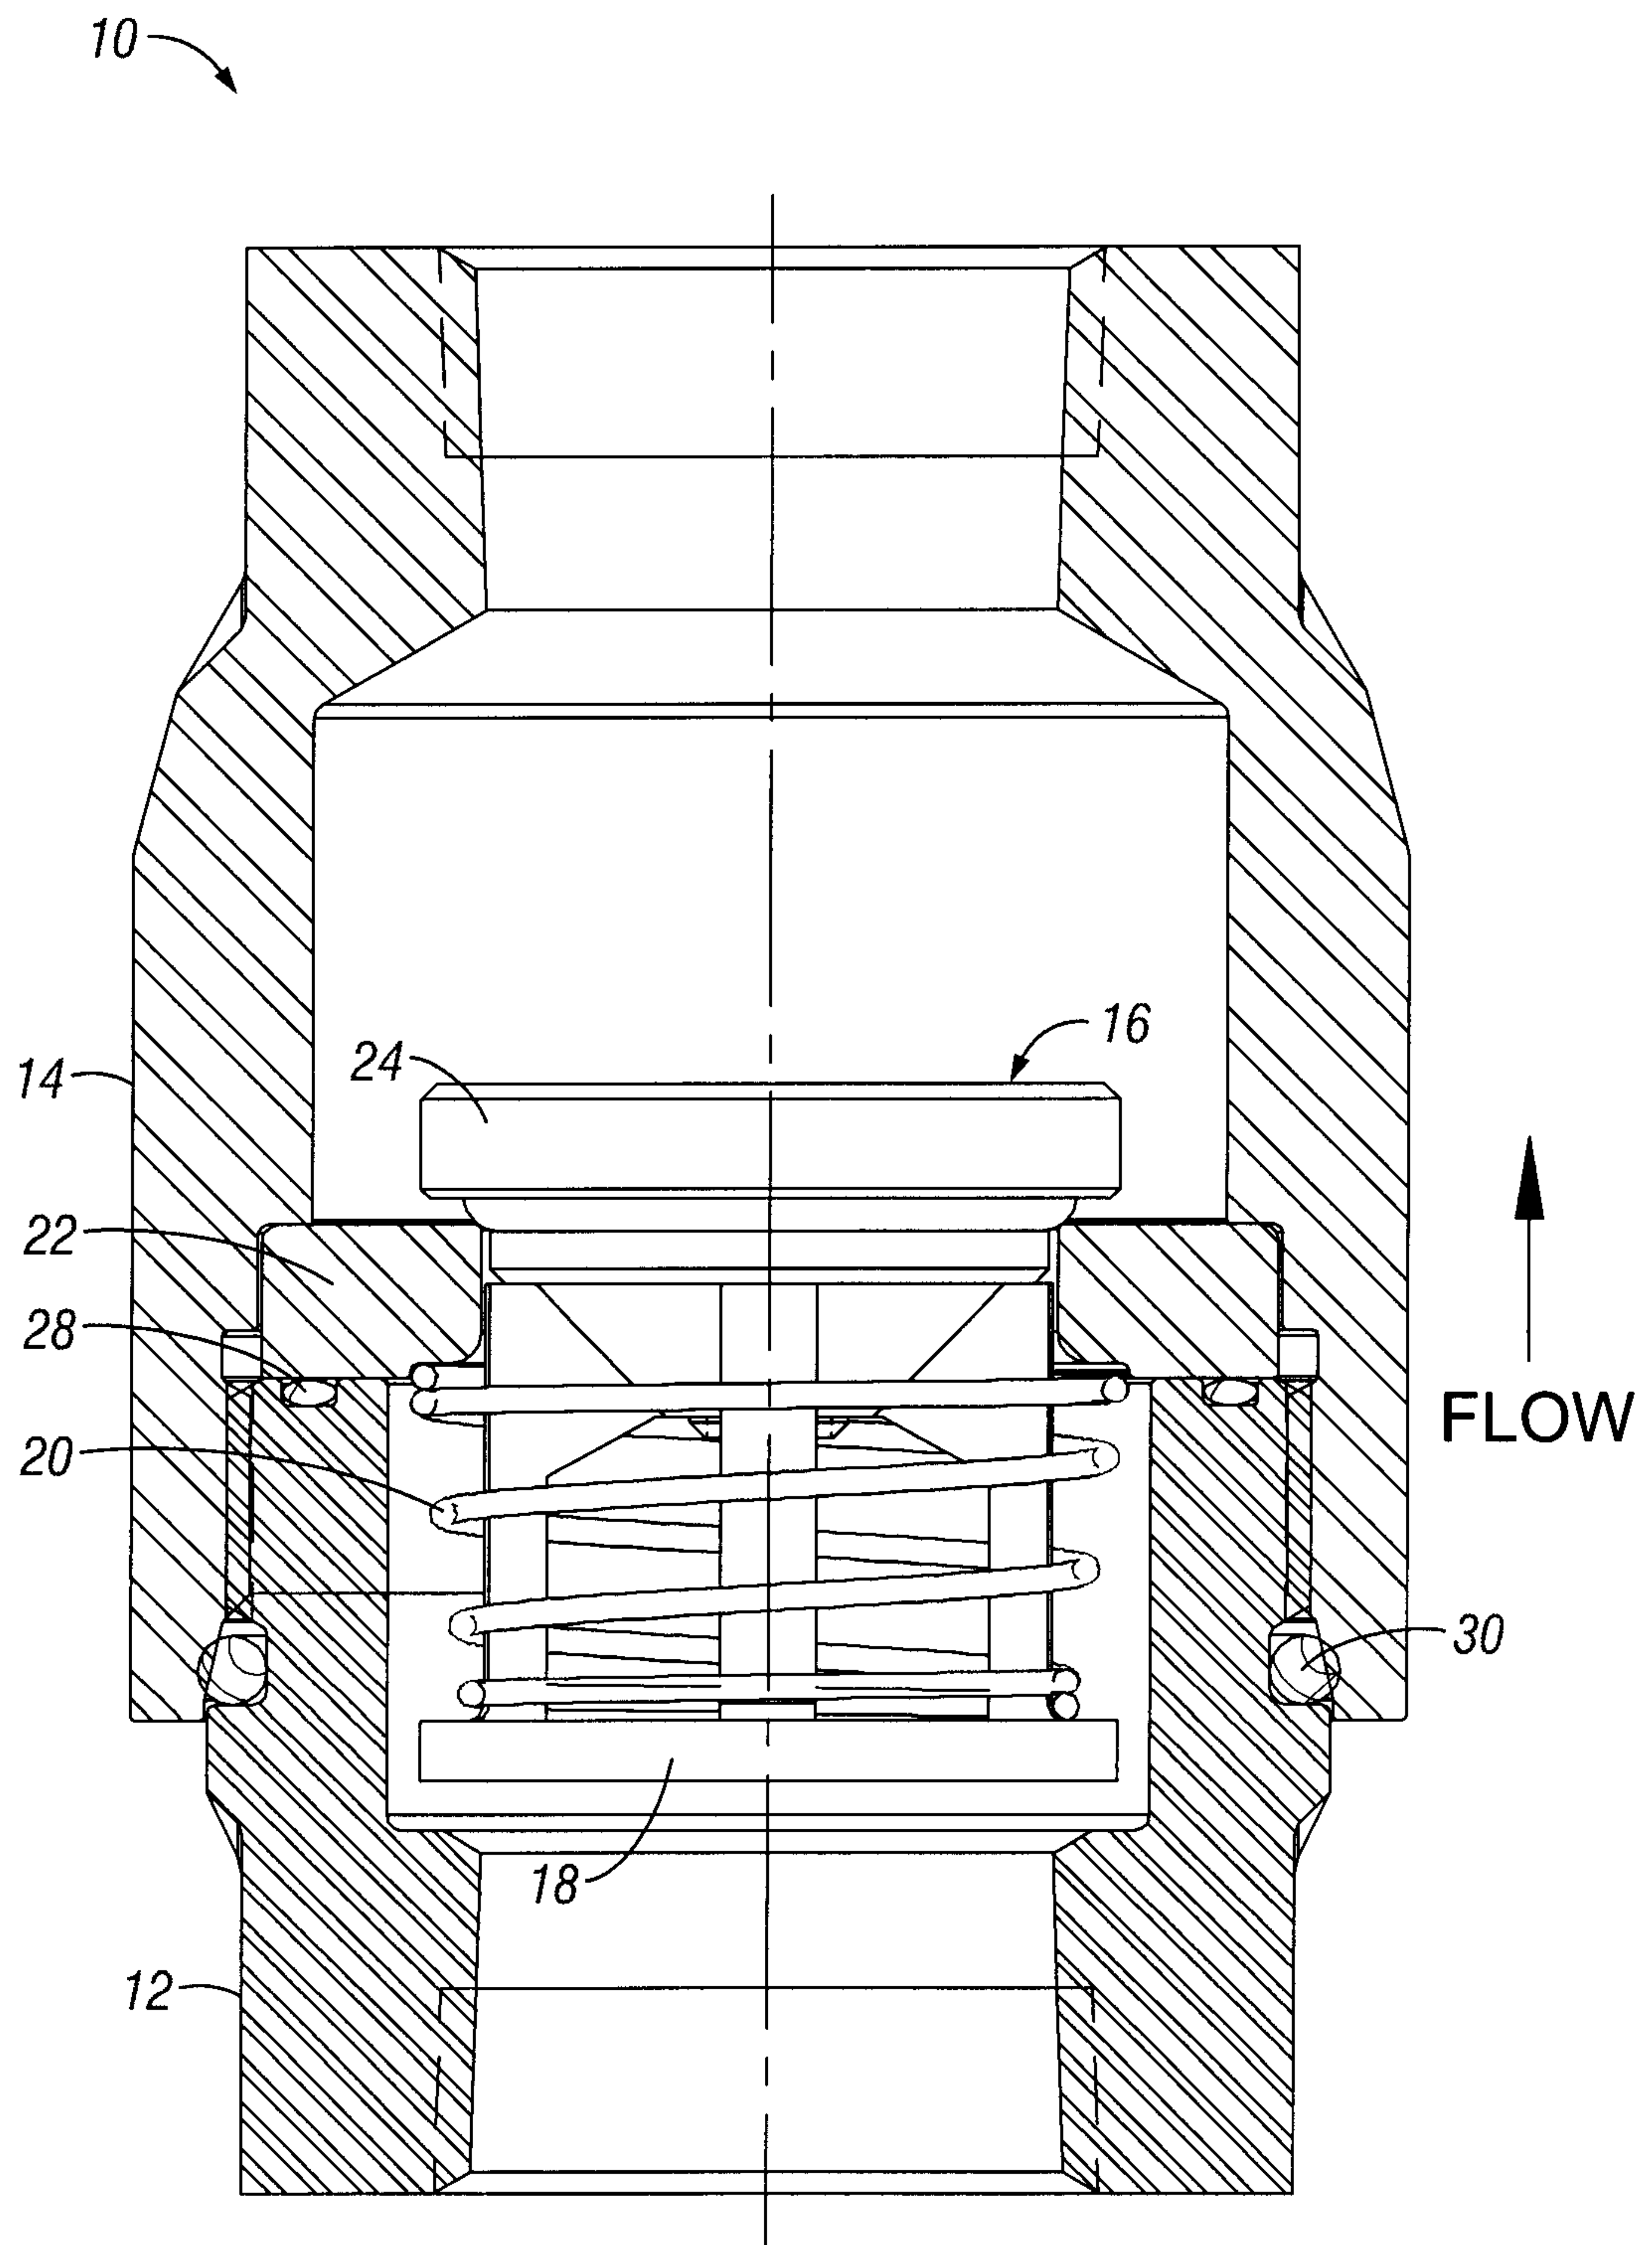


FIG. 4

5/5

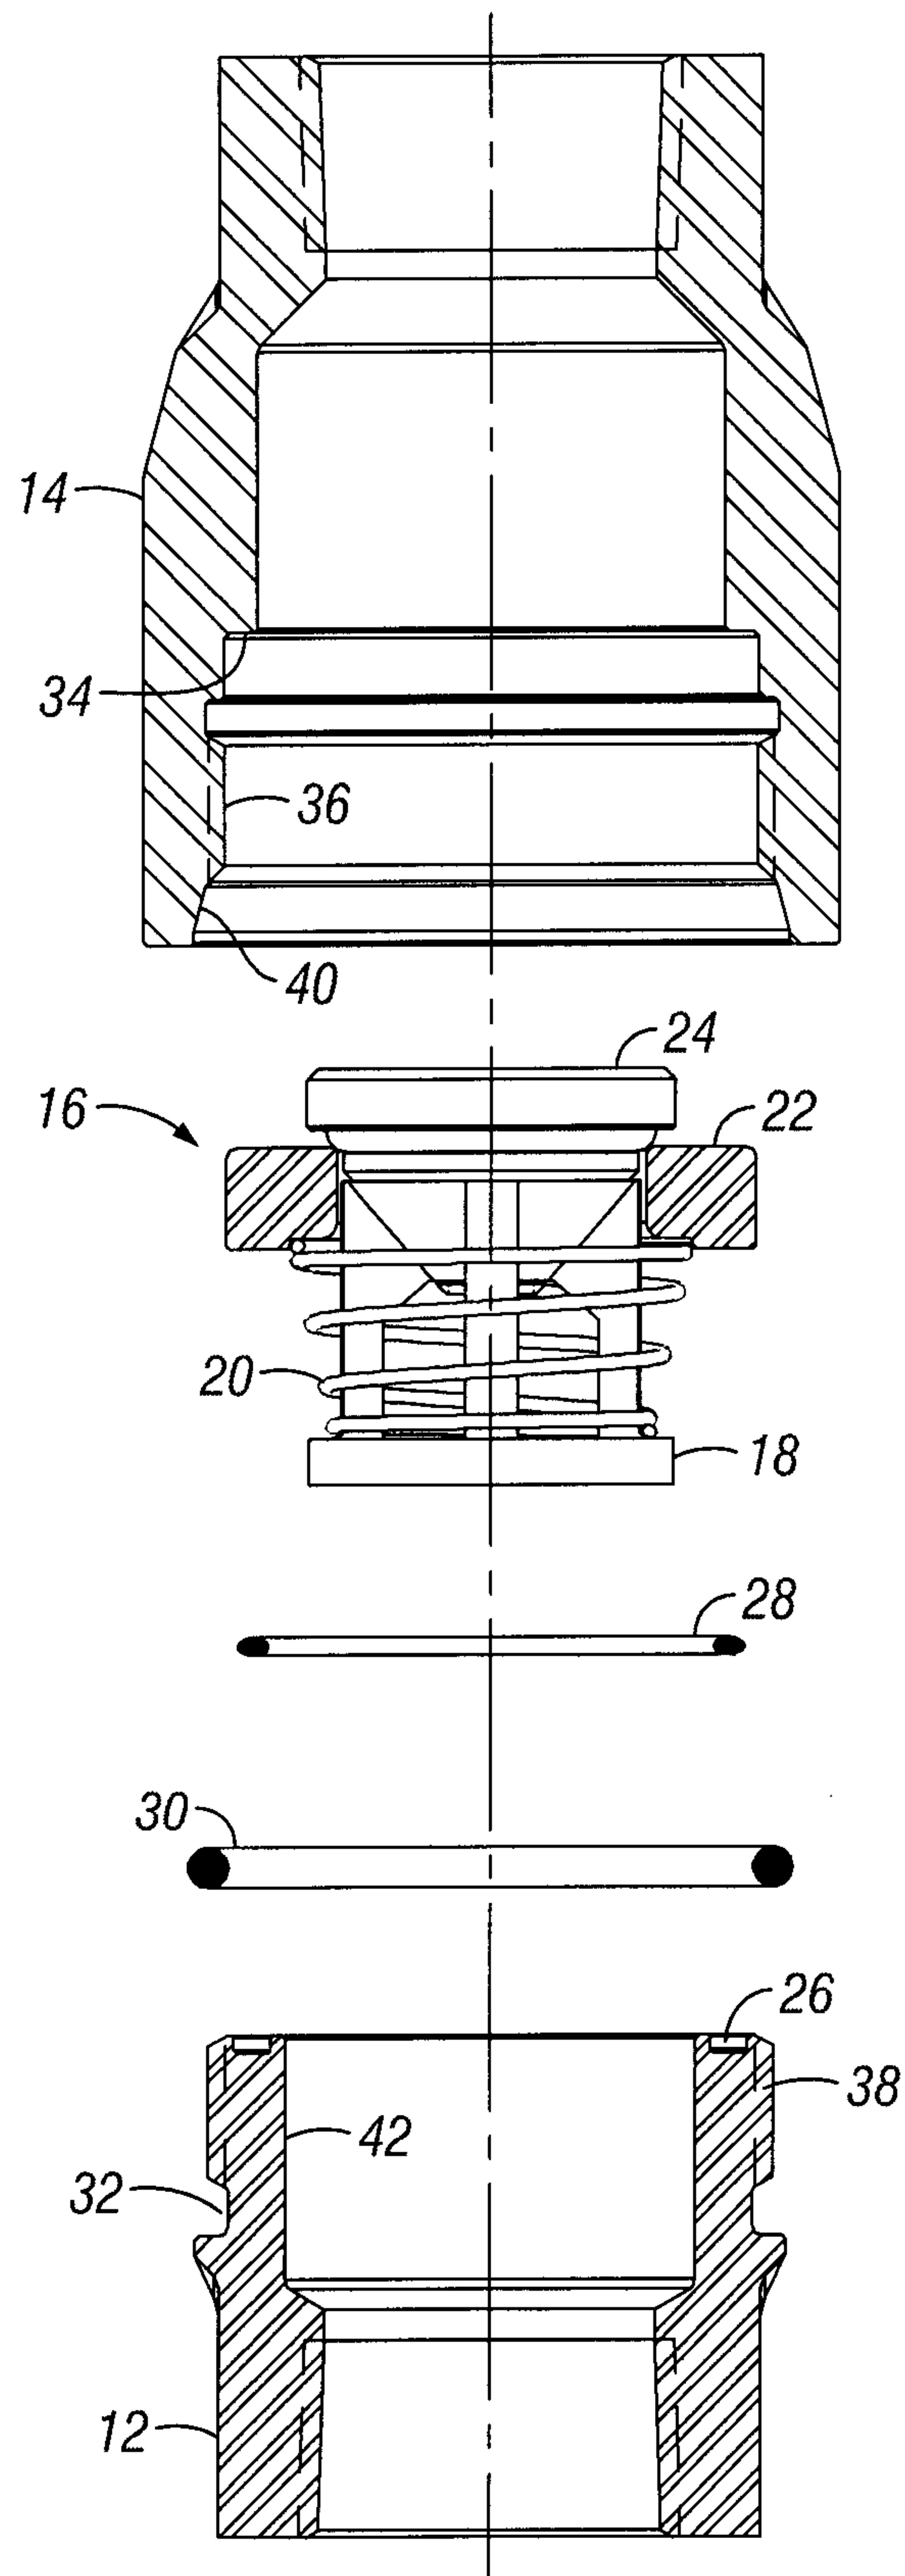


FIG. 5

