



(43) International Publication Date
15 September 2016 (15.09.2016)

(51) International Patent Classification:

A61F 13/472 (2006.01) A61F 13/475 (2006.01)
A61F 13/494 (2006.01)

(21) International Application Number:

PCT/US2016/018839

(22) International Filing Date:

22 February 2016 (22.02.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15158499.2 10 March 2015 (10.03.2015) EP

(71) Applicant: **THE PROCTER & GAMBLE COMPANY**
[US/US]; One Procter & Gamble Plaza, Cincinnati, Ohio
45202 (US).

(72) Inventors: **LIEBE, Tina**; Procter & Gamble Service
GmbH, Sulzbacher Strasse 40 - 50, 65824 Schwalbach am
Taunus (DE). **HIPPE, Matthias, Konrad**; Procter &
Gamble Service GmbH, Sulzbacher Strasse 40 - 50, 65824
Schwalbach am Taunus (DE).

(74) Agent: **KREBS, Jay A.**; c/o THE PROCTER & GAMBLE
COMPANY, Global Patent Services, One Procter &
Gamble Plaza, C8-229, Cincinnati, Ohio 45202 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ABSORBENT ARTICLES WITH IMPROVED BARRIER LEG CUFFS

Fig. 28

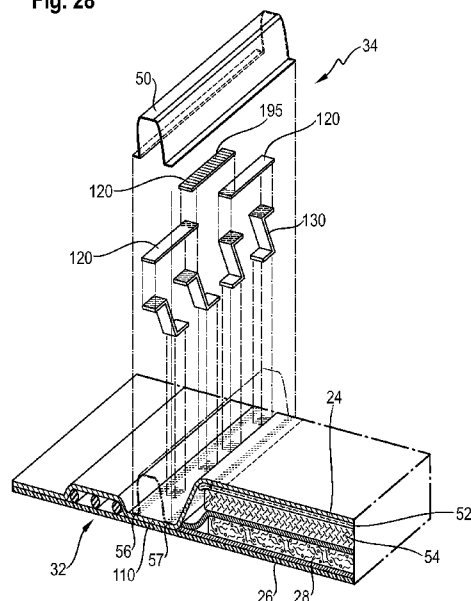

(57) Abstract: The invention refers to a disposable absorbent article such as a diaper, a pant or a sanitary napkin. The disposable absorbent article further comprises a structure having one or more elastic elements which are stretched when the absorbent article is flattened out and which is able to convert from an initial flat configuration into an erected configuration upon contraction of the one or more elastic elements. The structure is comprised by the absorbent article's barrier leg cuffs.

ABSORBENT ARTICLES WITH IMPROVED BARRIER LEG CUFFS

FIELD OF THE INVENTION

The invention relates to personal hygiene absorbent articles for wearing in the lower torso, such as but not limited to diapers and training pants for babies, toddlers and adults, or sanitary napkins. The absorbent articles comprise barrier leg cuffs. More particularly, the invention relates to barrier leg cuffs with improved gasketing when the absorbent article sags upon loading of the absorbent article.

BACKGROUND OF THE INVENTION

Absorbent articles for personal hygiene, such as disposable diapers and training pants for babies, toddlers and adults, are designed to absorb and contain body exudates, in particular large quantity of urine. These absorbent articles comprise several layers providing different functions, for example a topsheet, a backsheet and an absorbent core. Absorbent articles should be able to absorb a large amount of fluid while preventing the fluid from leaking.

Such absorbent articles typically comprise elasticized containment elements at their longitudinal sides to help maintaining the article in contact with the body. It is thus common for diapers to comprise raised flaps, often referred to as barrier leg cuffs (or simply barrier cuffs) which improve the containment of fluid in the leg-torso region of the wearer. Each barrier leg cuff may comprise one or more elastic strands, however, some simpler articles may have non-elasticized barrier leg cuffs. Another type of containment elements commonly found in diapers is often referred to (outer) leg cuffs. These typically comprise one or more elastic strands or elasticized elements inserted in the chassis of the diaper, for example between topsheet and backsheet, between topsheet and an extension of the barrier leg cuff material or between the backsheet and an extension of the barrier leg cuff (if the topsheet has a narrower width than the backsheet). They are positioned in the area of the leg openings longitudinally outboard of the barrier leg cuffs.

Many patents have proposed improvement to these containment elements. For example US4,808,178 and US 4,909,803 (Aziz) describe disposable diapers having such raised elasticized flaps referred to herein as barrier leg cuffs. US 4,695,278 (Lawson) and US 4,795,454 (Dragoo) describe disposable diapers having dual cuffs, including gasketing cuffs

and barrier leg cuffs. US 4,704,116 (Enloe) discloses an absorbent garment comprising a pair of gasketing cuffs and a pair of barrier leg cuffs which attached to or formed from the topsheet and spaced inwardly from said elasticized leg openings, defining a waste-containment pocket. Different solutions have been proposed to attach the barrier leg cuffs to the chassis of the diapers. US 4,795,454 (Dragoo) teaches attachment means such as an adhesive or heat/pressure sealing, ultrasonic bonding. Seal means such as an adhesive bead are further provided to present a barrier to the wicking of liquids through the topsheet. The seal means are said to prevent liquids from wicking underneath the barrier leg cuffs to the edges of the diaper. The seal means are positioned more inwardly of the diaper than the attachment means. US 7, 189,219 (Kasai) discloses creating liquid shut-off regions between the leg cuffs and the topsheet using a heat seal.

Barrier leg cuffs typically provide good containment of fluid, which collects on the surface of the topsheet prior to absorption into the absorbent article, when the (absorbent core of the) absorbent article, is little or moderately loaded with urine. Once absorbent articles approach their maximum capacity for liquid absorption, or when absorbent articles are worn for a prolonged period of time, they may tend to sag downward on the wearer due to the weight of the absorbent article. In such circumstances, the barrier leg cuffs may lose sufficient contact with the skin of the wearer, as the elastic elements at least partly contract.

There is thus a need for absorbent articles with barrier leg cuffs providing improved gasketing and containment. There is also a need for absorbent articles with barrier leg cuffs providing improved comfort for the wearer and reducing the risk of red marking on the wearer's skin.

SUMMARY OF THE INVENTION

An absorbent article is provided, having a longitudinal dimension and a transverse dimension and comprising a liquid pervious topsheet, a liquid impervious backsheet; and an absorbent core disposed between the topsheet and the backsheet. The absorbent article further comprises a barrier leg cuff disposed adjacent to each of the longitudinal edges of the absorbent article and extending substantially parallel to the longitudinal dimension of the absorbent article. Each barrier leg cuff comprises a structure. The structure is attached to the absorbent article with a proximal end. The structure has a longitudinal dimension, which is substantially parallel with the longitudinal dimension of the absorbent article, a lateral dimension and a

caliper. The structure comprises one or more elastic elements; and/or the structure being associated with one or more elastic elements. The structure is in a flat configuration when the absorbent article is flattened out and when the one or more elastic elements are stretched along the longitudinal dimension of the structure. Contraction of the one or more elastic elements applies a force along the longitudinal dimension of the structure, thus converting the structure into an erected, three-dimensional configuration, wherein the structure has a higher caliper in its erected configuration compared to the caliper of the structure in its flat configuration. The erected structure spaces a distal end of the barrier leg cuff away from the topsheet and causing the barrier leg cuff to stand up.

- 10 The non-elastic materials comprised by the structure may have a bending stiffness of less than 500 mNm, preferably less than 400 mNm, more preferably less than 200 mNm. The non-elastic materials comprised by the structure may have a tensile strength of less than 80 N/cm, preferably less than 50 N/cm, more preferably less than 40 N/cm.

- 15 The structure may comprise a first and a second layer, each layer having an inner and an outer surface, a longitudinal dimension parallel to the longitudinal dimension of the structure confined by first and second spaced apart lateral edges, and a lateral dimension parallel to the lateral dimension of the structure confined by two spaced apart longitudinal edges. The first and second layer at least partly overlap each other, wherein the second layer is able to shift relative to the first layer along the longitudinal structure dimension upon release of a contractive force, which has provided by the stretched one or more elastic elements along the longitudinal dimension. Such a structure further comprises ligaments provided between the first and second layer in at least a part of the region where the first and second layer overlap each other. Each ligament has a longitudinal dimension confined by two spaced apart lateral ligament edges, and a lateral dimension confined by two spaced apart longitudinal ligament edges. Each ligament is attached to the inner surface of the first layer with a portion at or adjacent to one of the ligament's lateral edges in a first ligament attachment region and is attached to the inner surface of the second layer with a portion at or adjacent to the ligament's other lateral edge in a second ligament attachment region, the region of each ligament between the first and second ligament attachment region forming a free intermediate portion.
- 25
- 30 The ligaments are spaced apart from one another along the longitudinal dimension of the structure, and the attachment of all ligaments to the first and second layer in the first and

second ligament attachment regions is such that the free intermediate portions of the ligaments are able to convert from an initial flat configuration to an erected configuration upon release of a contractive force, which has provided by the stretched one or more elastic elements along the longitudinal dimension of the structure, thus converting the structure as a whole from an initial flat configuration into an erected configuration, wherein the erection is in the direction perpendicular to the longitudinal and the lateral dimension of the structure, thus increasing in caliper.

The longitudinal dimension of the ligaments in the initial flat configuration of structure may be substantially parallel with the longitudinal dimension of the first and second layer.

One or more ligaments provided towards the longitudinal center of the structure may have a higher tensile strength and/or a higher bending stiffness than the ligaments provided towards the lateral edges of the structure.

In one or more ligaments, those portions of the free intermediate portion which are directly adjacent to the first and/or second ligament attachment region may have a different bending stiffness, different tensile strength, or different bending stiffness and tensile strength than the remaining free intermediate portion of said ligament.

The first layer and the second layer may be made of a single continuous material which is folded over at one of the lateral edges of the structure, such that one of the lateral edges of the first layer is coincident with one of the lateral edges of the second layer, with these lateral edges being located at the interface of the first and second layer.

For all ligaments in the structure, a first surface of the free intermediate portion may face towards the inner surface of the first layer and a second surface of the free intermediate portion may face towards the inner surface second layer in the structure's flat configuration, and the first surface of the free intermediate portion may face towards the second surface of the neighboring ligament when the structure is in the erected configuration.

For all ligaments in the structure, the ligament's first surface may not be facing towards the inner surface of the second layer when the structure is in its initial flat configuration, and the ligament's second surface may not be facing towards the inner surface of the first layer when the structure is in its initial flat configuration.

The ligaments of the structure may have a tensile strength of from 1N/cm to 100N/cm and/or may have a bending stiffness of from 0.01mNm to 1Nm.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other features, aspects and advantages of the present invention will become better understood with regard to the following description, appended claims, and accompanying drawing where:

Fig. 1A is a side view (parallel to the lateral dimension) of a cell-forming structure with ligaments having Z-like shape, wherein the structure is in its initial flat configuration and wherein the free intermediate portion of all ligaments has the same length.

Fig. 1B is a side view of the embodiment of Fig. 1A, wherein the structure is now in its erected configuration

Fig. 2 is a side view (parallel to the lateral dimension) of a cell-forming structure - with ligaments having Z-like shape -, wherein the structure is in its erected configuration and wherein the free intermediate portion of the ligaments varies with the central ligament having the biggest length

Fig. 3A is a side view (parallel to the lateral dimension) of a cell-forming structure - with ligaments having Z-like shape, wherein the structure is in its initial flat configuration and wherein the structure comprises a layer-to-layer stop aid

Fig. 3B is a side view (parallel to the lateral dimension) of the embodiment of Fig 3A, now in its erected configuration.

Fig. 4A is a side view (parallel to the lateral dimension) of a cell-forming structure - with ligaments having Z-like shape, wherein the structure is in its initial flat configuration and wherein the structure comprises a layer-to-ligament stop aid

Fig. 4B is a side view (parallel to the lateral dimension) of the embodiment of Fig 4A, now in its erected configuration

Fig. 5 is a side view of the structure shown in Fig. 1B which comprises a ligament-to-ligament material between neighboring ligaments

Fig. 6 is a side view of a cell-forming structure - with ligaments having Z-like shape

Fig. 7A is a side view of a cell-forming structure –with ligaments having C-like shape, wherein the structure is in its initial flat configuration

Fig. 7B is a side view of the embodiment of Fig. 7A, wherein the structure is in its
5 partly erected configuration

Fig. 7C is a side view of the embodiment of Fig. 7A, wherein the structure is in its maximum erected configuration

Fig. 8A is a side view of a cell-forming structure –with ligaments having Double-T-like shape-, wherein the structure is in its initial flat configuration

Fig. 8B is a side view of the embodiment of Fig. 8A, wherein the structure is in its
10 partly erected configuration

Fig. 8C is a side view of the embodiment of Fig. 8A, wherein the structure is in its maximum erected configuration

Fig. 9A is a side view of a cell-forming structure –with ligaments having T-like shape-,
15 wherein the structure is in its initial flat configuration

Fig. 9B is a side view of the embodiment of Fig. 9A, wherein the structure is in its partly erected configuration

Fig. 9C is a side view of the embodiment of Fig. 9A, wherein the structure is in its maximum erected configuration

Fig. 10A is a side view of a cell-forming structure – with ligaments of Z-like shape having inverse configuration, wherein the structure is in its initial flat configuration
20

Fig. 10B is a side view of the embodiment of Fig. 10A, wherein the structure is in its erected configuration

Fig. 11A is a side view of a cell-forming structure – with ligaments of C-like shape
25 having inverse configuration, wherein the structure is in its initial flat configuration

Fig. 11B is a side view of the embodiment of Fig. 11A, wherein the structure is in its erected configuration

Fig. 12 is a side view of a cell-forming structure not comprised by the present invention, wherein the structure cannot be converted into an erected configuration

5 Fig. 13A is a side view of a cell-forming structure –with ligaments made of two-layered laminates and having Double-T-like shape-, wherein the structure is in its initial flat configuration

Fig. 13B is a side view of the embodiment of Fig. 13A, wherein the structure is in its partly erected configuration

10 Fig. 13C is a side view of the embodiment of Fig. 13A, wherein the structure is in its maximum erected configuration

Fig. 14A is a side view of a cell-forming structure –with ligaments compiled of separate pieces of material and having Double-T-like shape-, wherein the structure is in its initial flat configuration

15 Fig. 14B is a side view of the embodiment of Fig. 14A, wherein the structure is in its partly erected configuration

Fig. 14C is a side view of the embodiment of Fig. 14A, wherein the structure is in its maximum erected configuration

20 Fig. 15A is a side view of a cell-forming structure –with ligaments compiled of separate pieces of material and having Z-like shape-, wherein the structure is in its initial flat configuration

Fig. 15B is a side view of the embodiment of Fig. 15A, wherein the structure is in its partly erected configuration

25 Fig. 15C is a side view of the embodiment of Fig. 15A, wherein the structure is in its maximum erected configuration

Fig. 16A is a side view of a cell-forming structure –with ligaments having cut out areas and having Z-like shape-, wherein the structure is substantially in its initial flat configuration

Fig. 16B is a side view of the embodiment of Fig. 16A, wherein the structure is in its
5 erected configuration

Fig. 17 is a schematic drawing of parts of the equipment used for the modulus test method

Fig. 18 is a schematic drawing of a barrier leg cuff of the present invention

Fig. 19 is a front view (along the longitudinal dimension of the barrier leg cuff) of Fig.
10 19, wherein the structure is in its flat configuration

Fig. 20 is a front view (along the longitudinal dimension of the barrier leg cuff) of Fig. 19, wherein the structure is in its erected configuration

Fig. 21 is a schematic drawing of a structure comprising an elastic member, wherein the structure is in its flat configuration

Fig. 22 is a schematic drawing of the embodiment of Fig. 21, wherein the structure is
15 in its erected configuration.

Fig. 23 is a spatial representation of the structure of Fig. 22

Fig. 24 is a schematic drawing of an alternative structure to the structure shown in Fig. 21 and comprising an elastic member, wherein the structure is in its flat configuration

Fig. 25 is a schematic drawing of the embodiment of Fig. 24, wherein the structure is
20 in its erected configuration.

Fig. 26 is a spatial representation of the structure of Fig. 25

Fig. 27 is a schematic drawing of an alternative structure to the structure shown in Fig. 24 and comprising an elastic member, wherein the structure is in its flat configuration.
25 Compared to the structure of Fig. 24, the ligaments are spaced apart from each other at a wider distance along the longitudinal dimension of the structure

Fig. 28 is a schematic drawing of a section of an absorbent article comprising the barrier leg cuff of the present invention.

Fig. 29 is a top view of an exemplary absorbent article in the form of a diaper.

DETAILED DESCRIPTION OF THE INVENTION

5 Definitions

"Absorbent article" refers to devices that absorb and contain body exudates, and, more specifically, refers to devices that are placed against or in proximity to the body of the wearer to absorb and contain the various exudates discharged from the body. Absorbent articles may include diapers (baby diapers and diapers for adult incontinence), pants, inserts, feminine care
10 absorbent articles such as sanitary napkins or pantliners, and the like. As used herein, the term "exudates" includes, but is not limited to, urine, blood, vaginal discharges, sweat and fecal matter. Preferred absorbent articles of the present invention are disposable absorbent articles, more preferably disposable diapers and disposable pants.

"Disposable" is used in its ordinary sense to mean an article that is disposed or discarded after
15 a limited number of usage over varying lengths of time, for example, less than 20 usages, less than 10 usages, less than 5 usages, or less than 2 usages. If the disposable absorbent article is a diaper, a pant, sanitary napkin, sanitary pad or wet wipe for personal hygiene use, the disposable absorbent article is most often intended to be disposed after single use.

"Diaper" and "pant" refers to an absorbent article generally worn by babies, infants and
20 incontinent persons about the lower torso so as to encircle the waist and legs of the wearer and that is specifically adapted to receive and contain urinary and fecal waste. In a pant, as used herein, the longitudinal edges of the first and second waist region are attached to each other to a pre-form waist opening and leg openings. A pant is placed in position on the wearer by inserting the wearer's legs into the leg openings and sliding the pant absorbent article into
25 position about the wearer's lower torso. A pant may be pre-formed by any suitable technique including, but not limited to, joining together portions of the absorbent article using refastenable and/or non-refastenable bonds (e.g., seam, weld, adhesive, cohesive bond, fastener, etc.). A pant may be preformed anywhere along the circumference of the article (e.g., side fastened, front waist fastened). In a diaper, the waist opening and leg openings are

only formed when the diaper is applied onto a wearer by (releasable) attaching the longitudinal edges of the first and second waist region to each other on both sides by a suitable fastening system.

The term "film" as used herein refers to a substantially non-fibrous sheet-like material wherein the length and width of the material far exceed the thickness of the material. Typically, films have a thickness of about 0.5 mm or less. Films may be configured to be liquid impermeable and/or vapor permeable (i.e., breathable). Films may be made of polymeric, thermoplastic material, such as polyethylene, polypropylene or the like.

"Garment-facing surface" means the outermost portion of an element of a wearable absorbent article when the absorbent article is worn as intended. The opposing surface, or innermost portion, of the same element is referred to as the "wearer-facing surface." It is to be understood that the garment-facing surface and the wearer-facing surface of an element are relative to the wearer of the article with the garment-facing surface being furthest from the wearer and the wearer-facing surface being closest to the wearer. In the example of a typical disposable diaper, the portion of the outer cover that faces away from the wearer is the garment-facing surface while the opposing surface of the outer cover is the wearer-facing surface.

"Longitudinally inboard" and "longitudinally outboard" as used herein in relation to the absorbent article describes the position of a component or material relative to another component or material with respect to the longitudinal axis of the absorbent article. Longitudinally inboard means closer to the longitudinal axis whereas longitudinally outboard means further away from the longitudinal axis.

"Non-extensible" as used herein refers to a material which, upon release of a contractive force, which has provided by the stretched one or more elastic elements, elongates beyond its original length by less than 20 % if subjected to the following test:

A rectangular piece of the material having a width of 2.54 cm and a length of 25.4 cm is maintained in a vertical position by holding the piece along its upper 2.54 cm wide edge along its complete width. A force of 10 N is applied onto the opposite lower edge along the complete width of the material for 1 minute (at 25°C and 50% rel. humidity; samples should be preconditioned at these temperature and humidity conditions for 2 hours prior to testing).

Immediately after one minute, the length of the piece is measured while the force is still applied and the degree of elongation is calculated by subtracting the initial length (25.4 cm) from the length measured after one minute.

5 If a material elongates beyond its original length by more than 20 % if subjected to the above described test, it is “extensible” as used herein.

“Highly non-extensible” as used herein refers to a material, which, upon release of a contractive force, which has provided by the stretched one or more elastic elements, elongates beyond its original length by less than 10% if subjected to the test described above for “non-extensible” material.

10 “Non-elastic” as used herein refers to a material which does not recover by more than 20% if subjected to the following test, which is to be carried out immediately subsequent to the test on “non-extensibility” set out above.

15 Immediately after the length of the rectangular piece of material has been measured while the 10N force is still applied, the force is removed and the piece is laid down flat on a table for 5 minutes (at 25°C and 50% rel. humidity) to be able to recover. Immediately after 5 minutes, the length of the piece is measured again and the degree of elongation is calculated by subtracting the initial length (25.4 cm) from the length after 5 minutes.

20 The elongation after one minute while the force has been applied (as measured with respect to “non-extensibility”) is compared to the elongation after the piece has been laid down flat on a table for 5 minutes: If the elongation does not recover by more than 20%, the material is considered to be “non-elastic”.

If a material recovers by more than 20%, the material is considered “elastic” as used herein.

25 “Highly non-elastic” as used herein refers to a material, which is either “non-extensible” or which does not recover by more than 10% if subjected to the test set out above for “non-elastic”.

For use in the cell forming structures of the present invention, extensible, non-extensible, highly non-extensible, elastic, non-elastic and highly non-elastic relate to the dimension of the material, which, once the material has been incorporated into the structure, is parallel to the

longitudinal dimension of the structure. Hence, the sample length of 25.4 cm for carrying out the tests described above corresponds to the longitudinal dimension of the cell forming structure once the material has been incorporated into the structure.

A "nonwoven web" is a manufactured web of directionally or randomly oriented fibers, consolidated and bonded together. The term does not include fabrics which are woven, knitted, or stitch-bonded with yarns or filaments. The fibers may be of natural or man-made origin and may be staple or continuous filaments or be formed in situ. Commercially available fibers have diameters ranging from less than about 0.001 mm to more than about 0.2 mm and they come in several different forms: short fibers (known as staple, or chopped), continuous single fibers (filaments or monofilaments), untwisted bundles of continuous filaments (tow), and twisted bundles of continuous filaments (yarn). Nonwoven fabrics can be formed by many processes such as meltblowing, spunbonding, solvent spinning, electrospinning, and carding. Nonwoven webs may be bonded by heat and/or pressure or may be adhesively bonded. Bonding may be limited to certain areas of the nonwoven web (point bonding, pattern bonding). Nonwoven webs may also be hydro-entangled or needle-punched. The basis weight of nonwoven fabrics is usually expressed in grams per square meter (g/m²).

A "pantliner" and a "sanitary napkin" generally have two end regions and a middle region (i.e. a crotch region). The pantliner and the sanitary napkin has a body-facing surface and a garment facing surface. The size and shape of the absorbent structure positioned between the topsheet and the backsheet can be altered to meet absorbent capacity requirements, and to provide comfort to the wearer. The garment facing surface of the pantliner and of the sanitary napkin can have thereon pressure sensitive adhesive for affixing to a wearer's undergarments. Typically, such adhesive is covered with a release strip which is removed before affixing to the undergarment. Pantliners can also be provided with lateral extensions known commonly in the art as "flaps" or "wings" intended to extend over and cover the panty elastics in the crotch region of the user's undergarment. However, wings are normally not used with pantliners but are more often used in sanitary napkins. Sanitary napkins and pantliners of the present invention comprise barrier leg cuffs.

A "paper" refers to a wet-formed fibrous structure comprising cellulose fibers.

“Releasably attached”, as used herein, refers to a temporary attachment. Temporary attachment can be achieved, e.g. by using an adhesive which allows for release of the attachment by use of moderate force, such as can be applied by a person without application of undue forces and leading to rupturing or substantial damaging (affecting proper and intended use) of the absorbent article. Releasably attachment can also be achieved by using an adhesive which provides strong attachment initially when the adhesive is applied, e.g. during manufacturing of the absorbent article, and wherein the adhesive forces decrease over time, e.g. by evaporation of certain solvents comprised by the adhesive during application of the adhesive or by degradation of certain ingredients comprised by the adhesive. Such adhesives may become brittle over time. It should be noted that though such releasable attachments may, under certain conditions, already lead to detachment prior to a consumer using the absorbent article (e.g. by removing it from a package prior to use), the releasable attachment will nevertheless be useful in the present invention, as long as the releasable attachment provides for initial attachment, e.g. during manufacture and packaging of the absorbent article. Unless specifically mentioned herein that an attachment/bond is meant to be releasable, all attachments/bonds described herein are permanent, i.e. they do not detach and open under conditions to which an absorbent article is normally subjected during its lifetime.

“Sheet-like foam”, as used herein is a solid sheet that is formed by trapping pockets of gas. The solid foam may be closed-cell foam or open-cell foam. In closed-cell foam, the gas forms discrete pockets, each completely surrounded by the solid material. In open-cell foam, the gas pockets connect with each other. “Sheet-like” means that the length and width of the material far exceed the thickness of the material

“Transversally inboard” and “transversally outboard” as used herein in relation to the absorbent article describes the position of a component or material relative to another component or material with respect to the transversal axis of the absorbent article.

Transversally inboard means closer to the transversal axis whereas transversally outboard means further away from the transversal axis.

The terms “upper”, “above”, “on top of”, as used herein in respect of the absorbent article relates to a position on a wearer-facing surface. Likewise, the terms “lower”, “below”, “beneath”, “underneath” and “under” as used herein in respect of the absorbent article relates to a position on a garment-facing surface.

Disposable absorbent articles

The structures of the present invention can find a wide variety of applications in absorbent articles, such as disposable absorbent articles.

5 A typical absorbent article is represented in Fig. 29 in the form of a diaper 20. However, the structure may be applied in other disposable absorbent articles, such as pants, pantliners and sanitary napkins in the same manner and configuration as described herein below for a diaper.

In more details, Figure 29 is a plan view of an exemplary diaper 20, in a flat-out state, with portions of the diaper being cut-away to more clearly show the construction of the diaper 20. As said, this diaper 20 is shown for illustration purpose only as the structure of the present
10 invention may be comprised in a wide variety of diapers or other absorbent articles.

As shown in Figure 29, the absorbent article, here a diaper, can comprise a liquid pervious topsheet 24, a liquid impervious backsheet 26, an absorbent core 28 which is preferably positioned between at least a portion of the topsheet 24 and the backsheet 26. The absorbent core 28 can absorb and contain liquid received by the absorbent article and may comprise
15 absorbent materials 60, such as superabsorbent polymers and/or cellulose fibers, as well as other absorbent and non-absorbent materials commonly used in absorbent articles (e.g. thermoplastic adhesives immobilizing the superabsorbent polymer particles). The diaper 20 may also include optionally an acquisition system with an upper 52 and lower 54 acquisition layer.

20 The diaper also comprises barrier leg cuffs 34 and may further comprise elasticized leg cuffs 32. Moreover, the absorbent article may comprise a fastening system, such as an adhesive fastening system or a hook and loop fastening member, which can comprise tape tabs 42, such as adhesive tape tabs or tape tabs comprising hook elements, cooperating with a landing zone 44 (e.g. a nonwoven web providing loops in a hook and loop fastening system). The diaper 20
25 as shown in Figure 29 can be notionally divided in a first waist region 36, a second waist region 38 opposed to the first waist region 36 and a crotch region 37 located between the first waist region 36 and the second waist region 38. The longitudinal centerline 80 is the imaginary line separating the diaper along its length in two equal halves. The transversal centerline 90 is the imagery line perpendicular to the longitudinal line 80 in the plane of the
30 flattened out diaper and going through the middle of the length of the diaper. The periphery of

the diaper 20 is defined by the outer edges of the diaper 20. The longitudinal edges of the diaper may run generally parallel to the longitudinal centerline 80 of the diaper 20 and the end edges run between the longitudinal edges generally parallel to the transversal centerline 90 of the diaper 20. The crotch region, the first and the second waist region each constitutes 1/3 of the absorbent article along the longitudinal centerline.

Further, the diaper may comprise other elements, such as a back waist feature, which may be non-elastic or elastic, and a front waist feature, which may be non-elastic or elastic, a lotion applied onto the wearer-facing surface of the topsheet, back ears 40, and/or front ears 46. The front and/or back ears 40, 46 may be separate components attached to the diaper or may instead be continuous with portions of the topsheet and/or backsheet –and/or even portions of the absorbent core – such that these portions form all or a part of the front and/or back ears 40, 46. Also combinations of the aforementioned are possible, such that the front and/or back ears 40, 46 are formed by portions of the topsheet and/or backsheet while additional materials are attached to form the overall front and/or back ears 40, 46. The front and/or back ears may be elastic or non-elastic.

The topsheet 24, the backsheet 26, and the absorbent core 28 may be assembled in a variety of well known configurations, in particular by gluing or heat embossing. Exemplary diaper configurations are described generally in US3,860,003; US5,221,274; US5,554,145; US5,569,234; US5,580,411; and US6,004,306.

As the structure has a relatively low caliper when in its initial flat configuration, it does not significantly contribute to the volume and bulk of the absorbent article prior to use. Hence, the structures do not add significantly to the overall packaging and storage volume of the absorbent articles.

Barrier leg cuffs

The absorbent article comprises barrier leg cuff 34 disposed adjacent to each of the longitudinal edges of the absorbent article and extending substantially parallel to the longitudinal dimension of the absorbent article. Each barrier leg cuff 34 comprises a structure 100. The structure may comprise one or more elastic elements 195, 196, or, alternatively, the structure may be associated with one or more elastic elements. The proximate end 110 of the structure is permanently attached to the absorbent article, such as to the topsheet 24, to the

backsheet 26 and/or to the (optional) barrier material 50. Alternatively, the proximate end of the structure may be formed by a portion of the topsheet, the backsheet and/or the (optional) barrier material.

The structure 100 is in a flat configuration when the absorbent article is flattened out, wherein
5 the one or more elastic elements 195, 196 are stretched along the longitudinal dimension of the structure (which is coextensive with the longitudinal dimension of the barrier leg cuff). Upon contraction of the one or more elastic elements, the structure is able to convert into an erected, three-dimensional configuration. Contraction of the one or more elastic elements often also leads to contraction of the absorbent article as a whole, and hence, the absorbent
10 article will no longer be flattened out, similar to contraction of elastic members comprised by conventional, known barrier leg cuffs. The erected structure spaces one end (the distal end) of the barrier leg cuff away from the topsheet and causes the barrier leg cuff to stand up. The proximate end of the erected structure remains permanently attached to the absorbent article, such as to the topsheet, to the backsheet and/or to a barrier material, which is described below
15 in more detail (or the proximate end is formed by a portion of the topsheet, the backsheet and/or the (optional) barrier material).

The structure has a longitudinal dimension parallel to the longitudinal dimension of the barrier leg cuff, a lateral dimension perpendicular to its longitudinal dimension and a caliper perpendicular to the longitudinal and lateral dimension of the structure. The caliper increasing
20 when the structure converts from its flat configuration into its erected three-dimensional configuration, thus causing the barrier leg cuff to stand up.

Different to conventional barrier leg cuffs, which are typically two-dimensional, flat cuffs, the barrier leg cuff of the present invention has a three-dimensional shape in its erected configuration. This enables the barrier leg cuff to withstand forces applied to it by a wearer in
25 an improved manner. Moreover, the caliper of the erected structure can be relatively high while still providing a relatively stiff and stable barrier leg cuff. Moreover, the barrier leg cuff of the present invention can improve comfort for the wearer, as barrier leg cuff can adapt more smoothly to the skin of the wearer and the forces can be distributed over a larger surface area (of the wearer's skin): In conventional two-dimensional barrier leg cuffs, the body
30 contact is typically achieved by a thin elastic strand. The three-dimensional shape of the

structure enables a body contact over a larger area as the distal end of the barrier leg cuff is in contact with a larger area of wearer's body.

The increase in caliper of the erected structure versus the flat structure may be more than 5 mm, or more than 8 mm, or more than 10 mm, or more than 15 mm, or more than 20 mm.

5 Also, the increase caliper of the erected structure versus the flat structure may be less than 80 mm, or less than 60 mm, or less than 50 mm, or less than 40 mm. Generally, the increase caliper will depend on the intended use, with absorbent articles intended to be worn by babies and small toddlers requiring a smaller caliper whereas absorbent articles to be worn by larger children or adults may require a higher caliper.

10 The lateral dimension of the structure can be from 3 mm to 50 mm, or from 3 mm to 40 mm, or from 4 mm to 30 mm, depending on the intended use of the absorbent article. For example, in absorbent articles, such as diapers or pants, which are intended for use by babies or small toddlers, the lateral dimension of the structure may be relatively small, such as from 3 mm to 10 mm, or from 3 mm to 8 mm, or from 3 mm to 5 mm. Thereby, the barrier leg cuff does not
15 extent excessively wide towards the longitudinal axis of the absorbent article to avoid discomfort and an adverse effect on the ability of the absorbent article to properly absorb liquid. If the barrier leg cuff extends too much towards the longitudinal axis 80, it might more or less "block" the central area where liquid will typically be introduced into the article (e.g. the area around the so-called "pee-point").

20 However, if the absorbent article is to be worn by larger children or by adults, the width of the absorbent article in the crotch region will be larger and thus, the lateral dimension of the structure may be larger accordingly, such as from be from 5 mm to 50 mm, or from 5 mm to 40 mm, or from 5 mm to 30 mm, or from 10 mm to 40 mm.

The longitudinal dimension of the structure will likewise depend on the intended use of the
25 absorbent article. Generally, the length of longitudinal dimension of the structure may be the same as the longitudinal dimension of the absorbent article. Alternatively, the length may be somewhat shorter than the longitudinal dimension of the absorbent article. For example, the longitudinal dimension of the structure may be from 50% to 95%, or from 50% to 90%, or from 60% to 80% of the longitudinal dimension of the absorbent article.

The structure of each barrier leg cuff may extend along the complete crotch region 37. The structure may extend into the first and second waist regions 36, 38. For example the structure of each barrier leg cuff may extend along at least 30%, or at least 50% of the first and second waist region.

- 5 The longitudinal and lateral dimensions are determined when the structure is in its initial flat configuration and are defined by the dimensions of the distal end of the structure (if the structure is a so-called cell-forming structure 100 as described below, the dimensions are defined by the dimensions of the second layer 120).

Each barrier leg cuff 34 may further comprise a barrier material 50, which partially or
10 completely enwraps the structure 100. The barrier material may, for example, be a nonwoven web or a film. The barrier material will typically be liquid impermeable and may be hydrophobic to avoid leakage of urine through the barrier leg cuff.

If the barrier leg cuff comprises a barrier material, it should be configured accordingly in order not to obstruct and hinder proper erection of the structure. For example, the barrier
15 material may not be attached to the structure at all or it may only be attached to the structure at or adjacent to the area of the structure, where the structure is attached to the absorbent article (e.g. to the topsheet, and/or backsheet).

The one or more elastic elements may be comprised by the barrier material and be associated with (e.g. may be attached to) the structure via the barrier material. Alternatively, the one or
20 more elastic elements may be comprised by the structure and be associated with (e.g. attached to) the barrier material. Still alternatively, the one or more elastic elements may be comprised by the structure, such as by the distal end of the structure, and the distal end of the structure is associated with (e.g. attached to) the barrier material.

If the barrier material is partly enwrapped around the structure, it may be folded loosely over
25 the structure in its flat configuration and attached to the topsheet and/or backsheet at the proximal end of the barrier leg cuff, as is shown in Figure 19. If the barrier material is fully enwrapped around the structure, it may be folded loosely over the structure in its flat configuration and attached to the topsheet, the backsheet, to itself and/or to the proximate end of the structure (such as to the first layer of the so-called "cell-forming structure" which is
30 described in detail below).

By folding the barrier material loosely over/around the structure, the barrier material provides sufficient leeway to allow conversion of the structure from its flat configuration into its erected configuration. Alternatively, the barrier material may be made of extensible material, which can elongate upon erection of the structure, such as extensible nonwoven. The material
5 may also be rendered extensible, i.e. by incrementally stretching the material (so-called “ring-rolling”).

However, the barrier material may be non-elastic or highly non-elastic (e.g. in order to not apply tension on the erected structure).

However, instead of using a separate barrier material, the distal end of the structure may also
10 be configured such that the lateral dimension of the structure is wider than the lateral dimension of the structure components between the distal end and the proximate end. That way, the material forming the distal end can be folded over towards the topsheet of the absorbent article and may be attached to the respective components of the absorbent article, such as to the topsheet, to the backsheet and/or to the material forming the proximate end of
15 the structure along its lateral side edges. For example, if the structure is a cell-forming structure as described below, the second layer may have a larger lateral dimension than the ligaments (and the stop aids, if present), such that the second layer may be attached to the topsheet, to the backsheet and/or to the first layer of the cell-forming structure.

The non-elastic materials comprised by the structure have a bending stiffness of less than 500
20 mNm, preferably less than 400 mNm, more preferably less than 200 mNm.

Also, the non-elastic materials comprised by the structure have a tensile strength of less than 80 N/cm, preferably less than 50 N/cm, more preferably less than 40 N/cm.

The increase in caliper of the erected structure vs. the flat structure may be more than 5 mm, or more than 8 mm, or more than 10 mm, or more than 15 mm, or more than 20 mm, or more
25 than 25 mm, or more than 30 mm, or more than 40 mm. Also, the increase in caliper of the erected structure may be less than 100 mm, or less than 80 mm, or less than 60 mm, or less than 50 mm vs. the flat structure. Generally, the increase in caliper will depend on the intended use, e.g. absorbent articles intended to be worn by babies and small toddlers may require a smaller caliper whereas absorbent articles to be worn by larger children or adults
30 may require higher caliper. Also, for sanitary napkins or pantliners or other absorbent inserts

to be worn by placing it in the wearer's undergarment, a smaller caliper may be sufficient versus the use in a diaper or pant.

The absorbent article of the present invention may comprise more than one barrier leg cuff disposed adjacent to each of the longitudinal edges of the absorbent article and extending
5 substantially parallel to the longitudinal dimension of the absorbent article, such as one barrier leg cuff comprising a structure of the present invention in combination with one conventional, two-dimensional barrier leg cuff.

Gasketing cuff

The absorbent article may further comprise a gasketing cuff 32 along each of the longitudinal
10 edges of the article. The gasketing cuff 32 is typically positioned longitudinally outboard of the barrier leg cuff. The gasketing cuff may comprise one or more elastic elements, such as elastic strands. Due to the one or more elastic elements 33, the gasketing cuff is made elastically contractible. The gasketing cuff may further comprise portions of the backsheet, of the topsheet and/or of a nonwoven gasketing material. The nonwoven gasketing material may
15 be the same or similar to the barrier material. The nonwoven gasketing material may be coextensive and continuous with the barrier material. The one or more elastic elements may be comprised in between the portions of the backsheet, of the topsheet and/or of a nonwoven gasketing material.

Cell forming structures

20 Examples of structures suitable for use in the barrier leg cuffs of the present invention are so-called "cell forming structures".

The name "cell forming structures" is due to the cells formed between neighboring ligaments in the erected structure configuration, the cells being delimited by two neighboring ligaments and the first and second layer. These structures are initially relatively flat. When a force is
25 applied along the longitudinal dimension (i.e. along the lengthwise extension) of the structure, the structure adopts an erected configuration. Thus, the structure increases in caliper. As used herein, the terms "caliper" and "thickness" are used interchangeably and refer to a direction perpendicular to the lateral and longitudinal dimension.

Figure 1A shows a cell-forming structure –with ligaments having Z-like shape- in its flat configuration whereas Figure 1B shows the structure in its erected configuration.

Generally, the structure (100) of the present invention comprises a first and a second layer (110, 120).

5 The first layer (110) may be attached to the topsheet, to the backsheet, and/or to the barrier material. Alternatively, the first layer may be made of a portion of the topsheet, of the backsheet and/or of the barrier material. The first layer may be made of non-elastic or highly non-elastic material. Also the first layer may be made non-extensible or highly non-extensible material. The first layer may form the proximate end of the erected structure and may be
10 comprised by the proximate end of the barrier leg cuff once the barrier leg cuff stands up away from the topsheet.

The second layer (120) may predominately be made of non-extensible or highly non-extensible material. However, the second layer may comprise the one or more elastic element of the structure, such that the second layer has elastic portions comprising the one or more
15 elastic elements and non-elastic portions made of non-elastic material. Alternatively, the one or more elastic element may be directly or indirectly associated with the second layer (120), in which case the second layer may be made of non-elastic material. The second layer may form the distal end of the erected structure and may be comprised by or may be adjacent to the distal end of the barrier leg cuff once the barrier leg cuff stands up away from the
20 topsheet.

The first and second layers may be made of nonwovens, film, paper, sheet-like foam, woven fabric, knitted fabric or combinations of these materials. Combinations of these materials may be laminates, e.g. a laminate of a film and a nonwoven. Generally, a laminate may consist of only two materials joined to each other in a face to face relationship and lying upon another
25 but alternatively may also comprise more than two materials joined to each other in a face to face and lying upon another.

The one or more elastic elements which may be comprised by the second layer may be elastic film, elastic nonwoven, elastic scrim or elastic strands.

The first and second layer may be made of the same material (apart from the one or more elastic elements if they are comprised by the second layer). Alternatively, the first layer may be made of material which is different from the material of the second layer.

Generally, the first and second layer may be made of two separate pieces of material.

- 5 The (non-elastic) materials of the first and second layer may be chosen such that the first and second layers have the same basis weight, tensile strength, bending stiffness, liquid permeability, breathability and/or hydrophilicity. Alternatively, the first and second layer may differ from each other in one or more properties, such as basis weight, tensile strength, bending stiffness, and/or breathability.
- 10 The basis weight of the first and second layer may be at least 2 g/m², or at least 3 g/m², or at least 5 g/m²; or at least 8 g/m², or at least 10 g/m², or at least 12 g/m², and the basis weight may further be not more than 500 g/m², or not more than 200 g/m², or not more than 100 g/m², or not more than 50 g/m², or not more than 30 g/m². If the second layer comprises the one or more elastic elements, the basis weight of the second layer, as used herein, refers to the
- 15 non-elastic material of the second layer as well as to the one or more elastic elements.

- The tensile strength of the first and second layer may be at least 3 N/cm, or at least 4 N/cm, or at least 5 N/cm. The tensile strength may be less than 100 N/cm, or less than 80 N/cm, or less than 50 N/cm, or less than 30 N/cm, or less than 20 N/cm. If the second layer comprises the one or more elastic elements, the tensile strength of the second layer refers to the non-elastic
- 20 materials only.

- The bending stiffness of the first and second layer may be at least 0.1 mNm, or at least 0.2 mNm, or at least 0.3 mNm. The bending stiffness may be less than 200 mNm, or less than 150 mNm, or less than 100 mNm, or less than 50 mNm, or less than 10 mNm, or less than 5 mNm. If the second layer comprises the one or more elastic elements, the bending stiffness of
- 25 the second layer refers to the non-elastic materials only.

Generally, the higher the tensile strength and the bending stiffness of the first and second layer, the more rigid, but also the more stable the overall structure will become. Hence, the choice of tensile strength and bending stiffness for the first and second layer depends on the application of the structure (e.g. whether the barrier leg cuff comprising the structure is used

in an absorbent article for babies, toddlers or adults, or whether it is used in a diaper or in an absorbent article which is inserted into the wearer's underwear), balancing overall softness, drape and conformability requirements with overall stability and robustness. The bending stiffness of the first and second layer may be chosen such as to ensure that the contracting
5 forces of the one or more elastic elements do not result in excessive buckling of the structure, so that erection of the structure is not adversely impacted.

The first and second layers (110, 120) are connected to each other via ligaments (130).

In the structure (100), each of the first and second layers (110, 120) has an inner (111, 121) and an outer surface (112, 122) wherein the inner surfaces (111, 121) face towards the
10 ligaments (130). Each of the first and second layer (110, 120) in the structure (100) further has a longitudinal dimension which is parallel to the longitudinal dimension of the structure (100) and which is confined by two spaced apart lateral edges. Each of the first and second layers (110, 120) also has a lateral dimension parallel with the lateral dimension of the structure and confined by two spaced apart longitudinal edges. The first and second layer
15 (110, 120) in the structure (100) overlap at least in the area where the ligaments are positioned between the first and second layer. The first and second layer (110, 120) may also overlap—at least partly—in the areas extending outboard of the area where the ligaments (130) are positioned.

The ligaments (130) are positioned in between the first and second layer (110, 120). Each
20 ligament (130) has a longitudinal dimension confined by two spaced apart lateral edges (134) and a lateral dimension confined by two spaced apart longitudinal edges.

In Figure 1, a coordinate system is shown with X-, Y- and Z-directions. The longitudinal dimension of the overall structure (100) and of the first and second layer (110, 120) extends along the longitudinal direction X of the coordinate system. The longitudinal dimension of the
25 ligaments (130) in the structure's initial flat configuration may substantially extend along the longitudinal direction X of the illustrated coordinate system.

Likewise, the lateral dimension of the overall structure (100) and of the first and second layer (110, 120) extends along the lateral direction Y of the coordinate system. The lateral dimension of the ligaments (130) in the structure's initial flat configuration may substantially
30 extend along the lateral direction Y of the illustrated coordinate system.

The caliper of the structure (100) extends along the Z direction of the coordinate system.

Each ligament (130) is attached to the inner surface (111) of the first layer (110) at or adjacent to one of the lateral edges (134) of the respective ligament. Each ligament (130) is also attached to the inner surface (121) of the second layer (120) at or adjacent to the other lateral edge (134) of the respective ligament. Due to this attachment, the ligaments (130) will generally adopt a C-like, Z-like, T-like, or Double-T-like shape when the structure is in its erected configuration.

When the ligament adopts a Z-like shape when the structure is in its erected configuration, the ligament (130) is attached to the inner surface (111) of the first layer (110) with a portion of the ligament's first surface (131) at or adjacent to one of its lateral ligament edges (134) in the first ligament attachment region (135) and is further attached to the inner surface (121) of the second layer (120) with a portion of the ligament's second surface (132) at or adjacent to its other lateral ligament edge (134) in the second ligament attachment region (136).

Moreover, for Z-like shapes, the ligament's (130) first surface (131) may not be facing towards the inner surface (121) of the second layer (120) when the structure (100) is in its initial flat configuration, and the ligament's second surface (132) may not be facing towards the inner surface (111) of the first layer (110) when the structure (100) is in its initial flat configuration. With such embodiments, it is possible to obtain structures with no folds and hinges (or very few folds and hinges, e.g. when the ligaments have different longitudinal dimension in their free intermediate portion (137), see below). Hence, these structures will generally exhibit a lower tendency to partly erect in the absence of an applied force along the longitudinal dimension and will consequently remain in their initial flat configuration. Also, such structures will generally exhibit a greater tendency to return to their initial flat configuration when the applied force is released.

Alternatively, when the ligament adopts a C-like shape when the structure is in its erected configuration (as exemplary shown in Fig. 7A through 7C), the ligament (130) is attached to the inner surface (111) of the first layer (110) with a portion of the ligament's first surface (131) at or adjacent to one of its lateral ligament edges (134) in the first ligament attachment region (135) and is further attached to the inner surface (121) of the second layer (120) with a

portion of the ligament's first surface (132) at or adjacent to its other lateral ligament edge (134) in the second ligament attachment region (136).

Still alternatively, one portion of the ligament at or adjacent to one of its lateral ligament edges may be attached to the first layer such as to form a T-like (as exemplary shown in Fig. 9A through 9C), or Double-T-like shape (as exemplary shown in Fig. 8A through 8C). To facilitate such attachment, the portion of the ligament adjacent to a first lateral ligament edge has to comprise at least two ligament layers and the two ligament layers are not attached to each other in the portion of the ligament which is attached to the first layer. Thereby, the ligament can be split up and unfolded such that both ligament layers can be respectively attached to the first layer in the first ligament attachment region (135) to form a T-like shape when the structure is in its erected configuration.

For embodiments where a ligament adopts a T-like shape, the portion of the ligament at or adjacent to the second lateral ligament edge is attached to the second layer with either its first or second surface to form the second ligament attachment region (136). If the ligament is also made of a laminate in the second ligament attachment region (136), the ligament layers are not split up in this area (i.e. only the portion adjacent to the first lateral ligament edge forms a T-like shape).

When the ligament adopts a Double-T-like shape when the structure is in its erected configuration, the portion of the ligament at or adjacent to the second lateral ligament edge is attached to the second layer similar to the manner in which the portion at or adjacent to the first lateral ligament edge is attached to the first layer, i.e. the ligament laminate is split up and unfolded such that two ligament layers can be respectively attached to the second layer to form the second ligament attachment region (136).

Splitting up and unfolding the ligament layers to form the respective first and second ligament attachment regions (135, 136) is exemplified in Figures 13A through 13C (showing ligaments with Double-T-like shape).

In a given structure, all ligaments may adopt a Z-like shape when the structure is in its erected configuration. Alternatively, all ligaments may adopt a C-like shape, all ligaments may adopt a T-like shape or all ligaments may adopt a Double-T-like shape when the structure is in its erected configuration. In a further alternative, a given structure may have a combination of

ligaments selected from the group consisting of: ligaments adopting a Z-like shape, C-like shape, T-like shape and Double-T-like shapes.

In a given structure, ligaments adopting a Z-like shape when the structure is in its erected configuration may all adopt the same orientation. That means, in such embodiments none of
5 the ligaments adopting a Z-like shape has an inverse configuration of another ligament adopting a Z-like shape.

Likewise, in a given structure, ligaments adopting a C-like shape when the structure is in its erected configuration may all adopt the same orientation. That means, in such embodiments none of the ligaments adopting a C-like shape has an inverse configuration of another
10 ligament adopting a C-like shape.

However, it is also possible to facilitate the structure such that that one or more ligaments adopt a Z-like shape which has an inverse configuration of one or more other ligaments with Z-like shape. An example of such structure is illustrated in Fig. 10A (flat configuration) and Fig. 10B (erected configuration).

15 Similarly, a structure with one or more ligaments adopting a C-like shape which has an inverse configuration of one or more other ligaments with C-like shape is exemplified in Fig. 11A (flat configuration) and Fig. 11B (erected configuration).

Such inverse configurations are feasible as long as the structure can be readily converted from its flat configuration to its erected configuration. An example of a structure having Z-like
20 ligaments with inverse configuration which can only be converted from its flat to erected configuration when the one or more elastic elements are provided in the second layer (120) between the two neighboring ligament attachment regions (136) shown in Fig. 12. If no elastic element(s) are provided between the two neighboring ligaments, the ligaments on the right side of the Figure will “block” the ligaments on the left side of the Figure from being
25 erected upon release of a contractive force, which has provided by the stretched one or more elastic elements along the longitudinal direction (and vice versa, the ligaments on the left side of the Figure “block” the ligaments on the right side of the Figure from being erected).
Generally, the ligaments shown on the right side (or left side) of the Figure also cannot serve as a stop aid (explained below in detail) as no leeway is provided.

Generally, ligaments in a given structure have to be configured and attached accordingly such that the structure is able to be converted from an initial flat configuration into an erected configuration whereby the ligaments convert from an initial flat configuration into an erected configuration. Moreover, the ligaments in a given structure have to be configured and
5 attached accordingly such that, upon further release of a contractive force, which has provided by the stretched one or more elastic elements along the longitudinal dimension, it would be possible –in the absence of a means that maintains the structure in its erected configuration, such as a stop aid, which is described below- to convert the erected structure into a turned-over flat structure, wherein the ligaments would have been turned over by 180° based on the
10 ligament's position in the initial flat structure configuration.

The longitudinal dimension of each ligament (130) between the first and second ligament attachment regions (135, 136) remains unattached to the first and second layer (110, 120) or is releasable attached to the first and/or second layers (110, 120) and/or to their neighboring ligament(s). This unattached or releasable attached portion is referred to as the “free
15 intermediate portion” (137) of the ligament (130). “Releasable attachment of ligaments” means a temporary attachment to the first and/or second layer (110, 120) and/or the neighboring ligament(s) in a way, that the bond strength is sufficiently weak to allow easy detachment from the first and/or second layer and/or the neighboring ligament(s) upon initial contraction of the structure (100) along the longitudinal dimension without rupturing or
20 otherwise substantially damaging the ligaments (130) and/or the first and/or second layer (110, 120) and without substantially hindering the conversion of the structure from its initial flat configuration into its erected configuration. Such releasable attachments may help to maintain the structure in its initial flat configuration, e.g. during manufacturing processes when the structure is incorporated into an article.

25 When the structure is in its initial flat configuration, the first surface (131) of a ligament's free intermediate portion (137) faces towards the first layer (110) and the second surface (132) of a ligament's free intermediate portion (137) faces towards the second layer (120). When the structure (100) is converted into its erected configuration, the first surface (131) of a ligament's (130) free intermediate portion (137) faces towards the second surface (132) of its
30 neighboring ligament (130). This is irrespective as to whether the ligament has been attached to adopt a Z-like, C-like, T-like or Double-T-like shape. Unless expressly mentioned herein,

neighboring ligaments refers to ligaments which are neighboring along the longitudinal dimension.

The ligaments (130) may be attached to the first and second layer (110, 120) by any means known in the art, such as by use of adhesive, by thermal bonding, by mechanical bonding
5 (such as pressure bonding), by ultrasonic bonding, or by combinations thereof. The attachment of the ligaments to the first and second layer is permanent, i.e. the attachment should not be releasable by forces which can typically be expected during use of the structure.

Structures (100) as described supra are able to adopt an initial flat configuration when no external forces are applied. Upon release of a contractive force, which has provided by the
10 stretched one or more elastic elements along the longitudinal dimension, the structure will increase in caliper, i.e. in the direction perpendicular to the longitudinal and lateral dimension.

The force along the longitudinal dimension may be applied by appropriately positioning the one or more elastic elements. For example, one or more elastic element (196) may be comprised by and/or attached to the second layer longitudinally outboard of the second
15 ligament attachment region (136) which is closest to one of the lateral edges of the structure. The second layer (120) may be permanently attached (197) to the first layer (110), to the topsheet, to the backsheet and/or to the barrier material longitudinally outboard of the one or more elastic elements or may be permanently attached to the first layer (110), to the topsheet, to the backsheet and/or to the barrier material with the elastic material comprised by the
20 second layer. The one or more elastic elements may be comprised by or associated with the second layer only in the area longitudinally outboard of the second ligament attachment region (136) which is closest to one of the lateral edges of the structure. Alternatively, the one or more elastic elements may be continuously comprised by or be associated with the second layer from the area longitudinally outboard of the second ligament attachment region (136)
25 which is closest to one of the lateral edges of the structure into the area between neighboring second ligament attachment regions (136) (such that in the erected structure, the one or more elastic element is also comprised by or associated with the second layer between neighboring ligaments). Still alternatively, the one or more elastic elements may be comprised by or be associated with the second layer continuously along the complete longitudinal dimension of
30 the second layer. The second layer may also be completely formed by the elastic element.

When the structure is in its flat configuration, the one or more elastic elements are in a stretched condition. On the respective other side of the one or more elastic elements along the longitudinal dimension of the structure, e.g. at or adjacent to the respective other lateral edge of the structure, the second layer (120) may be releasably attached (198) to the first layer (110), to the topsheet, to the backsheet and/or to the barrier material. If the one or more elastic element extends over the complete longitudinal dimension of the second layer, the releasable attachment (198) may also encompass the one or more elastic element, i.e. the releasable attachment is between the one or more elastic element of the second layer and the first layer (110), the topsheet, the backsheet and/or the barrier material.

- 10 The one or more elastic element may take the form of one or more elastic strands comprised by the second layer. Alternatively, the one or more elastic elements may be sheet-like materials, such as elastic film or elastic nonwoven, which is comprised by the second layer.

Upon release of the releasable attachment, the one or more elastic element contracts, thus applying a force along the longitudinal dimension of the structure. Thereby, the free intermediate portion of the ligaments lifts upward away from the first layer (and away from the second layer), thus lifting the second layer upwardly and converting the structure into its erected configuration. An example of such a structure is shown in Figures 21-23. Consequently, the barrier leg cuff stands up away from the topsheet.

- Alternatively or in addition to providing or associating the one or more elastic element in the second layer and/or attaching one or more elastic element to the second layer longitudinally outboard of the ligament which is closest to one of the lateral edges of the structure, one or more elastic element (195) may be comprised by the second layer (120) in an area between two neighboring ligaments (i.e. between neighboring second ligament attachment regions), and may not be comprised by or associated with the second outermost layer in the areas longitudinally outboard of the second ligament attachment region (136) which is closest to one of the lateral edges of the structure. Likewise to the above, these one or more elastic elements (195) are stretched when the structure is in its flat configuration. Also similar to the above, the structure is maintained in its initial flat configuration due to a releasable attachment (198) of the second layer (120) to the first layer (110), to the topsheet, to the backsheet and/or to the barrier material. However, compared to the configuration described in the previous paragraph, here the second layer is releasably attached to the first layer, to the

topsheet to the backsheet and/or to the barrier material on both sides outside of the one or more elastic elements (viewed along the longitudinal dimension of the structure). There may hence not be a permanent attachment of the second layer to the first layer, to the topsheet to the backsheet and/or to the barrier material. Upon release of these releasable attachments
5 (198), the one or more elastic element (195) comprised by the second layer (120) between two neighboring ligaments contracts, thus applying a force along the longitudinal dimension of the structure.

Other than in the above embodiment, where the force is applied in the same direction along the longitudinal dimension of the structure along the complete structure, here the forces are
10 applied in opposite directions along the longitudinal dimension of the structure: I.e. for the areas of the structure on one side (along the longitudinal dimension) of the one or more elastic elements the force is applied towards the one or more elastic element and for the areas of the structure on the respective other side (along the longitudinal dimension) of the one or more elastic elements, the force is applied towards the one or more elastic element and hence, in
15 the opposite direction vs. the area on the other side of the one or more elastic elements. Examples for such structures are shown in Figures 24 through 28.

It is possible to provide one or more elastic elements between neighboring second ligament attachment regions for more than two neighboring second ligament attachment regions, e.g. by providing one or more elastic element between two neighboring second ligament
20 attachment regions and providing further elastic element(s) between two different neighboring second ligament attachment regions. Likewise, several elastic elements can be provided between a number of neighboring second ligament attachment regions.

The one or more elastic elements, especially the dimension of the one or more elastic elements, should to be facilitated accordingly, such that upon full contraction of the elastic
25 element(s), the free intermediate portions of the ligaments are properly lifted and the overall structure is transferred into its erected configuration. The exact configuration of the one or more elastic elements thus need to be adapted to the respective overall design of the structure, taking into consideration aspects such as longitudinal dimension of the ligament's free intermediate portions, the distance between neighboring ligaments, the dimension of the one
30 or more elastic elements in their contracted state etc.

Also, the orientation of the ligaments needs to be configured accordingly to enable proper erection of the ligaments upon contraction of the one or more elastic elements. Examples are shown in Figures 18 through 28.

By permanently attaching the second layer to the first layer, to the topsheet, to the backsheet
5 and/or to the barrier material, the one or more elastic elements can be coupled to the rest of the absorbent article, which helps bending of the absorbent article such that the absorbent article adopts an overall arcuate form upon contraction of the one or more elastic elements of the structure.

In the structure described above, where the second layer is releasably attached to the first
10 layer, to the topsheet, to the backsheet and/or to the barrier material, on both sides (along the longitudinal dimension of the structure) of the one or more elastic elements, the second layer may be permanently attached to the first layer, to the topsheet, to the backsheet and/or to the barrier material indirectly via a layer-to-layer or a layer-to-ligament stop aid as described below in detail, in order to couple the one or more elastic elements to the rest of the absorbent
15 article, and help bending of the absorbent article such that the absorbent article adopts an overall arcuate form upon contraction of the one or more elastic elements of the structure. Alternatively or in addition, the second layer may be permanently attached to the first layer, to the topsheet, to the backsheet and/or to the barrier material longitudinally outboard of the releasable attachments. In such cases, a leeway has to be provided in the second layer
20 between the releasable attachment and the permanent attachment. Upon release of the releasable attachment, the one or more elastic elements contract and the structure erects. The leeway flattens out (or extends, in case the leeway is provided by extensible or elastic material –which is in a non-stretched state when the structure is in the flat configuration similar to the provision of the stop aid, see below), which can induce an overall arcuate form
25 of the absorbent article.

Unless specifically mentioned herein, “attached” or “attachment” means directly attached.

It is also possible to combine one or more elastic element which is associated with the second layer with one or more elastic elements which are comprised by the second layer.

The ligaments must be attached appropriately for each of the described structures to enable
30 erection of the structure upon contraction of the one or more elastic elements. I.e. the

ligaments should not be attached such as to hinder proper erection (see also above with respect to Fig. 12).

The structure can be facilitated such that, in its initial flat configuration, no hinges and folds may be created in the structure (100) and the first and second layers (110, 120) as well as the
5 ligaments (130) lie flat and outstretched. Such structures allow having a very thin caliper in the flat configuration. In these kinds of structures, all ligaments will adopt a Z-like shape when the structure is in its erected configuration.

In structures where no hinges may be created, the complete first surface (131) of each
10 ligament (130) (i.e. not only the free intermediate portion) does not face towards the inner surface (121) of the second layer (110) when the structure (100) is in its initial flat configuration, and the complete second surface (132) of each ligament (130) (i.e. not only the free intermediate portion) does not face towards the inner surface (111) of the first layer (120) when the structure is in its initial flat configuration. Such a structure is illustrated in Fig. 1.

Figs. 6 and 7 show structures where the ligaments are folded when the structure is in its initial
15 flat configuration.

Also, for certain other executions, e.g. those where the longitudinal dimension of the free intermediate portion (137) of the ligaments (130) differs from each other, the initial flat configuration may have some folds and hinges.

Upon erection of the structure (100) due to the erection of the ligaments (130), a space, a so-
20 called “cell” (140) is formed between neighboring ligaments, which is confined by the first and second layer and the respective neighboring ligaments. When viewed from the side, along the lateral direction, the cells may take for example a rectangular shape, a trapezoid shape, a rhomboid shape, or the like. However, for use in barrier leg cuffs, the structure will typically not form any rectangular shapes as the absorbent article will tend to flex upwardly along the
25 longitudinal axis of the article and towards the barrier leg cuffs, thus forming an overall arcuate form. The structure, being attached to the absorbent article, will follow this arcuate shape, and the shape of the cells will not be completely rectangular accordingly.

For structures wherein the longitudinal dimension of the free intermediate portion (137) is the same for all ligaments, the structure (100) will adopt its highest possible caliper when the

ligaments (130) are in an upright position, i.e. when the free intermediate portion (137) of the ligaments (130) is perpendicular to the first and second layers (110, 120) between neighboring ligaments. However, the formation of this upright position may possibly be hindered, at least in some areas, when a force towards the caliper of the structure is applied at the same time, if this force is sufficiently high to deform the structure in the caliper dimension. The formation of such fully upright position may also be hindered when the absorbent article flexes and takes an arcuate form due to erection of the structure.

In structures, where the longitudinal dimension of the free intermediate portion (137) differs between different ligaments (130), the ligaments (130) may not be perpendicular to the first and second layer (110, 120) in the erected configuration, see e.g. Fig. 2). In such embodiments, the first and second layer (110, 120) are not parallel to each other when the structure is in its erected configuration but instead, the first and/or second layer (110, 120) take(s) an inclined shape. This may also happen due to the arcuate form of the absorbent article described above.

Tensile strength, and especially bending stiffness, impacts the resistance of the structure (especially of the structure in its erected configuration) against compression forces. Thus, when the ligaments have a relatively high tensile strength and bending stiffness, the structure is more resistant to forces applied in the Z-direction (i.e. towards the caliper of the structure). Also, if the first and/or second layers have relatively high tensile strength and relatively high bending stiffness, resistance of the structure against forces applied in the Z-direction (i.e. towards the caliper of the structure) is increased. For the present invention, the compression resistance of the erected structure is measured in terms of the structure's modulus according to the test method set out below.

As a difference in bending stiffness results in a difference in the resistance against compression forces (and hence, the modulus) applied in the Z-direction (i.e. towards the caliper of the structure), using ligaments with different bending stiffness enables structures which have improved resistance to compression (higher modulus) in the Z-direction in areas where the ligaments have higher bending stiffness, whereas the structure adjusts more readily e.g. to curved surfaces in the areas where ligaments with lower bending stiffness are applied (lower structure modulus). For example, the bending stiffness of the ligaments which are arranged in the center of the structure along the longitudinal dimension (and may be in the

area of the crotch region of the absorbent article due to a typical positioning of a barrier leg cuff) may be higher compared to the ligaments arranged towards the lateral edges of the structure.

In addition to the tensile strength and the bending stiffness of the materials used for the structure, the resistance of the (erected) structure against compression forces is also impacted by the number of ligaments which are provided, and the distance between neighboring ligaments. Neighboring ligaments which have a relatively small gap between them along the longitudinal dimension of the structure will provide for higher resistance of the erected structure against compression forces (higher modulus) compared to a structure wherein neighboring ligaments are more widely spaced apart along the longitudinal dimension of the structure (lower modulus) as long as the material used for the different ligaments and their size does not differ from each other.

Moreover, if the modulus is measured between neighboring ligaments, the modulus will typically be lower than the modulus measured in the location where a ligament is positioned.

Modulus is measured following the test method set out below and is measured in the Z-direction of the structure. Generally, the modulus of a structure is not measured while the structure is built into the absorbent article by ideally, prior to incorporating the structure into the absorbent article (otherwise, the structure needs to be carefully removed from the absorbent article).

The structure in its erected configuration may have a modulus of at least 0.004 N/mm², or at least 0.01 N/mm², or at least 0.02 N/mm², or at least 0.03 N/mm² in those areas where a ligament is positioned as well as in the areas between neighboring ligaments.

Moreover, it may also be desirable to avoid excessively high compression resistance (i.e. too high modulus), e.g. to avoid that the erected structure is too stiff, thus possibly leading to red marking on the wearer's skin in the area of the barrier leg cuffs. For such structures, the structure in its erected configuration may have a modulus of not more than 1.0 N/mm², or not more than 0.5 N/mm², or not more than 0.2 N/mm², but at least 0.1 N/mm², or at least 0.5 N/mm², or at least 1.0 N/mm² in those areas where a ligament is positioned as well as in the areas between neighboring ligaments.

Alternatively, the structure in its erected configuration may have a modulus of at least 0.05 N/mm², or at least 0.08 N/mm², or at least 0.1 N/mm², or at least 0.13 N/mm², but not more than 2.0 N/mm², or not more than 1.0 N/mm², or not more than 0.5 N/mm², or not more than 0.3 N/mm² in the locations where the ligaments are positioned, while the structure in its
5 erected configuration may have a modulus of at least 0.004 N/mm², or at least 0.01 N/mm², or at least 0.02 N/mm², or at least 0.03 N/mm² between neighboring ligaments.

Generally, the ligaments (130) may be spaced apart from each other along the longitudinal dimension at equal distances or, alternatively, at varying distances. Also, the ligaments (130) may be spaced apart from each other such, that the ligaments (130) do not overlap with each
10 other when the structure (100) is in its initial flat configuration. Thereby, it is possible to provide structures (100) with very small caliper when the structure (100) is in its initial flat configuration, as the ligaments (130) do not “pile up” one on top of each other when the structure is in its initial flat configuration.

The free intermediate portion (137) of the ligaments (130) may all have the same longitudinal
15 dimension. Thereby, the structure will have a constant caliper across its longitudinal (and lateral) dimension between neighboring ligaments when the structure (100) is in its erected configuration. An example of such an embodiment is shown in Figure 1B. Alternatively, the longitudinal dimension of the free intermediate portion (137) may vary for different ligaments (130) in a structure (100). Thereby, the caliper of the structure will vary across the
20 longitudinal dimension. An example of such an embodiment is shown in Fig. 2.

As exemplified in Fig. 2, the one or more ligaments (130) in the center of the structure (as seen along the longitudinal dimension) may have a longer free intermediate portion (137) than the ligaments towards the lateral edges of the structure, resulting in a structure with a higher caliper in the center (which will typically coincide with the crotch region of the absorbent
25 article between the wearer’s leg, where the caliper of the barrier leg cuffs needs to be sufficiently large) than towards the edges when the structure is in its erected configuration. Generally, the caliper of the erected structure depends on the length of the free intermediate portion (137) of the ligaments (130).

Generally, the maximum increase in caliper of the structure is defined by the longitudinal
30 dimension of the free intermediate portion (137) of the ligaments (130). If the ligaments (130)

differ from each other in the longitudinal dimension of their free intermediate portions (137), the maximum increase in caliper of the structure in its erected configuration, as used herein, is defined by the longitudinal dimension of the ligament with the largest longitudinal dimension of free intermediate portion. If a stop aid (180, 190) is used (as described below), the structure
5 may not be able to adopt its maximum increase in caliper in its erected configuration as the erection is stopped by the stop aid before the maximum erection, which would have been possible in the absence of a stop aid, is reached.

The maximum increase in caliper of the erected structure versus the flat structure may be more than 5 mm, or more than 8 mm, or more than 10 mm, or more than 15 mm, or more than
10 20 mm. Also, the maximum increase caliper of the erected structure versus the flat structure may be less than 80 mm, or less than 60 mm, or less than 50 mm, or less than 40 mm. Generally, the increase caliper will depend on the intended use, with absorbent articles intended to be worn by babies and small toddlers requiring a smaller caliper whereas absorbent articles to be worn by larger children or adults may require a higher caliper. The
15 maximum increase in caliper is solely defined by the longitudinal dimension of the free intermediate portion. As used herein, the maximum increase in caliper is equal to the longitudinal dimension of the free intermediate portion.

If formation of wrinkles in the first and second layer (110, 120) and/or in the ligament (130) shall be avoided when the structure is in its erected configuration, it is desirable, that the
20 ligaments (130) are arranged such that, when the structure is in its initial flat configuration, the longitudinal dimension of the ligaments is substantially parallel with the longitudinal dimension of the first and second layer. "Substantially parallel" means that the orientation of the longitudinal dimension of the ligaments does not deviate by more than 20°, or not more than 10°, or not more than 5°, or not more than 2° from the longitudinal dimensions of the
25 first and second layer. The orientation of the longitudinal dimension of the ligaments may also not deviate at all from the longitudinal dimension of the first and second layer.

Typically, the free intermediate portions (137) are not attached to each other. However, for certain applications it may be desirable that the free intermediate portion (137) of neighboring ligaments (130) are attached to each other directly, which results in some buckling of the
30 ligaments attached to each other when the structure is in its erected configuration. Alternatively, the free intermediate portion (137) of neighboring ligaments (130) may be

attached to each other indirectly via a separate ligament-to-ligament material (150), such as a piece of nonwoven, film, paper, or the like (shown in Fig. 5). If neighboring ligaments are attached to each other, especially via a separate piece of material, the overall stability and stiffness of the structure may be improved. This may be desirable in structures having a relatively large caliper when the structure is in its erected configuration, as the free intermediate portion of the ligaments will have a relatively large longitudinal dimension. Also, in such embodiments, the cells formed between neighboring ligaments when the structure is in its erected configuration, are separated into sub-cells.

Generally, the first and second layer (110, 120) may have the same lateral dimension and the longitudinal edges of the first and second layer may be congruent with each other. Also, the lateral dimension of all ligaments (130) may be the same, and the lateral dimension of all ligaments (130) may also be the same as the lateral dimension of the first and second layer (110, 120). The longitudinal edge of the first layer (110) may coincide with the longitudinal edge of the second layer (120) and/or with the longitudinal edges of the ligaments (130).

Also, one or more of the ligaments (130) may have the same lateral dimension as the first and second layer (110, 120) and one or more of the ligaments, which do not have the same lateral dimension as the first and second layer may be flanked on one or both longitudinal edges by other ligaments, such that the structure has laterally neighboring ligaments.

Ligaments

The ligaments may be elastic, but it is desirable that the ligaments are non-elastic or highly non-elastic. Also, the ligaments may be extensible, but it is desirable that the ligaments are non-extensible or highly non-extensible. The ligaments may be made of nonwovens, film, paper, or sheet-like foam, woven fabric, knitted fabric, or combinations of these materials. Combinations of these materials may be laminates, e.g. a laminate of a film and a nonwoven.

The ligaments within a structure may all be made of the same material or, alternatively, the different ligaments within a structure may be made of different materials.

The material may be the same throughout each ligament, i.e. the ligament may be made of a single piece of material or of a laminate wherein each laminate layer extends over the complete ligament.

The ligaments may have the same properties throughout the ligament, especially with regard to bending stiffness and tensile strength.

Alternatively, the ligaments may have areas with properties (such as bending stiffness and/or tensile strength) which differ from the properties in one or more other areas of a given
5 ligament.

Such areas with differing properties can be facilitated by modifying the material in one or more ligament areas, e.g. by mechanical modification. Non-limiting examples of mechanical modifications are the provision of cut outs in one or more areas of the ligament to reduce tensile strength and bending stiffness in those areas; incremental stretching (so-called “ring-rolling”) one or more ligament areas to reduce tensile strength and bending stiffness; slitting
10 one or more ligament areas to reduce tensile strength and bending stiffness; applying pressure and/or heat to one or more areas of ligaments; or combinations of such mechanical modifications. Application of heat and/or pressure may either increase or reduce tensile strength and bending stiffness: For example, if heat and/or pressure are applied on a ligament
15 made of nonwoven with fibers made of thermoplastic material, the fibers may be molten together and bending stiffness and tensile strength can be increased. However, if an excessive amount of heat and/or pressure is used, the material of the ligaments may be damaged (such as fiber breakage in a nonwoven web) and weakened areas are formed, thus reducing bending stiffness and tensile strength. Cutting out areas of the ligaments may either result in the
20 formation of apertures within the ligament or the cut out may not be fully surrounded by uncut areas as is illustrated in Figures 16A (essentially flat configuration) and 16B (erected configuration).

Alternatively, or in addition to the above, areas with different properties can also be obtained by chemically modifying one or more areas of the ligament, e.g. by adding chemical
25 compounds, such as binders or thermoplastic compositions to increase bending stiffness and tensile strength, which may be followed by curing. One or more areas with different properties can also be obtained by providing different materials in different areas or by adding additional pieces of materials only in certain areas (thus, e.g. forming a laminate in these areas), while having another material (which may be the same or different from the piece of
30 material added in certain areas) which is coextensive with the ligament and used throughout the ligament.

Still further, one or more areas with different properties may be achieved by providing ligaments which are assembled by attaching different pieces of material to each other so they overlap partly and partly do not overlap, such that together they form the overall ligament (instead of having one continuous material coextensive with the ligament to which additional
5 pieces of material(s) are added only in certain areas). Examples of structures with ligaments being assembled of pieces of (different) materials are illustrated in Fig. 14A through 14C and 15A through 15C.

By having ligaments with one or more areas having properties different from the remaining ligament, the behavior of the structure with respect to e.g. bending stiffness and tensile
10 strength can be fine-tuned to meet certain needs in different areas of the structure (e.g. the ability to accommodate readily and softly to the skin of a wearer in some areas and to be stiffer and more resistant to compression in other areas to close gaps).

If providing such areas of different properties by any of the above means, it may be especially desirable to provide them in the areas of the free intermediate portion of a ligament which are
15 directly adjacent to the first and second ligament attachment region. The areas of the free intermediate portion which are directly adjacent to the first and second ligament attachment regions are those areas which bend upon release of a contractive force, which has provided by the stretched one or more elastic elements along the longitudinal direction of the structure, thus erecting the free intermediate portion.

20 The basis weight of each of the ligaments may be at least 1 g/m², or at least 2 g/m², or at least 3 g/m², or at least 5 g/m²; and the basis weight may further be not more than 1000 g/m², or not more than 500 g/m², or not more than 200 g/m², or not more than 100 g/m², or not more than 50 g/m², or not more than 30 g/m².

If the tensile strength is the same throughout the ligament, the tensile strength of the
25 ligaments may be at least 3 N/cm, or at least 5 N/cm or at least 10 N/cm. The tensile strength may be less than 100 N/cm, or less than 80 N/cm, or less than 70 N/cm, or less than 50 N/cm, or less than 40 N/cm.

If the tensile strength is the same throughout the ligament, the bending stiffness of the ligaments may be at least 0.1 mNm, or at least 0.2 mNm, or at least 0.3 mNm. The bending
30 stiffness may be less than 500 mNm, or less than 300 mNm, or less than 200 mNm, or less

than 150 mNm. Principally, for the ligaments the same considerations regarding overall softness, drape and conformability versus overall stability and robustness apply as set out above for the first and second layer. However, the bending stiffness and tensile strength of the ligaments typically has a higher impact on the overall bending resistance of the erected
5 structure (when a force is applied along the caliper of the structure, i.e. perpendicular to the lateral and longitudinal dimension of the structure) vs. the impact of the bending stiffness and tensile strength of the first and second layer. Thus, it may be desirable that the ligaments have a higher bending stiffness and a higher tensile strength than the first and second layer.

The different ligaments in a structure may vary from each other in basis weigh and/or tensile
10 strength, bending stiffness and the like.

Stop aid

It may be desirable to define a maximum shifting of the first and second layers (110, 120) relative to each other upon release of the contractive force, which has provided by the stretched one or more elastic elements along the longitudinal dimension of the structure (100).
15 This can be facilitated by providing a stop aid (180; 190). However, for the present invention, the provision of such stop aid may not be required, as the maximum shifting of the first layer and the second layer relative to each other is generally defined by the contraction of the one or more elastic elements. Hence, when the one or more elastic elements are completely contracted, no further shifting of first and second layer occurs. It may, however, be desirable
20 to stop further erection by hindering further contraction of the one or more elastic elements, such that the one or more elastic elements do not fully contract. Therefore, a stop aid can be facilitated to provide a counter-force along the longitudinal dimension of the structure, such that, in the erected structure, the force applied by the one or more elastic elements in one direction along the longitudinal dimension (due to incomplete contraction of the elastic
25 elements) is balanced against a force applied in the respective opposite direction by an appropriate stop aid.

By using a stop aid (180; 190), the structure (100) can thus be stopped in a defined erected configuration, i.e. with a defined caliper (which, however, is higher than the caliper of the structure in its flat configuration), even if the force along the longitudinal dimension is
30 continued to be applied (due to incomplete contraction of the one or more elastic elements).

The stop aid (180; 190) may facilitate that the structure (100) is stopped in the erected configuration with a certain caliper, which is higher than the caliper of the initial flat configuration but lower than the highest possible caliper which would be possible due to the longitudinal dimension of the free intermediate portion (137) of the ligaments (130).

5 There are many different ways to provide a stop aid (180; 190), for example:

- a) A layer-to-layer stop aid (180) may be provided, which extends from the first layer (110) to the second layer (120). This layer-to-layer stop aid (180) is attached to the inner surface (111) or outer surface (112) of the first layer (110) in a first layer-to-layer stop aid attachment region (181) and is further attached to the inner surface (121) or outer surface (122) of the second layer (120) in a second layer-to-layer stop aid attachment region (182). The first layer-to-layer stop aid attachment region (181) may be longitudinally spaced apart from the second layer-to-layer stop aid attachment region (182) when the structure is in its initial flat configuration. The layer-to-layer stop aid (180) is provided with a layer-to-layer stop aid leeway between the first and second layer-to-layer stop aid attachment regions (181, 182) when the structure (100) is in its initial flat configuration. The leeway may be configured in form of a slack. Upon release of a contractive force, which has provided by the stretched one or more elastic elements along the longitudinal dimension the first and second layers (110, 120) shift relative to each other along the longitudinal dimension, the structure contracts in areas where the one or more elastic elements are provided and erects, and the slack forming the layer-to-layer stop aid leeway between the first and second layer-to-layer stop aid attachment regions (181, 182) straightens out. Once the slack is flattened when the structure (100) is in its erected position, further longitudinal extension of the structure is inhibited also when the force in the longitudinal dimension is continued to be applied. An example of a layer-to-layer stop aid (180) is illustrated in Figs. 3A (initial flat configuration) and 3B (erected configuration).

Alternatively, the leeway of the layer-to-layer stop aid (180) can be generated by adapting the material between the first and second layer-to-layer stop aid attachment regions (181, 182) to create extensibility of the respective area of the layer-to-layer stop aid (180). Adapting the material can be done by modifying the material, e.g. by selfing (weakening the material of the first or second layer to render it relatively easily

extensible), creating holes or using extensible materials to form the leeway.

Alternatively, the layer-to-layer stop aid (180) may be made of extensible material.

For such layer-to-layer stop aids (180), the material of the leeway elongates when the first and second layers (110, 120) are shifted against each other until elongation of the

5 layer-to-layer stop aid leeway is not possible any longer (without applying an excessive amount of force, which may even rupture the structure). Hence, the material in the leeway has reached its maximum elongation i.e. it cannot be elongated further upon application of force without causing damage to the structure that limits or impedes its intended use.

10 The material of the leeway may also be elastic. For such structures, the layer-to-layer stop aid (180) can retract when the force is no longer applied onto the structure such that the structure can substantially “snap back” into its initial flat configuration. The difference between the provision of an elastic leeway and the one or more elastic elements comprised by or associated with the structure is that the one or more elastic
15 elements are stretched when the structure is in its flat configuration and contracts upon erection of the structure. Contrary thereto, an elastic leeway will be relaxed in the flat configuration of the structure and stretch upon erection of the structure.

It is also possible to provide a leeway that is a combination of a slack and the provision of extensible material in the leeway, such that, upon elongation, initially the
20 slack straightens out and subsequently, the extensible material elongates.

Compared to the attachment of the ligaments to the first and second layer and the resulting configuration, the layer-to-layer stop aid, when applied between the first and second layer and being attached to the inner surfaces of the first and second layer, does not adopt a Z-like or C-like shape having the same orientation as the ligaments
25 with Z-like or C-like shape (otherwise, it would simply be an additional ligament). Instead, the first layer-to-layer stop aid attachment region may be between the first surface of the layer-to-layer stop aid and the inner surface of the first layer. The second layer-to-layer stop aid attachment region may be between the first surface of the layer-to-layer stop aid (i.e. on the same surface of the layer-to-layer stop aid as the
30 first layer-to-layer stop aid attachment region) and the inner surface of the second

layer. Thus, the layer-to-layer stop aid adopts a C-like shape when the structure is in its erected configuration.

Alternatively or additionally, the first layer-to-layer stop aid attachment region may be between a first surface of the layer-to-layer stop aid and the inner surface of the first layer. The second layer-to-layer stop aid attachment region may be between the second surface of the layer-to-layer stop aid (i.e. opposite surface of the layer-to-layer stop aid than the first layer-to-layer stop aid attachment region) and the inner surface of the second layer. Thus, the layer-to-layer stop aid adopts a Z-like shape configuration when the structure is in its erected configuration.

Attachment of the layer-to-layer stop aid (180) to the first and second layer (110, 120) in the first and second layer-to-layer stop aid attachment regions (181, 182) can be obtained by any means known in the art, such as adhesive, thermal bonding, mechanical bonding (e.g. pressure bonding), ultrasonic bonding, or combinations thereof.

As the first layer is attached to the topsheet, the backsheet and/or the barrier material, the layer-to-layer attachment regions may actually also be between the second layer and the topsheet, the backsheet and/or the barrier material, as long as all necessary requirements set out above for the layer-to-layer stop aid are fulfilled to provide a stop aid function.

b) A layer-to-ligament stop aid (190) may be provided, which extends from the first or second layer (110, 120) to one of the ligaments (130). This layer-to-ligament stop aid (190) is attached to the inner surface (111) or outer surface (112) of the first or second layer (110, 120) in a first layer-to-ligament stop aid attachment region (191) and is further attached to the first surface (131) or second surface (132) of the ligament (130) in a second layer-to-ligament stop aid attachment region (192). The first layer-to-ligament stop aid attachment region (191) may be longitudinally spaced apart from the second layer-to-ligament stop aid attachment region (192). The layer-to-ligament stop aid (190) is provided with a layer-to-ligament stop aid leeway between the first and second layer-to-ligament stop aid attachment region (191, 192) when the structure (100) is in its initial flat configuration. The leeway may be configured in form of a

slack (193). Upon release of a contractive force, which has provided by the stretched one or more elastic elements in the longitudinal dimension the first and second layer (110, 120) shift relative to each other along the longitudinal dimension, the structure contracts in areas where the one or more elastic elements are provided and erects, and the slack (193) forming the layer-to-ligament stop aid leeway between the first and second layer-to-ligament stop aid attachment regions (191, 192) straightens out. Once the slack (193) is straightened out when the structure (100) is in its erected position, further longitudinal extension of the structure is inhibited also when the force in the longitudinal dimension is continued to be applied. A layer-to-ligament stop aid (190) is shown in Figs. 4A (initial flat configuration) and 4B (erected configuration).

Alternatively or additionally, the leeway of the layer-to-ligament stop aid (190) can be generated by adapting the material between the first and second layer-to-ligament stop aid attachment regions (191, 192) to create extensibility of the respective area of the layer-to-ligament stop aid (190). Adapting the material can be done by modifying the material, e.g. by selfing (weakening the material of the first or second layer to render it relatively easily extensible), creating holes or using extensible materials to form the leeway.

Alternatively or additionally, the layer-to-ligament stop aid (190) may be made of extensible material. For such layer-to-ligament stop aids (190), the material of the leeway elongates when the first and second layers (110, 120) are shifted against each other until elongation of the layer-to-ligament stop aid leeway is not possible any longer (without applying an excessive amount of force, which may even rupture the structure). Hence, the material in the leeway has reached its maximum elongation i.e. it cannot be elongated further upon application of force without causing damage to the structure that limits or impedes its intended use.

The material of the leeway may also be elastic. For such structures, the layer-to-ligament stop aid (190) can retract when the force is no longer applied onto the structure such that the structure can substantially “snap back” into its initial flat configuration.

For the material properties and appropriate selection of extensible or elastic leeways, and the difference between elastic leeways and the one or more elastic elements comprised by or associated with the structure, the same considerations apply as are set out above for the layer-on-layer stop aid.

- 5 It is also possible to provide a leeway that is a combination of a slack and the provision of extensible material in the leeway, such that, upon elongation, initially the slack straightens out and subsequently, the extensible material elongates.

Attachment of the layer-to-ligament stop aid (190) to the first and second layer (110, 120) in the first and second layer-to-layer stop aid attachment regions (181, 182) can
10 be obtained by any means known in the art, such as adhesive, thermal bonding, mechanical bonding (e.g. pressure bonding), ultrasonic bonding, or combinations thereof.

Generally, the layer-to-ligament stop aid (190) may be attached in the first and second layer-to-ligament stop aid attachment regions such that the layer-to-ligament stop aid
15 extends along or adjacent to one of the longitudinal edges of the at least one ligament (130) or, alternatively, such that it extends between the longitudinal edges of the at least one ligament.

As the first layer is attached to the topsheet, the backsheet and/or the barrier material, the layer-to-ligament attachment regions may actually also be between the second
20 layer and the topsheet, the backsheet and/or the barrier material, as long as all necessary requirements set out above for the layer-to-ligament stop aid are fulfilled to provide a stop aid function.

- c) The structure (100) may comprise an enveloping stop aid which encircles at least a portion of the first and second layer (110, 120) and the ligaments (130) provided
25 between the first and second layer in the respective portion. This enveloping stop aid is attached to the first layer (110), in one or more enveloping stop aid attachment region. Attaching the enveloping stop aid to only one of the first layer (110). The barrier material may serve as an enveloping stop aid.

The enveloping stop aid is attached to itself to form a closed loop with a defined circumference around at least a portion of the first and second layer with the ligaments in between. Alternatively or in addition, if the barrier material serves as an enveloping stop aid, the barrier material may be attached to the topsheet and/or to the backsheet.

5 The enveloping stop aid may (probably together with portions of the topsheet and/or of the backsheet) encircle the first and second layer (110, 120) along the lateral dimension (and the caliper).

The circumference of the enveloping stop aid defines the maximum shifting of the first layer (110) and the second layer (120) relative to each other along the longitudinal dimension upon release of a contractive force, which has provided by the stretched one or more elastic elements along the longitudinal dimension.

When the structure (100) is in its initial flat configuration, the enveloping stop aid is loose around the first and second layer (and the respective ligaments between the first and second layer). Upon release of a contractive force, which has provided by the stretched one or more elastic elements along the longitudinal dimension of the structure, the structure erects until the enveloping stop aid fits tightly around the first and second layer (and the respective ligaments between the first and second layer), which will stop further shifting of the first layer relative to the second layer also if the force along the longitudinal dimension is continued to be applied. To assist in avoiding overexpansion of the structure (100), the circumference of the enveloping stop aid may be such that further shifting of the first layer (110) relative to the second layer (120) along the longitudinal dimensions is inhibited before the ligaments (130) are in their fullest upright position.

General considerations for the layer-to-layer stop aid, the layer-to-ligament stop aid and, if expressly mentioned, the enveloping stop aid:

The layer-to-layer stop aid and/or the layer-to-ligament stop aid may be non-elastic or highly non-elastic (apart from the leeway, if the leeway is provided by modifying the material to render it elastically extensible). Also the layer-to-layer stop aid and/or the layer-to-ligament stop aid may be non-extensible or highly non-extensible (apart from the leeway, if the leeway is provided by modifying the material to render it extensible).

The layer-to-layer stop aid and/or the layer-to-ligament stop aid and/or enveloping stop aid can be made of a sheet-like material, such as nonwoven, film, paper, sheet-like foam, woven fabric, knitted fabric, or combinations of these materials. Combinations of these materials may be laminates, e.g. a laminate of a film and a nonwoven. The layer-to-layer stop aid
5 and/or the layer-to-ligament stop aid and/or enveloping stop aid may also be made of a cord- or string-like material.

The layer-to-layer stop aid and/or the layer-to-ligament stop aid and/or enveloping stop aid is not necessarily intended to contribute to the resistance of the structure against a force exerted onto the structure in the thickness-direction. However, the basis weight, tensile strength and
10 bending stiffness of the layer-to-layer stop aid and/or the layer-to-ligament stop aid and/or enveloping stop aid should be sufficiently high to avoid inadvertent tearing of the layer-to-layer stop aid and/or the layer-to-ligament stop aid and/or enveloping stop aid upon expansion of the structure.

If the layer-to-layer stop aid and/or the layer-to-ligament stop aid and/or enveloping stop aid
15 is made of a sheet-like material, the basis weight of the layer-to-layer stop aid and/or the layer-to-ligament stop aid and/or enveloping stop aid may be at least 1 g/m², or at least 2 g/m², or at least 3 g/m², or at least 5 g/m²; and the basis weight may further be not more than 500 g/m², or not more than 200 g/m², or not more than 100 g/m², or not more than 50 g/m², or not more than 30 g/m².

20 If the layer-to-layer stop aid and/or the layer-to-ligament stop aid and/or enveloping stop aid is made of a cord- or string-like material, the basis weight of the layer-to-layer stop aid and/or the layer-to-ligament stop aid and/or enveloping stop aid may be at least 1 gram per meter (g/m), or at least 2 g/m, or at least 3 g/m, or at least 5 g/m; and the basis weight may further be not more than 500 g/m, or not more than 200 g/m, or not more than 100 g/m, or not more
25 than 50 g/m, or not more than 30 g/m.

The basis weight of the layer-to-layer stop aid and/or the layer-to-ligament stop aid may be less than the basis weight of the ligaments, for example the basis weight of the layer-to-layer stop aid and/or the layer-to-ligament stop aid may be less than 80%, or less than 50% of the basis of the ligaments (if the ligaments vary in basis weight, then these values are with respect
30 to the ligament(s) with the lowest basis weight).

The tensile strength of the layer-to-layer stop aid may be at least 2 N/cm, or at least 4 N/cm or at least 5 N/cm. The tensile strength may be less than 100 N/cm, or less than 80 N/cm, or less than 50 N/cm, or less than 30 N/cm, or less than 20 N/cm.

5 The bending stiffness of the layer-to-layer stop aid and/or the layer-to-ligament stop aid and/or enveloping stop aid may be at least 0.1 mNm, or at least 0.2 mNm, or at least 0.3 mNm. The bending stiffness may be less than 200 mNm, or less than 150 mNm, or less than 100 mNm, or less than 50 mNm, or less than 10 mNm, or less than 5 mNm. These values apply to sheet-like layer-to-layer stop aids and/or layer-to-ligament stop aids and/or enveloping stop aids, for cord- or string-like layer-to-layer stop aids and/or layer-to-ligament
10 stop aids and/or enveloping stop aids, the bending stiffness is generally not seen as critical.

The tensile strength of the layer-to-layer stop aid and/or the layer-to-ligament stop aid and/or enveloping stop aid may be lower than the tensile strength of the ligaments, for example the tensile strength of the layer-to-layer stop aid may be less than 80%, or less than 50% of the tensile strength of the ligaments (if the ligaments vary in tensile strength, then these values
15 are with respect to the ligament(s) with the lowest tensile strength).

The bending stiffness of the layer-to-layer stop aid and/or the layer-to-ligament stop aid and/or enveloping stop aid (when made of sheet-like material) may be lower than the bending stiffness of the ligaments, for example the bending stiffness of the layer-to-layer stop aid and/or the layer-to-ligament stop aid and/or enveloping stop aid may be less than 80%, or less
20 than 50% of the bending stiffness of the ligaments (if the ligaments vary in bending stiffness, then these values are with respect to the ligament(s) with the lowest bending stiffness).

Test methods:

Tensile Strength

Tensile Strength is measured on a constant rate with extension tensile tester Zwick Roell Z2.5
25 with computer interface, using TestExpert 11.0 Software, as available from Zwick Roell GmbH & Co. KG, Ulm, Germany. A load cell is used for which the forces measured are within 10% to 90% of the limit of the cell. Both the movable (upper) and stationary (lower) pneumatic jaws are fitted with rubber faced grips, wider than the width of the test specimen.

All testing is performed in a conditioned room maintained at about $23^{\circ}\text{C} + 2^{\circ}\text{C}$ and about 45 % $\pm$ 5% relative humidity.

With a die or razor knife, cut a material specimen which is 25.4 mm wide and 100 mm long. For the present invention, the length of the specimen correlates to the longitudinal dimension
5 of the material within the structure.

If the ligament is smaller than the size of the material specimen specified in the previous paragraph, the material specimen may be cut from a larger piece such as the raw material used for making the ligaments. Care should be taken to correlate the orientation of such specimen accordingly, i.e. with the length of the specimen correlating to the longitudinal dimension of
10 the material within the structure. However, if the ligament has a width somewhat smaller than 25.4 mm (e.g. 20 mm, or 15 mm) the width of the specimen can be accordingly smaller without significantly impacting the measured tensile strength.

If the ligament comprises different materials in different regions, the tensile strength of each material can be determined separately by taking the respective raw materials. It is also
15 possible to measure the tensile strength of the overall ligament. However, in this case, the measured tensile test will be determined by the material within the ligament which has the lowest tensile strength.

Precondition the specimens at about $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and about 45 % $\pm$ 5% relative humidity for 2 hours prior to testing.

20 For analyses, set the gauge length to 50 mm. Zero the crosshead and load cell. Insert the specimen into the upper grips, aligning it vertically within the upper and lower jaws and close the upper grips. Insert the specimen into the lower grips and close. The specimen should be under enough tension to eliminate any slack, but less than 0.025 N of force on the load cell.

Program the tensile tester to perform an extension test, collecting force and extension data at
25 an acquisition rate of 50 Hz as the crosshead raises at a rate of 100 mm/min until the specimen breaks. Start the tensile tester and data collection. Program the software to record Peak Force (N) from the constructed force (N) versus extension (mm) curve. Calculate tensile strength as:

Tensile Strength = Peak Force (N) / width of specimen (cm)

For rope/string like materials: tensile strength = peak force (N)

- Analyze all tensile Specimens. Record Tensile Strength to the nearest 1 N/cm. A total of five test samples are analyzed in like fashion. Calculate and report the average and standard deviation of Tensile Strength to the nearest 1 N/cm for all 5 measured specimens.

Bending Stiffness

- Bending stiffness is measured using a Lorentzen & Wettre Bending Resistance Tester (BRT) Model SE016 instrument commercially available from Lorentzen & Wettre GmbH, Darmstadt, Germany. Stiffness of the materials (e.g. ligaments and first and second layer) is measured in accordance with SCAN-P 29:69 and corresponding to the requirements according to DIN 53121 (3.1 "Two-point Method"). For analysis a 25.4 mm by 50 mm rectangular specimen was used instead of the 38.1 mm by 50 mm specimen recited in the standard. Therefore, the bending force was specified in mN and the bending resistance was measured according to the formula present below.

- The bending stiffness is calculated as follows:

$$S_b = \frac{60 \times F \times l^2}{\pi \times \alpha \times b}$$

with:

- S_b = bending stiffness in mNm

F = bending force in N

l = bending length in mm

α = bending angle in degrees

b = sample width in mm

- With a die or razor knife, cut a specimen of 25.4 mm by 50 mm whereby the longer portion of the specimen corresponds to the lateral dimension of the material when incorporated into a structure. If the materials are relatively soft, the bending length "l" should be 1 mm. However, if the materials are stiffer such that the load cell capacity is not sufficient any longer for the

measurement and indicates “Error”, the bending length “l” has to be set at 10 mm. If with a bending length “l” of 10 mm, the load cell again indicates “Error”, the bending length “l” may be chosen to be more than 10 mm, such as 20 mm or 30 mm. Alternatively (or in addition, if needed), the bending angle may be reduced from 30° to 10°.

- 5 For the ligament data given in Table 1, the bending length “l” was 10 mm. For the 1st and 2nd layer materials the bending length “l” was 1 mm. The bending angel has been 30° for the ligaments as well as for the 1st and 2nd layer.

Precondition the specimen at about 23 °C ± 2°C and about 45 % ± 5% relative humidity for two hours prior to testing.

- 10 Regarding the size of the ligament and the procedure in case the size of the ligament is smaller than the size of the specimen, the same applies as set out above for the tensile test.

Table 1: Basis weight, tensile strength and bending stiffness of suitable first and second layers materials:

Example No.	1	2	3	4
Basis weight of 1 st and 2 nd layer	13 g/m ²	15 g/m ²	17 g/m ²	25 g/m ²
Bending stiffness of 1 st and 2 nd layer	0.3 mNm	0.4 mNm	0.5 mNm	0.9 mNm
Tensile strength of 1 st and 2 nd layer	6.9 N/cm	7.9 N/cm	7.8 N/cm	8.1 N/cm

Example materials 1 to 4 are all spunbond polypropylene nonwovens.

- 15 **Table 2:** Basis weight, tensile strength and bending stiffness of suitable ligament materials:

Example No.	1	2	3	4
Basis weight of ligaments	40 g/m ²	43 g/m ²	51 g/m ²	60 g/m ²
Bending stiffness of ligaments	10.8 mNm	36.3 mNm	52.6 mNm	105.3 mNm
Tensile strength of ligaments	16.2 N/cm	16.1 N/cm	18.8 N/cm	26.1 N/cm

Except for Example 1 (40 g/m² material), all ligament materials were spunbond PET nonwovens. Example 1 was a spunbond polypropylene material.

Method to measure ligament caliper

Average Measured caliper is measured using a Mitutoyo Absolute caliper device model ID-
5 C1506, Mitutoyo Corp., Japan.

A sample of the material used for the ligaments with a sample size of 40 mm x 40 mm is cut. If the samples are taken from a ready-made structure and the size of the ligaments is smaller than 40 mm x 40 mm, the sample may be assembled by placing two or more ligaments next to each other with no gap and no overlap between them. Precondition the specimens at about 23
10 °C ± 2°C and about 45 % ± 5% relative humidity for 2 hours prior to testing.

Place the measuring plate on the base blade of the apparatus. Zero the scale when the probe touches the measuring plate (Measuring plate 40 mm diameters, 1.5 mm height and weight of 2.149 g). Place the test piece on the base plate. Place the measurement plate centrally on top of the sample without applying pressure. After 10 sec. move the measuring bar downwards
15 until the probe touches the surface of the measuring plate and read the caliper from the scale to the nearest 0.01 mm.

Method of measuring modulus of the structure

The modulus of the structure is measured on a constant rate of structure compression using a tensile tester with computer interface (a suitable instrument is the Zwick Roell Z2.5 using
20 TestExpert 11.0 Software, as available from Zwick Roell GmbH & Co. KG, Ulm, Germany) using a load cell for which the forces measured are within 10% to 90% of the limit of the cell. The movable upper stationary pneumatic jaw is fitted with rubber faced grip to securely clamp the plunger plate (500). The stationary lower jaw is a base plate (510) with dimensions of 100mm x 100mm. The surface of the base plate (510) is perpendicular to the plunger plate
25 (500). To fix the plunger plate (500) to the upper jaw, lower the upper jaw down to 20mm above the upper surface (515) of the base plate (510). Close the upper jaw and make sure the plunger plate (500) is securely tightened. Plunger plate (500) has a width of 3.2mm and a length of 100mm. The edge (520) of the plunger plate (500) which will contact the structure has a curved surface with an impacting edge radius of $r = 1.6\text{mm}$. For analysis, set the gauge

length to at least 10% higher than the caliper of the structure in its erected configuration (see Fig 17). Zero the crosshead and load cell. The width of the plunger plate (500) should be parallel with the transverse direction of the structure.

Precondition samples at about $23\text{ }^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and about $45\% \text{ RH} \pm 5\% \text{ RH}$ relative humidity for 2 hours prior to testing. The structure is placed on the base plate, is transformed into its erected configuration and fixed in its erected configuration with substantially maximum possible caliper to the base plate with the outer surface of its first (lower) layer facing towards the upper surface (515) of the base plate (510). The structure can be fixed to the upper surface of the base plate, e.g. by placing adhesive tapes on the lateral edges of the structure's first (lower) layer and fix the tapes to the upper surface of the base plate.

Program the tensile tester to perform a compression test, collecting force and travel distance data at an acquisition rate of 50 Hz as the crosshead descends at a rate of 50 mm/min from starting position to 2mm above base plate (safety margin to avoid destruction of load cell).

If the modulus of the structure is measured directly in an area where a ligament is placed, the force P [N] is the force when the indentation depth h [mm] of the plunger plate into the structure is equal to 50% of the longitudinal dimension of the free intermediate portion of the ligament below the plunger plate.

If the modulus of the structure is measured between two neighboring ligaments, the force P [N] is the force when the indentation depth h [mm] of the plunger plate into the structure is equal to 50% of the longitudinal dimension of the free intermediate portion of the two ligaments nearest to the plunger plate (i.e. the ligaments on each side of the plunger plate as seen along the longitudinal structure dimension). If the free intermediate portion of the two neighboring ligaments, between which the modulus is measured, differ from each other with respect to the longitudinal dimension of their free intermediate portions, the average value over these two free intermediate portions is calculated and the indentation depth h [mm] of the plunger plate into the structure is equal to 50% of this average free longitudinal dimension.

A total of three test specimens are analyzed in like fashion.

The modulus E [N/mm²] is calculated as follows:

$$E = \frac{3P}{8rh}$$

With r being the impacting edge radius of the plunger plate, i.e. r = 1.6mm

Calculate and report the average of modulus E for all 3 measured specimens.

- 5 All testing is performed in a conditioned room maintained at about 23°C + 2°C and about 45%RH ± 5% relative humidity.

Example structures

- 10 *Note: the following example structures will generally be too small to be suitable for use as barrier leg cuffs of the present invention. Moreover, no elastic elements are provided in the structure. The examples are mainly intended to exemplify and explain in more detail how a “cell forming structure” can be made in general. Changing and adapting the dimensions, material and configuration of the structures described below in order to render them suitable for use in barrier leg cuffs is a matter of simple routine work based on the detailed description provided above.*

- 15 Making of example structures:

- For each structure, cut 2 pieces of nonwovens with longitudinal dimension of 150 mm and a lateral dimension of 25 mm, with a die or razor knife. These nowovens will become the first and second layers of the structure. Cut 4 ligaments (Examples 1, 2, 4 and 5), respectively 6 ligaments (Example 3) with a longitudinal dimension of 10 mm (which will result in a
- 20 longitudinal dimension of the free intermediate portion of 4 mm in the final structures, while 3 mm on each lateral edge are attached to the first and second layer, respectively) and a lateral dimension of 25 mm, with a die or razor knife. Apply a double sided tape (e.g. 3M Double sided medical tape 1524-3M (44g/m²) available from 3M) with length of 3 mm and width of
- 25 first lateral edge of the ligament in the final structure and a second tape on the second surface of each ligament adjacent the side edge, which will become the second lateral edge of the

ligament in the final structure. The width of the tape is aligned with the lateral dimension of the ligaments.

Remove one release tape from the ligaments and attach the tape to the first layer the first layer such that the lateral dimension of the ligament is aligned with the lateral dimension of the first layer.

For Example 1: Place the first, second, third and fourth ligaments such that the spacing between neighboring ligaments is 10 mm when the ligaments are lying flat on the first layer.

For Example 2, 4 and 5: Place the first, second, third and fourth ligaments such that the spacing between neighboring ligaments is 5mm when the ligaments are lying flat on the first layer.

For Example 3: In this example, 6 ligaments where positioned between the first and second layer. Place the first to sixth ligaments such that there is no spacing between neighboring ligaments and neighboring ligaments overlap by 3 mm with each other when the ligaments are lying flat on the first layer.

For all examples, the ligaments should be positioned accordingly, to leave sufficient space at the lateral edges of the first and second layer to allow attaching the first layer to the second layer in the manner described below.

For all Examples structures, the 1st and 2nd layer were made of the material of Example 2 of Table 1. The ligaments for the Example structures 1, 2, 3 and 5 were made of the ligament material of Example 4 of Table 2, while the ligaments of Example structure 4 were made of the ligament material of Example 1 of Table 2.

Remove the remaining release layers from the remaining tape pieces on all four ligaments and attach the second layer on top of the first layer and the ligaments such that the second layer is congruent with the first layer.

To bond the first layer to the second layer in the areas longitudinally outwardly from the area where the ligaments are placed (stop aid), two double-sided tapes (e.g. 3M Double sided medical tape 1524-3M (44g/m²) available from 3M) having a length of 3 mm and a width of 25 mm are provided. A first tape is attached to the first layer towards one of the first layer's

lateral edges such that the distance between this first tape and the adjacent ligament is 20 mm. The second tape is attached to the first layer towards the respective other lateral edge of the first layer such that the distance between this second tape and the respective adjacent ligament is 20 mm. The width of the first and second tape is aligned with the lateral dimension of the first layer. Pay attention that the first and second tapes are not attached to the second layer before the structure has been transformed into its erected configuration (see next step).

Stretch the resulting cell forming structure along the longitudinal dimension into the erected configuration such that the first and second layer shift relative to each other and the ligaments move in upright position of 90° relative to the first and second layer. Notably, the 90° does not apply to the area longitudinally outwardly from the outermost ligaments (viewed along the longitudinal dimension) because the first and second layers follow a tapered path in this area until the point where they coincide with each other (see e.g. Fig. 1B). Maintain the structure in its erected configuration and attach the first layer to the second layer via the first and second tape to fix the structure in its erected configuration. Release the force and allow the structure to relax.

For the Structure Modulus Test, place the assembled cell forming structure flat and unstretched under the plunger plate. Stretch the cell forming structure such that in the erected configuration the ligaments are approximately at an angle of 90° versus the first and second layer in the areas between neighboring ligaments.

The plunger plate was placed centrally in the space between the two center ligaments of the structure, except for Example 5, where the plunger plate was placed centrally directly in the location where one of the two centrally positioned (viewed along the longitudinal direction of the structure) ligaments is. The erected structure was fixed to the base plate using tape. The test procedure set out above for the structure modulus was followed.

Table 3: Modulus of the structure

Example Structure No.	1	2	3	4	5
Modulus [N/mm ²]	0.028	0.039	0.107	0.005	0.151

The data show that the measured modulus of a structure will be different depending e.g. on whether the modulus is measured between neighboring ligaments (Examples 1 to 4), or if it is measured directly in the location where a ligament is attached to the first and second layer. For a given structure, between neighboring ligaments, the modulus will typically be lower
5 than directly at a ligament.

All patents and patent applications (including any patents which issue thereon) assigned to the Procter & Gamble Company referred to herein are hereby incorporated by reference to the extent that it is consistent herewith.

The dimensions and values disclosed herein are not to be understood as being strictly limited
10 to the exact numerical values recited. Instead, unless otherwise specified, each such dimension is intended to mean both the recited value and a functionally equivalent range surrounding that value. For example, a dimension disclosed as “40 mm” is intended to mean “about 40 mm.”

All documents cited in the Detailed Description of the Invention are, in relevant part,
15 incorporated herein by reference; the citation of any document is not to be construed as an admission that it is prior art with respect to the present invention. To the extent that any meaning or definition of a term in this document conflicts with any meaning or definition of the same term in a document incorporated by reference, the meaning or definition assigned to that term in this document shall govern.

20 While particular embodiments of the present invention have been illustrated and described, it would be obvious to those skilled in the art that various other changes and modifications can be made without departing from the spirit and scope of the invention. It is therefore intended to cover in the appended claims all such changes and modifications that are within the scope of this invention.

CLAIMS

What is claimed is:

1. An absorbent article (20) having a longitudinal dimension and a transverse dimension and comprising
5 a liquid pervious topsheet (24),
a liquid impervious backsheet (26); and
an absorbent core (28) disposed between the topsheet (24) and the backsheet (26);
the absorbent article (20) further comprising a barrier leg cuff (34) disposed adjacent
to each of the longitudinal edges of the absorbent article and extending substantially
10 parallel to the longitudinal dimension of the absorbent article (20);
each barrier leg cuff (34) comprising a structure (100), wherein the structure (100) is
attached to the absorbent article (20) with a proximal end, the structure having a
longitudinal dimension, which is substantially parallel with the longitudinal dimension
of the absorbent article (20), a lateral dimension and a caliper, and comprising one or
15 more elastic elements (195, 196); and/or the structure (100) being associated with one
or more elastic elements;

the structure (100) being in a flat configuration when the absorbent article (20) is
flattened out and when the one or more elastic elements (195, 196) are stretched along
the longitudinal dimension of the structure (100), whereby contraction of the one or
20 more elastic elements (195, 196) applies a force along the longitudinal dimension of
the structure, thus converting the structure (100) into an erected, three-dimensional
configuration, wherein the structure (100) has a higher caliper in its erected
configuration compared to the caliper of the structure in its flat configuration, the
erected structure spacing a distal end of the barrier leg cuff (34) away from the
25 topsheet (24) and causing the barrier leg cuff (34) to stand up.
2. The absorbent article of claim 1, wherein the lateral dimension of the structure (100) is
from 3 mm to 50 mm.
3. The absorbent article of any of the preceding claims, wherein each barrier leg cuff
(34) further comprises a barrier material (50) partially or fully enwrapping the
30 structure (100).

4. The absorbent article of claim 3, wherein the one or more elastics (195, 196) are comprised by or associated with the barrier material (50).

5. The absorbent article of any of the preceding claims,

wherein the structure (100) comprises a first and a second layer (110, 120), each layer

5 having an inner (111, 121) and an outer surface (112, 122), a longitudinal dimension

parallel to the longitudinal dimension of the structure (100) confined by first and

second spaced apart lateral edges, and a lateral dimension parallel to the lateral

dimension of the structure (100) confined by two spaced apart longitudinal edges,

wherein the first and second layer (110, 120) at least partly overlap each other,

10 wherein the second layer (120) is able to shift relative to the first layer (110) along the

longitudinal structure dimension upon release of a contractive force, which has

provided by the stretched one or more elastic elements along the longitudinal

dimension,

the structure (100) further comprising ligaments (130) provided between the first and

15 second layer (110, 120) in at least a part of the region where the first and second layer

overlap each other,

each ligament (130) has a longitudinal dimension confined by two spaced apart lateral

ligament edges (134), and a lateral dimension confined by two spaced apart

longitudinal ligament edges,

20 each ligament (130) being attached to the inner surface (111) of the first layer (110)

with a portion at or adjacent to one of the ligament's lateral edges (134) in a first

ligament attachment region (135) and being attached to the inner surface (121) of the

second layer (120) with a portion at or adjacent to the ligament's other lateral edge

(134) in a second ligament attachment region (136), the region of each ligament

25 between the first and second ligament attachment region (135, 136) forming a free
intermediate portion (137),

the ligaments (130) being spaced apart from one another along the longitudinal

dimension of the structure (100), and the attachment of all ligaments (130) to the first

and second layer (110, 120) in the first and second ligament attachment regions (135,

30 136) is such that the free intermediate portions (137) of the ligaments (130) are able to

convert from an initial flat configuration to an erected configuration upon release of a

contractive force, which has provided by the stretched one or more elastic elements

along the longitudinal dimension of the structure (100), thus converting the structure as a whole from an initial flat configuration into an erected configuration, wherein the erection is in the direction perpendicular to the longitudinal and the lateral dimension of the structure, thus increasing in caliper.

- 5 6. The absorbent article of claim 5, wherein the one or more elastic elements (195, 196) form one or more portions of the second layer (120) or wherein the one or more elastic elements are attached to the second layer (120).
7. The absorbent article of claim 5 or 6, wherein the first layer (110) of the structure (110) is formed by any of the following: a portion the topsheet, a portion of the
10 backsheet and/or a portion of the barrier material of the barrier leg cuff.
8. The absorbent article of claim 5, wherein the outer surface (112) of the first layer (110) is attached to any of the following: the topsheet, the backsheet, the barrier material of the barrier leg cuff or combinations thereof.
9. The absorbent article of any of claims 5 to 8, wherein the second layer (120) is
15 permanently attached (197) to the first layer (110), to the topsheet, to the backsheet and/or to the barrier material longitudinally outboard of the second ligament attachment region (136) which is closest to the first lateral edge of the structure and wherein the one or more elastic elements (196) at least form a portion of the second layer (120) between the second ligament attachment region (136) which is closest to
20 the first lateral edge of the structure and the attachment (197) of the second layer (120) to the first layer (110), to the topsheet, to the backsheet and/or to the barrier material.
10. The absorbent article of any of claims 5 to 9, wherein the second layer is permanently attached to the first layer, to the topsheet, to the backsheet and/or to the barrier material longitudinally outboard of the second ligament attachment region which is
25 closest to the first lateral edge of the structure and wherein the one or more elastic element is attached to the second layer at least between the second ligament attachment region which is closest to the first lateral edge of the structure and the attachment of the second layer to the first layer, to the topsheet, to the backsheet and/or to the barrier material.

11. The absorbent article of any of claims 7 to 10, wherein, in the flat configuration of the structure, the second layer is releasably attached to the first layer, to the topsheet, to the backsheet and/or to the barrier material in a location which is on the side of the one or more elastic elements along the longitudinal dimension of the structure which is opposite from the side where the second layer is permanently attached to the first layer, to the topsheet, to the backsheet and/or to the barrier material, and wherein release of the releasable attachment enables the one or more elastic elements to contract and thereby convert the structure from its flat configuration into its erected configuration.
12. The absorbent article of any of claims 5 to 11, wherein the one or more elastic elements form (a) portion(s) of the second layer between adjacent second ligament attachment regions.
13. The absorbent article of any of claims 5 to 12, wherein the one or more elastic elements are attached to the second layer between adjacent second ligament attachment regions.
14. The absorbent article of claim 11 or 13, wherein the second layer is releasably attached to the first layer, to the topsheet, to the backsheet and/or to the barrier material on both sides of the one or more elastic elements along the longitudinal dimension of the structure and wherein release of the releasable attachments enables the one or more elastic elements to contract and thereby convert the structure from its flat configuration into its erected configuration.
15. The absorbent article of any of claims 5 to 14, wherein, in the structure, the ligaments (130), in their erected configuration, either adopt a Z-like shape, a C-like shape, a T-like shape, or a Double-T-like shape.
16. The absorbent article of any of claims 5 to 15, wherein the structure comprises one or more stop aid(s) (180, 190) which define(s) the maximum shifting of the second layer (120) relative to the first layer (110) along the longitudinal dimension when the force along the longitudinal dimension is applied due to contraction of the one or more elastic elements (195, 196), wherein the maximum shifting defined by the stop aid

(180, 190) is less than the maximum shifting provided by the ligaments (130) in the absence of such stop aid.

17. The absorbent article of claim 16, wherein the one or more stop (180, 190) aid is selected from the group consisting of:

- 5 a. a layer-to-layer stop aid (180) extending from the first layer to the second layer and being attached to the first layer in a first layer-to-layer stop aid attachment region and being further attached to the second layer in a second layer-to-layer stop aid attachment region, wherein the layer-to-layer stop aid is provided with a layer-to-layer stop aid leeway between the first layer-to-layer stop aid
10 attachment region and the second layer-to-layer stop aid attachment region when the structure is in its initial flat configuration, said leeway being able to straighten out and/or extend when the structure is transferred into its erected configuration; and
- 15 b. a layer-to-ligament stop aid (190) extending from the first or second layer to one of the ligaments and being attached to the first or second layer in a first layer-to-ligament stop aid attachment region and being attached to the ligament in a second layer-to-ligament stop aid attachment region, wherein the layer-to-ligament stop aid is provided with a layer-to-ligament stop aid leeway between
20 the first layer-to-ligament stop aid attachment region and the second layer-to-ligament stop aid attachment region when the structure is in its initial flat configuration, said leeway being able to straighten out and/or extend when the structure is transferred into its erected configuration; and
- 25 c. an enveloping stop aid encircling a least a portion of the first and second layer and of the ligaments between the first and second layer, wherein the enveloping stop aid is attached to the first layer, the second layer and/or one or more ligaments in at least one enveloping stop aid attachment region and wherein the enveloping stop aid is further attached to itself to form a closed loop with a defined circumference around a least a portion of the first and second layer and
30 of the ligaments between the first and second layer, wherein the circumference of the enveloping stop aid defines the maximum caliper of the structure in its

erected configuration; wherein the caliper is perpendicular to the lateral and longitudinal dimension of the structure; and

d. any combinations of a) to c).

- 5 18. The absorbent article of any of claims 5 to 17, wherein, in the structure, the areas where the ligaments are located and the areas between neighboring ligaments have a modulus of from about 0.01 N/mm² to about 0.3 N/mm².

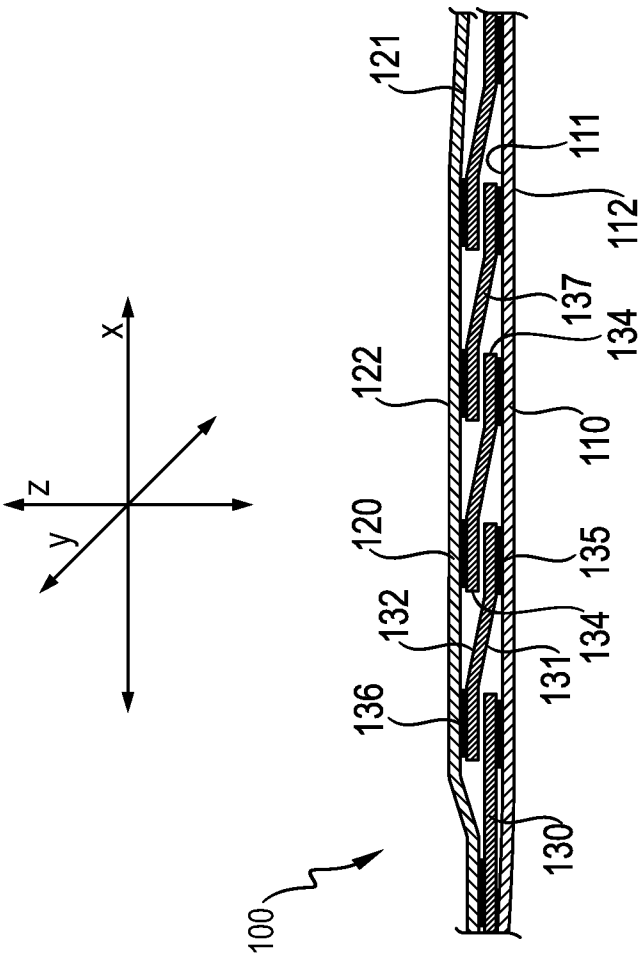


Fig. 1A

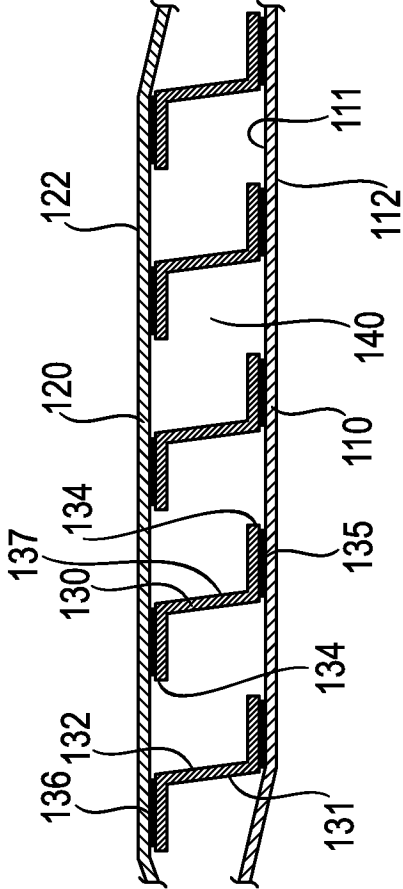
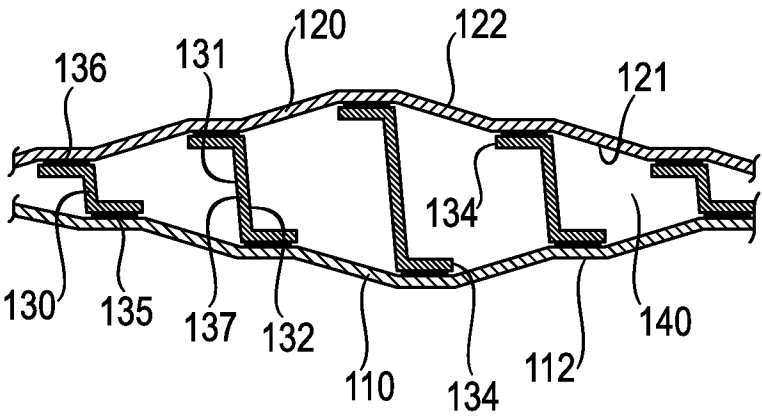


Fig. 1B

Fig. 2



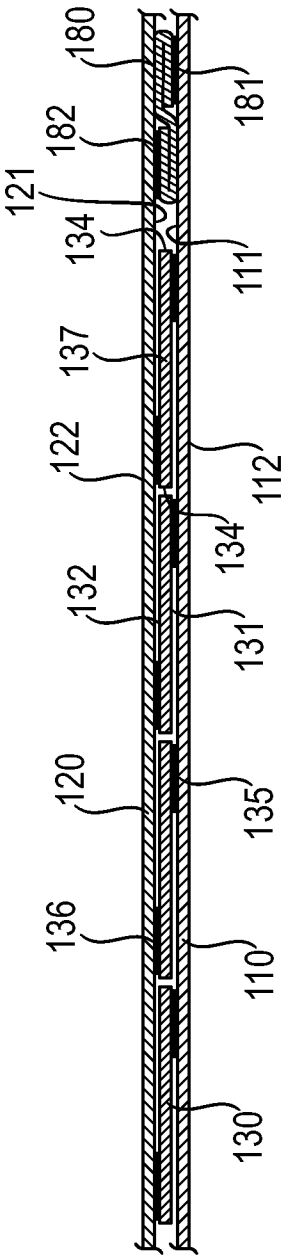


Fig. 3A

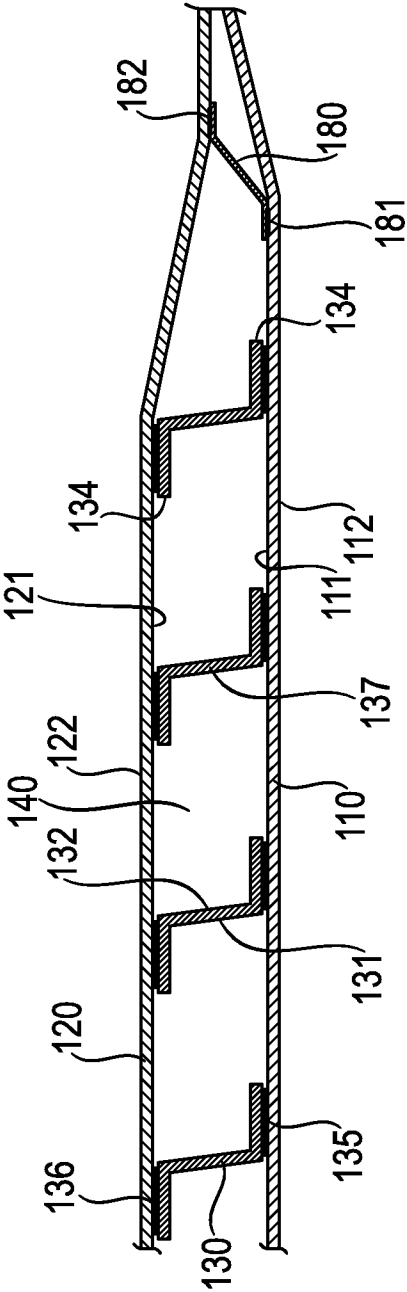


Fig. 3B

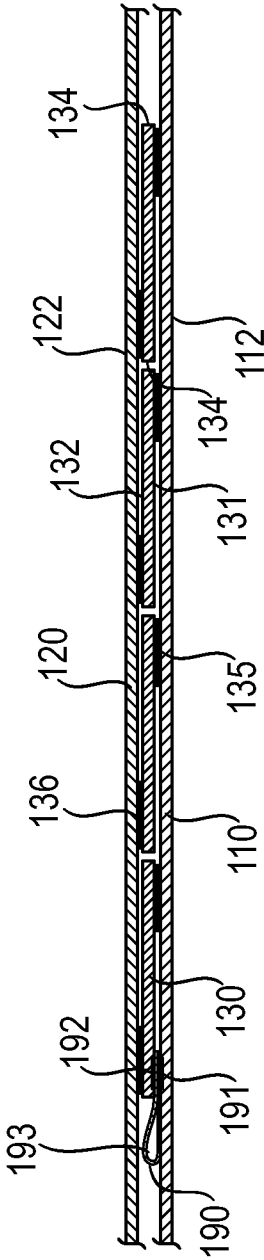


Fig. 4A

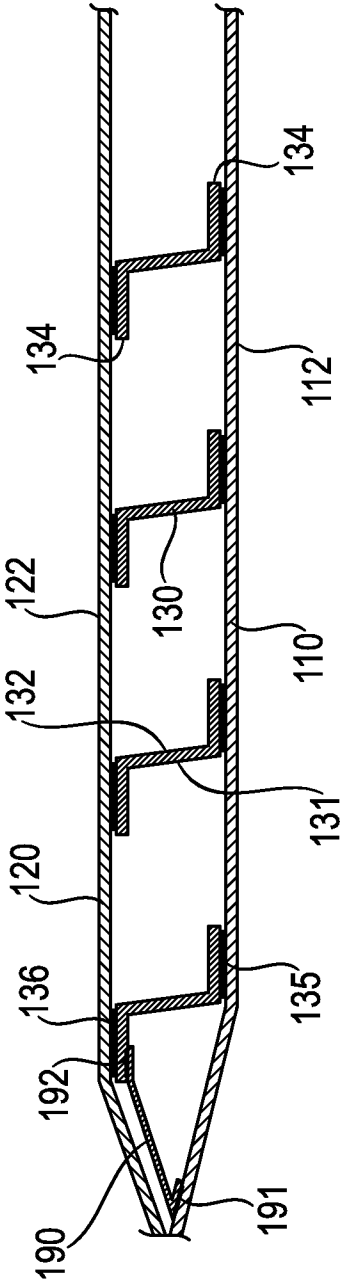


Fig. 4B

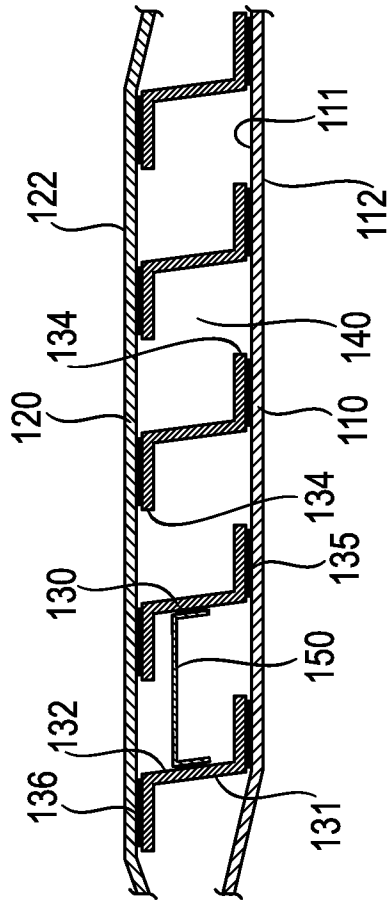


Fig. 5

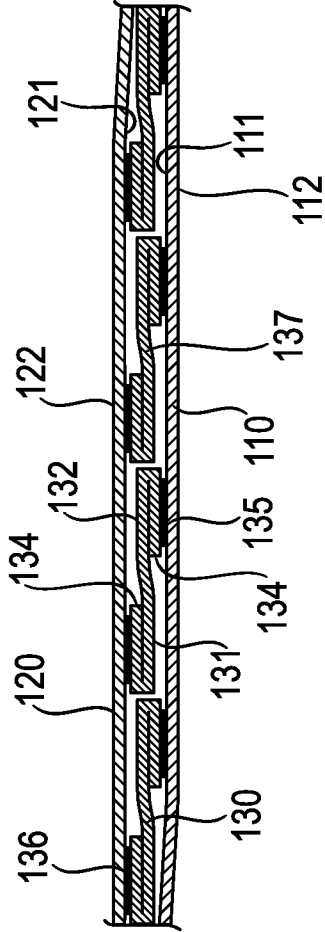


Fig. 6

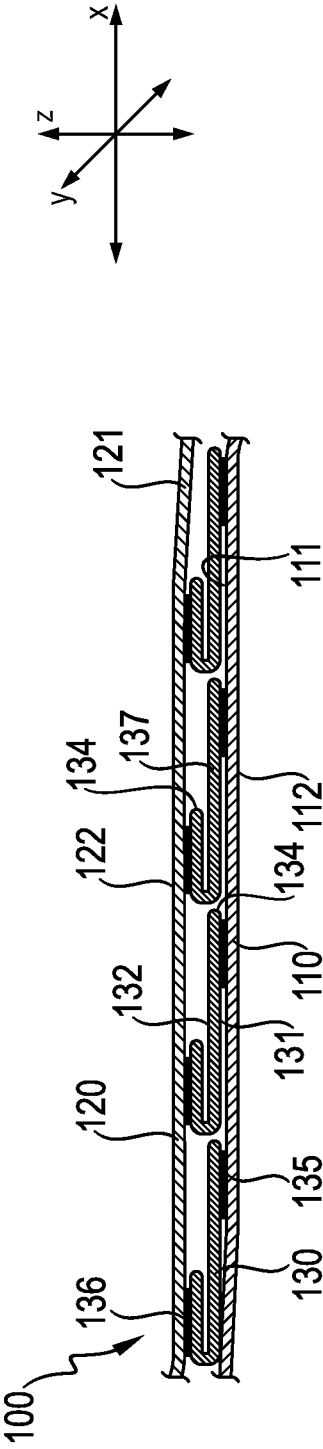


Fig. 7a

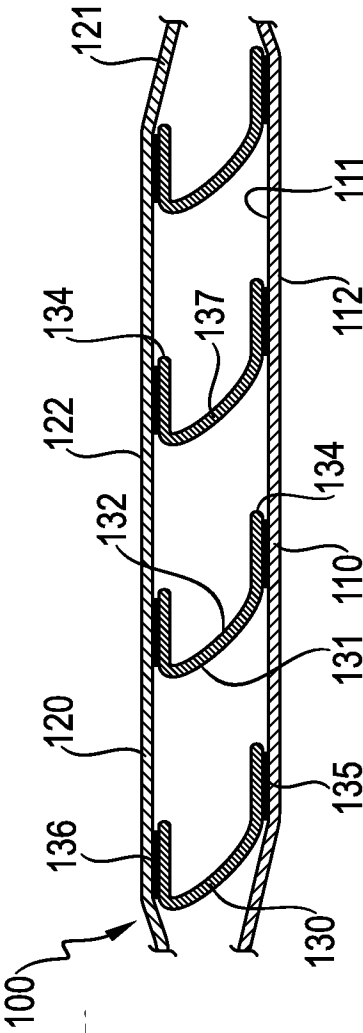


Fig. 7b

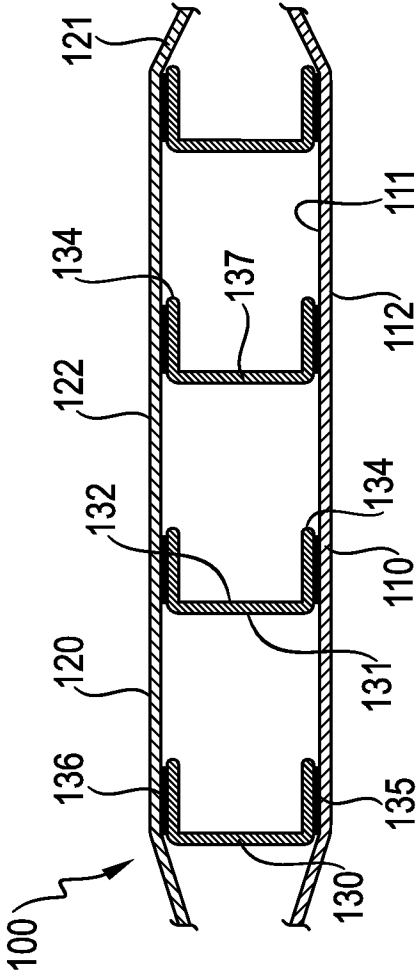


Fig. 7c

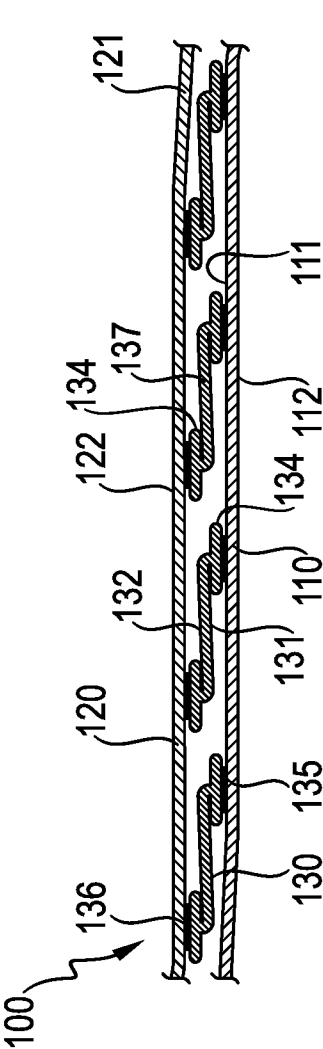



Fig. 8a

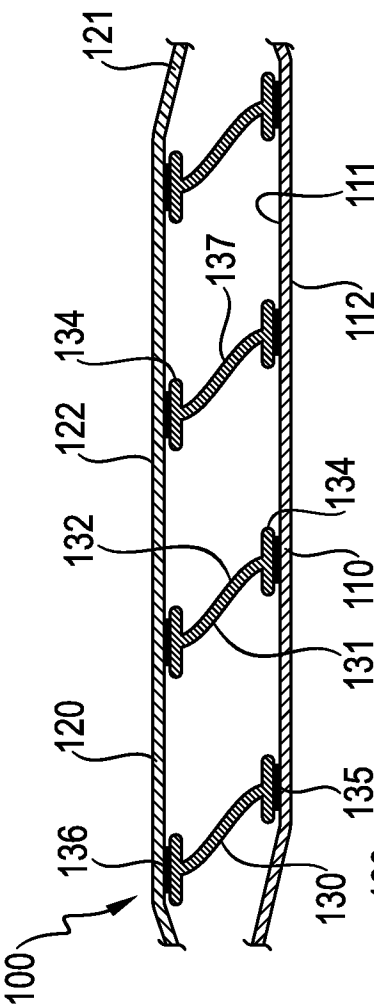


Fig. 8b

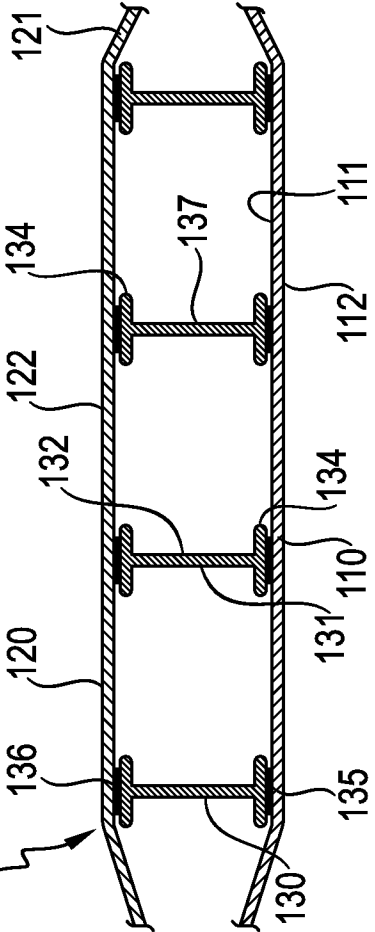


Fig. 8c

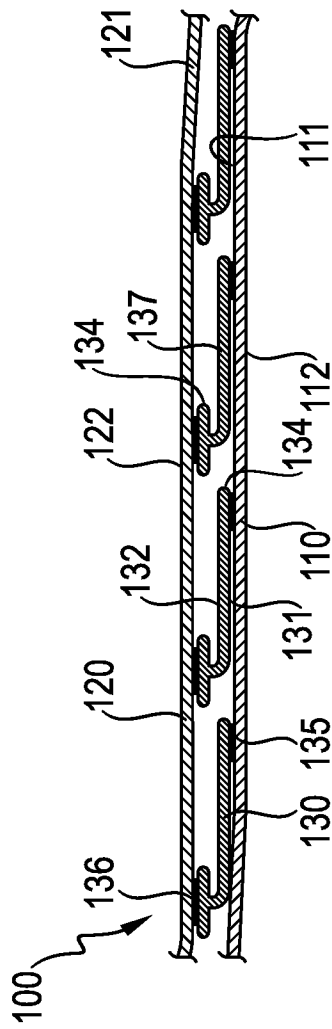



Fig. 9a

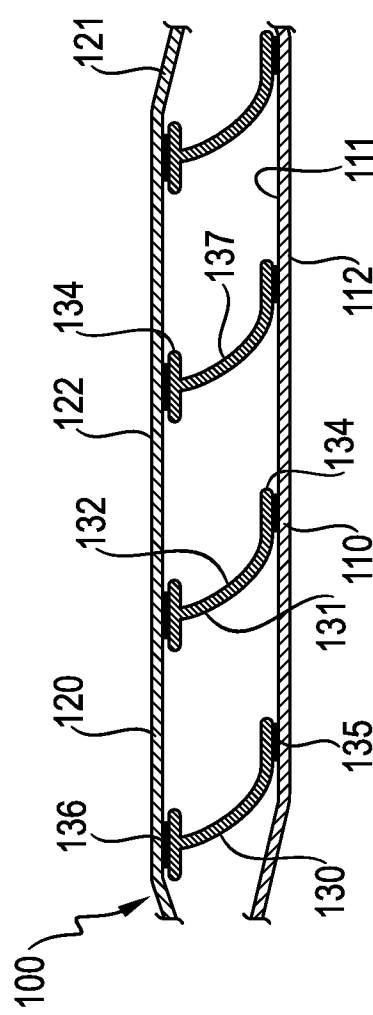


Fig. 9b

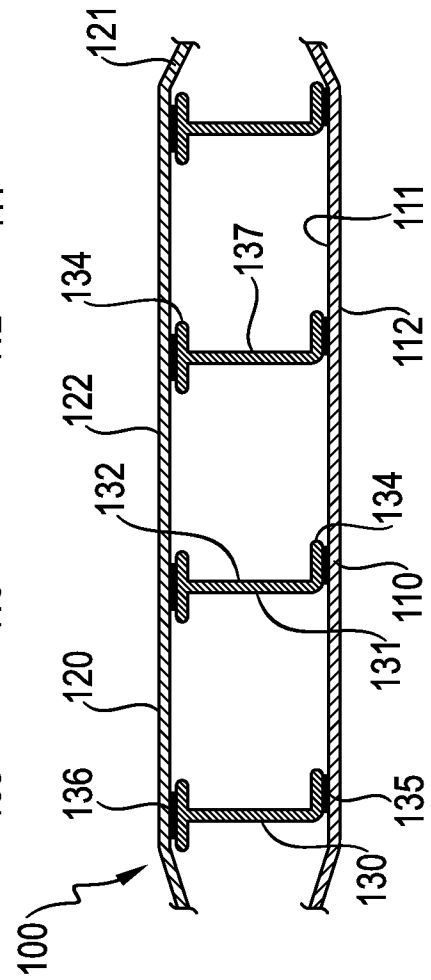


Fig. 9c

9 / 20

Fig. 10a

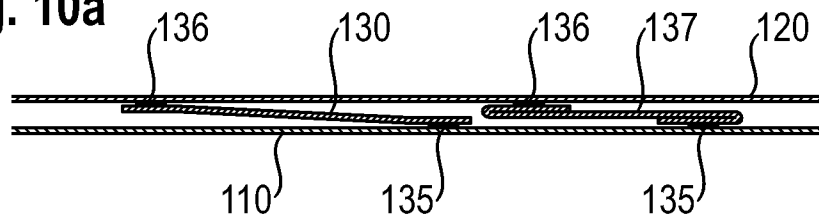


Fig. 10b

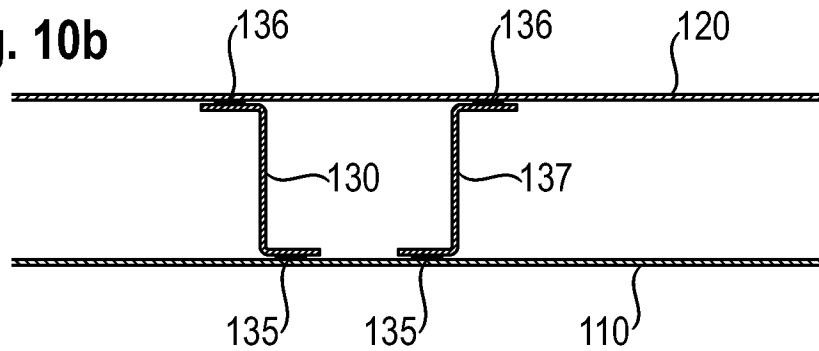


Fig. 11a

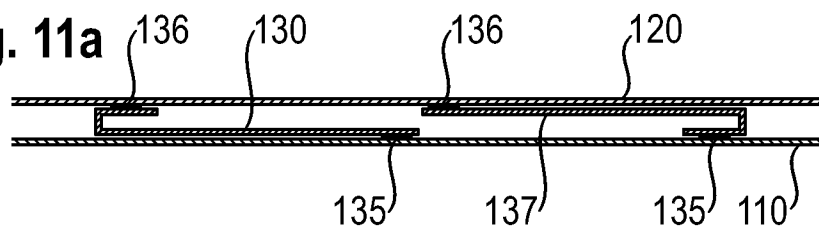


Fig. 11b

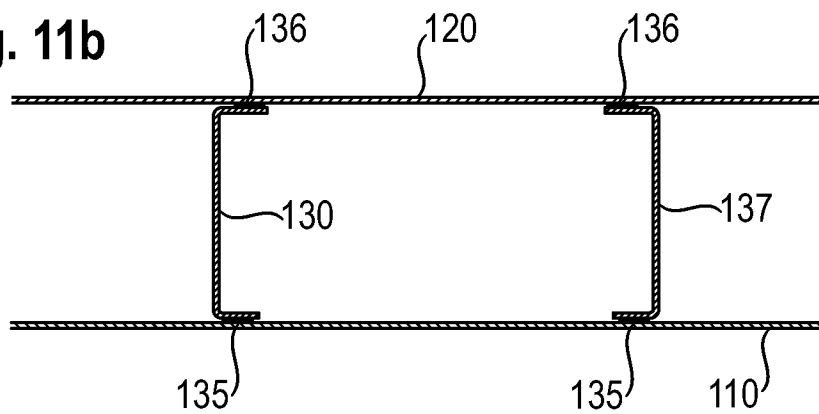
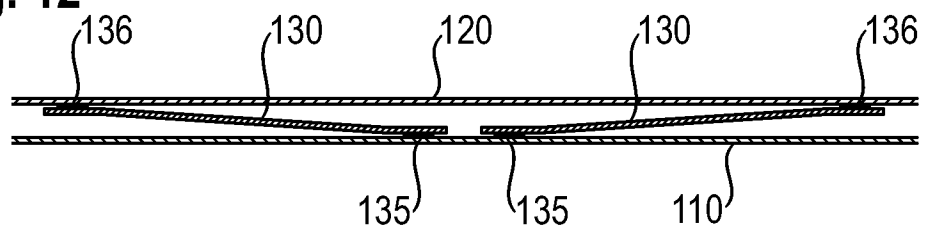
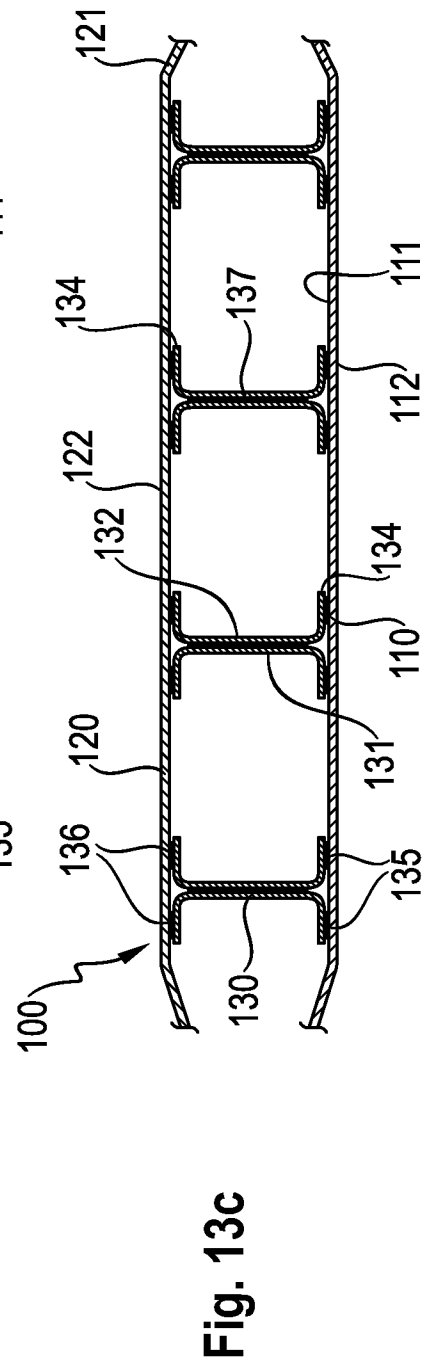
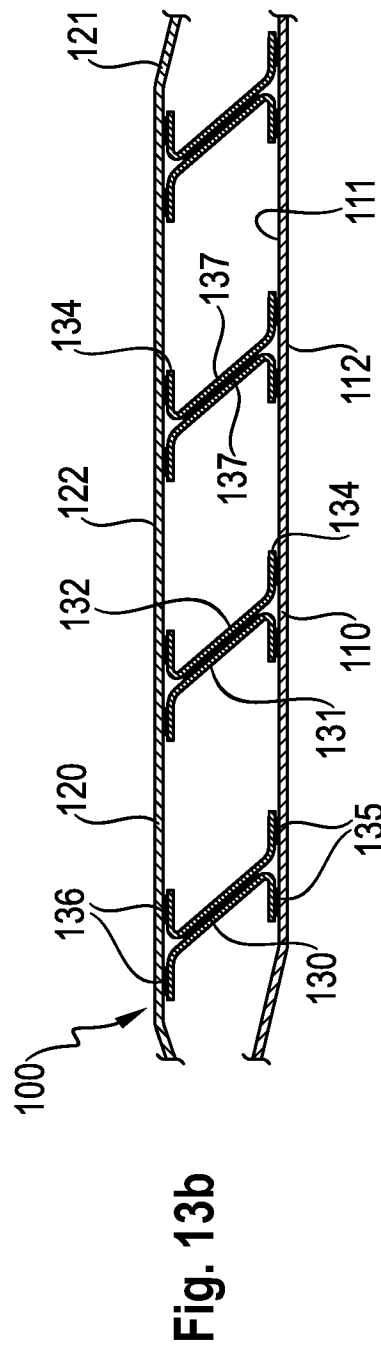
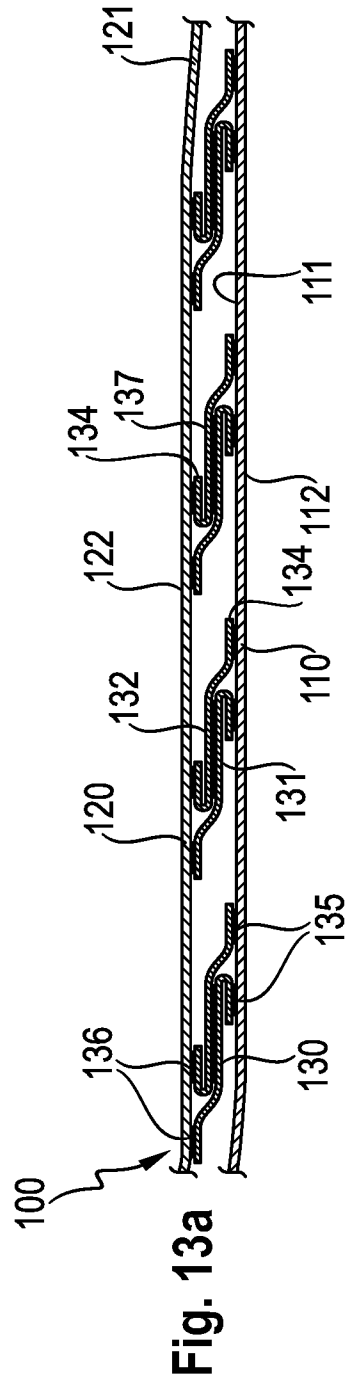



Fig. 12





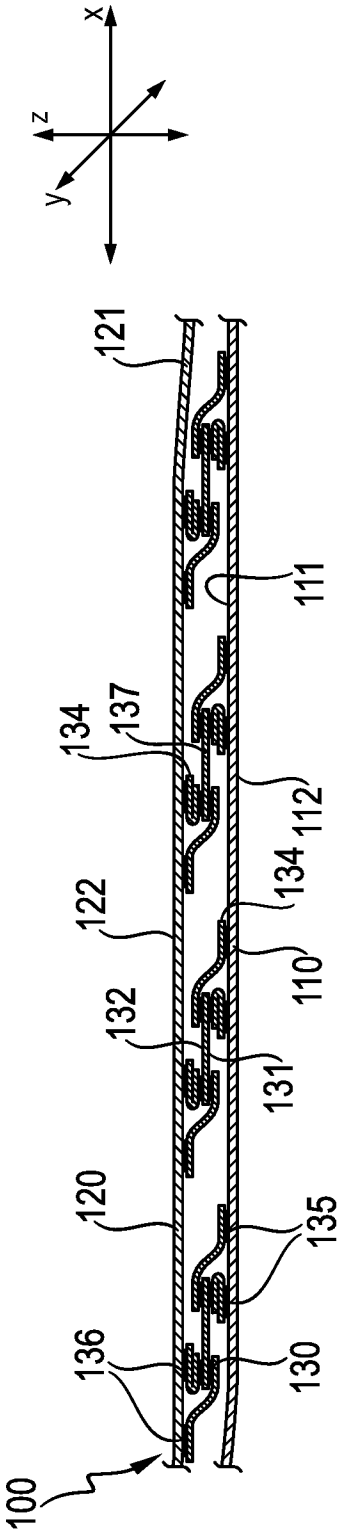


Fig. 14a

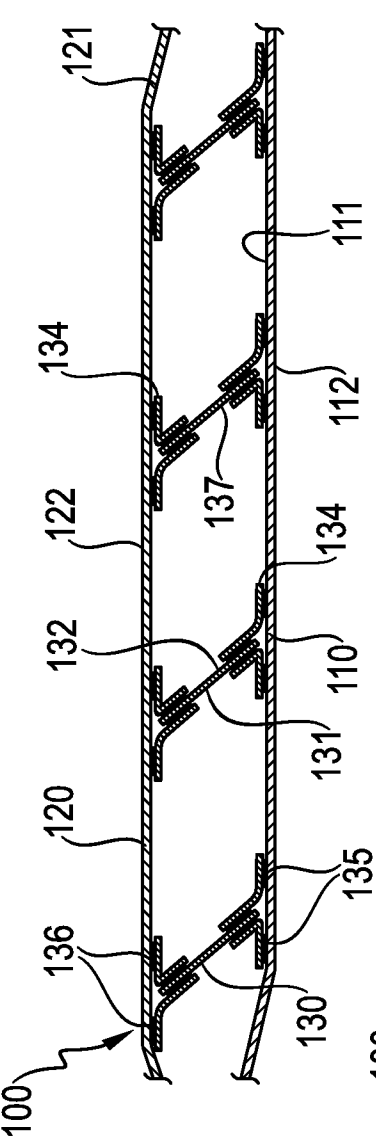


Fig. 14b

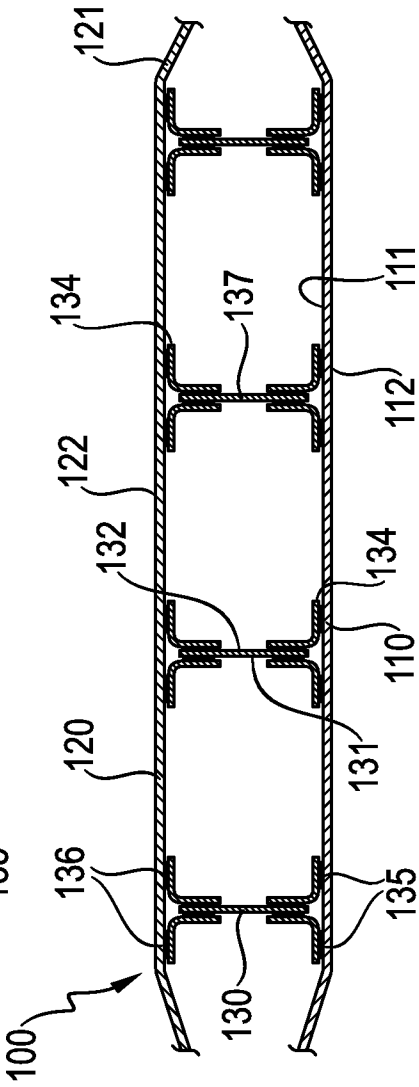


Fig. 14c

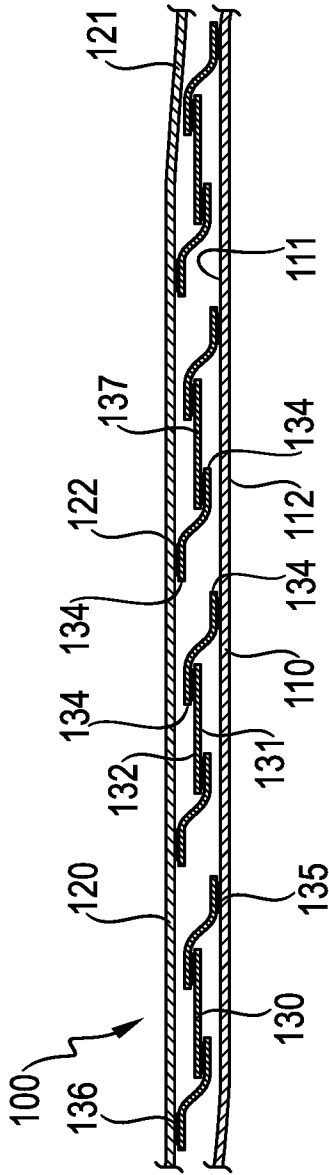



Fig. 15a

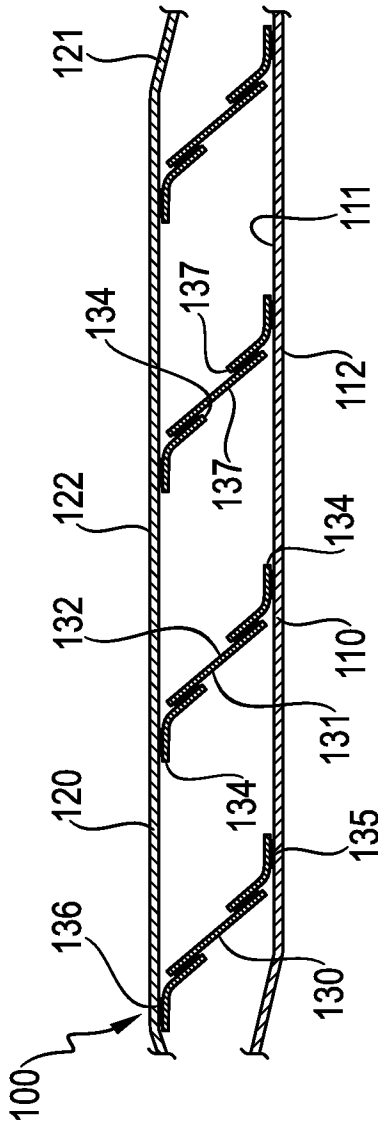


Fig. 15b

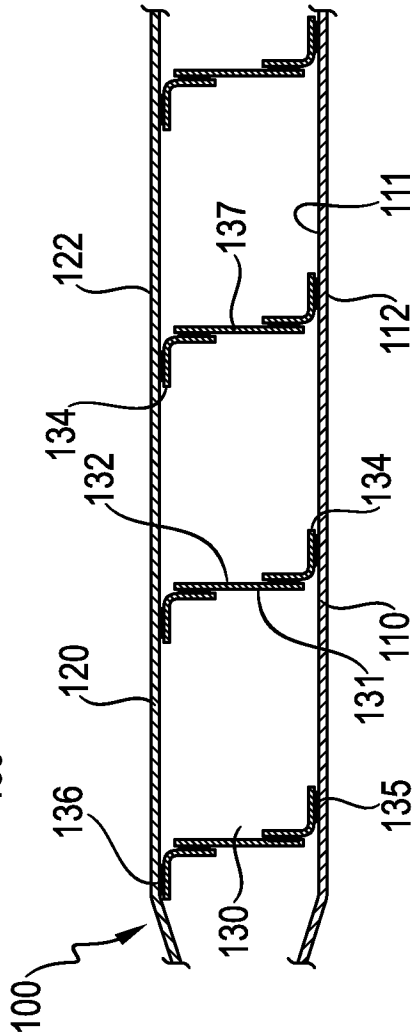


Fig. 15c

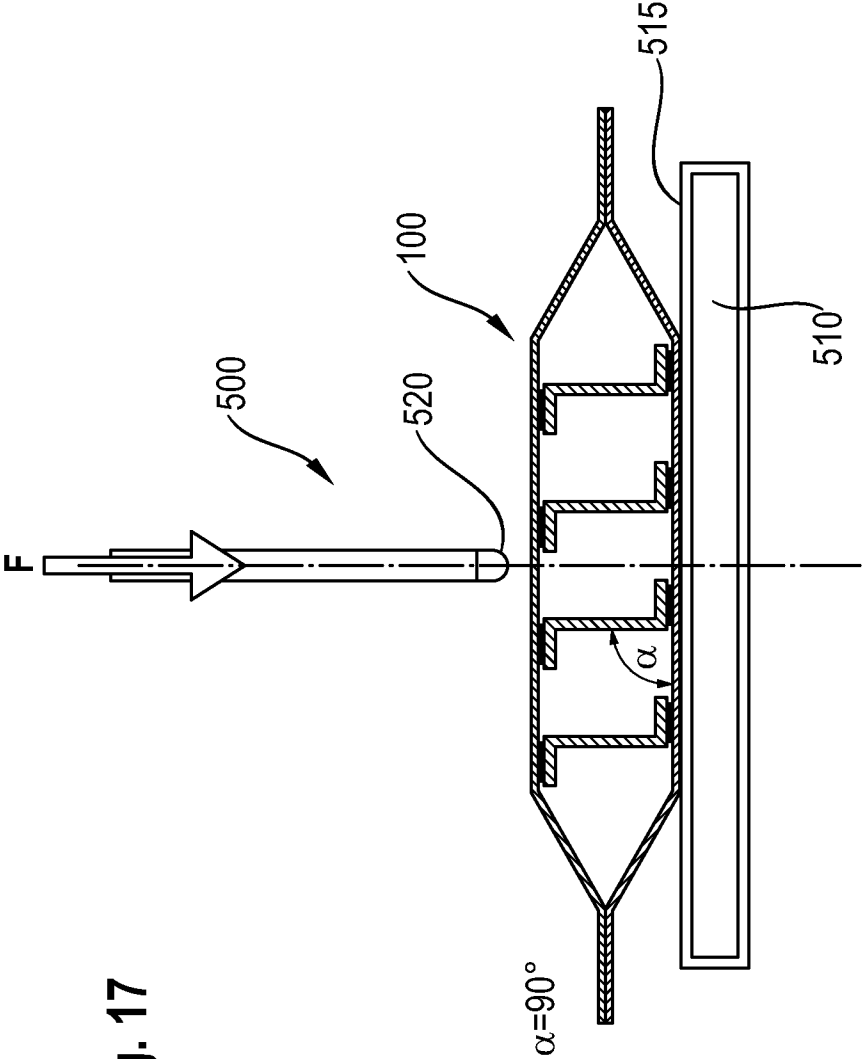


Fig. 17

15 / 20

Fig. 18

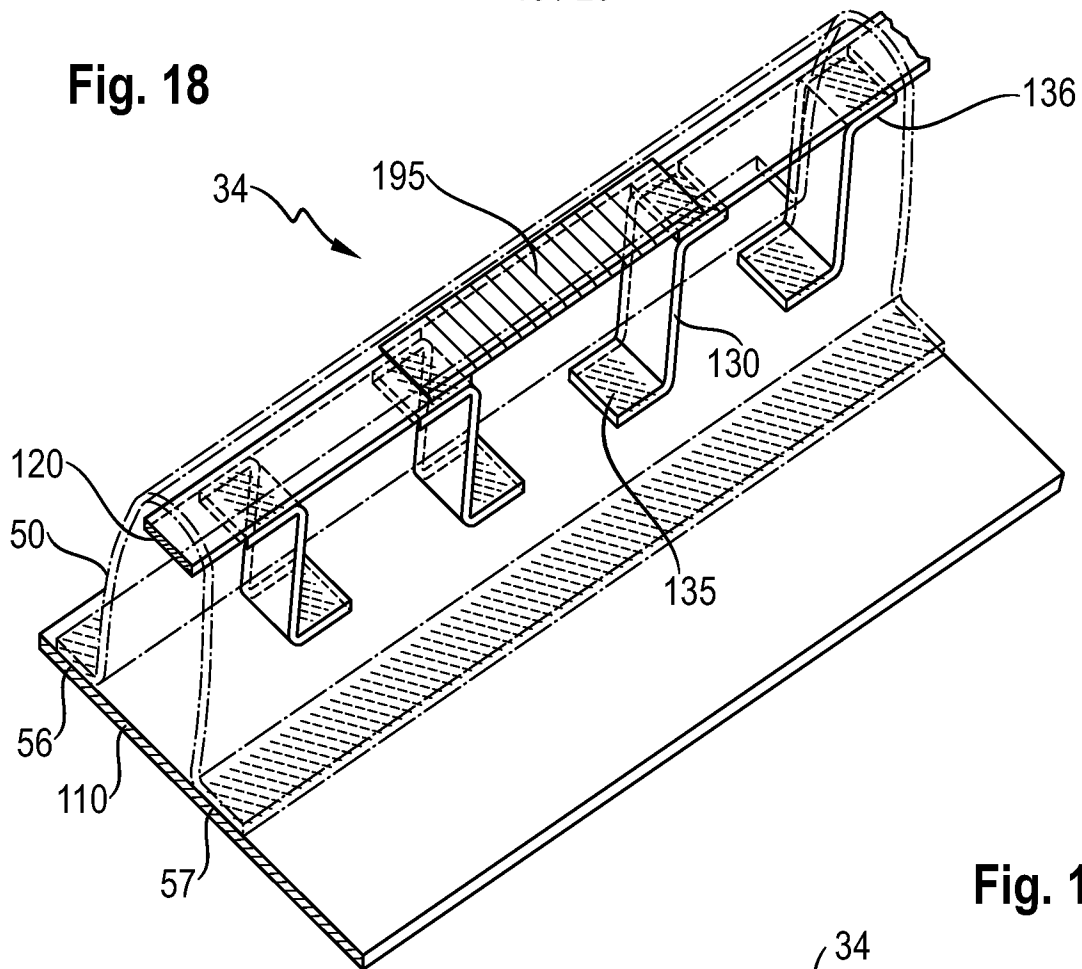


Fig. 19

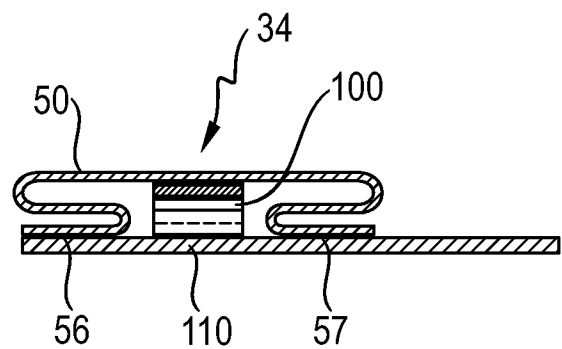
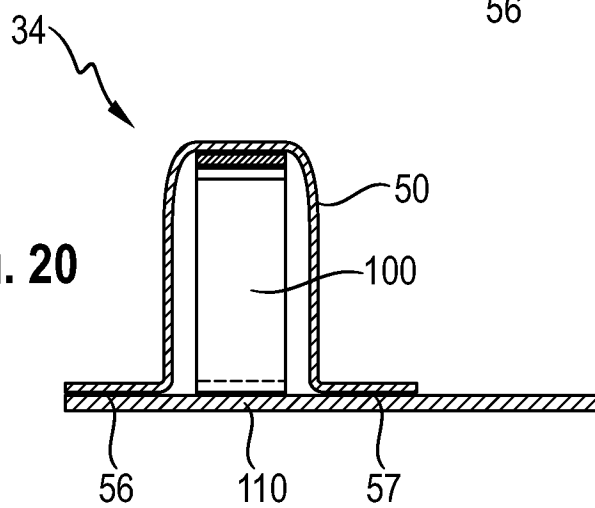
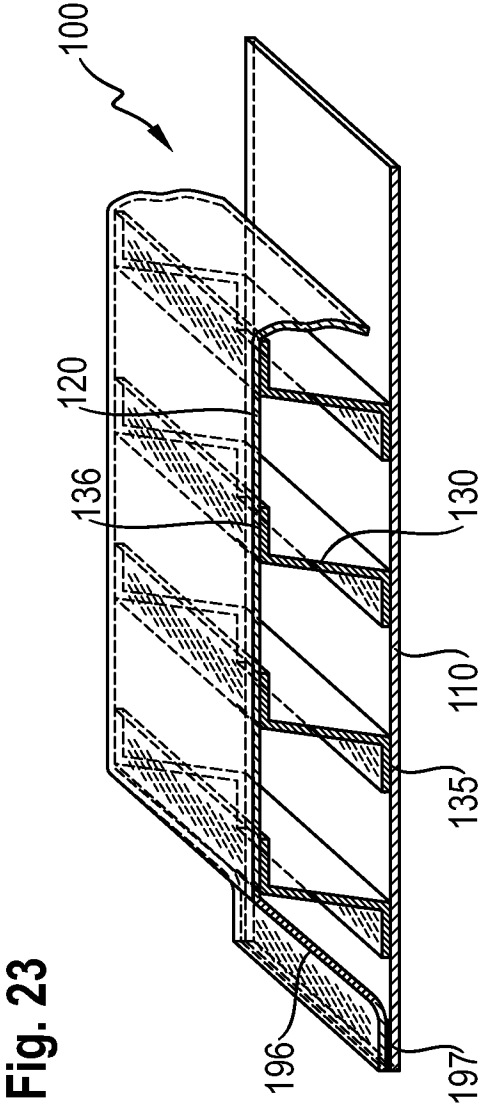
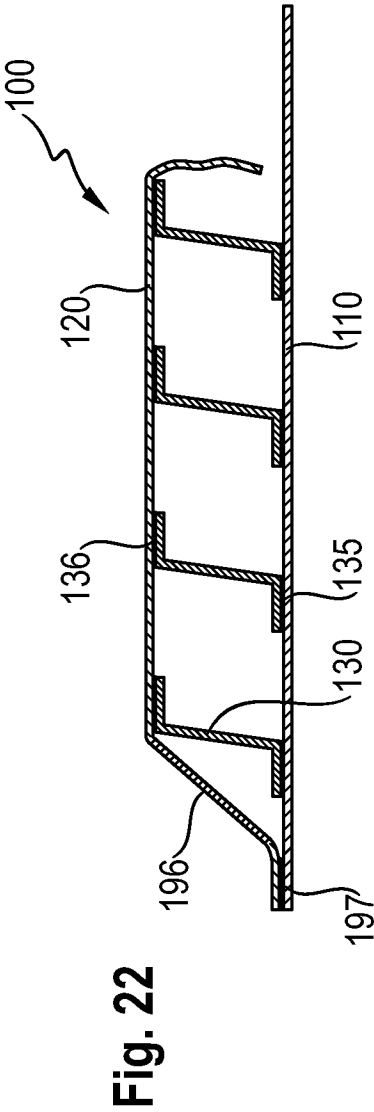
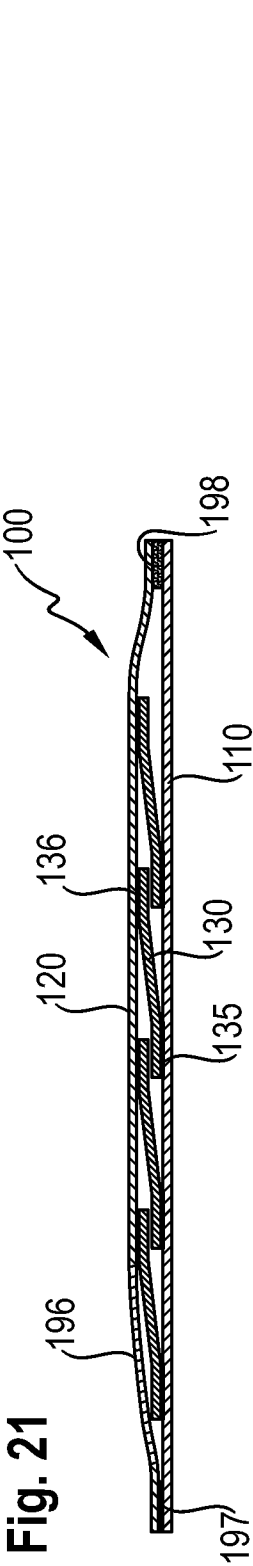


Fig. 20





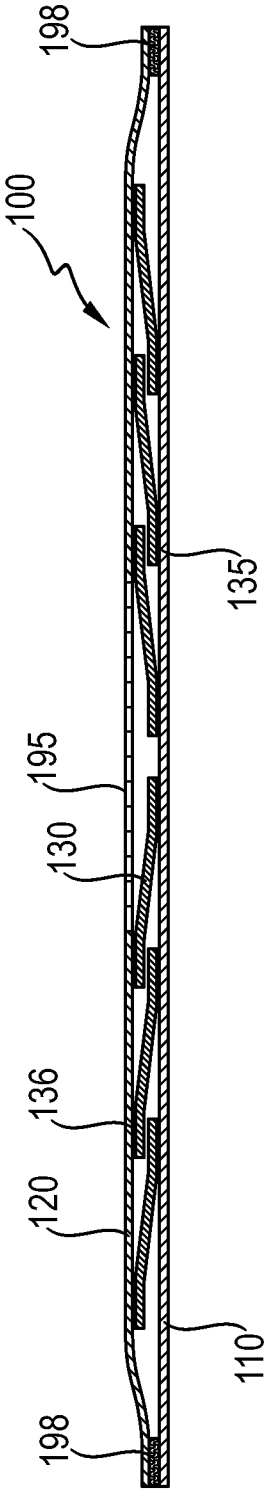


Fig. 24

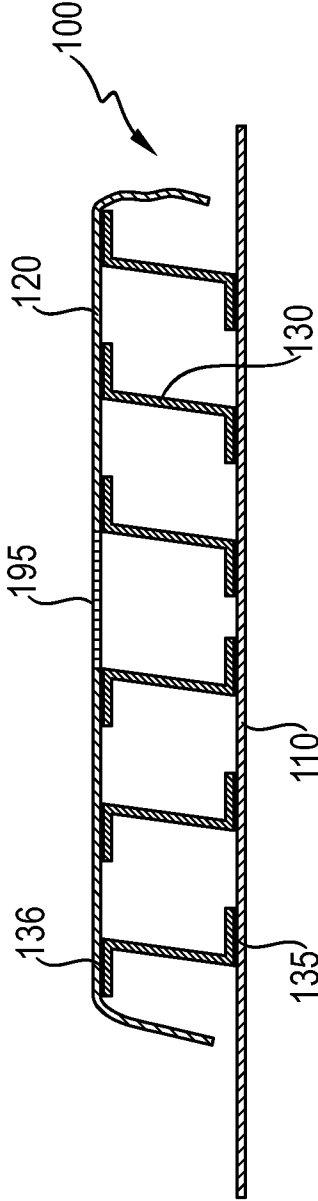


Fig. 25

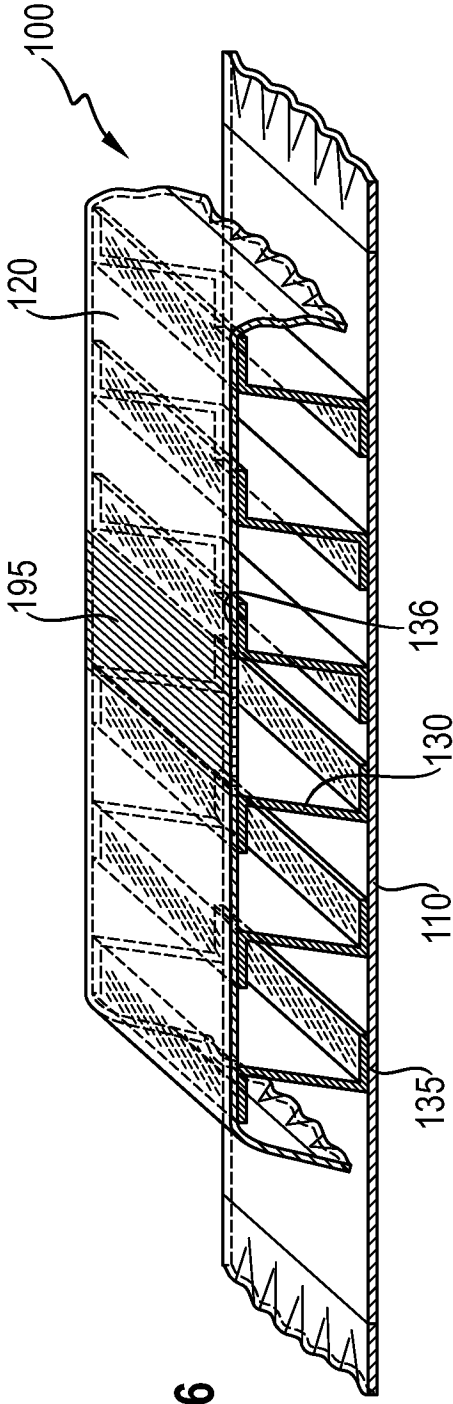


Fig. 26

Fig. 27

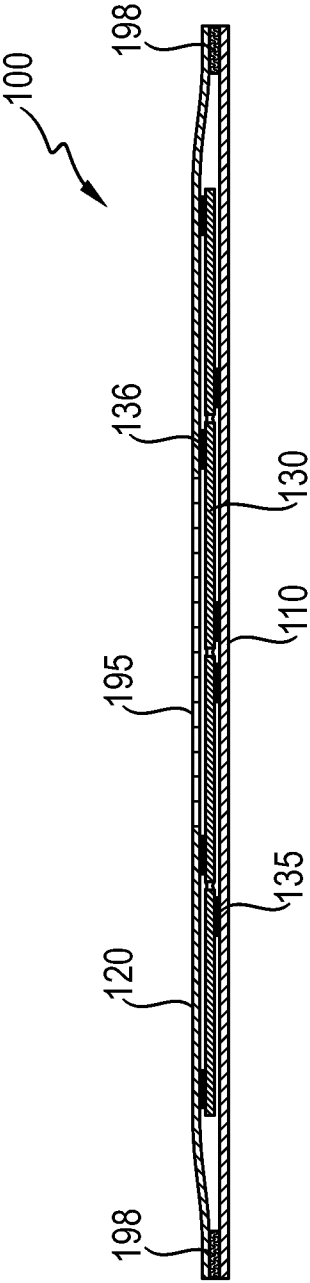


Fig. 28


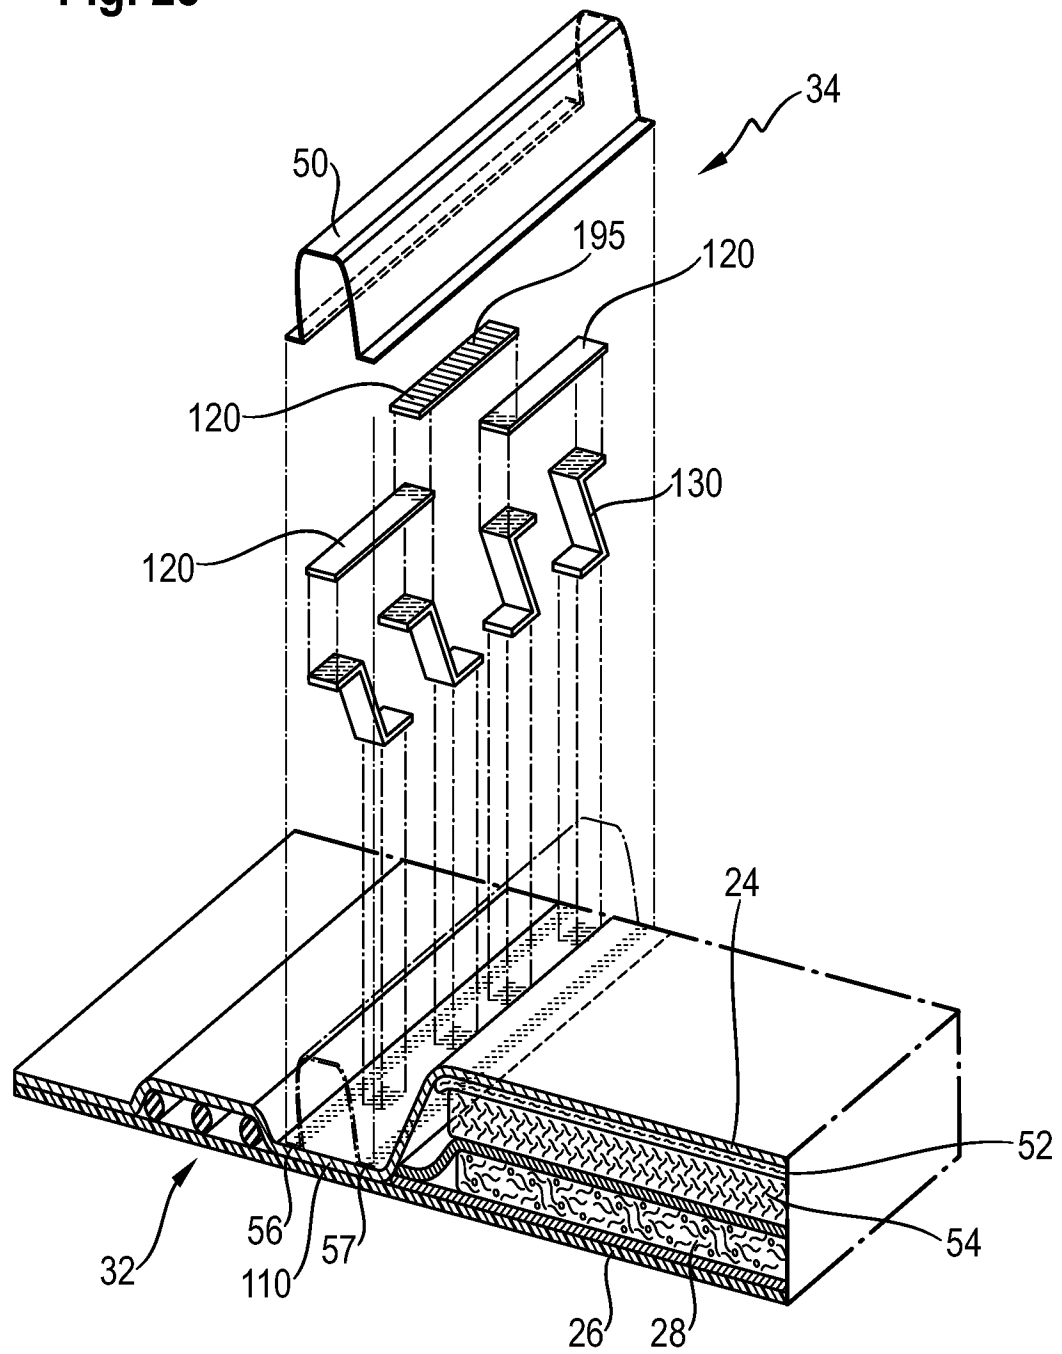


Fig. 29

20 / 20

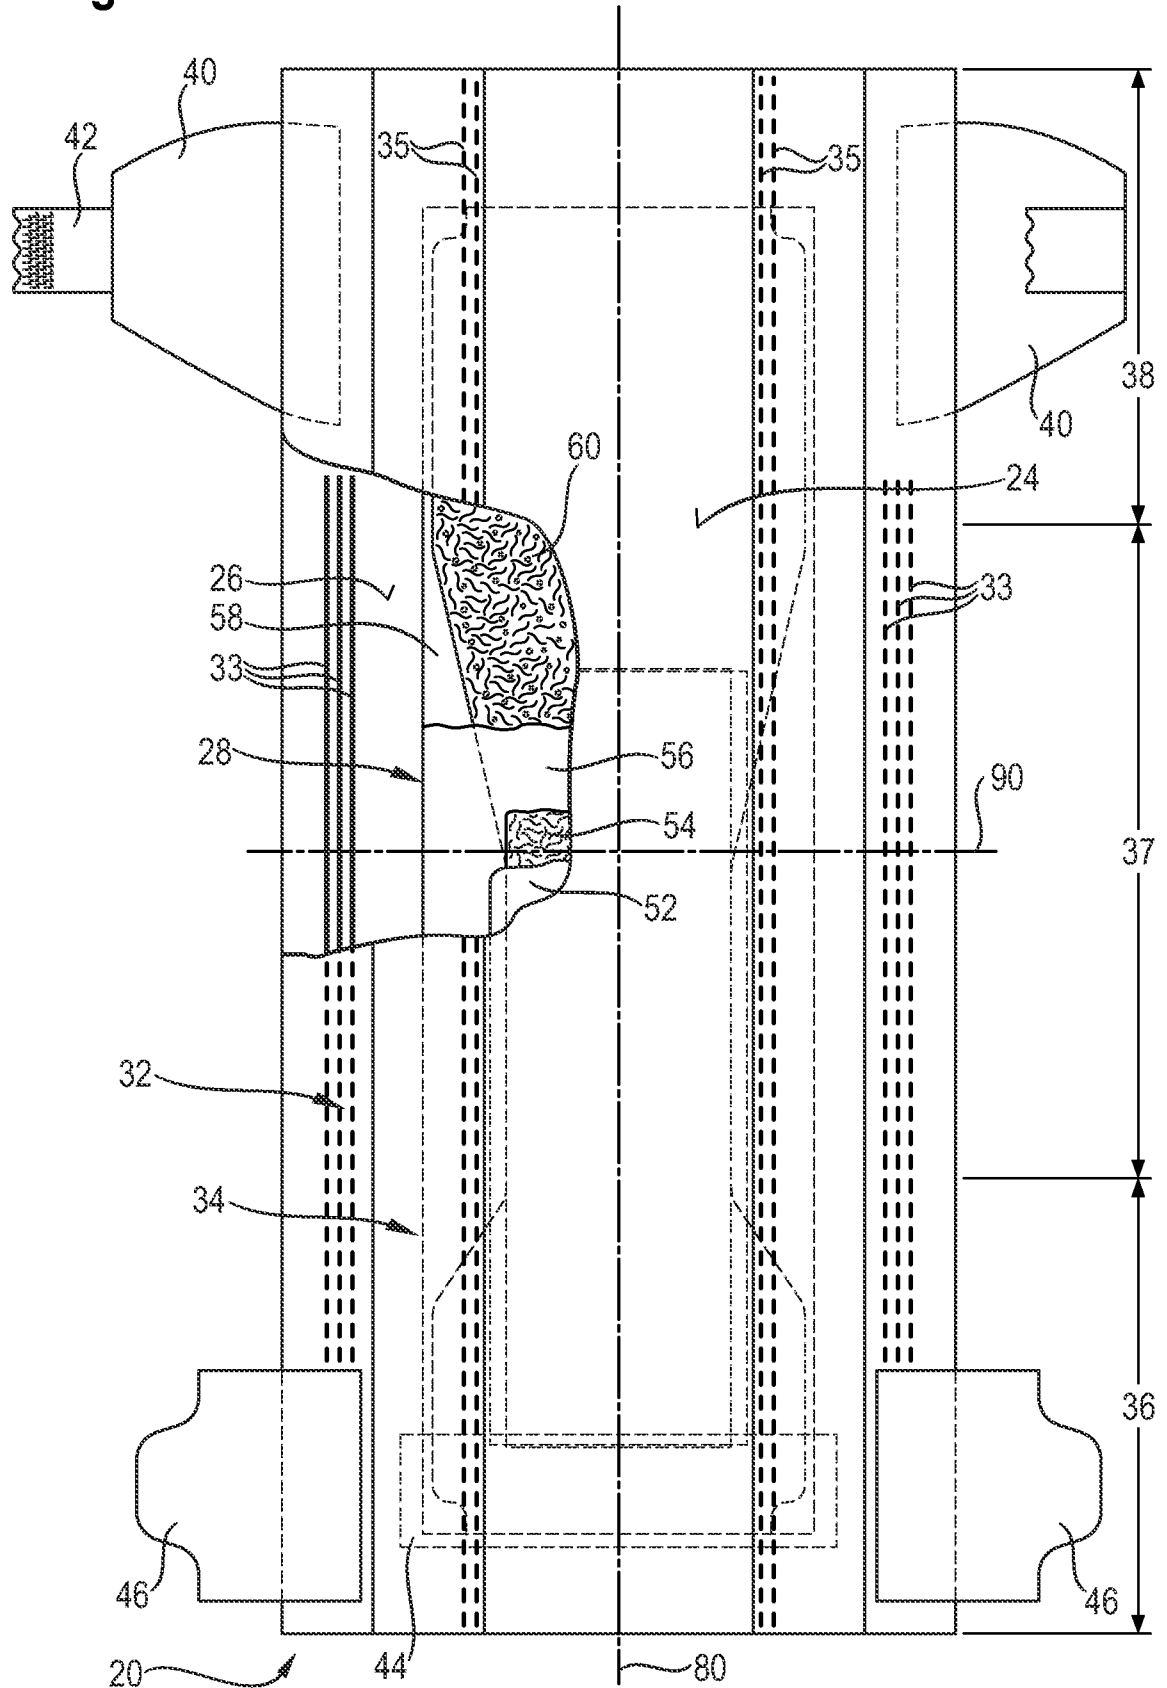

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2016/018839

A. CLASSIFICATION OF SUBJECT MATTER

INV. A61F13/472 A61F13/494 A61F13/475
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 6 186 996 B1 (MARTIN FRANCOISE [FR]) 13 February 2001 (2001-02-13) figures 1-5 column 6, line 17 - column 6, line 25 -----	1,3-10, 12,13,15 11,14, 16-18
X	US 2006/142723 A1 (KURODA KENICHIRO [JP] ET AL) 29 June 2006 (2006-06-29) paragraphs [0080], [0082]; figures 1-15 -----	1-4,18
X	EP 1 132 068 A2 (UNI CHARM CORP [JP]) 12 September 2001 (2001-09-12) figures 1-9 -----	1
X	EP 0 904 759 A2 (UNI CHARM CORP [JP]) 31 March 1999 (1999-03-31) figures 1,2 ----- -/-	1,3,4



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 May 2016

Date of mailing of the international search report

10/05/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Gennari, Silvia

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2016/018839

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2005/267434 A1 (TANIO TOSHIYUKI [JP] ET AL) 1 December 2005 (2005-12-01) figures 1-14 -----	1-18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2016/018839

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6186996	B1	13-02-2001	AT 162942 T 15-02-1998
		AU 682885 B2 23-10-1997	
		AU 7264794 A 06-02-1995	
		CA 2166481 A1 19-01-1995	
		CZ 9600058 A3 15-05-1996	
		DE 69408458 D1 12-03-1998	
		DE 69408458 T2 20-05-1998	
		DK 0707466 T3 04-05-1998	
		EP 0707466 A1 24-04-1996	
		ES 2114210 T3 16-05-1998	
		FR 2707159 A1 13-01-1995	
		GB 2280593 A 08-02-1995	
		GR 3026440 T3 30-06-1998	
		JP H08512224 A 24-12-1996	
		NZ 269157 A 26-11-1996	
		PL 312460 A1 29-04-1996	
		SK 2596 A3 01-10-1996	
		TN SN94077 A1 25-04-1995	
		US 6186996 B1 13-02-2001	
		WO 9501768 A2 19-01-1995	
		ZA 9404938 A 08-01-1996	
US 2006142723	A1	29-06-2006	CN 101090691 A 19-12-2007
			JP 4712374 B2 29-06-2011
			JP 2006181156 A 13-07-2006
			KR 20070090961 A 06-09-2007
			MY 145155 A 30-12-2011
			TW I299263 B 01-08-2008
			US 2006142723 A1 29-06-2006
			WO 2006070573 A1 06-07-2006
EP 1132068	A2	12-09-2001	AU 775321 B2 29-07-2004
			AU 2486501 A 13-09-2001
			BR 0100868 A 27-11-2001
			CA 2339439 A1 07-09-2001
			CN 1312059 A 12-09-2001
			EP 1132068 A2 12-09-2001
			ID 29650 A 13-09-2001
			JP 3859419 B2 20-12-2006
			JP 2001245928 A 11-09-2001
			KR 20010088432 A 26-09-2001
			MY 126015 A 29-09-2006
			TW 522006 B 01-03-2003
			US 2001021834 A1 13-09-2001
EP 0904759	A2	31-03-1999	AU 750726 B2 25-07-2002
			AU 8521398 A 22-04-1999
			BR 9804127 A 07-12-1999
			CA 2247587 A1 30-03-1999
			CN 1214234 A 21-04-1999
			DE 69821564 D1 18-03-2004
			DE 69821564 T2 03-06-2004
			EP 0904759 A2 31-03-1999
			ID 20969 A 01-04-1999
			JP 3385190 B2 10-03-2003
			JP H11104173 A 20-04-1999
			MY 118559 A 31-12-2004
			SG 77198 A1 19-12-2000

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2016/018839

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		TW 535572 U	01-06-2003
		US 6293934 B1	25-09-2001
		US 2002019619 A1	14-02-2002

US 2005267434 A1	01-12-2005	CN 1917837 A	21-02-2007
		JP 4554275 B2	29-09-2010
		JP 2005334294 A	08-12-2005
		KR 20070029136 A	13-03-2007
		TW I272093 B	01-02-2007
		US 2005267434 A1	01-12-2005
		WO 2005115288 A1	08-12-2005
