

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 199647861 B2**
(10) Patent No. **704151**

(54) Title
Device for regulating a water supply plant

(51)⁶ International Patent Classification(s)
E03B 007/07 E03B 005/00

(21) Application No: 199647861 (22) Application Date: 1996 .02 .01

(87) WIPO No: W096/23936

(30) Priority Data

(31) Number	(32) Date	(33) Country
19503403	1995 .02 .02	DE

(43) Publication Date : 1996 .08 .21
(43) Publication Journal Date : 1996 .10 .10
(44) Accepted Journal Date : 1999 .04 .15

(71) Applicant(s)
Leader Pumps Group S.p.A

(72) Inventor(s)
Claudio Carmignani; Ugo Ciurlo; Luciano Martini; Martin
Nimbach ; Luca Pinoli

(74) Agent/Attorney
WATERMARK PATENT and TRADEMARK ATTORNEYS,Locked Bag 5,HAWTHORN VIC 3122

(56) Related Art
US 5580221
US 3973877
US 4344741

OPI DATE 21/08/96 APPLN. ID 47861/96
AOJP DATE 10/10/96 PCT NUMBER PCT/EP96/00429



AU9647861

(51) Internationale Patentklassifikation ⁶ : E03B 7/07, 5/00		A1	(11) Internationale Veröffentlichungsnummer: WO 96/23936
		(43) Internationales Veröffentlichungsdatum:	8. August 1996 (08.08.96)
(21) Internationales Aktenzeichen: PCT/EP96/00429		(81) Bestimmungsstaaten: AU, CA, US, europäisches Patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) Internationales Anmeldedatum: 1. Februar 1996 (01.02.96)		Veröffentlicht Mit internationalem Recherchenbericht. Vor Ablauf der für Änderungen der Ansprüche zugelassenen Frist. Veröffentlichung wird wiederholt falls Änderungen eintreffen.	
(30) Prioritätsdaten: 195 03 403.1 2. Februar 1995 (02.02.95) DE		(71) Leader Pumps Group S.p.A Via Bonanno Pisano, 1, I-56031 Bagnina (PI), Italy	
(71) Anmelder (für alle Bestimmungsstaaten ausser US): RITEC S.R.L. [IT/IT], Via di Moriano, 1625, I-55100 Lucca (IT).			
(72) Erfinder; und			
(73) Erfinder/Anmelder (nur für US): CARMIGNANI, Claudio [IT/IT]; Via della Chiesa Trav., 1, I-55100 Lucca (IT). CIURLO, Ugo [IT/IT]; Via di Moriano, 1625, I-55100 Lucca (IT). MARTINI, Luciano [IT/IT]; Via di Campagna La Rotta, 76, I-56025 Pontedera (IT). NIMBACH, Martin [DE/DE]; Oscar-von-Miller-Strasse 26, D-86956 Schongau (DE). PINOLI, Luca [IT/IT]; Via Egola, 15, I-56028 S. Miniato (IT).			
(74) Anwalt: VOGESER, Werner; Albert-Roßhaupter-Strasse 65, D-81369 München (DE).			

(54) Title: DEVICE FOR REGULATING A WATER SUPPLY PLANT


(54) Bezeichnung: REGELVORRICHTUNG FÜR EINE WASSERVERSORGUNGSANLAGE

(57) Abstract

A device for constant, automatic regulation of water pressure and flow in a water supply plant, comprising an electric pump fitted in the main water pipe (11), an adjustable pressure switch connected to the main water pipe (11), and an electronic control unit (15), which switches the pump on if the pressure falls short of a predetermined level or switches it off if a predetermined pressure level is exceeded. The device is characterized in that a turbine (14), incorporated in the water pipe (11), acts as a sensor, cooperating with a rotation signal transmitter (16, 17) which is connected to the electronic control unit in order to keep the pump switched on as long as the sensor detects a flow of water.

(57) Zusammenfassung

Die Erfindung betrifft eine Vorrichtung zur automatischen und konstanten Regelung des Wasserdruckes und des Wasserflusses in einer Wasserversorgungsanlage, bestehend aus einer in die Hauptwasserleitung (11) geschalteten Elektropumpe, einem an die Hauptwasserleitung (11) angeschlossenen, einstellbaren Druckschalter, und einer Steuerelektronik (15), die bei Unterschreiten eines bestimmten Druckes die Pumpe einschaltet und bei Überschreiten eines bestimmten Druckes ausschaltet. Diese Vorrichtung zeichnet sich durch eine in der Wasserleitung (11) eingebaute Turbine (14) als Sensor aus, der mit einem Drehsignalgeber (16, 17) zusammenwirkt, der an die Steuerelektronik angeschlossen ist, um die Pumpe nach dem Einschalten solange in Betrieb zu halten, solange der Strömungssensor einen Wasserfluß feststellt.

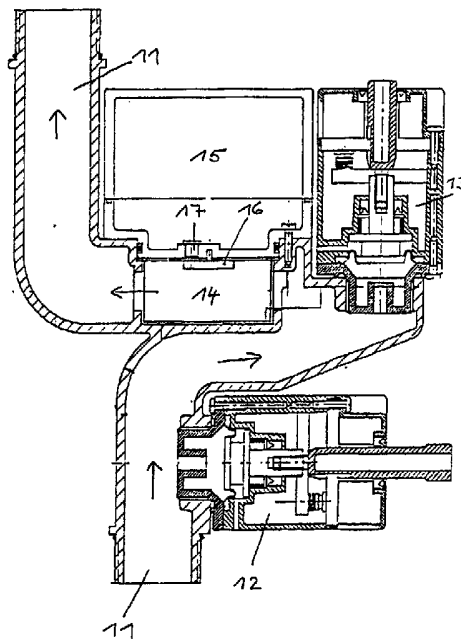

ABSTRACT

A device for constant, automatic regulation of water pressure and flow in a water supply plant, comprising an electric pump fitted in the main water pipe, and adjustable pressure switch connected to the main water pipe, and an electronic control unit, which switches the pump on if the pressure falls short of a predetermined level or switches it off if a predetermined pressure level is exceeded. The device is characterised in that a turbine, incorporate din the water pipe, acts as a sensor, cooperating with a rotation signal transmitter which is connected to the electronic control unit in order to keep the pump switched on as long as the sensor detects a flow of water.



DEVICE FOR CONTROLLING THE WATER PRESSURE AND FLOW IN A WATER SUPPLY UNIT

FIELD OF THE INVENTION

Control devices for automatically and constantly controlling the water
5 pressure and the water flow in a water supply system.

BACKGROUND OF THE INVENTION

Existing devices of this type use a differential pressure switch, resulting in
frequent switching on and off of the pump due to the pressure switch's relative
insensibility and therefore resulting in a pulsing water flow and disturbing noise.
10 The problem solved by this invention is to provide an improved device of the
above type producing an automatic and constant control of the water pressure
and water flow.

SUMMARY OF THE INVENTION

A device for constant, automatic regulation of water pressure and flow in a
15 water supply plant, comprising an electric pump fitted in the main water pipe, an
adjustable pressure switch connected to the main water pipe, and an electronic
control unit, which switches the pump on if the pressure falls short of a
predetermined level or switches it off if a predetermined pressure level is
exceeded. The device is characterised in that a turbine, incorporated in the
20 water pipe, acts as a sensor, cooperating with a rotation signal transmitter which
is connected to the electronic control unit in order to keep the pump switched on
as long as the sensor detects a flow of water.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the apparatus of this invention will be described
25 in detail below in connection with the following drawing: is:

FIG. 1 is a cross section through a pump assembly comprising the control
device of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

By using a turbine, switching on and off operations of the pump are
30 avoided, regardless of the admissible pressure ranges, since the turbine is also



driven by a low water flow, and the pump remains switched on also in case of low water use. A water wheel may be used instead of a turbine, as are usually incorporated in a water meter.

A preferred embodiment of the invention will be explained in detail
5 hereinafter with reference to the drawing showing a schematic cross sectional view of a part of the device according to the invention.

Referring to FIG. 1, water flows through an electric pump (not shown) at the bottom of the drawing in a water main 11 of a water supply system and leaves the system on top into a pipe system (not shown) connected with several users.

10 An adjustable pressure switch 13 is connected with water main 11 which switches on the pump at a minimum pressure of for example 1.5 to 2 bar to establish the necessary pressure. When water is drawn off a turbine 14 connected into the water main 11 is energised. The rotation of the turbine is signalled through a rotary signal unit comprising a magnet 16 supported on the
15 turbine shaft and a stationary magnetic field sensor to an electronic control unit 15 keeping the pump switched on until the turbine 14 acting as a flow sensor detects water use. The advantage of the turbine mainly lies in the fact that it responds to very low water use and that therefore the operation of the pump is controlled as desired. A minimum pressure switch 12 may be connected with
20 water main 11 switching off the pump in case of need to avoid a running dry of the pump when the pressure falls below a minimum pressure of for example 0.5 to 1 bar.

Instead of this minimum pressure switch 12 the electronic control unit may be arranged such that the pump switches off after a predetermined time period
25 during which the pressure adjusted on the pressure switch 13 falls below an adjusted pressure. This time period may be approximately 5 seconds.

A maximum pressure value does not need to be considered because it the pump's nominal pressure will match the system's maximum permitted pressure.



THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A control device for automatically and constantly controlling the water pressure and the water flow in a water supply system comprising:
an electronic pump connected to a water main;
a pressure switch connected to said water main and an electronic control system, said switch switching on said pump if the pressure falls below a predetermined value measured in a turbine connected with said water main and acting as a flow sensor in conjunction with a rotary signal detector and transmitter connected to said electronic control system, whereby said pump is kept in operation after said switching on as long as said flow sensor senses water flow.
2. The control device of claim 1 wherein said rotary signal transmitter further comprises a magnet connected to said turbine and a magnetic field sensor proximal said turbine.
3. The control device of claim 2 further comprising a minimum pressure switch connected to said water main.
4. The control device of claim 2 wherein said electronic control system switches off the pump after a predetermined time period of the pressure falls below an adjusted minimum pressure value.

DATED this 29th day of October 1998

LEADER PUMPS GROUP S.P.A.

WATERMARK PATENT & TRADEMARK ATTORNEYS
290 BURWOOD ROAD
HAWTHORN VICTORIA 3122
AUSTRALIA

VAX DOC023 AU4786196.WPC : SKP/SJM/RES



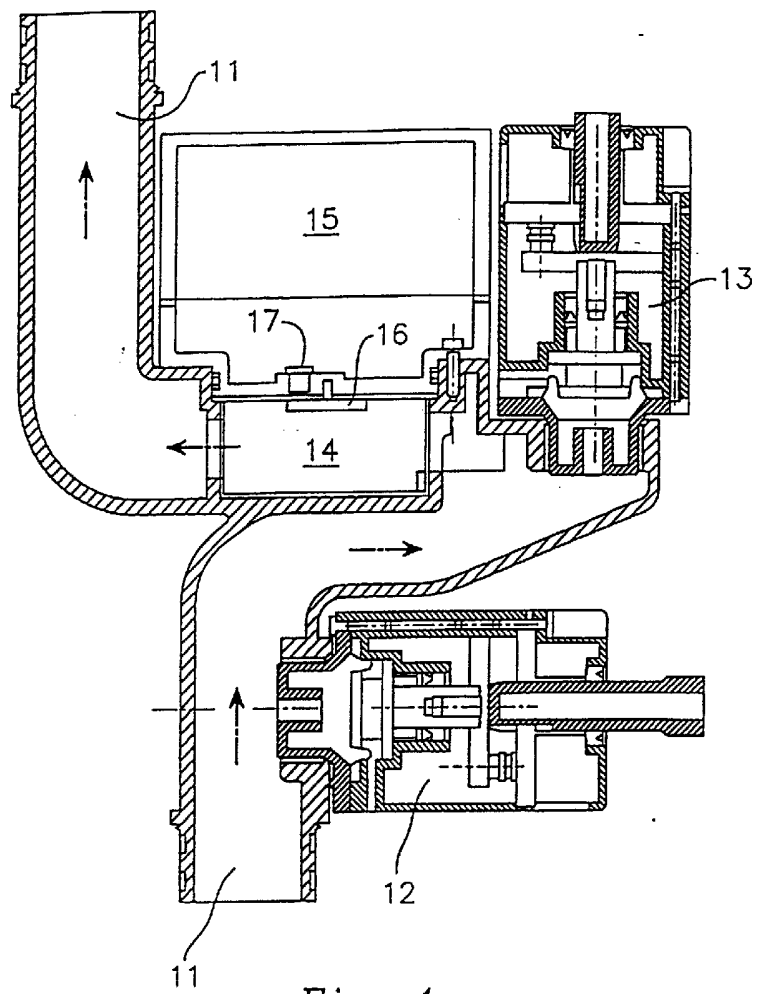


Fig. 1

