



(86) Date de dépôt PCT/PCT Filing Date: 2012/01/16
(87) Date publication PCT/PCT Publication Date: 2012/07/19
(45) Date de délivrance/Issue Date: 2017/05/16
(85) Entrée phase nationale/National Entry: 2013/07/11
(86) N° demande PCT/PCT Application No.: CN 2012/070404
(87) N° publication PCT/PCT Publication No.: 2012/095036
(30) Priorité/Priority: 2011/01/14 (CN201110008186.1)

(51) Cl.Int./Int.Cl. *H04N 19/159* (2014.01),
H04N 19/14 (2014.01), *H04N 19/176* (2014.01),
H04N 19/50 (2014.01)


(72) Inventeurs/Inventors:
LAI, CHANGCAI, CN;
LIN, YONGBING, CN;
ZHENG, XIAOZHEN, CN

(73) Propriétaire/Owner:
HUAWEI TECHNOLOGIES CO., LTD., CN

(74) Agent: SMART & BIGGAR

(54) Titre : PROCEDES DE CODAGE ET DE DECODAGE D'IMAGE, PROCEDE DE TRAITEMENT DE DONNEES
D'IMAGE ET APPAREIL CORRESPONDANT

(54) Title: INTRA BLOCK VIDEO CODING IN VIDEO WITH NEIGHBOURING INTER AND INTRA BLOCKS

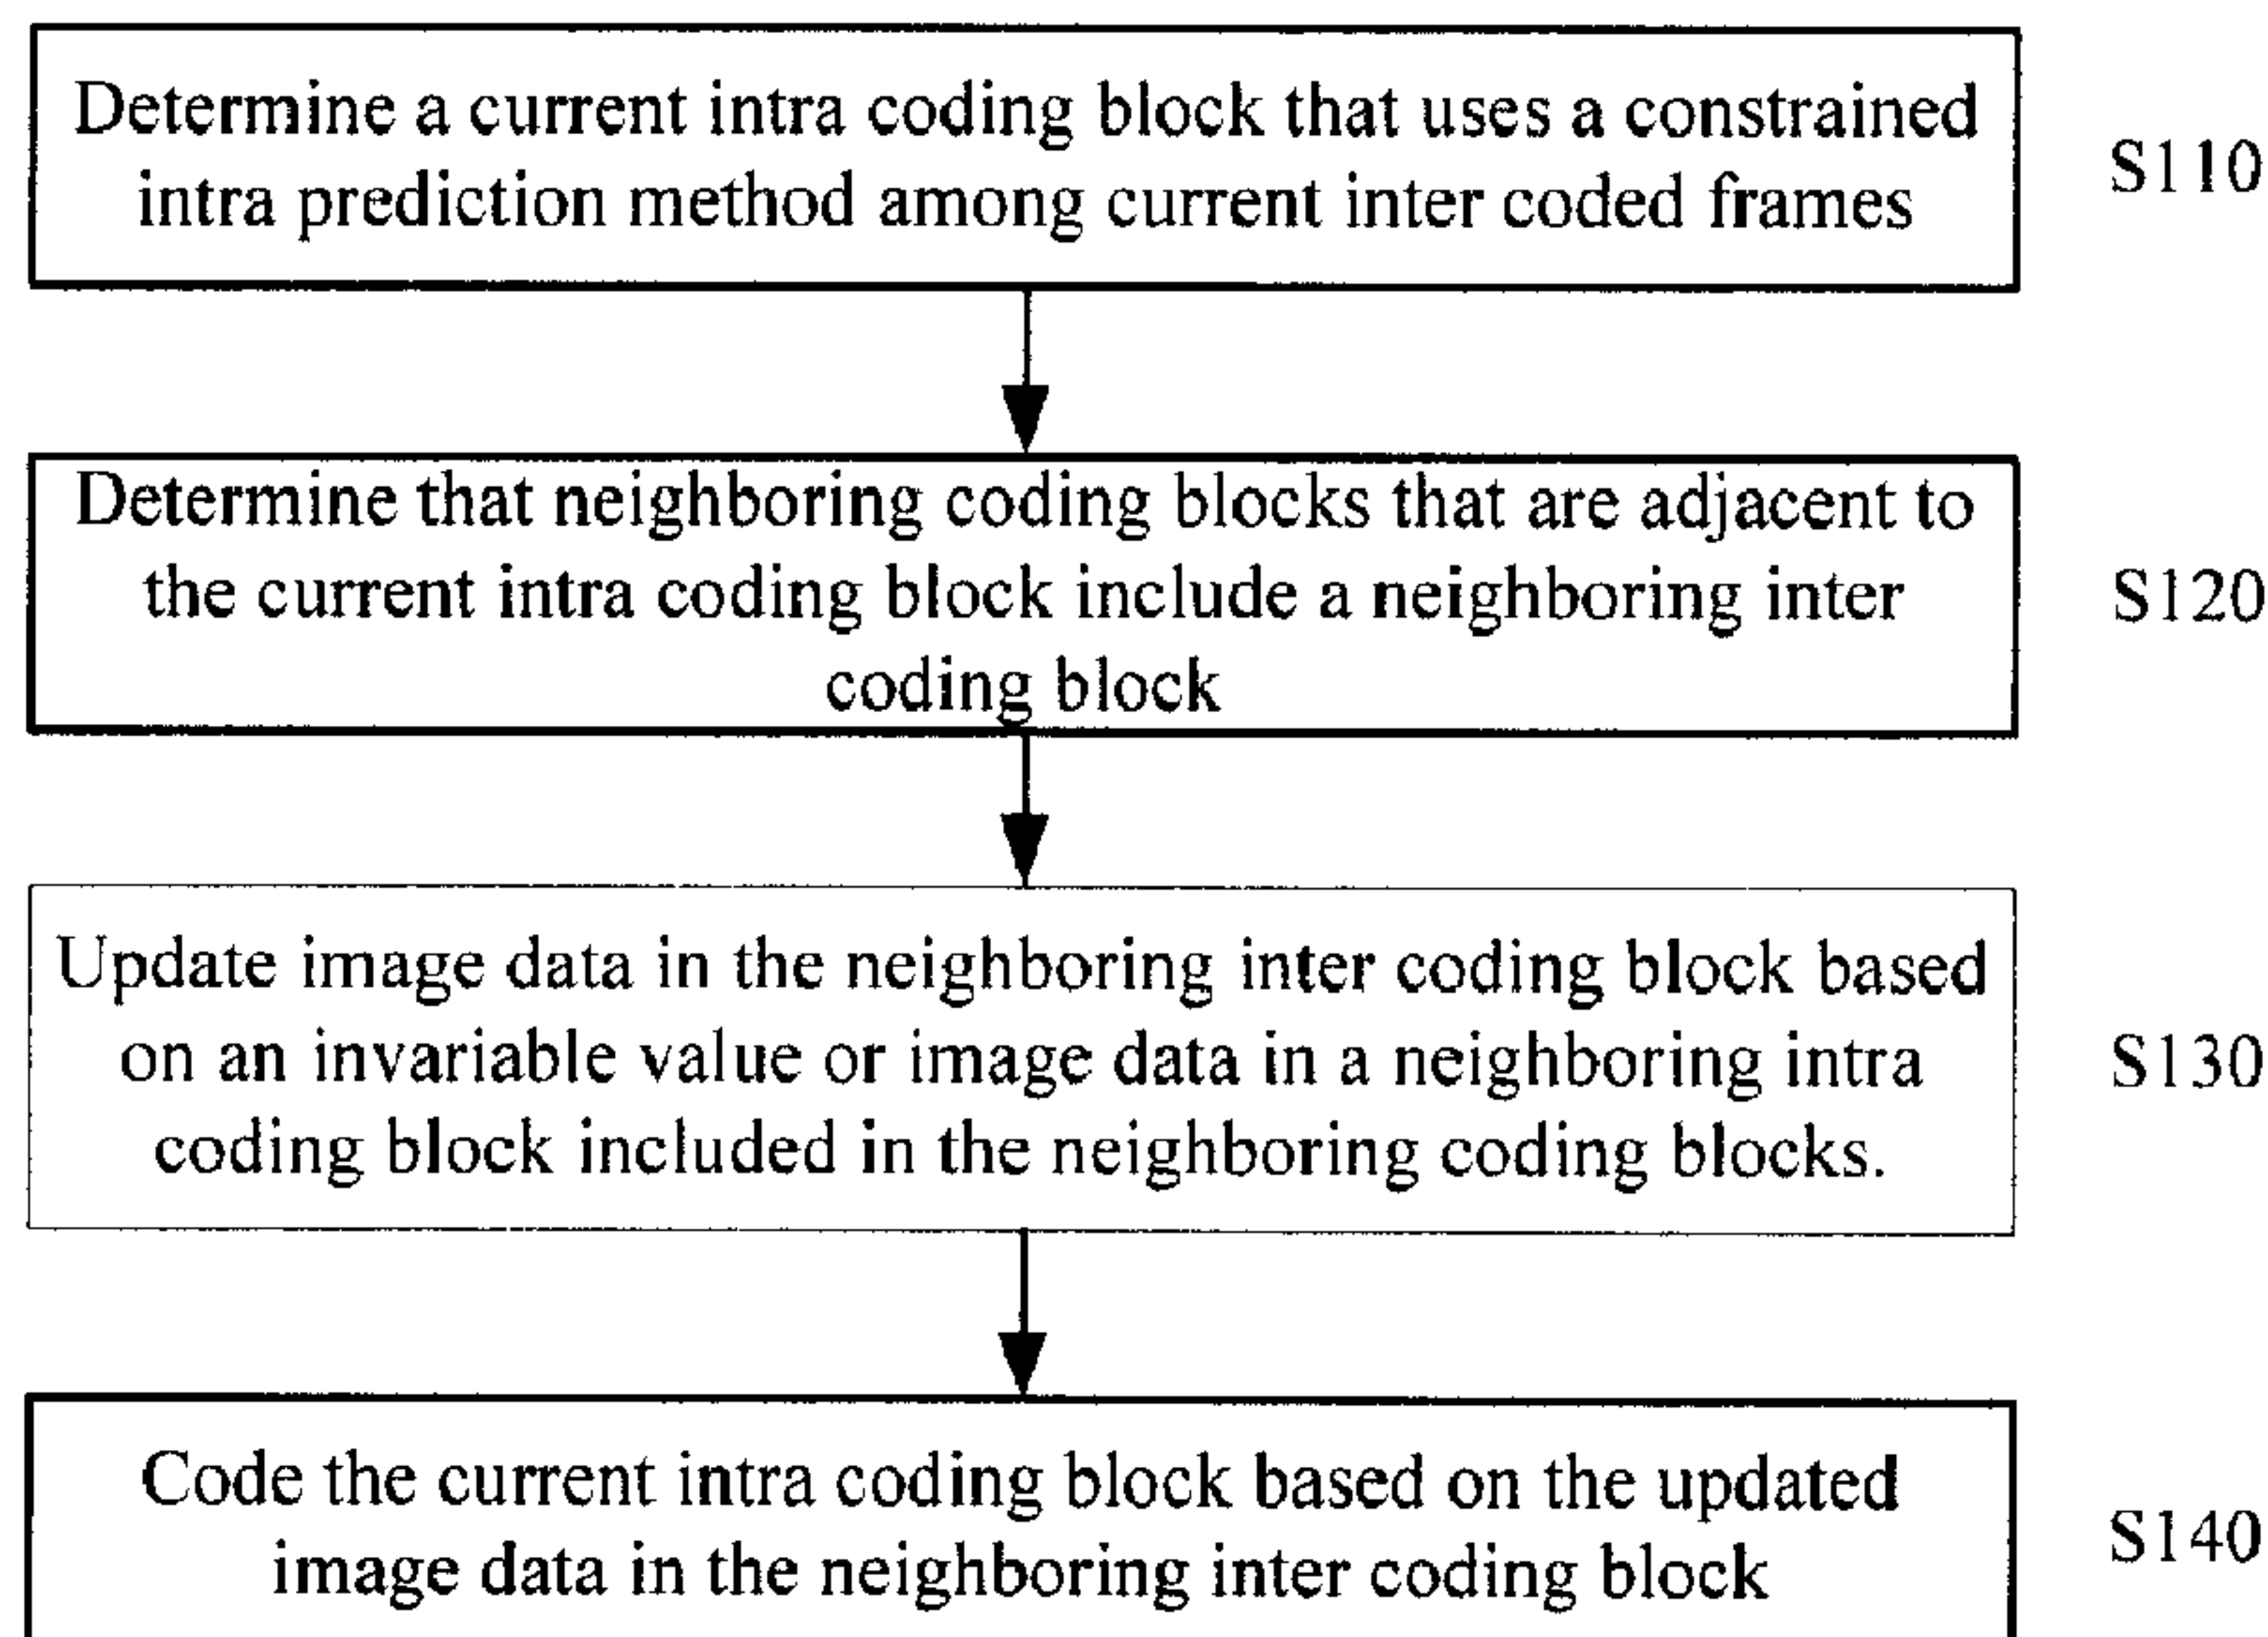

(57) Abrégé/Abstract:

The present invention discloses a method for coding an image, a method for decoding an image, a method for processing image data, and devices thereof. The method for coding the image according to the present invention includes: determining a current



(57) Abrégé(suite)/Abstract(continued):

intra coding block that uses a constrained intra prediction method among current inter coded frames; determining that neighboring coding blocks that are adjacent to the current intra coding block include a neighboring inter coding block; updating image data in the neighboring inter coding block based on an invariable value or image data in a neighboring intra coding block included in the neighboring coding blocks; and coding the current intra coding block based on the updated image data in the neighboring inter coding block. The device that is used for coding an image according to the present invention includes: a first determining module, a second determining module, an updating module, and an coding module. By using the methods and devices according to the present invention, the error recovery capability of an intra coding block may be improved, and the image data decoding quality may be improved.

ABSTRACT

The present invention discloses a method for coding an image, a method for decoding an image, a method for processing image data, and devices thereof. The method for coding the image according to the present invention includes: determining a current intra coding block that uses a
5 constrained intra prediction method among current inter coded frames; determining that neighboring coding blocks that are adjacent to the current intra coding block include a neighboring inter coding block; updating image data in the neighboring inter coding block based on an invariable value or image data in a neighboring intra coding block included in the neighboring coding blocks; and coding the current intra coding block based on the updated image data in the
10 neighboring inter coding block. The device that is used for coding an image according to the present invention includes: a first determining module, a second determining module, an updating module, and an coding module. By using the methods and devices according to the present invention, the error recovery capability of an intra coding block may be improved, and the image data decoding quality may be improved.

INTRA BLOCK VIDEO CODING IN VIDEO WITH NEIGHBOURING INTER AND INTRA BLOCKS

FIELD OF THE INVENTION

The present invention relates to the field of communications, and in particular to a
5 method for coding an image, a method for decoding an image, a method for processing image data,
and devices thereof in the field of communications.

BACKGROUND OF THE INVENTION

Video data inevitably suffers bit error or packet loss in cable networks and radio
networks, especially in radio networks. Video data after being efficiently compressed by tools such
10 as variable length coding has great relevance in semantics. As such, the video data is very sensitive
to network errors such as bit error and packet loss. Once a bit error occurs in the video data, not
only recovery of current video data is affected, but also the bit error spreads in time and space
domains. In addition, predictive coding of the video data also makes errors of a certain frame have
the effect of error accumulation on subsequent frames. Therefore, it is necessary to take relevant
15 measures to improve the capability of video data for resisting bit errors. Especially when certain
video frames already have transmission errors, video content needs to be recovered from the errors
as soon as possible, thereby providing favorable subjective experience for users.

Intra-frame refreshing method is a simple and efficient error recovery method, for
example, I-frame refreshing method, I-block refreshing method based on random or error tracking,
20 and adaptive intra-frame macroblock refreshing, and so on. An I-frame uses an intra-frame (INTRA)
coding method for coding, and therefore may be also called intra coded frame. The I-frame does not
need to refer to other frames. This frame is moderately compressed as a random access reference
point, and as an image. As refreshing the whole I-frame will result in frames with high code rates
that suddenly occur in bit stream, which will lead to a rather strong bit stream shock to the system.
25 Therefore, in practical, the frame is refreshed by refreshing partial coding blocks in the frame for
most of the time.

A P frame in video frames uses an inter-frame (INTER) coding method for coding, and
therefore the P frame may also be called inter coded frame. Inter-frame prediction of the P frame

needs to refer to previous P frames. Therefore, when a certain P frame has a transmission error, the error will be transferred to subsequent P frames, thereby resulting in severe degrade of the decoding quality of subsequent P frames. As such, to avoid degrade of the decoding quality, an intra refresh frame (Intra Refresh Frame, IR frame for short) may be defined in the P frame. Partial or all coding blocks in the IR frame use the intra-frame coding method for coding. The coding blocks that use intra-frame coding may also be called intra refreshing blocks. As such, the intra coding blocks (intra refreshing blocks) in the IR frame will not directly refer to the P frame before the IR frame for coding, but refer to neighboring coding blocks of the frame and use the intra-frame coding method for coding.

If a neighboring coding block of a certain intra coding block is an inter coding block, however, the inter coding block still refers to the previous P frame, the inter coding block may also accumulate certain transmission errors from the previous reference frames, and pass the errors to an intra coding block that is used for refreshing, so that the intra coding block is also adversely affected by transmission errors, thereby greatly reducing the due error recovery capability of the intra refreshing method, and affecting the decoding quality of image data such as a video.

SUMMARY OF THE INVENTION

[0001] As such, embodiments of the present invention provide a method for coding an image, a method for decoding an image, a method for processing image data, and devices thereof, which update the image data in neighboring inter coding blocks, and code or decode a current intra coding block by using the updated image data, thereby improving the error recovery capability of the intra coding block and improving the image data decoding quality.

[0002] In one aspect, an embodiment of the present invention provides a method for coding an image. The method includes: determining a current intra coding block that uses a constrained intra prediction method among current inter coded frames; determining that neighboring coding blocks that are adjacent to the current intra coding block include a neighboring inter coding block; updating image data in the neighboring inter coding block based on an invariable value or image data in a neighboring intra coding block included in the neighboring coding blocks; and coding the current intra coding block based on the updated image data in the neighboring inter coding block.

[0003] In another aspect, an embodiment of the present invention further provides a method for decoding an image. The method includes: determining a current intra coding block that uses a constrained intra prediction method among current inter coded frames; determining that neighboring coding blocks that are adjacent to the current intra coding block include a neighboring inter coding block; updating image data in the neighboring inter coding blocks based on an

invariable value or image data in a neighboring intra coding block included in the neighboring coding blocks; and decoding the current intra coding block based on the updated image data in the neighboring inter coding block.

5 In still another aspect, an embodiment of the present invention further provides a method for processing image data. The method includes: determining that all coding blocks in a current coding object use a constrained intra prediction method; among neighboring coding blocks that are adjacent to a current intra coding block, determining a specific neighboring coding block that belongs to a different coding object from the current intra coding block; determining that the specific neighboring coding block is a neighboring inter coding block that uses an inter-frame
10 coding method for coding; updating image data in the neighboring inter coding block based on an invariable value or image data in a neighboring intra coding block included in the neighboring coding blocks; and coding or decoding the current intra coding block based on the updated image data in the neighboring inter coding block.

15 In still another aspect, an embodiment of the present invention further provides a device for coding an image. The device includes: a first determining module, configured to determine a current intra coding block that uses a constrained intra prediction method among current inter coded frames; a second determining module, configured to determine that neighboring coding blocks that are adjacent to the current intra coding block include a neighboring inter coding block; an updating module, configured to update image data in the neighboring inter coding blocks based on an
20 invariable value or image data in a neighboring intra coding block included in the neighboring coding blocks; and an coding module, configured to code the current intra coding block based on the updated image data in the neighboring inter coding block.

25 In still another aspect, an embodiment of the present invention further provides a device for decoding an image. The device includes: a first determining module, configured to determine a current intra coding block that uses a constrained intra prediction method among current inter coded frames; a second determining module, configured to determine that neighboring coding blocks that are adjacent to the current intra coding block include a neighboring inter coding block; an updating module, configured to update image data in a neighboring intra coding blocks based on an invariable value or image data in the neighboring inter coding block included in the neighboring
30 coding blocks; and a decoding module, configured to decode the current intra coding block based on the updated image data in the neighboring inter coding block.

In still another aspect, an embodiment of the present invention further provides a device for processing image data. The device includes: a first determining module, configured to determine that all coding blocks in a current coding object use a constrained intra prediction method; a second

52663-57

determining module, configured to determine, among neighboring coding blocks that are adjacent to a current intra coding block, a specific neighboring coding block that belongs to a different coding object from the current intra coding block; a third determining module, configured to determine that the specific neighboring coding block is a neighboring inter coding block that uses an inter-frame coding method for coding; an updating module, configured to update image data in the neighboring inter coding block based on an invariable value or image data in a neighboring intra coding block included in the neighboring coding blocks; and an coding/decoding module, configured to code or decode the current intra coding block based on the updated image data in the neighboring inter coding block.

10 In still another aspect, an embodiment of the present invention provides a method for coding an image, comprising: determining a current intra coding block that uses a constrained intra prediction method among current inter coded frames; determining that neighboring coding blocks that are adjacent to the current intra coding block comprise a neighboring inter coding block; updating the neighboring coding blocks with an invariable
15 value if all of the neighboring coding blocks are determined as neighboring inter coding blocks; otherwise, updating at least one pixel data in one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block based on at least one pixel data determined from one row or one column of pixel data in a neighboring intra coding block adjacent to the current intra coding block, and updating pixel data in another
20 neighboring inter coding block that needs to be updated with the already updated pixel data in the neighboring inter coding block; and coding the current intra coding block based on the updated pixel data in the neighboring inter coding block.

In still another aspect, an embodiment of the present invention provides a method for decoding an image, comprising: determining a current intra coding block that uses
25 a constrained intra prediction method among current inter coded frames; determining that neighboring coding blocks that are adjacent to the current intra coding block comprise a neighboring inter coding block; updating the neighboring coding blocks with an invariable value if all of the neighboring coding blocks are determined as neighboring inter coding blocks; otherwise, updating at least one pixel data in one row or one column of pixel data in

52663-57

the neighboring inter coding block adjacent to the current intra coding block based on at least one pixel data determined from one row or one column of pixel data in the neighboring intra coding block adjacent to the current intra coding block; updating pixel data in another neighboring inter coding block that needs to be updated with the already updated pixel data in
 5 the neighboring inter coding block; and decoding the current intra coding block based on the updated pixel data in the neighboring inter coding block.

In still another aspect, an embodiment of the present invention provides a method for processing image data, comprising: determining that all coding blocks in a current coding object use a constrained intra prediction method; among neighboring coding blocks
 10 that are adjacent to a current intra coding block, determining a specific neighboring coding block that belongs to a different coding object from the current intra coding block; determining that the specific neighboring coding block is a neighboring inter coding block that uses an inter-frame coding method for coding; updating the neighboring coding blocks with an invariable value if all of the neighboring coding blocks are determined as neighboring
 15 inter coding blocks; otherwise, updating at least one pixel data in one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block based on at least one pixel data determined from one row or one column of pixel data in a neighboring intra coding block adjacent to the current intra coding block, and updating pixel data in another neighboring inter coding block that needs to be updated with the already
 20 updated pixel data in the neighboring inter coding block; and coding or decoding the current intra coding block based on the updated pixel data in the neighboring inter coding block.

In still another aspect, an embodiment of the present invention provides a device for coding an image, wherein the device comprises: a first determining module, configured to determine a current intra coding block that uses a constrained intra prediction method among
 25 current inter coded frames; a second determining module, configured to determine that neighboring coding blocks that are adjacent to the current intra coding block comprise a neighboring inter coding block; an updating module, configured to update the neighboring coding blocks with an invariable value if all of the neighboring coding blocks are determined as neighboring inter coding blocks; otherwise, update at least one pixel data in one row or one

52663-57

column of pixel data in the neighboring inter coding block adjacent to the current intra coding block based on at least one pixel data determined from one row or one column of pixel data in the neighboring intra coding block adjacent to the current intra coding block, the updating module, further configured to update image data in another neighboring inter coding block
 5 that needs to be updated with the already updated pixel data in the neighboring inter coding block; and a coding module, configured to code the current intra coding block based on the updated pixel data in the neighboring inter coding block.

In still another aspect, an embodiment of the present invention provides a device for decoding an image, wherein the device comprises: a first determining module, configured
 10 to determine a current intra coding block that uses a constrained intra prediction method among current inter coded frames; a second determining module, configured to determine that neighboring coding blocks that are adjacent to the current intra coding block comprise a neighboring inter coding block; an updating module, configured to update the neighboring coding blocks with an invariable value if all of the neighboring coding blocks are determined
 15 as neighboring inter coding blocks; otherwise, update at least one pixel data in one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block based on at least one pixel data determined from one row or one column of pixel data in the neighboring intra coding block adjacent to the current intra coding block; the updating module, further configured to update image data in another neighboring inter coding block
 20 that needs to be updated with the already updated pixel data in the neighboring inter coding block; and a decoding module, configured to decode the current intra coding block based on the updated pixel data in the neighboring inter coding block.

In still another aspect, an embodiment of the present invention provides a device for processing image data, wherein the device comprises: a first determining module,
 25 configured to determine that all coding blocks in a current coding object use a constrained intra prediction method; a second determining module, configured to determine, among neighboring coding blocks that are adjacent to a current intra coding block, a specific neighboring coding block that belongs to a different coding object from the current intra coding block; a third determining module, configured to determine that the specific

52663-57

neighboring coding block is a neighboring inter coding block that uses an inter-frame coding method for coding; an updating module, configured to update the neighboring coding blocks with an invariable value if all of the neighboring coding blocks are determined as neighboring inter coding blocks; otherwise, update at least one pixel data in one row or one column of

5 pixel data in the neighboring inter coding block adjacent to the current intra coding block based on at least one pixel data determined from one row or one column of pixel data in the neighboring intra coding block adjacent to the current intra coding block; the updating module, further configured to update image data in another neighboring inter coding block that needs to be updated with the already updated pixel data in the neighboring inter coding

10 block; and an coding/decoding module, configured to code or decode the current intra coding block based on the updated pixel data in the neighboring inter coding block.

52663-57

Based on the technical solutions, the methods and devices according to the embodiments of the present invention update the image data in neighboring inter coding blocks, and code or decode the current intra coding block by using the updated image data, so that inter coding blocks referenced by the intra coding block will not pass on accumulated errors to the intra coding block, thereby improving the error recovery capability of the intra coding block and improving the image data decoding quality.

BRIEF DESCRIPTION OF THE DRAWINGS

To illustrate the technical solutions in the embodiments of the present invention more clearly, the following briefly describes the accompanying drawings required for describing the embodiments of the present invention. Apparently, the accompanying drawings in the following description merely show some embodiments of the present invention, and persons of ordinary skill in the art can derive other drawings from these accompanying drawings without creative efforts.

FIG. 1 is a schematic diagram of an application scenario according to an embodiment of the present invention;

FIG. 2 is a schematic diagram of a method for coding an image according to an embodiment of the present invention;

FIG. 3 is a schematic diagram of update processing according to another embodiment of the present invention;

FIG. (a) to FIG. (c) in FIG. 4 are schematic diagrams of update processing according to still another embodiment of the present invention;

FIG. 5 is a schematic diagram of a method for decoding an image according to an embodiment of the present invention;

FIG. 6 is a schematic diagram of a method for processing image data according to an embodiment of the present invention;

FIG. 7 is a block diagram of a device for coding an image according to an embodiment of the present invention;

FIG. 8 is a block diagram of a device for coding an image according to another embodiment of the present invention;

5 FIG. 9 is a block diagram of a device for decoding an image according to an embodiment of the present invention;

FIG. 10 is a block diagram of a device for decoding an image according to another embodiment of the present invention; and

10 FIG. 11 is a block diagram of a device for processing image data according to an embodiment of the present invention.

DETAILED DESCRIPTION OF THE EMBODIMENTS

The following clearly and completely describes the technical solutions according to the embodiments of the present invention with reference to the accompanying drawings in the embodiments of the present invention. Apparently, the embodiments in the following description are
15 merely a part rather than all of the embodiments of the present invention. All other embodiments obtained by persons of ordinary skill in the art based on the embodiments of the present invention without creative efforts shall fall within the protection scope of the present invention.

FIG. 1 shows a scenario of an application according to an embodiment of the present invention. As shown in FIG. 1, video frames may include an intra coded frame (as shown by an I-frame in FIG. 1) and an inter coded frame (as shown by a P frame in FIG. 1). The intra coded
20 frame and inter coded frame may then be divided into multiple coding blocks. All coding blocks in the intra coded frame are intra coding blocks, and coding blocks in the inter coded frame may include intra coding blocks and may also include inter coding blocks, where the intra coded frame and intra coding blocks use intra-frame coding method for coding or decoding, and the inter coded
25 frame and inter coding blocks use the inter-frame coding method for coding or decoding.

To avoid accumulation of transmission errors and ensure the image data decoding quality, certain intra refreshing frames (as shown by an IR frame in FIG. 1) may be defined in the inter coded frame to force certain coding blocks in the intra refreshing frames to use the intra-frame coding method for coding or decoding. These coding blocks belong to intra coding blocks, and may
30 also be called intra refreshing blocks. When neighboring coding blocks of an intra coding block are inter coding blocks, the inter coding blocks may have already accumulated certain transmission errors. If these inter coding blocks are directly made reference to, the intra coding block may also be affected by the transmission errors, thereby making the intra coding block hard to ensure the due

error recovery capability of the intra refreshing method. As shown in FIG. 1, neighboring blocks A and B of an intra coding block E are error blocks with transmission errors. To avoid accumulation of the transmission errors, the reference characteristics of the intra coding block need to be restricted according to the embodiment of the present invention.

5 FIG. 2 is a schematic diagram of a method for coding an image according to an embodiment of the present invention. As shown in FIG. 2, this method includes:

 S110: Determine a current intra coding block that uses a constrained intra prediction method among current inter coded frames, where the constrained intra prediction method means that during coding, decoding, or prediction of an intra coding block, reference data of the intra
10 coding block only can come from image data of intra coding blocks that are adjacent to the intra coding block, or a default value (or invariable value), but cannot come from image data of neighboring inter coding blocks.

 S120: Determine that neighboring coding blocks that are adjacent to the current intra coding block include a neighboring inter coding block, where the neighboring coding blocks are
15 coding blocks that are adjacent to or connected to the current intra coding block, and for the current intra coding block, its neighboring coding blocks may include a left neighboring coding block, an upper neighboring coding block, a lower left neighboring coding block, and an upper right neighboring coding block. Certainly, persons skilled in the art may further think of that the neighboring coding blocks may further include a right neighboring coding block, a lower
20 neighboring coding block, an upper left neighboring coding block, and a lower right neighboring coding block.

 S130: Update image data in the neighboring inter coding block based on an invariable value or image data in a neighboring intra coding block included in the neighboring coding blocks.

 S140: Code the current intra coding block based on the updated image data in the
25 neighboring inter coding block.

 For a current coding block of a current inter coded frame, whether the current coding block is an intra coding block that uses an intra-frame coding method for coding, and whether the current coding block uses the constrained intra prediction method for prediction, coding, or decoding are judged. If it is determined that the current coding block is a current intra coding block
30 that uses the constrained intra prediction method, coding methods of neighboring coding blocks of the current intra coding block are further judged. If the neighboring coding blocks include an inter coding block, the inter coding block cannot serve as a reference coding block for the current intra coding block. That is, in intra prediction, image data in the inter coding block cannot be used to predict the current intra coding block. As such, before the intra prediction, the image data in the

neighboring inter coding block may be updated based on the invariable value or the image data in the neighboring intra coding block included in the neighboring coding blocks. Then, the current intra coding block may be coded based on the updated image data in the neighboring inter coding block.

5 After updating, the image data that is to be referenced in the inter coding block may be referenced according to a normal method, where the image data that is to be referenced indicates pixels in the neighboring blocks that may be used during the prediction for the current intra coding block. As the image data of the inter coding block is updated, the included image data that is to be referenced is no longer the pixels that may have transmission errors in the inter coding block, and as
10 such may serve as pixels referenced by the current intra coding block, thereby ensuring that the current intra coding block will not refer to the image data in the neighboring inter coding block, which may stop the transmission errors from being passed on to the current intra coding block.

 According to the method in the embodiment of the present invention, the image data in neighboring inter coding blocks is updated, and the current intra coding block is coded or decoded
15 by using the updated image data, so that inter coding blocks referenced by the intra coding block will not pass on accumulated errors to the intra coding block, thereby improving the error recovery capability of the intra coding block and improving the image data decoding quality.

 In the embodiment of the present invention, a judgment may first be made about whether the current coding block is an intra coding block. If the current coding block is an inter coding
20 block, the current image data processing procedure is ended, and subsequent processing for the next coding block in the current inter coded frame is performed. When it is determined that the current coding block is an intra coding block, a judgment is further made about whether the current intra coding block uses the constrained intra prediction method for prediction. If not, no subsequent update processing is necessary, and the current procedure ends. Optionally, a judgment may first
25 also be made about whether the current coding block uses the constrained intra prediction method for prediction. When it is determined that the current coding block uses the constrained intra prediction method, a judgment is made about the coding method of the current coding block. Persons skilled in the art may further think of that judging the coding method of the current coding block and judging whether the constrained intra prediction method is used for prediction, coding, or
30 decoding are performed simultaneously.

 In the embodiment of the present invention, during decoding, an identifier in a bit stream may be used to judge a coding method of a current coded frame to determine whether the current coded frame is an inter coded frame; and during coding, a judgment may be made about whether the current coded frame is an inter coded frame through coding parameters and coding procedures.

Likewise, for judging a coding method of a coding block, each coding block may have an identifier that indicates the coding method of the coding block. During decoding, whether the current coding block uses the intra-frame coding method for coding may be determined according to a corresponding coding method identifier of the current coding block in the bit stream; and during
 5 decoding, whether the current coding block is an intra coding block may also be determined through coding parameters and coding procedures. Persons skilled in the art may understand that other methods well-known in the art may further be used to judge the coding methods of the coded frame and coding block.

In the embodiment of the present invention, whether the current coding block uses the
 10 constrained intra prediction method for coding or decoding may be determined according to a constrained intra prediction flag (Constrained Intra Prediction Flag) in the bit stream. For example, when the constrained intra prediction flag is 1, it indicates that the current coding block uses the constrained intra prediction method for prediction, coding, or decoding; and when the constrained intra prediction flag is 0, it indicates that the current coding block does not use the constrained intra
 15 prediction method for prediction, coding, or decoding. Persons skilled in the art may understand that other methods well-known in the art may further be used to judge the constrained intra prediction method.

FIG. 3 is a schematic diagram of update processing according to an embodiment of the present invention by taking hierarchical blocks of high efficiency video coding (High Efficiency
 20 Video Coding, HEVC for short) for example. During the update processing for the image data in the neighboring inter coding block, all image data in the neighboring inter coding block may be updated. Optionally, only one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block may be updated. Persons skilled in the art may understand that multiple rows or multiple columns of the pixel data in the neighboring inter coding block may
 25 be updated.

In the embodiment of the present invention, during the update processing for the image data in the neighboring inter coding block, it may first be determined that the neighboring coding blocks further include at least one neighboring intra coding block. That is, the neighboring coding blocks of the current intra coding block include the inter coding block and intra coding block
 30 simultaneously. In the at least one neighboring intra coding block, a neighboring intra coding block that is most adjacent to the current neighboring inter coding block may be determined, and the image data in the neighboring inter coding block may be updated based on image data in the most neighboring intra coding block. Optionally, a pixel value in the most neighboring intra coding block that is nearest to the neighboring inter coding block may be filled to the neighboring inter coding

block.

As shown in FIG. (a) in FIG. 4, the current intra coding block E includes four neighboring coding blocks, that is, upper left neighboring coding block A, upper neighboring coding block B, upper right neighboring coding block C, and left neighboring coding block D, where only the upper right neighboring coding block C is determined as a neighboring intra coding block. The following takes update processing for image data in the neighboring inter coding block B for example. Among the four neighboring coding blocks, only the upper right neighboring coding block C is an intra coding block. In this case, a pixel value in the upper right neighboring coding block C that is nearest to the neighboring inter coding block B may be filled to the neighboring inter coding block B. Optionally, the pixel value may be filled to a row of pixels in the neighboring inter coding block B adjacent to the current intra coding block E, as shown in FIG. (a) in FIG. 4.

When the neighboring coding blocks include multiple intra coding blocks, as shown in FIG. (b) in FIG. 4, the upper right neighboring coding block C and left neighboring coding block D are both neighboring intra coding blocks. During the update processing for the image data in the neighboring inter coding block B, it may be determined that the left neighboring coding block D is nearest the neighboring inter coding block B. As such, the image data in the neighboring inter coding block B may be updated to image data in the left neighboring coding block D.

In another embodiment of the present invention, when determining that the neighboring coding blocks include at least two neighboring intra coding blocks, the image data in the neighboring inter coding block may be updated based on image data in the at least two neighboring intra coding blocks through weighted average of distances from the at least two neighboring intra coding blocks to the current intra coding block.

The following takes FIG. (c) in FIG. 4 for example. There are neighboring intra coding blocks at both sides of the neighboring inter coding block B, that is, the upper left neighboring coding block A and upper right neighboring coding block C. Assume that pixel values in the upper left neighboring coding block A and upper right neighboring coding block C that are nearest to the neighboring inter coding block B are P_r and P_l respectively, and the shortest distances from the current pixel of the neighboring inter coding block B are a and b respectively. Pixel value R may be filled to a current pixel in the neighboring inter coding block B. The pixel value R may be expressed by formula (1):

$$R = (P_r \times a + P_l \times b) / (a + b) \quad (1)$$

In another embodiment of the present invention, during the update processing for the image data in the neighboring inter coding block, when it is determined that all neighboring coding blocks are inter coding blocks, the image data in the neighboring inter coding block may be updated

to an invariable value, for example, 128 or another invariable value. Optionally, the image data in all neighboring coding blocks may be directly updated to an invariable value after it is determined that the neighboring coding blocks include neighboring inter coding blocks, regardless of whether the neighboring coding blocks include the neighboring intra coding block.

5 For the processed neighboring inter coding block, as its image data to be referenced comes from the invariable value or neighboring intra coding block, the neighboring inter coding block after the update processing may serve as a reference coding block for the current intra coding block. In addition, the neighboring inter coding block may be viewed as an intra coding block. In another aspect, during update processing for image data of other neighboring inter coding blocks,
10 the updated image data in the neighboring inter coding block may be filled to other neighboring inter coding blocks according to the preceding method.

According to the method in the embodiment of the present invention, the image data in neighboring inter coding blocks is updated, and the current intra coding block is coded or decoded by using the updated image data, so that inter coding blocks referenced by the intra coding block
15 will not pass on accumulated errors to the intra coding block, thereby improving the error recovery capability of the intra coding block and improving the image data decoding quality; in addition, as the intra coding block may refer to image data of neighboring coding blocks, the method according to the embodiment of the present invention may further improve the coding or decoding efficiency of the intra coding block.

20 FIG. 5 is a schematic diagram of a method for decoding an image according to an embodiment of the present invention. As shown in FIG. 5, this method includes:

S210: Determine a current intra coding block that uses a constrained intra prediction method among current inter coded frames, where the constrained intra prediction method means that during coding, decoding, or prediction of an intra coding block, reference data of the intra
25 coding block only can come from image data of intra coding blocks that are adjacent to the intra coding block, or a default value (or invariable value), but cannot come from image data of neighboring inter coding blocks.

S220: Determine that neighboring coding blocks that are adjacent to the current intra coding block include a neighboring inter coding block, where the neighboring coding blocks are
30 coding blocks that are adjacent to or connected to the current intra coding block, and for the current intra coding block, its neighboring coding blocks may include a left neighboring coding block, an upper neighboring coding block, a lower left neighboring coding block, and an upper right neighboring coding block. Certainly, persons skilled in the art may further think of that the neighboring coding blocks may further include a right neighboring coding block, a lower

neighboring coding block, an upper left neighboring coding block, and a lower right neighboring coding block.

S230: Update image data in the neighboring inter coding block based on an invariable value or image data in a neighboring intra coding block included in the neighboring coding blocks.

5 S240: Decode the current intra coding block based on the updated image data in the neighboring inter coding block.

In the embodiment of the present invention, it may be determined according to a corresponding coding method identifier of the current coding block of a current inter coded frame in a bit stream that a current coding block uses an intra-frame coding method for coding. Optionally, it
10 may be determined according to a constrained intra prediction flag in the bit stream that the current coding block uses the constrained intra prediction method for decoding. Optionally, only one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block may be updated. Persons skilled in the art may understand that multiple rows or multiple columns of the pixel data in the neighboring inter coding block may be updated.

15 In the embodiment of the present invention, all update processing methods as shown in FIG. 3 to FIG. 4 may also be used to update the image data in the neighboring inter coding block, which are not described herein for conciseness.

According to the method in the embodiment of the present invention, the image data in neighboring inter coding blocks is updated, and the current intra coding block is coded or decoded
20 by using the updated image data, so that inter coding blocks referenced by the intra coding block will not pass on accumulated errors to the intra coding block, thereby improving the error recovery capability of the intra coding block and improving the image data decoding quality and efficiency.

The following describes the coding procedure and decoding procedure of the method according to the embodiment of the present invention.

25 In the coding procedure, the coding method of the current coding block may be judged first according to coding parameters and coding procedure. If the current coding block is an intra coding block that uses an intra-frame coding method for coding in an inter coded frame, a judgment may be made about whether the current coding block uses the constrained intra prediction method for prediction according to, for example, a constrained intra prediction flag in the bit stream. For the
30 current intra coding block that uses the constrained intra prediction method, coding methods of its neighboring coding blocks are then judged. When it is determined that the neighboring coding blocks include the neighboring inter coding block, the pixel data to be referenced in the inter coding block may be updated based on the invariable value or the image data in the neighboring intra coding block included in the neighboring coding blocks. Then the current intra coding block may be

intra predicted to obtain residual data. The residual data is converted and quantized to obtain a quantization coefficient. The quantization coefficient may be finally entropy coded.

In the decoding procedure, the bit stream may first be parsed to obtain a prediction coding method and quantization coefficient of a decoding block in the current inter coded frame.

5 For example, it may be determined according to a corresponding coding method identifier of the current coding block in the bit stream whether the current coding block uses the intra-frame coding method for coding. If the current block is an intra coding block, a judgment is made about whether the current intra coding block uses the constrained intra prediction method for prediction, coding, or decoding. For a current intra coding block that uses constrained intra prediction, coding types of its

10 neighboring coding blocks are then judged. When it is determined that the neighboring coding blocks include the neighboring inter coding block, the pixel data to be referenced in the inter coding block may be updated based on the invariable value or the image data in the neighboring intra coding block included in the neighboring coding blocks. Then the current intra coding block is intra predicted to obtain prediction data; the quantization coefficient is inversely quantized, and the

15 coefficient after inverse quantization is inversely quantized to obtain residual data. Finally a decoded image may be finally restructured and obtained according to the obtained residual data and prediction data.

The method according to the embodiment of the present invention may not only be applied in existing video codec standards, for example, the H.264, advanced video coding

20 (Advanced Video Coding, AVC for short) standard, and audio video standard (Audio Video Standard, AVS for short), and may also be applied in the HEVC standard under formulation.

The following takes the application of the method for coding an image according to the embodiment of the present invention in the HEVC standard as an example for detailed description. A hierarchical block structure in the HEVC standard may be shown in FIG. 3. In the HEVC

25 standard, the maximum unit of a coding object may reach 64x64 or even a larger unit. Therefore, a left or upper neighboring coding block of an intra refreshing block (INTRA refreshing block) may include multiple neighboring coding blocks. Among the multiple neighboring coding blocks, there may be intra coding blocks and inter coding blocks, which is different from the case of the H.264/AVC standard. In the H.264/AVC standard, as a coding block type in the H.264/AVC

30 standard uses 16x16 coding blocks as a unit, an intra refreshing block has only one neighboring coding block at a certain side. The neighboring coding block may either be an intra coding block or an inter coding block.

In the HEVC standard, intra refreshing may be performed internally in the coding object with the maximum unit of 64x64. That is, inside a 64x64 coding object, partial coding blocks may

be selected for intra coding. For example, when the maximum division of a coding object is 64x64, if the current coding object is refreshed, all coding blocks in the current 64x64 coding object are coded according to the intra-frame coding method. In this case, for all coding blocks in the 64x64 coding object, there is no need to identify whether the current coding block uses the inter-frame coding method or intra-frame coding method for coding, but all coding blocks in the 64x64 coding object use the intra-frame coding method for coding by default. As such, there is only the need to identify whether the current 64x64 coding object uses the intra-frame refreshing method for coding for example by using a bit symbol in the 64x64 coding object.

During processing of the reference image data of the neighboring coding blocks, a method similar to the method according to the previous embodiment may still be used. The only difference lies in that, if the neighboring coding blocks of the current intra coding block belong to a same coding object with the current intra coding block, the neighboring coding blocks are definitely intra coding blocks. In this case, there is no need to perform update processing for the reference image data, and the pixel data of the neighboring coding blocks may be referenced.

In another aspect, if the neighboring coding blocks are not in a same coding object with the current intra coding block, and it is determined that the neighboring coding blocks use the inter-frame coding method for coding or decoding, image data in the neighboring inter coding block needs to be updated.

As shown in FIG. 6, a method for processing image data applied in the HEVC standard includes:

S310: Determine that all coding blocks in a current coding object use a constrained intra prediction method, where it may be determined that all intra coding blocks in the coding object use the constrained intra prediction method for coding or decoding according to a constrained intra prediction flag in a bit stream, for example, when the constrained intra prediction flag is 1.

S320: Among neighboring coding blocks that are adjacent to a current intra coding block, determine a specific neighboring coding block that belongs to a different coding object from the current intra coding block.

S330: Determine that the specific neighboring coding block is a neighboring inter coding block that uses an inter-frame coding method for coding.

S340: Update image data in the neighboring inter coding block based on an invariable value or image data in a neighboring intra coding block included in the neighboring coding blocks, where the image data may be updated according to the method as shown in FIG. 3 and FIG. 4.

S350: Code or decode the current intra coding block based on the updated image data in the neighboring inter coding block.

According to the method in the embodiment of the present invention, the image data in neighboring inter coding blocks is updated, and the current intra coding block is coded or decoded by using the updated image data, so that inter coding blocks referenced by the intra coding block will not pass on accumulated errors to the intra coding block, thereby improving the error recovery capability of the intra coding block and improving the image data decoding quality and efficiency.

Persons skilled in the art may understand that all replacements or variations according to FIG. 2 to FIG. 5 may be also applied in the method as shown in FIG. 6, which are not described herein for conciseness.

The following describes devices used for coding, decoding, and image data processing according to the embodiments of the present invention with reference to the accompanying drawings.

FIG. 7 is a block diagram of a device for coding an image according to an embodiment of the present invention. As shown in FIG. 7, a device 500 used for decoding an image includes a first determining module 510, a second determining module 520, an updating module 530, and an coding module 540.

The first determining module 510 is configured to determine a current intra coding block that uses a constrained intra prediction method among current inter coded frames.

The second determining module 520 is configured to determine that neighboring coding blocks that are adjacent to the current intra coding block include a neighboring inter coding block.

The updating module 530 is configured to update image data in the neighboring inter coding blocks based on an invariable value or image data in a neighboring intra coding block included in the neighboring coding blocks.

The coding/decoding module 540 is configured to code the current intra coding block based on the updated image data in the neighboring inter coding block.

Optionally, as shown in FIG. 8, a device 600 used for decoding an image includes a first determining module 610, a second determining module 620, an updating module 630, and an coding module 640. The updating module 630 may further include one or more of the following units or unit combinations: a first determining unit 631 and a first updating unit 632; a second determining unit 633 and a second updating unit 634; a third updating unit 635; and a fourth updating unit 636.

The first determining unit 631 is configured to determine that the neighboring coding blocks further include at least one neighboring intra coding block.

The first updating unit 632 is configured to update the image data in the neighboring inter coding block based on image data in a neighboring intra coding block that is most adjacent to

52663-57

the neighboring inter coding block.

The second determining unit 633 is configured to determine that the neighboring coding blocks further include at least two neighboring intra coding blocks.

5 The second updating unit 634 is configured to update the image data in the neighboring inter coding block based on image data in the at least two neighboring intra coding blocks through weighted average of distances from the at least two neighboring intra coding blocks to the current intra coding block.

10 The third updating unit 635 is configured to update the image data in the neighboring inter coding block to an invariable value when determining that all the neighboring coding blocks are inter coding blocks.

The fourth updating unit 636 is configured to update image data in all the neighboring coding blocks to an invariable value.

15 The first determining module 610, second determining module 620, and coding module 640 of the device 600 used for processing image data are similar to the first determining module 510, second determining module 520, and coding module 540 of the device 500 used for processing image data. The preceding and other operations and/or functions of the devices 500 and 600 used for processing image data are respectively intended for implementing the corresponding procedures of all methods in FIG. 2 to FIG. 5, which are not described herein for conciseness.

20 According to the device used for decoding an image in the embodiment of the present invention, the image data in neighboring inter coding blocks is updated, and the current intra coding block is coded or decoded by using the updated image data, so that inter coding blocks referenced by the intra coding block will not pass on accumulated errors to the intra coding block, thereby improving the error recovery capability of the intra coding block and improving the image data decoding quality and efficiency.

25 FIG. 9 is a block diagram of a device for decoding an image according to an embodiment of the present invention. As shown in FIG. 9, a device 700 used for decoding an image includes a first determining module 710, a second determining module 720, an updating module 730, and a decoding module 740.

30 The first determining module 710 is configured to determine a current intra coding block that uses a constrained intra prediction method among current inter coded frames.

The second determining module 720 is configured to determine that neighboring coding blocks that are adjacent to the current intra coding block include a neighboring inter coding block.

The updating module 730 is configured to update image data in the neighboring inter coding blocks based on an invariable value or image data in a neighboring intra coding block

included in the neighboring coding blocks.

The coding module 740 is configured to decode the current intra coding block based on the updated image data in the neighboring inter coding block.

Optionally, as shown in FIG. 10, a device 800 used for decoding includes a first
 5 determining module 810, a second determining module 820, an updating module 830, and a
 decoding module 840. The updating module 830 may further include one or more of the following
 units or unit combinations: a first determining unit 831 and a first updating unit 832; a second
 determining unit 833 and a second updating unit 834; a third updating unit 835; and a fourth
 10 updating unit 836. All units included in the updating module 830 are similar to the updating module
 630 of the device 600 used for decoding an image. The preceding and other operations and/or
 functions of the devices 700 and 800 used for decoding are respectively intended for implementing
 the corresponding procedures of all methods in FIG. 2 to FIG. 5, which are not described herein for
 conciseness.

According to the device used for decoding in the embodiment of the present invention,
 15 the image data in neighboring inter coding blocks is updated, and the current intra coding block is
 coded or decoded by using the updated image data, so that inter coding blocks referenced by the
 intra coding block will not pass on accumulated errors to the intra coding block, thereby improving
 the error recovery capability of the intra coding block and improving the image data decoding
 quality and efficiency.

FIG. 11 is a block diagram of a device for processing image data according to an
 20 embodiment of the present invention. As shown in FIG. 11, a device 900 used for processing image
 data includes:

a first determining module 910, configured to determine that all coding blocks in a
 current coding object use a constrained intra prediction method;

25 a second determining module 920, configured to determine, among neighboring coding
 blocks that are adjacent to a current intra coding block, a specific neighboring coding block that
 belongs to a different coding object from the current intra coding block;

a third determining module 930, configured to determine that the specific neighboring
 coding block is a neighboring inter coding block that uses an inter-frame coding method for coding;

30 an updating module 940, configured to update image data in the neighboring inter
 coding blocks based on an invariable value or image data in a neighboring intra coding block
 included in the neighboring coding blocks; and

an coding/decoding module 950, configured to code or decode the current intra coding
 block based on the updated image data in the neighboring inter coding block.

Alternatively, the updating module 940 may further include one or more of the following units or unit combinations: a first determining unit 941 and a first updating unit 942, a second determining unit 943 and a second updating unit 944, a third updating unit 945, and a fourth updating unit 946. These units are similar to all units of the updating module 630 or updating module 830. The preceding and other operations and/or functions of the device 900 used for processing image data are respectively intended for implementing the corresponding procedures of all updating methods shown in FIG. 6, which are not described herein for conciseness.

According to the device used for processing image data in the embodiment of the present invention, the image data in neighboring inter coding blocks is updated, and the current intra coding block is coded or decoded by using the updated image data, so that inter coding blocks referenced by the intra coding block will not pass on accumulated errors to the intra coding block, thereby improving the error recovery capability of the intra coding block and improving the image data decoding quality and efficiency.

Persons of ordinary skill in the art should appreciate that, each of the steps in the methods and the units described in combination with the embodiments disclosed herein can be implemented by electronic hardware, computer software, or a combination thereof. To clearly describe the interchangeability between hardware and software, the foregoing has generally described compositions and steps of each embodiment according to functions. Whether the functions are executed by hardware or software depends on particular applications and design constraint conditions of the technical solutions. Persons of ordinary skill in the art can use different methods to implement the described functions for each particular application, but it should not be considered that the implementation goes beyond the scope of the present invention.

The methods or steps described in combination with the embodiments disclosed herein may be implemented by using hardware, or a software program executed by a processor, or a combination thereof. The software program may be placed in a random access memory (RAM), a memory, a read-only memory (ROM), an electrically programmable ROM, an electrically erasable programmable ROM, a register, a hard disk, a removable magnetic disk, an optical disk, or a storage medium of any other form well-known in the technical field.

The present invention is described in detail with reference to the accompany drawings in combination with the preferred embodiments, but the present invention is not limited thereto. Various equivalent modifications or replacements made by persons of ordinary skill in the art to the embodiments of the present invention without departing from the essence of the present invention shall fall within the scope of the present invention.

52663-57

CLAIMS:

1. A method for coding an image, comprising:
 - determining a current intra coding block that uses a constrained intra prediction method among current inter coded frames;
 - 5 determining that neighboring coding blocks that are adjacent to the current intra coding block comprise a neighboring inter coding block;
 - updating the neighboring coding blocks with an invariable value if all of the neighboring coding blocks are determined as neighboring inter coding blocks; otherwise,
 - 10 updating at least one pixel data in one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block based on at least one pixel data determined from one row or one column of pixel data in a neighboring intra coding block adjacent to the current intra coding block, and updating pixel data in another neighboring inter coding block that needs to be updated with the already updated pixel data in the neighboring inter coding block; and
 - 15 coding the current intra coding block based on the updated pixel data in the neighboring inter coding block.
2. The method according to claim 1, comprising: determining according to a constrained intra prediction flag in a bit stream that the current coding block uses a constrained intra prediction method for coding.
- 20 3. The method according to claim 1, wherein the updating at least one pixel data in one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block comprises:
 - updating only one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block.

52663-57

4. The method according to any one of claims 1 to 3, wherein the updating at least one pixel data in one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block based on at least one pixel data determined from one row or one column of pixel data in a neighboring intra coding block adjacent to the
5 current intra coding block comprises:

determining that the neighboring coding blocks further comprise at least two neighboring intra coding blocks; and

updating the image data in the neighboring inter coding block based on image data in a neighboring intra coding block that is most adjacent to the neighboring inter coding
10 block.

5. The method according to any one of claims 1 to 3, wherein the updating at least one pixel data in one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block based on at least one pixel data determined from one row or one column of pixel data in the neighboring intra coding block adjacent to
15 the current intra coding block comprises:

determining that the neighboring coding blocks further comprise at least two neighboring intra coding blocks; and

updating the image data in the neighboring inter coding block based on image data in the at least two neighboring intra coding blocks through weighted average of distances
20 from the at least two neighboring intra coding blocks to the current intra coding block.

6. A method for decoding an image, comprising:

determining a current intra coding block that uses a constrained intra prediction method among current inter coded frames;

determining that neighboring coding blocks that are adjacent to the current
25 intra coding block comprise a neighboring inter coding block;

52663-57

updating the neighboring coding blocks with an invariable value if all of the neighboring coding blocks are determined as neighboring inter coding blocks; otherwise,

updating at least one pixel data in one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block based on at least one
 5 pixel data determined from one row or one column of pixel data in the neighboring intra coding block adjacent to the current intra coding block;

updating pixel data in another neighboring inter coding block that needs to be updated with the already updated pixel data in the neighboring inter coding block;

and

10 decoding the current intra coding block based on the updated pixel data in the neighboring inter coding block.

7. The method according to claim 6, wherein it is determined according to a corresponding coding method identifier of the current coding block of the current inter coded frame in a bit stream that the current coding block uses an intra-frame coding method for
 15 coding.

8. The method according to claim 6, wherein it is determined according to a constrained intra prediction flag in a bit stream that the current coding block uses a constrained intra prediction method for coding.

9. The method according to claim 6, wherein the updating at least one pixel data
 20 in one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block based on at least one pixel data determined comprises:

updating only one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block.

10. The method according to any one of claims 6 to 9, wherein the updating at
 25 least one pixel data in one row or one column of pixel data in the neighboring inter coding

52663-57

block adjacent to the current intra coding block based on at least one pixel data determined from one row or one column of pixel data in the neighboring intra coding block adjacent to the current intra coding block comprises:

5 determining that the neighboring coding blocks further comprise at least two neighboring intra coding blocks; and

updating the image data in the neighboring inter coding block based on image data in a neighboring intra coding block that is most adjacent to the neighboring inter coding block.

11. The method according to any one of claims 6 to 9, wherein the updating at
10 least one pixel data in one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block based on at least one pixel data determined from one row or one column of pixel data in the neighboring intra coding block adjacent to the current intra coding block comprises:

15 determining that the neighboring coding blocks further comprise at least two neighboring intra coding blocks; and

updating the image data in the neighboring inter coding block based on image data in the at least two neighboring intra coding blocks through weighted average of distances from the at least two neighboring intra coding blocks to the current intra coding block.

12. A method for processing image data, comprising:

20 determining that all coding blocks in a current coding object use a constrained intra prediction method;

among neighboring coding blocks that are adjacent to a current intra coding block, determining a specific neighboring coding block that belongs to a different coding object from the current intra coding block;

25 determining that the specific neighboring coding block is a neighboring inter

52663-57

coding block that uses an inter-frame coding method for coding;

updating the neighboring coding blocks with an invariable value if all of the neighboring coding blocks are determined as neighboring inter coding blocks; otherwise,

5 updating at least one pixel data in one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block based on at least one pixel data determined from one row or one column of pixel data in a neighboring intra coding block adjacent to the current intra coding block, and updating pixel data in another neighboring inter coding block that needs to be updated with the already updated pixel data in the neighboring inter coding block; and

10 coding or decoding the current intra coding block based on the updated pixel data in the neighboring inter coding block.

13. The method according to claim 12, wherein it is determined according to a constrained intra prediction flag in a bit stream that all intra coding blocks in the coding object use a constrained intra prediction method for coding or decoding.

15 14. The method according to claim 12, wherein the updating at least one pixel data in one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block comprises:

updating only one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block.

20 15. The method according to any one of claims 12 to 14, wherein the updating at least one pixel data in one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block based on at least one pixel data determined from one row or one column of pixel data in a neighboring intra coding block adjacent to the current intra coding block comprises:

25 determining that the neighboring coding blocks further comprise at least one

52663-57

neighboring intra coding block; and

updating pixel data in the neighboring inter coding block based on image data in a neighboring intra coding block that is most adjacent to the neighboring inter coding block.

5 16. The method according to any one of claims 12 to 14, wherein the updating at least one pixel data in one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block based on at least one pixel data determined from one row or one column of pixel data in a neighboring intra coding block adjacent to the current intra coding block comprises:

10 determining that the neighboring coding blocks further comprise at least two neighboring intra coding blocks; and

updating the image data in the neighboring inter coding block based on image data in the at least two neighboring intra coding blocks through weighted average of distances from the at least two neighboring intra coding blocks to the current intra coding block.

15 17. A device for coding an image, wherein the device comprises:

a first determining module, configured to determine a current intra coding block that uses a constrained intra prediction method among current inter coded frames;

a second determining module, configured to determine that neighboring coding blocks that are adjacent to the current intra coding block comprise a neighboring inter coding
20 block;

an updating module, configured to update the neighboring coding blocks with an invariable value if all of the neighboring coding blocks are determined as neighboring inter coding blocks; otherwise, update at least one pixel data in one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block based on

52663-57

at least one pixel data determined from one row or one column of pixel data in the neighboring intra coding block adjacent to the current intra coding block,

the updating module, further configured to update image data in another neighboring inter coding block that needs to be updated with the already updated pixel data in the neighboring inter coding block; and

a coding module, configured to code the current intra coding block based on the updated pixel data in the neighboring inter coding block.

18. The device according to claim 17, wherein the updating module comprises:

a first determining unit, configured to determine that the neighboring coding blocks further comprise at least one neighboring intra coding block; and

a first updating unit, configured to update the image data in the neighboring inter coding block based on image data in a neighboring intra coding block that is most adjacent to the neighboring inter coding block.

19. The device according to claim 17, wherein the updating module comprises:

a second determining unit, configured to determine that the neighboring coding blocks further comprise at least two neighboring intra coding blocks; and

a second updating unit, configured to update the image data in the neighboring inter coding block based on image data in the at least two neighboring intra coding blocks through weighted average of distances from the at least two neighboring intra coding blocks to the current intra coding block.

20. A device for decoding an image, wherein the device comprises:

a first determining module, configured to determine a current intra coding block that uses a constrained intra prediction method among current inter coded frames;

a second determining module, configured to determine that neighboring coding

52663-57

blocks that are adjacent to the current intra coding block comprise a neighboring inter coding block;

an updating module, configured to update the neighboring coding blocks with an invariable value if all of the neighboring coding blocks are determined as neighboring inter coding blocks; otherwise, update at least one pixel data in one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block based on at least one pixel data determined from one row or one column of pixel data in the neighboring intra coding block adjacent to the current intra coding block;

the updating module, further configured to update image data in another neighboring inter coding block that needs to be updated with the already updated pixel data in the neighboring inter coding block; and

a decoding module, configured to decode the current intra coding block based on the updated pixel data in the neighboring inter coding block.

21. The device according to claim 20, wherein the updating module comprises:

15 a first determining unit, configured to determine that the neighboring coding blocks further comprise at least two neighboring intra coding blocks; and

a first updating unit, configured to update image data in the neighboring inter coding block based on image data in a neighboring intra coding block that is most adjacent to the neighboring inter coding block.

20 22. The device according to claim 20, wherein the updating module comprises:

a second determining unit, configured to determine that the neighboring coding blocks further comprise at least two neighboring intra coding blocks; and

a second updating unit, configured to update the image data in the neighboring inter coding block based on image data in the at least two neighboring intra coding blocks through weighted average of distances from the at least two neighboring intra coding blocks

52663-57

to the current intra coding block.

23. A device for processing image data, wherein the device comprises:

a first determining module, configured to determine that all coding blocks in a current coding object use a constrained intra prediction method;

5 a second determining module, configured to determine, among neighboring coding blocks that are adjacent to a current intra coding block, a specific neighboring coding block that belongs to a different coding object from the current intra coding block;

a third determining module, configured to determine that the specific neighboring coding block is a neighboring inter coding block that uses an inter-frame coding
10 method for coding;

an updating module, configured to update the neighboring coding blocks with an invariable value if all of the neighboring coding blocks are determined as neighboring inter coding blocks; otherwise, update at least one pixel data in one row or one column of pixel data in the neighboring inter coding block adjacent to the current intra coding block based on
15 at least one pixel data determined from one row or one column of pixel data in the neighboring intra coding block adjacent to the current intra coding block;

the updating module, further configured to update image data in another neighboring inter coding block that needs to be updated with the already updated pixel data in the neighboring inter coding block; and

20 an coding/decoding module, configured to code or decode the current intra coding block based on the updated pixel data in the neighboring inter coding block.

24. The device according to claim 23, wherein the updating module comprises:

a first determining unit, configured to determine that the neighboring coding blocks further comprise at least one neighboring intra coding block; and

52663-57

a first updating unit, configured to update image data in the neighboring inter coding block based on image data in a neighboring intra coding block that is most adjacent to the neighboring inter coding block.

25. The device according to claim 23, wherein the updating module comprises:

5 a second determining unit, configured to determine that the neighboring coding blocks further comprise at least two neighboring intra coding blocks; and

a second updating unit, configured to update the image data in the neighboring inter coding block based on image data in the at least two neighboring intra coding blocks through weighted average of distances from the at least two neighboring intra coding blocks
10 to the current intra coding block.

1/9

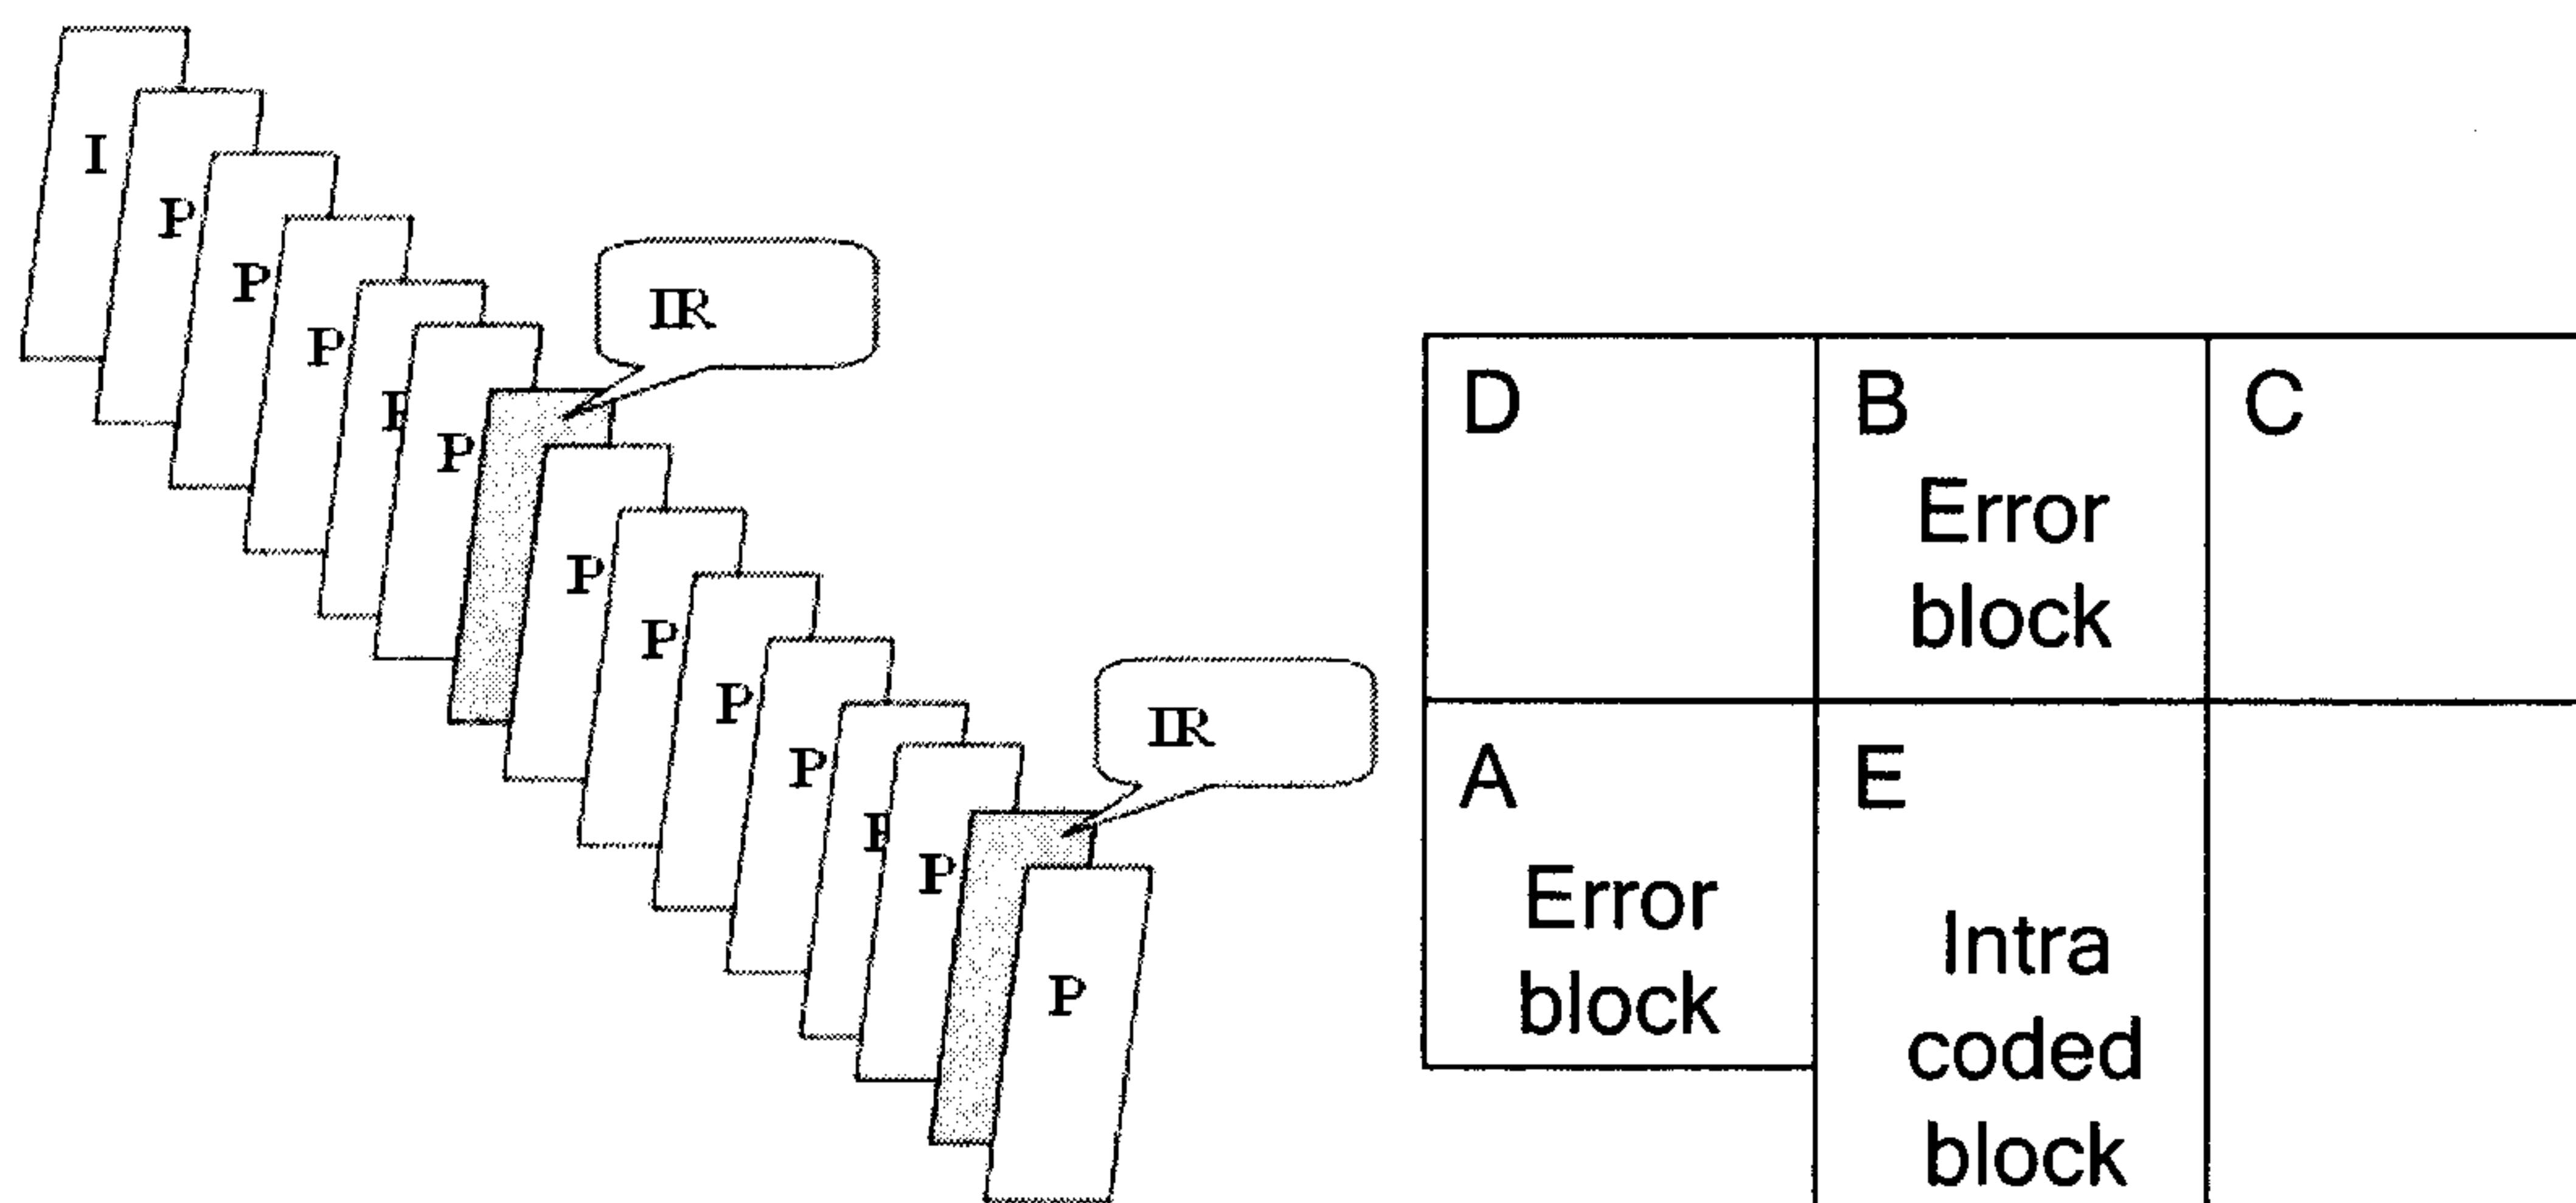


FIG. 1

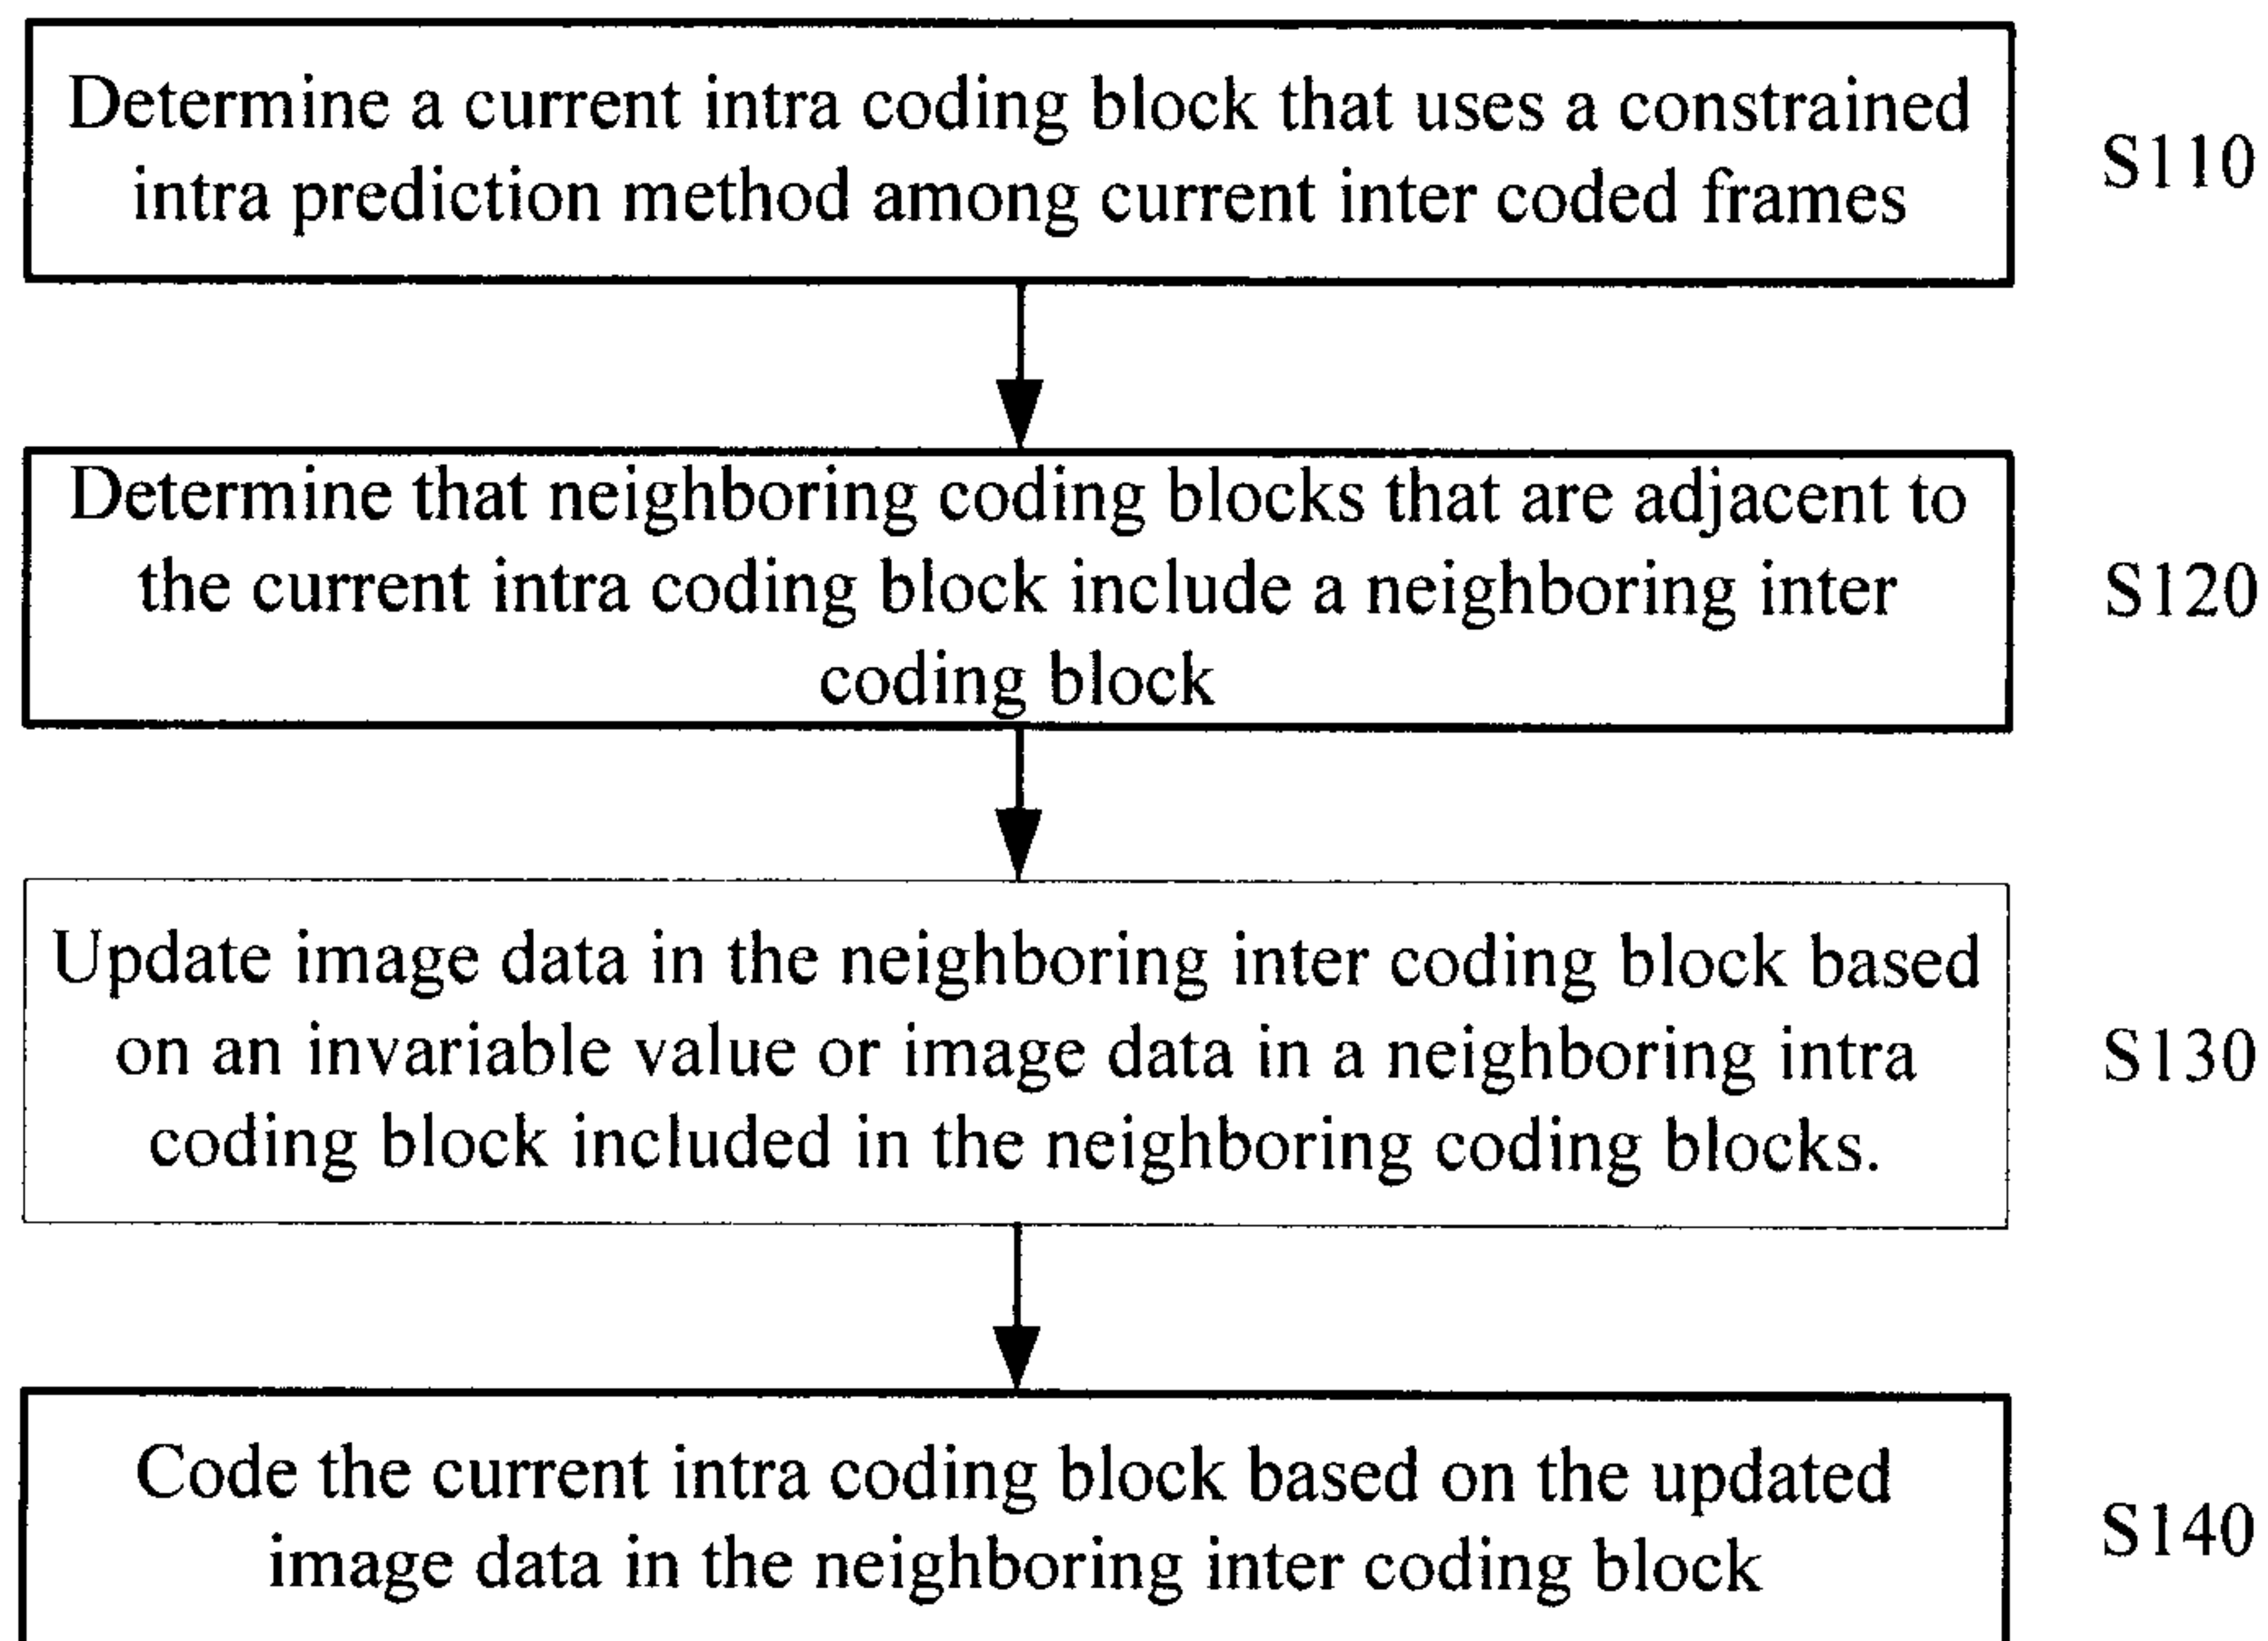


FIG. 2

2/9

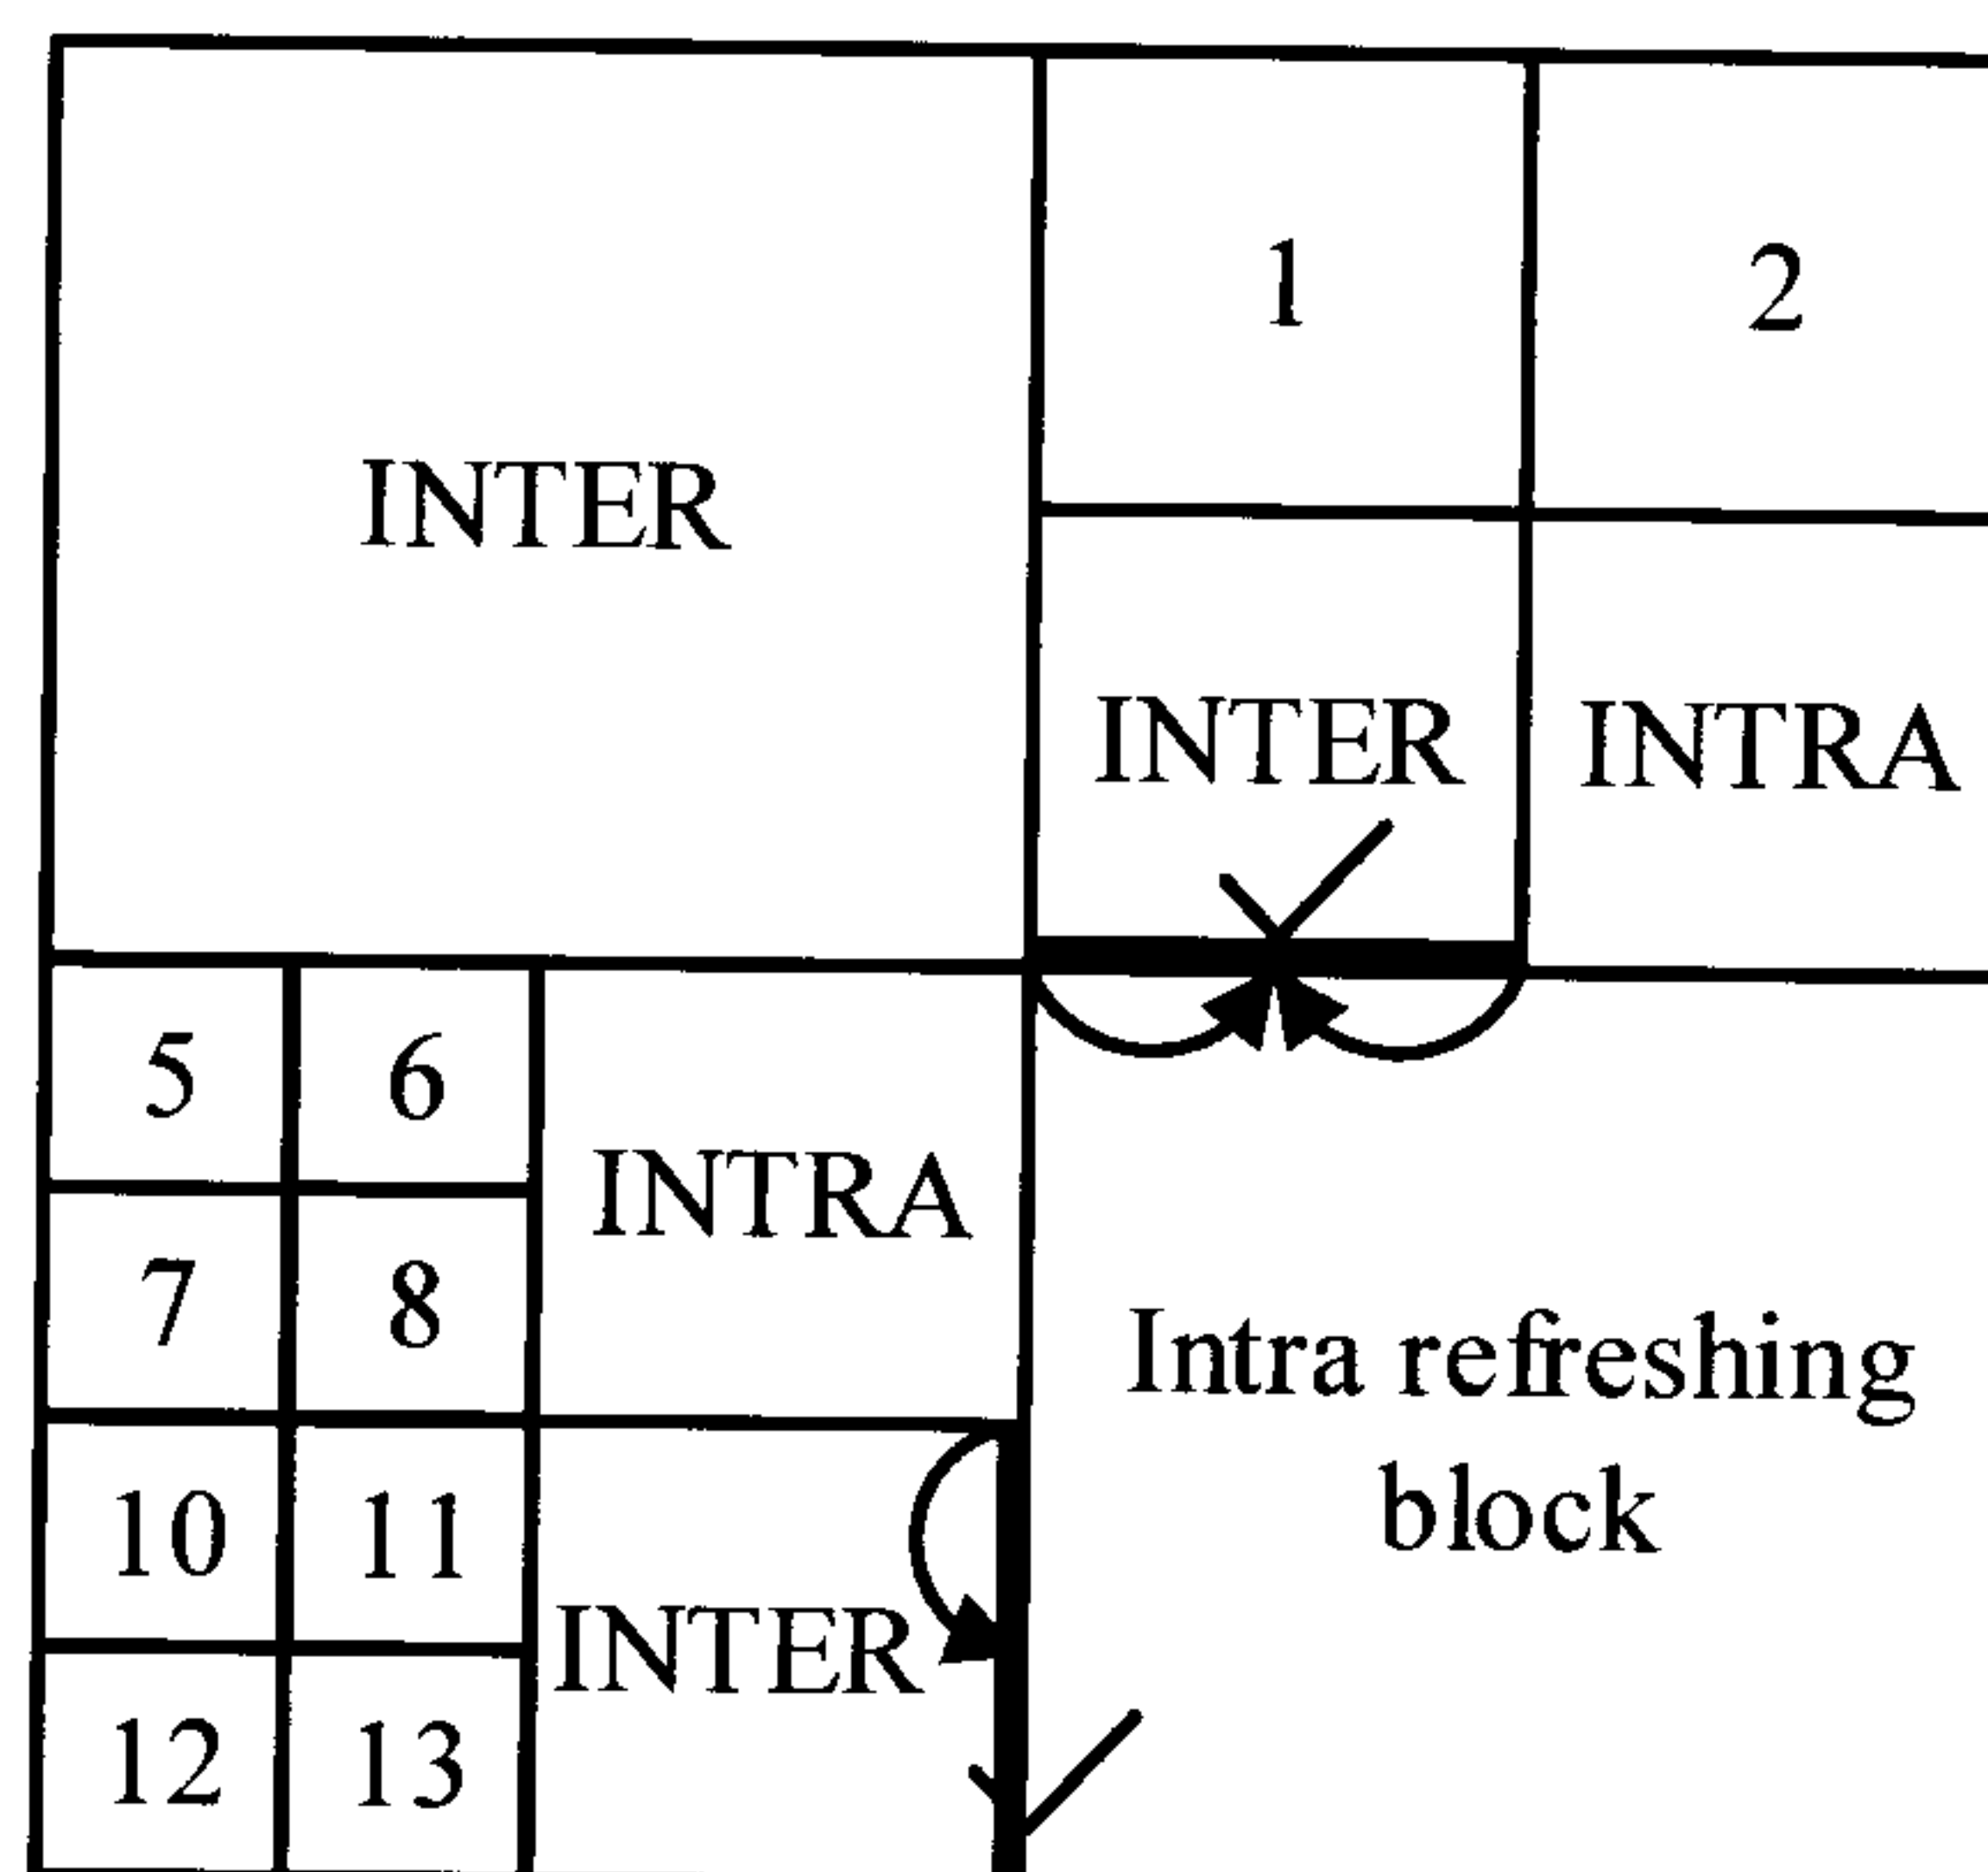


FIG. 3

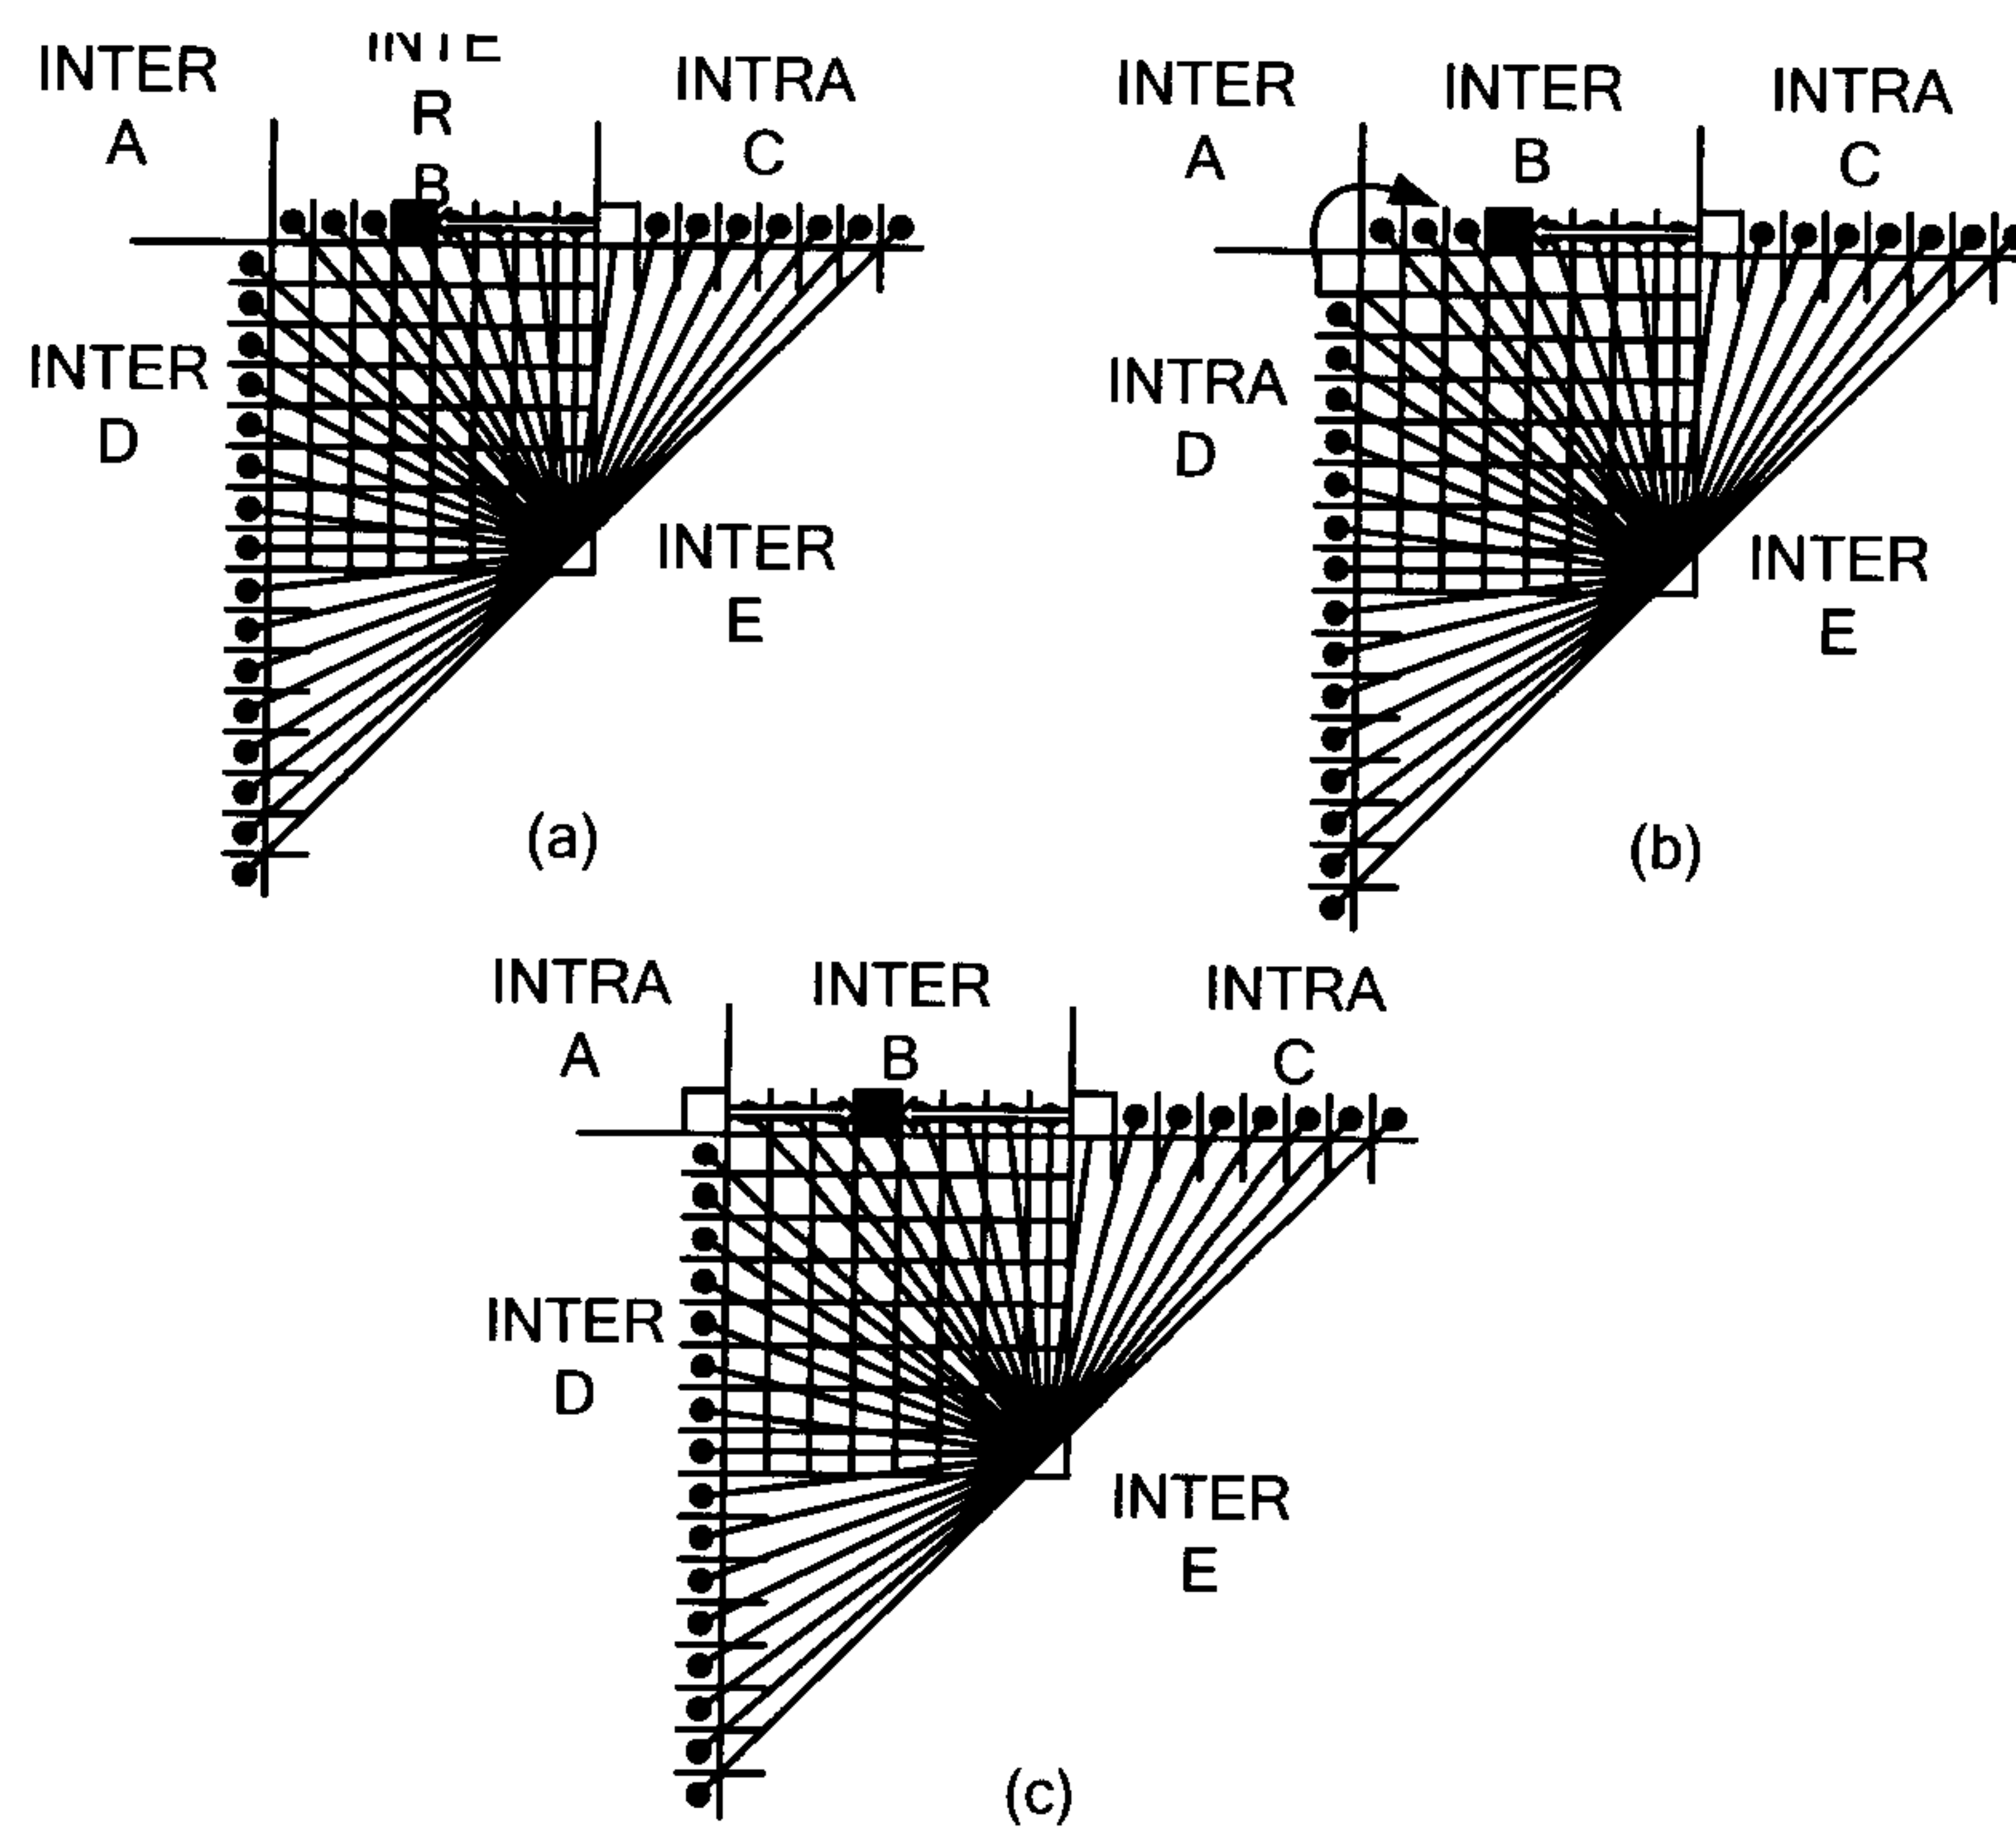


FIG. 4

3/9

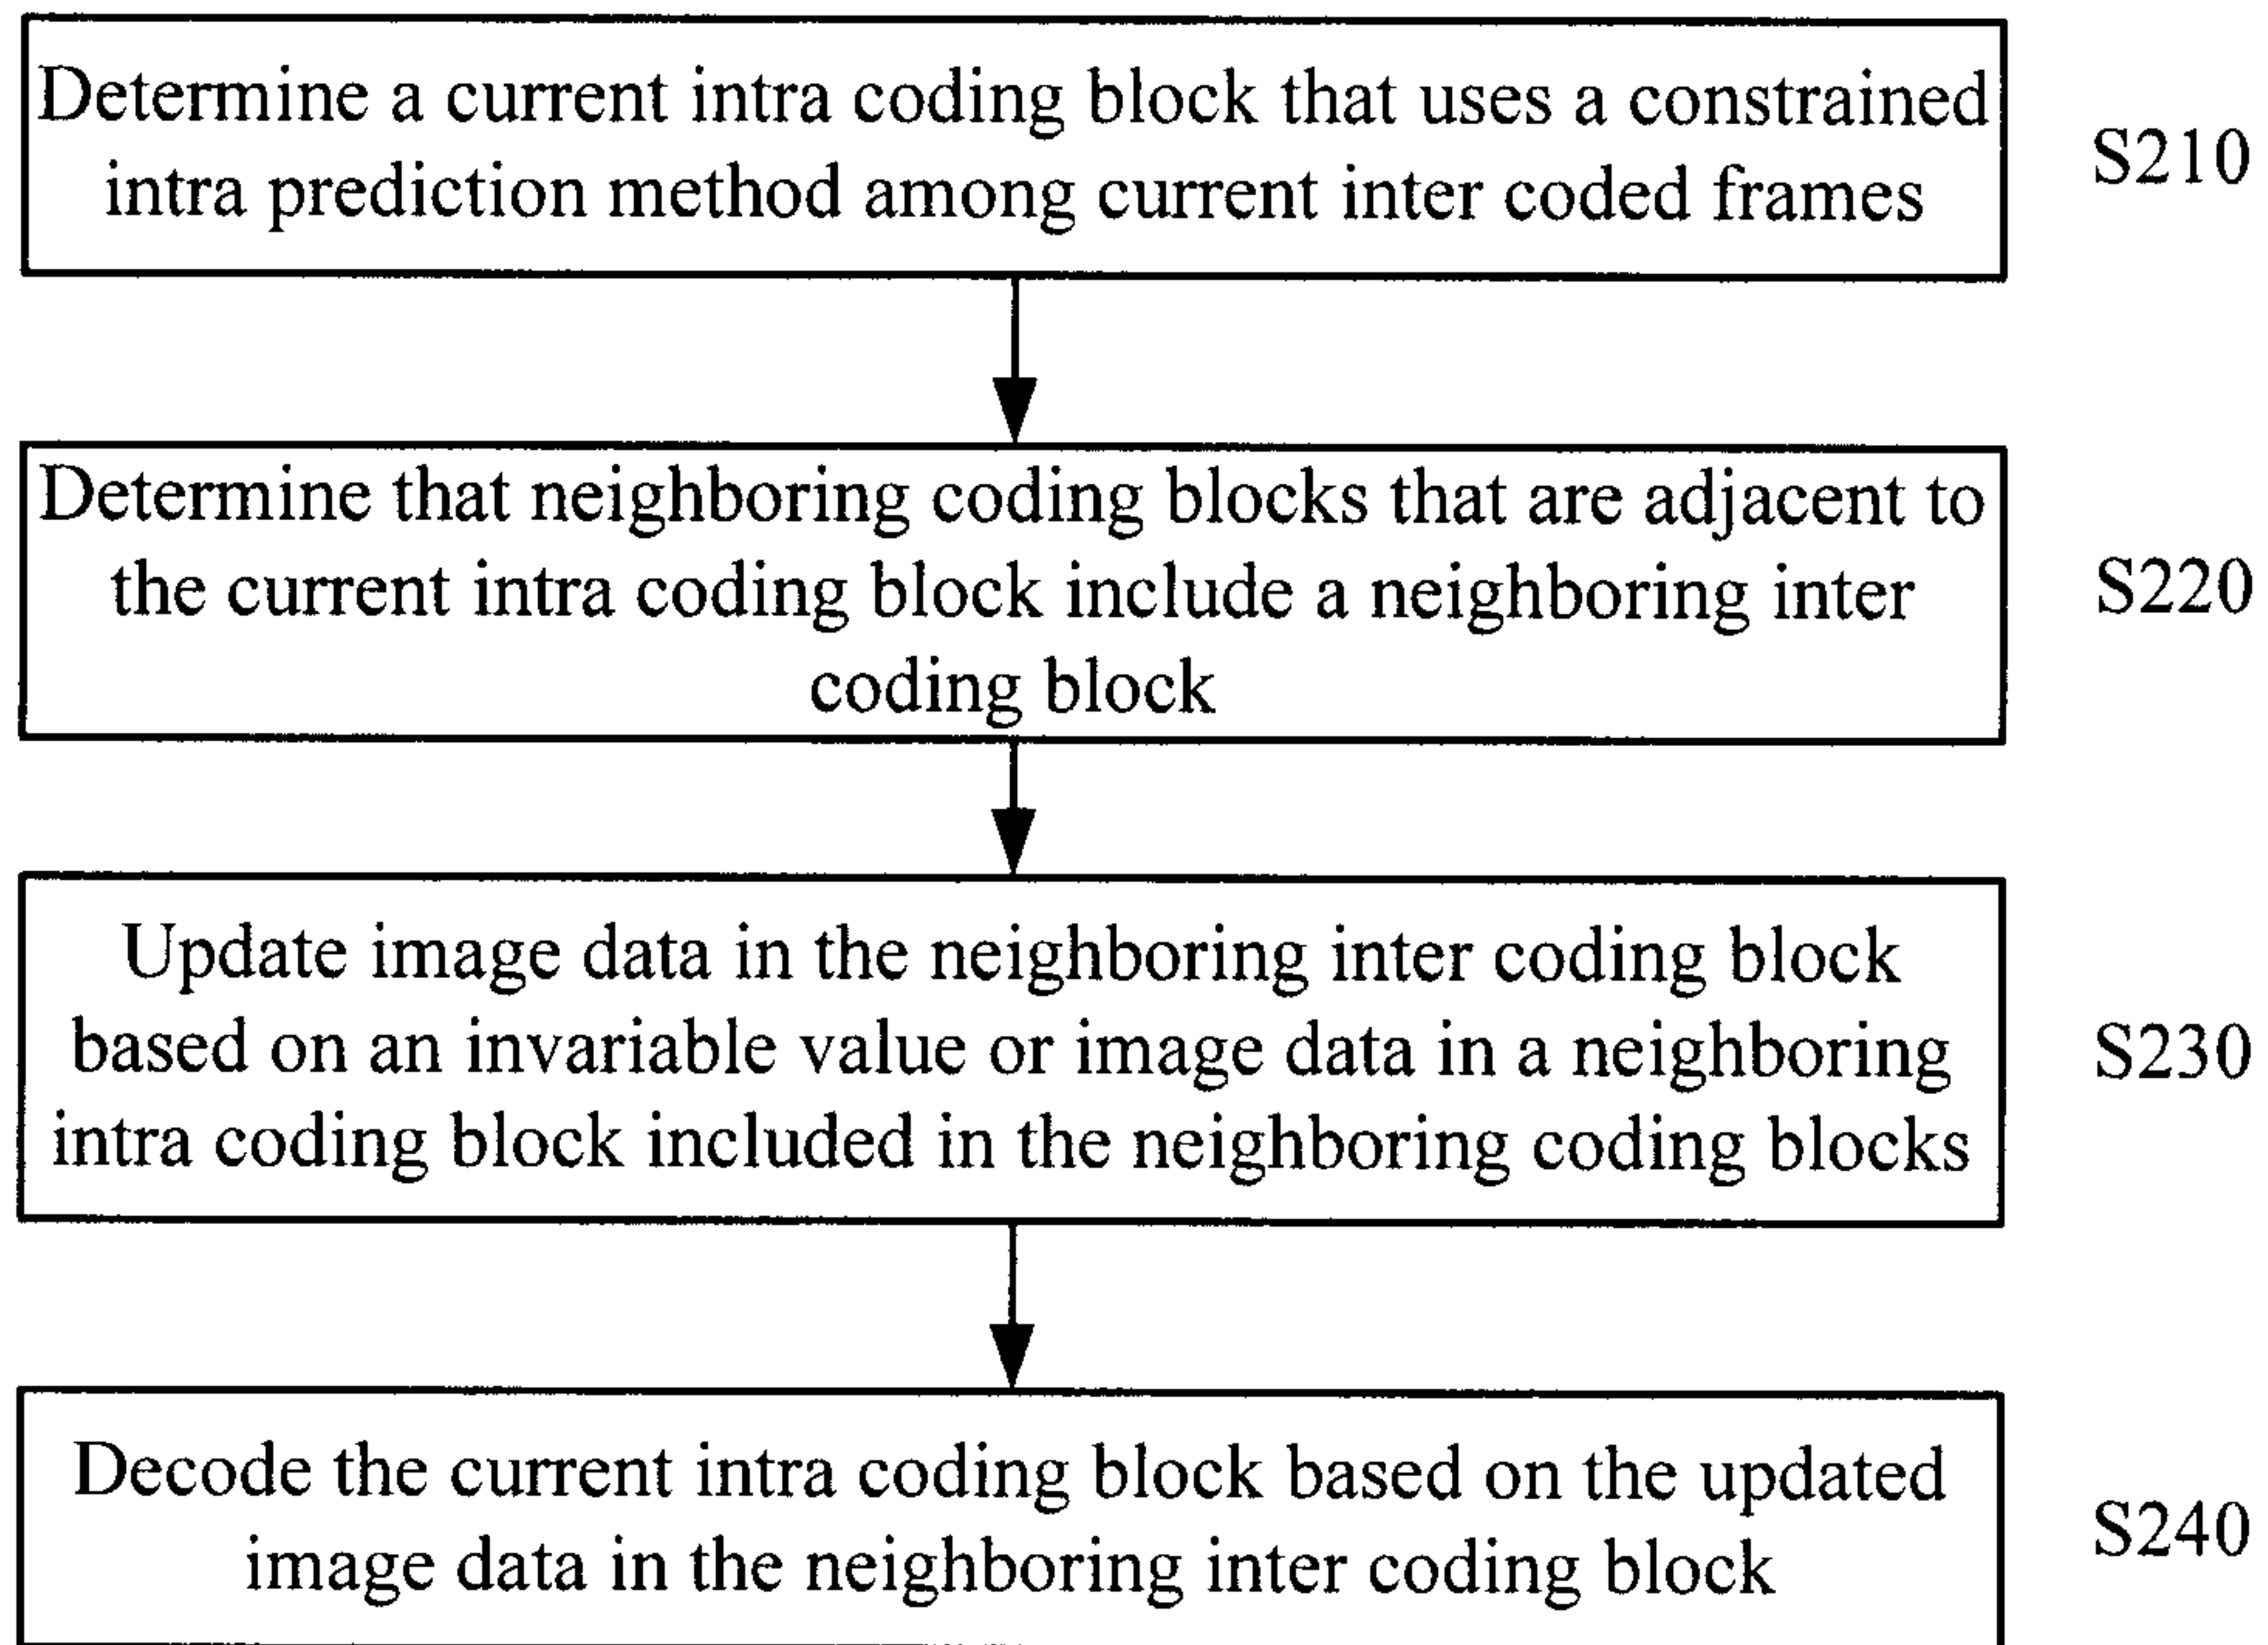


FIG. 5

4/9

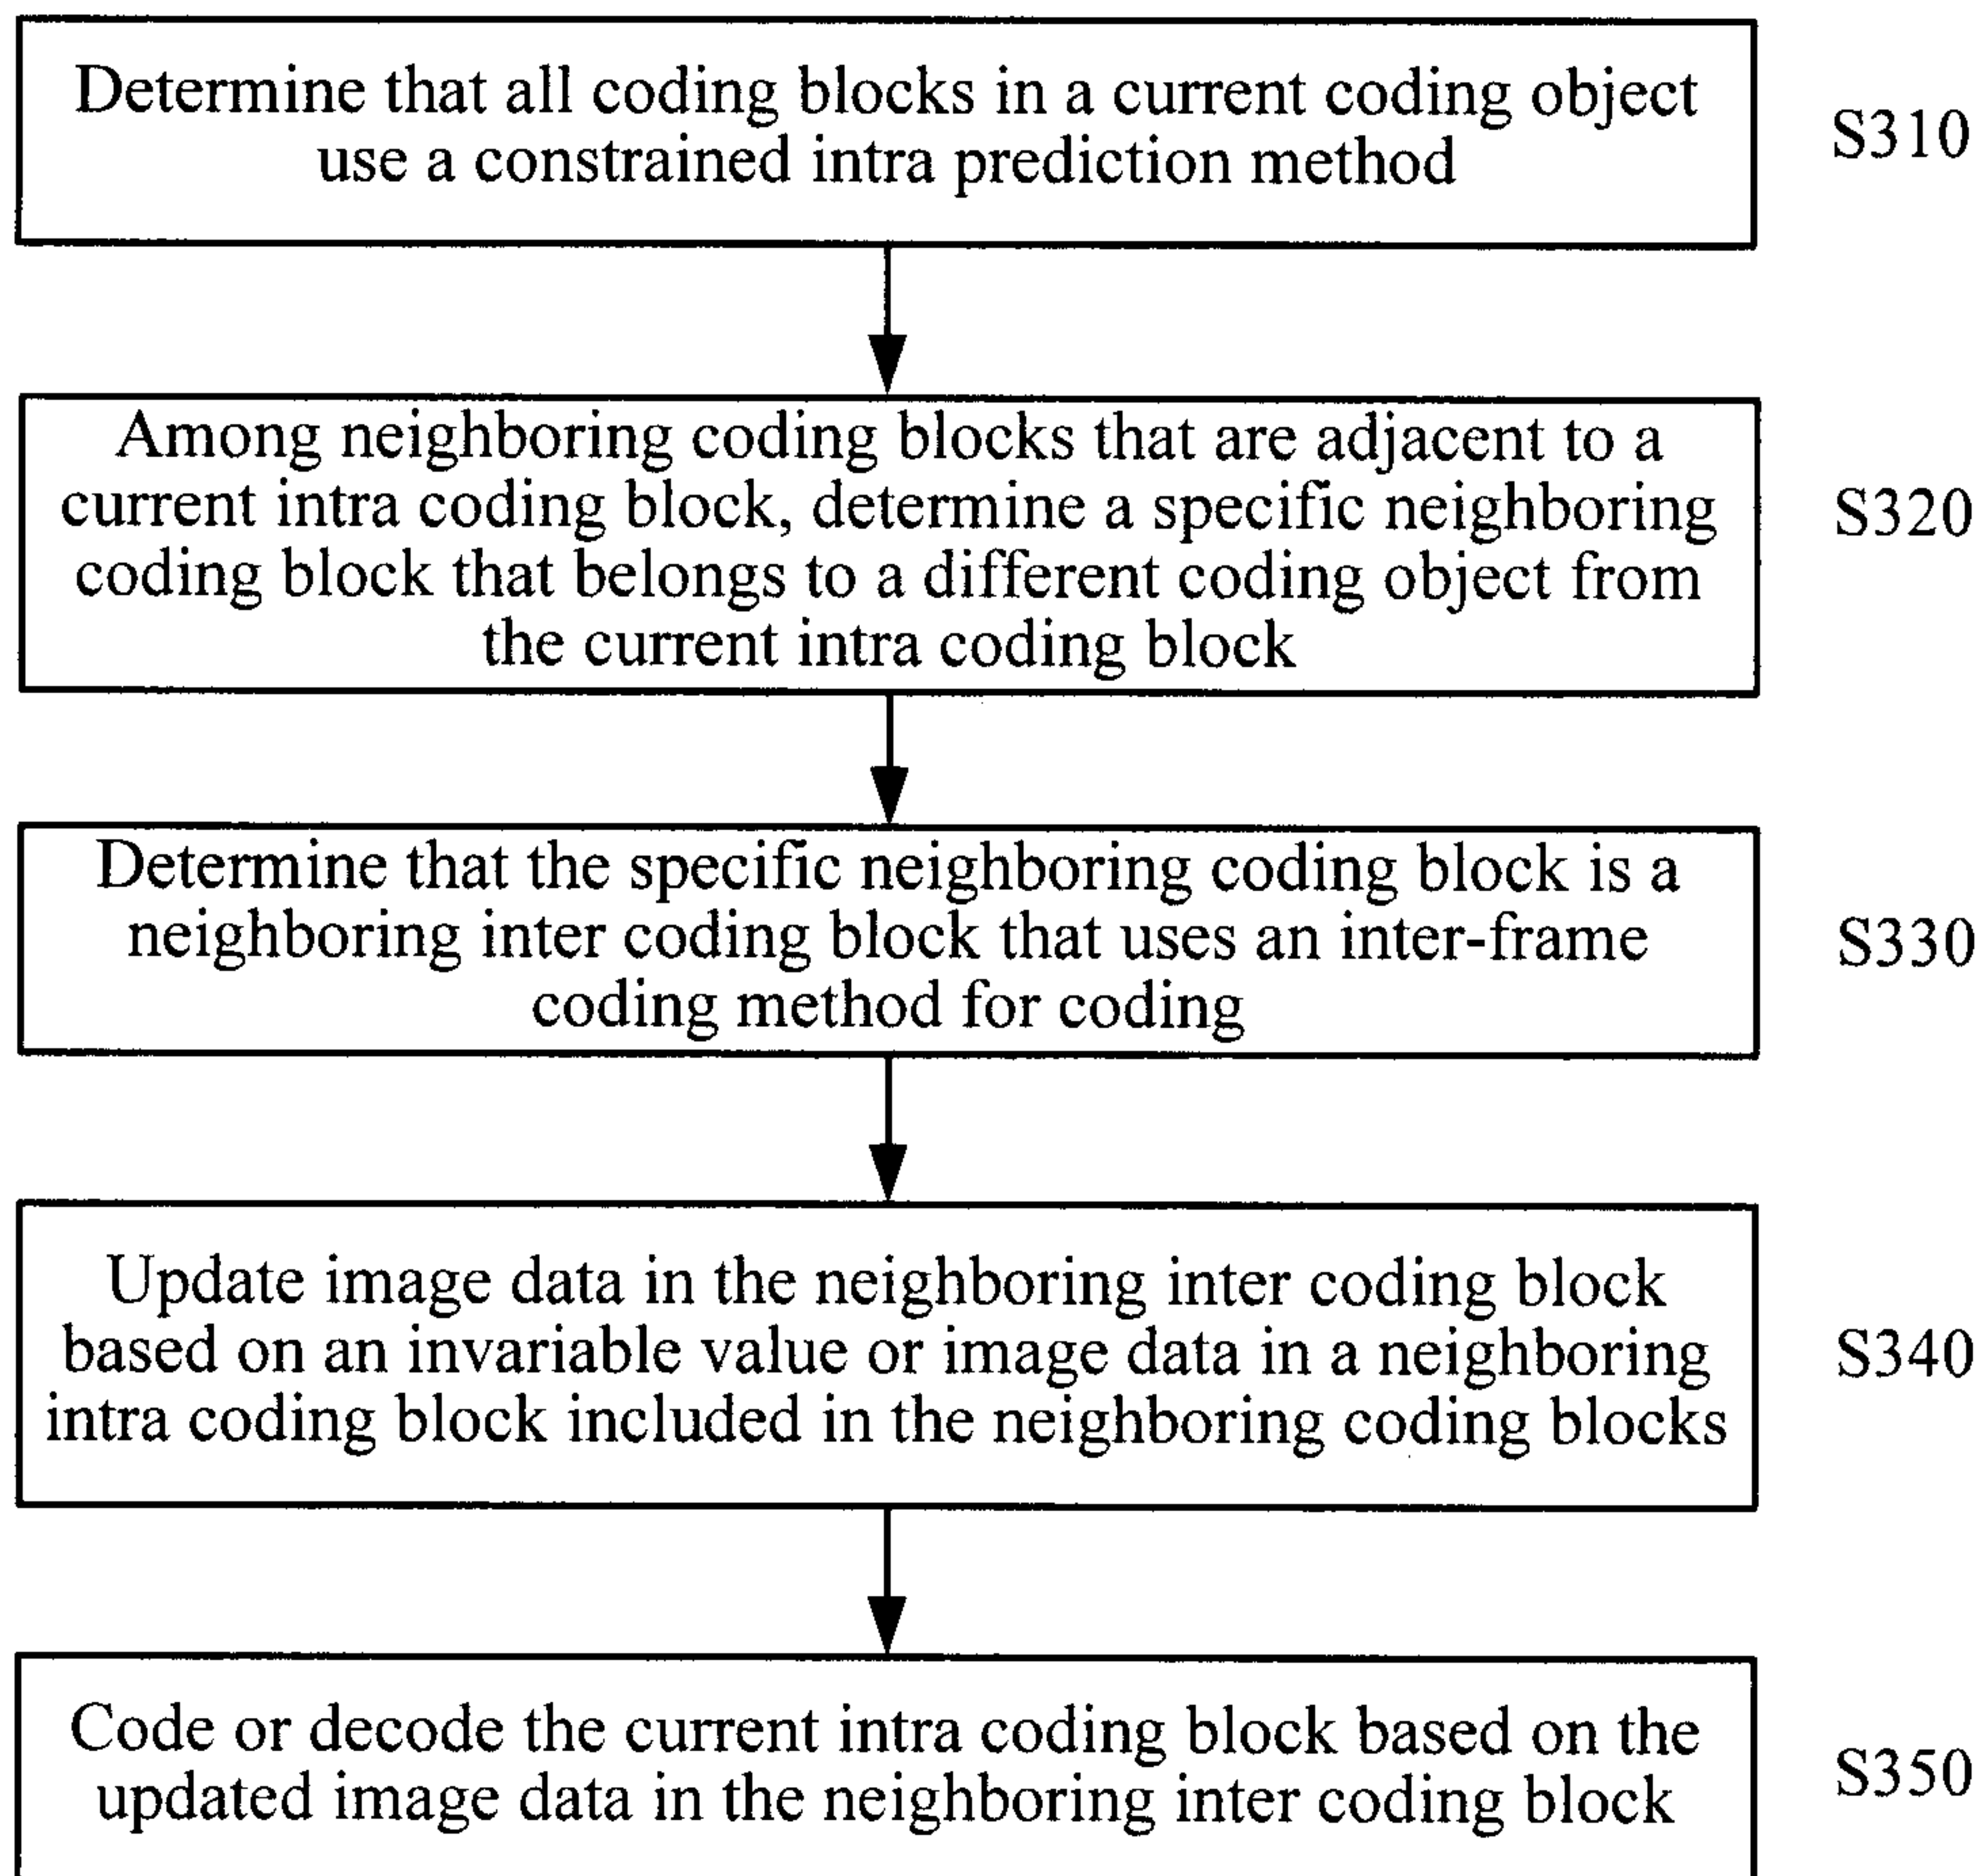


FIG. 6

5/9

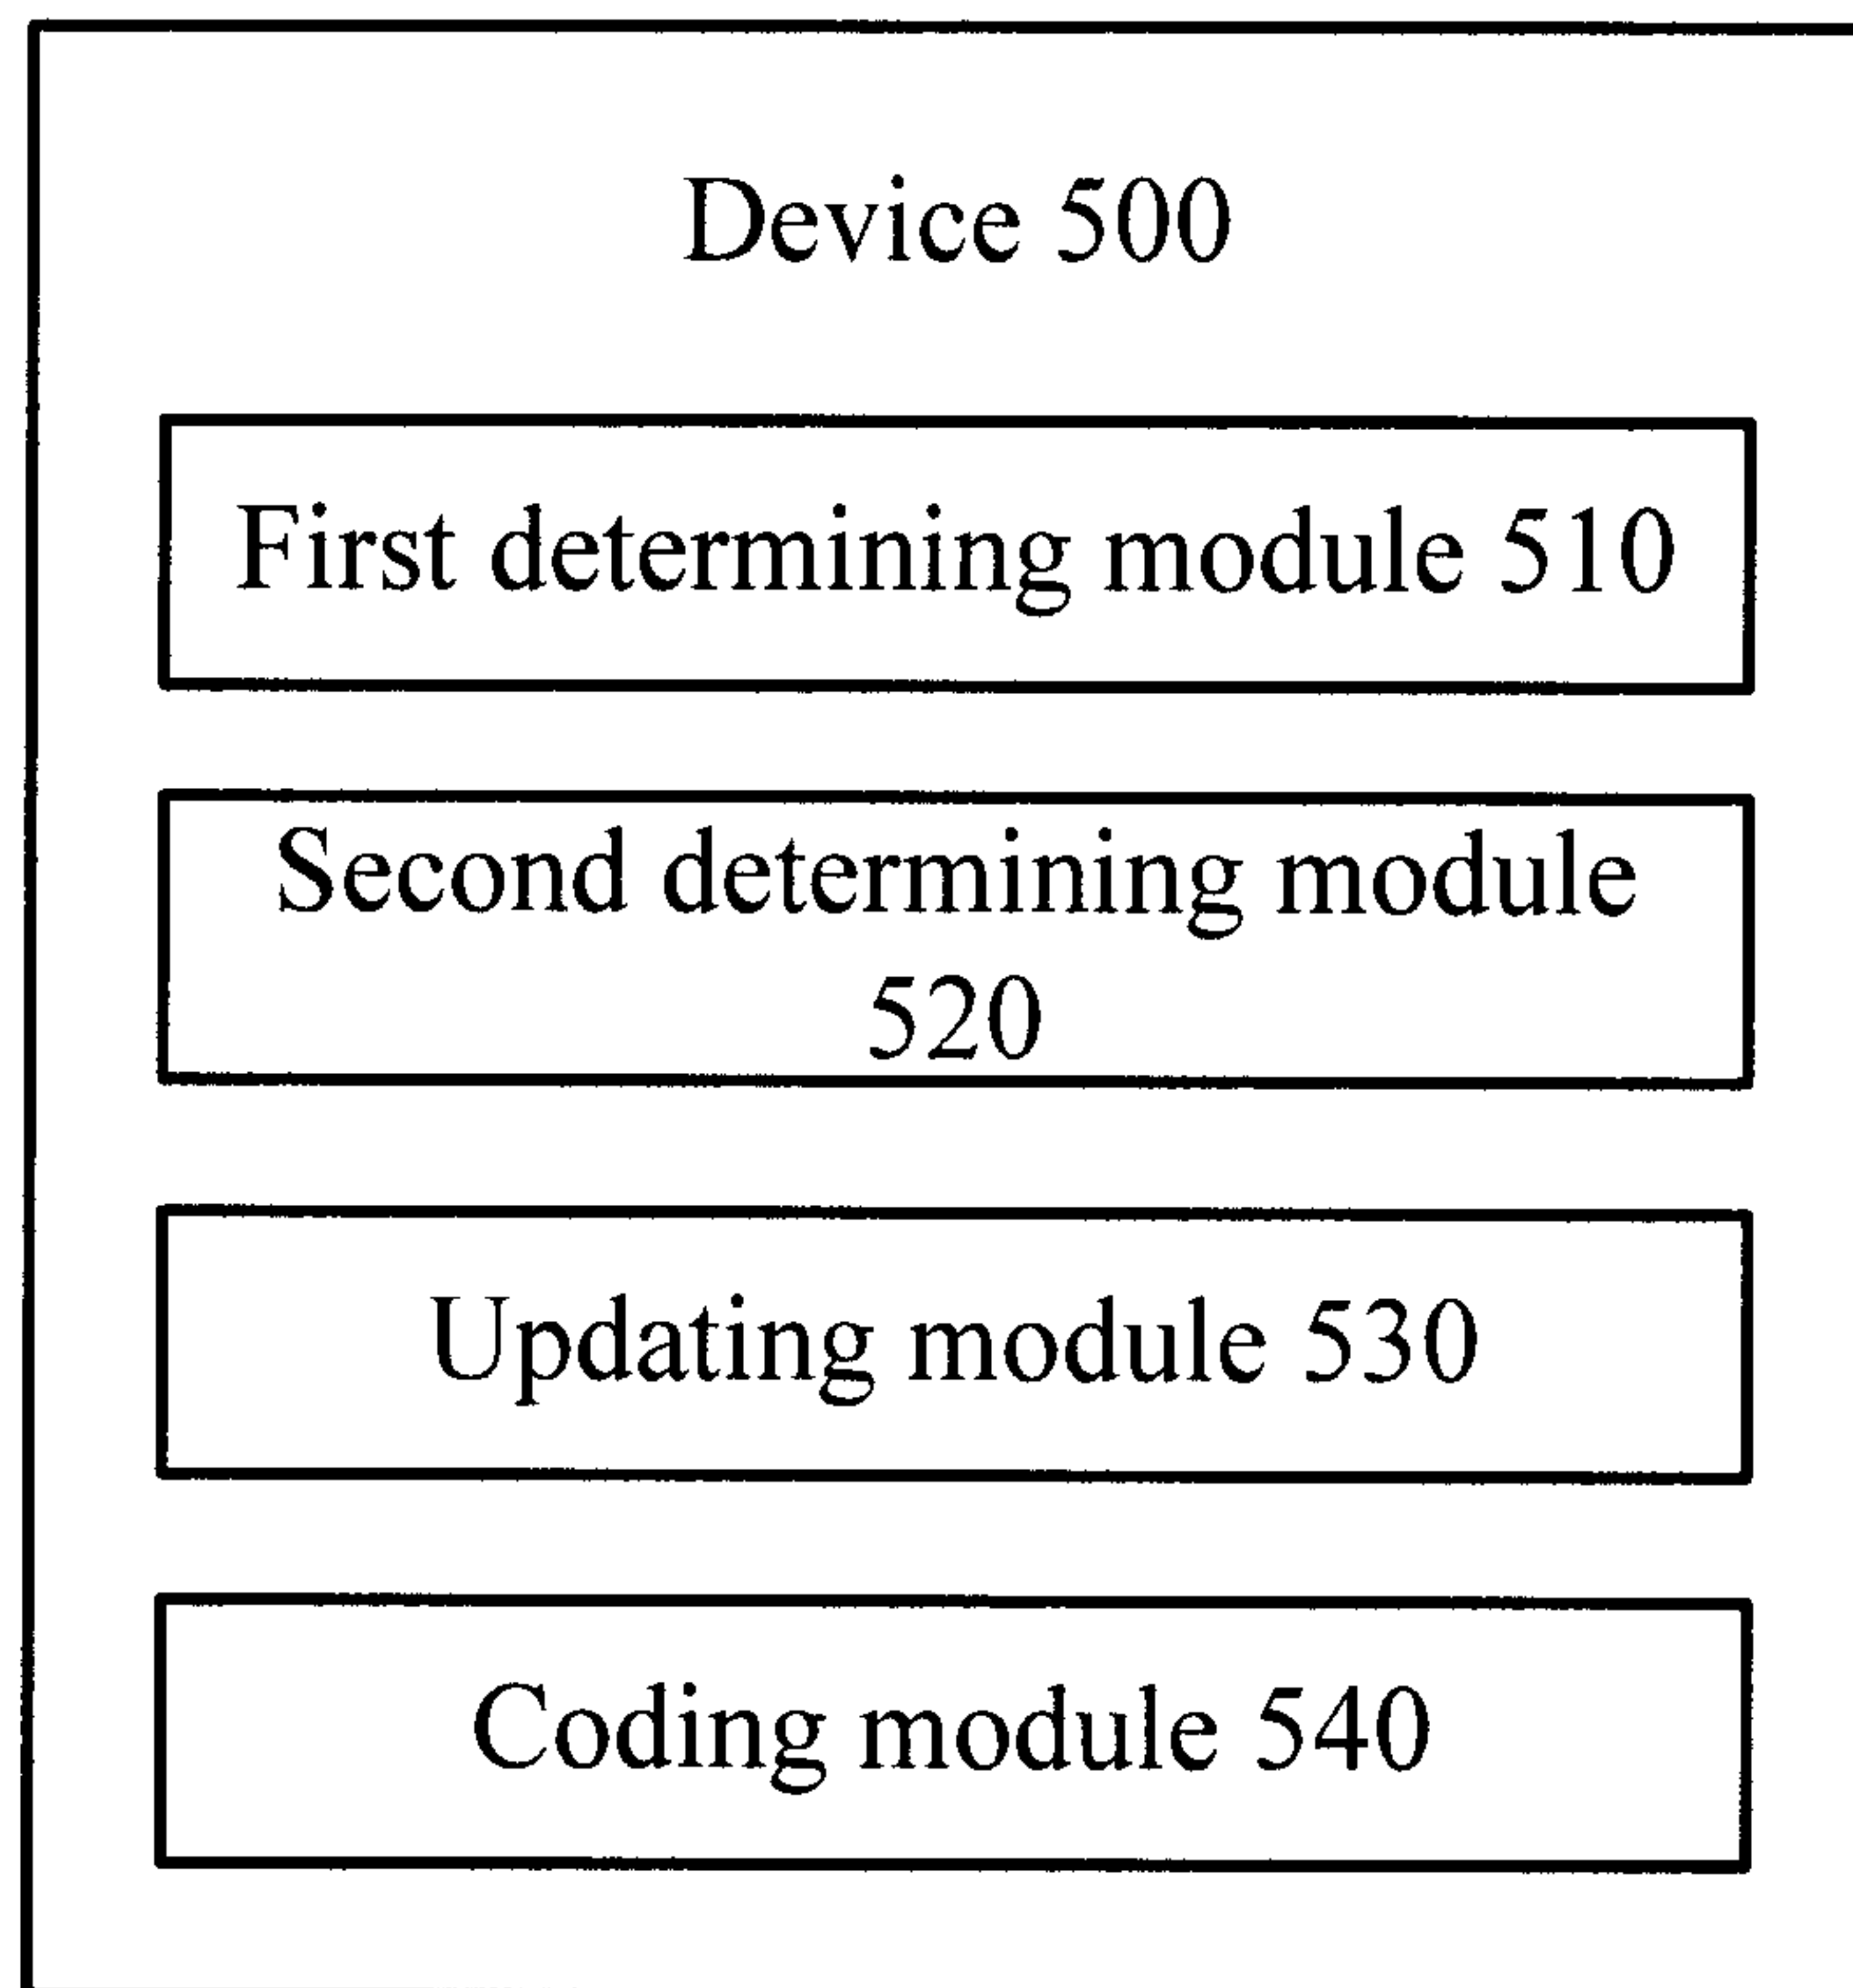


FIG. 7

6/9

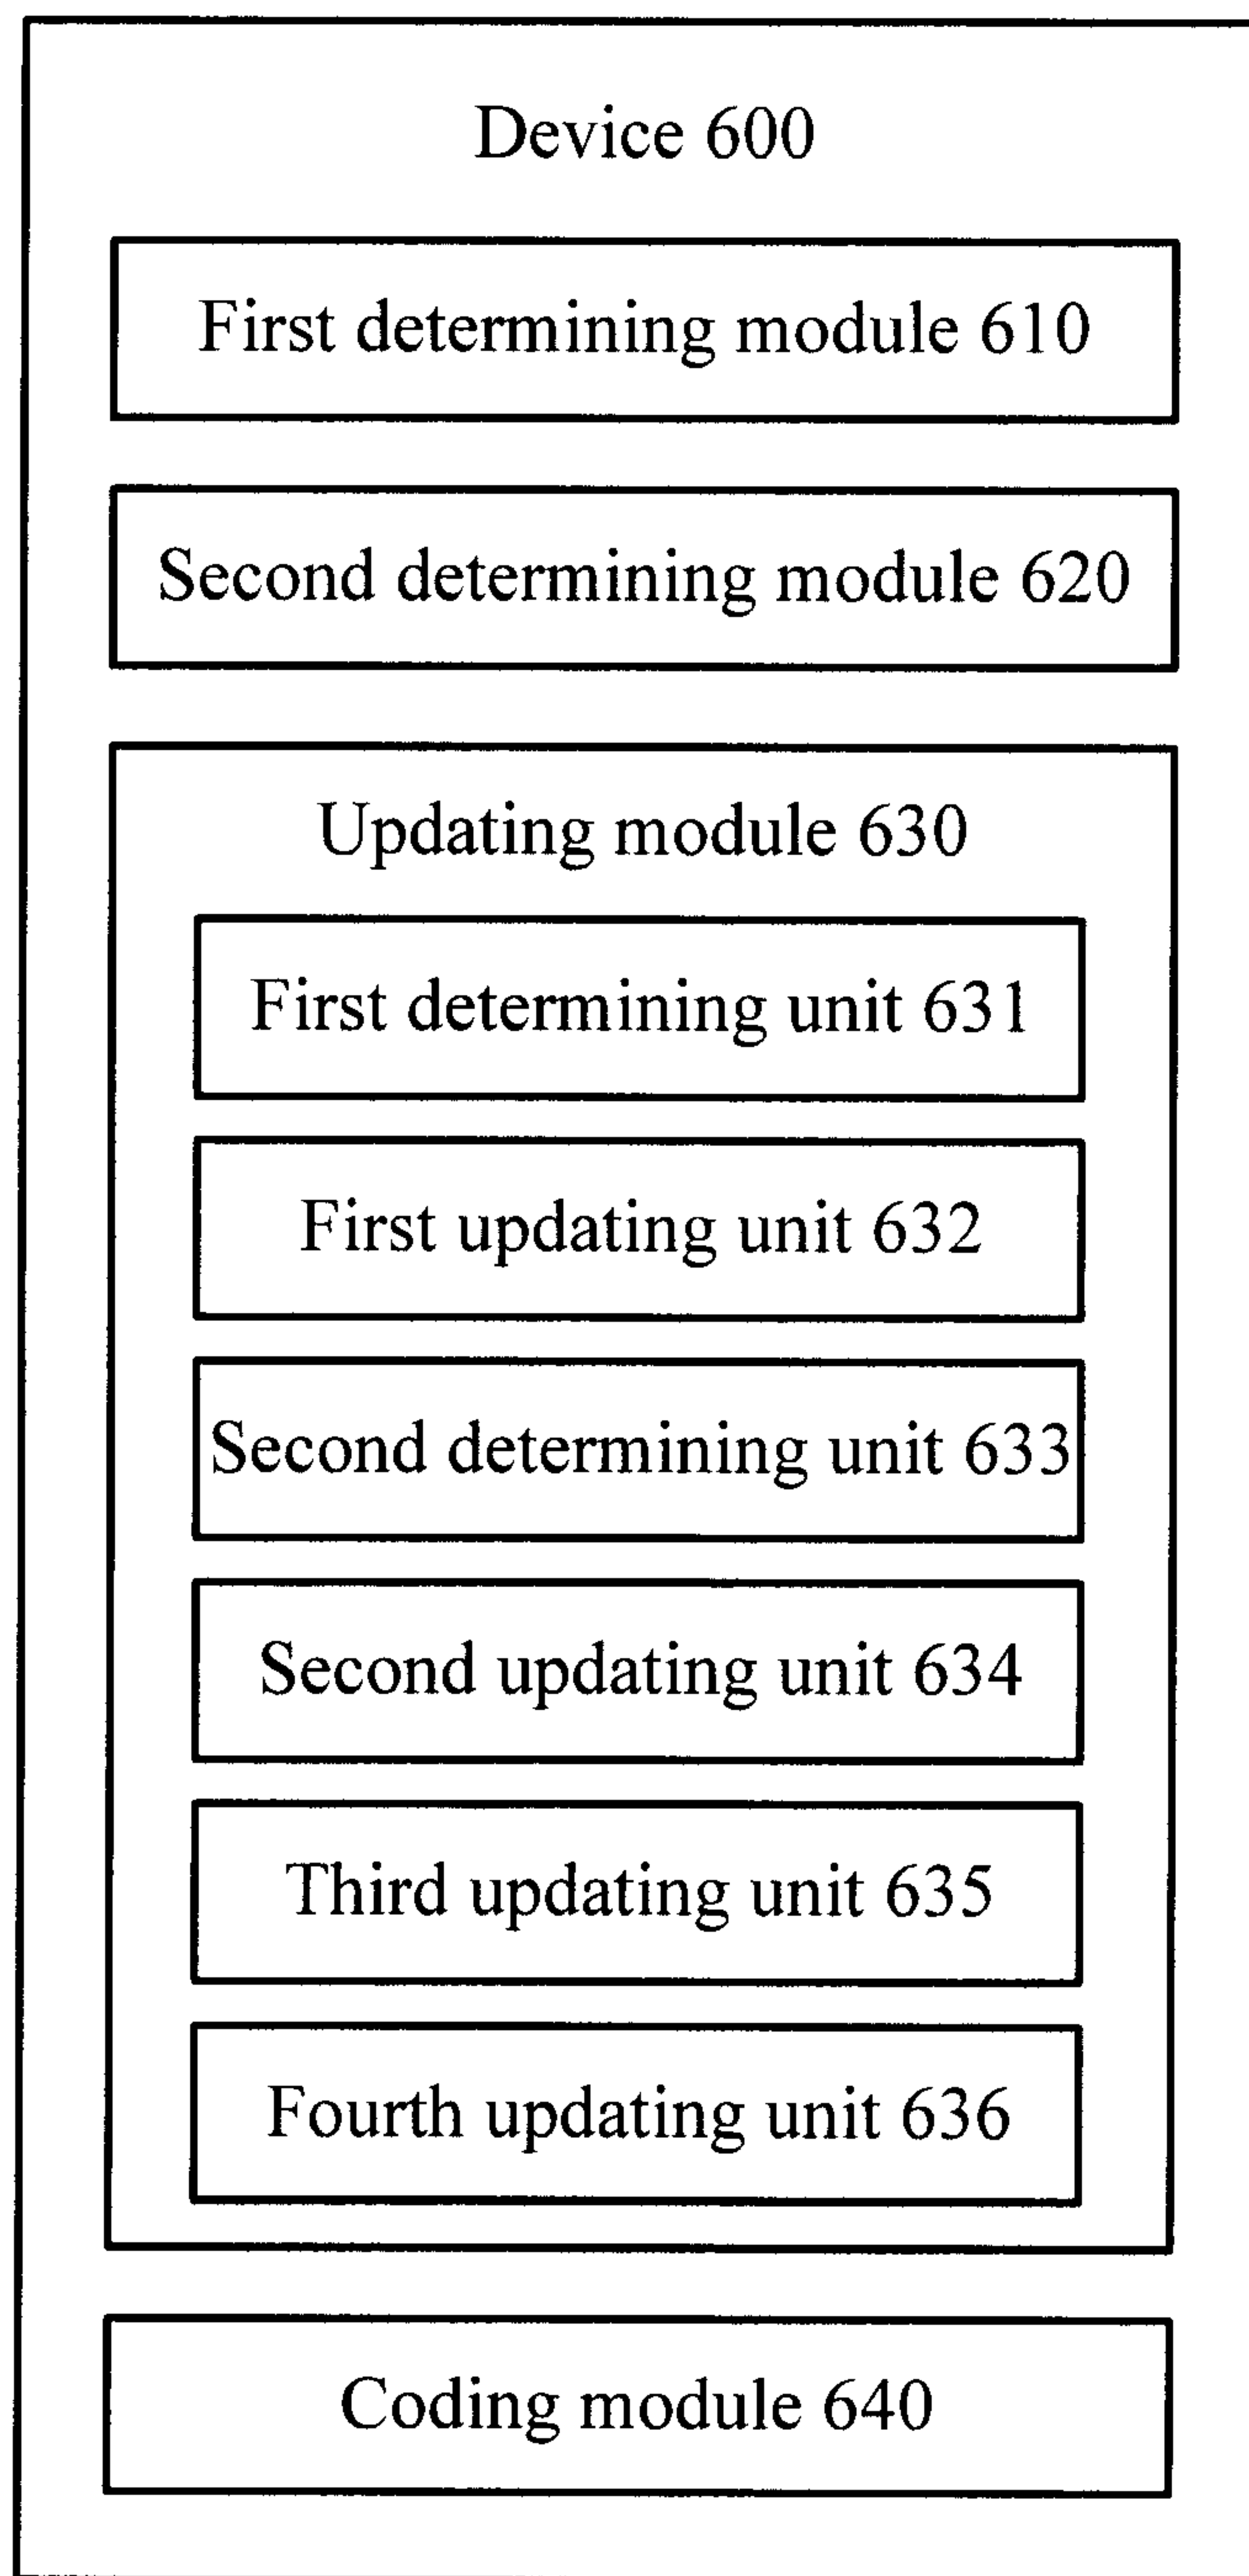


FIG. 8

7/9

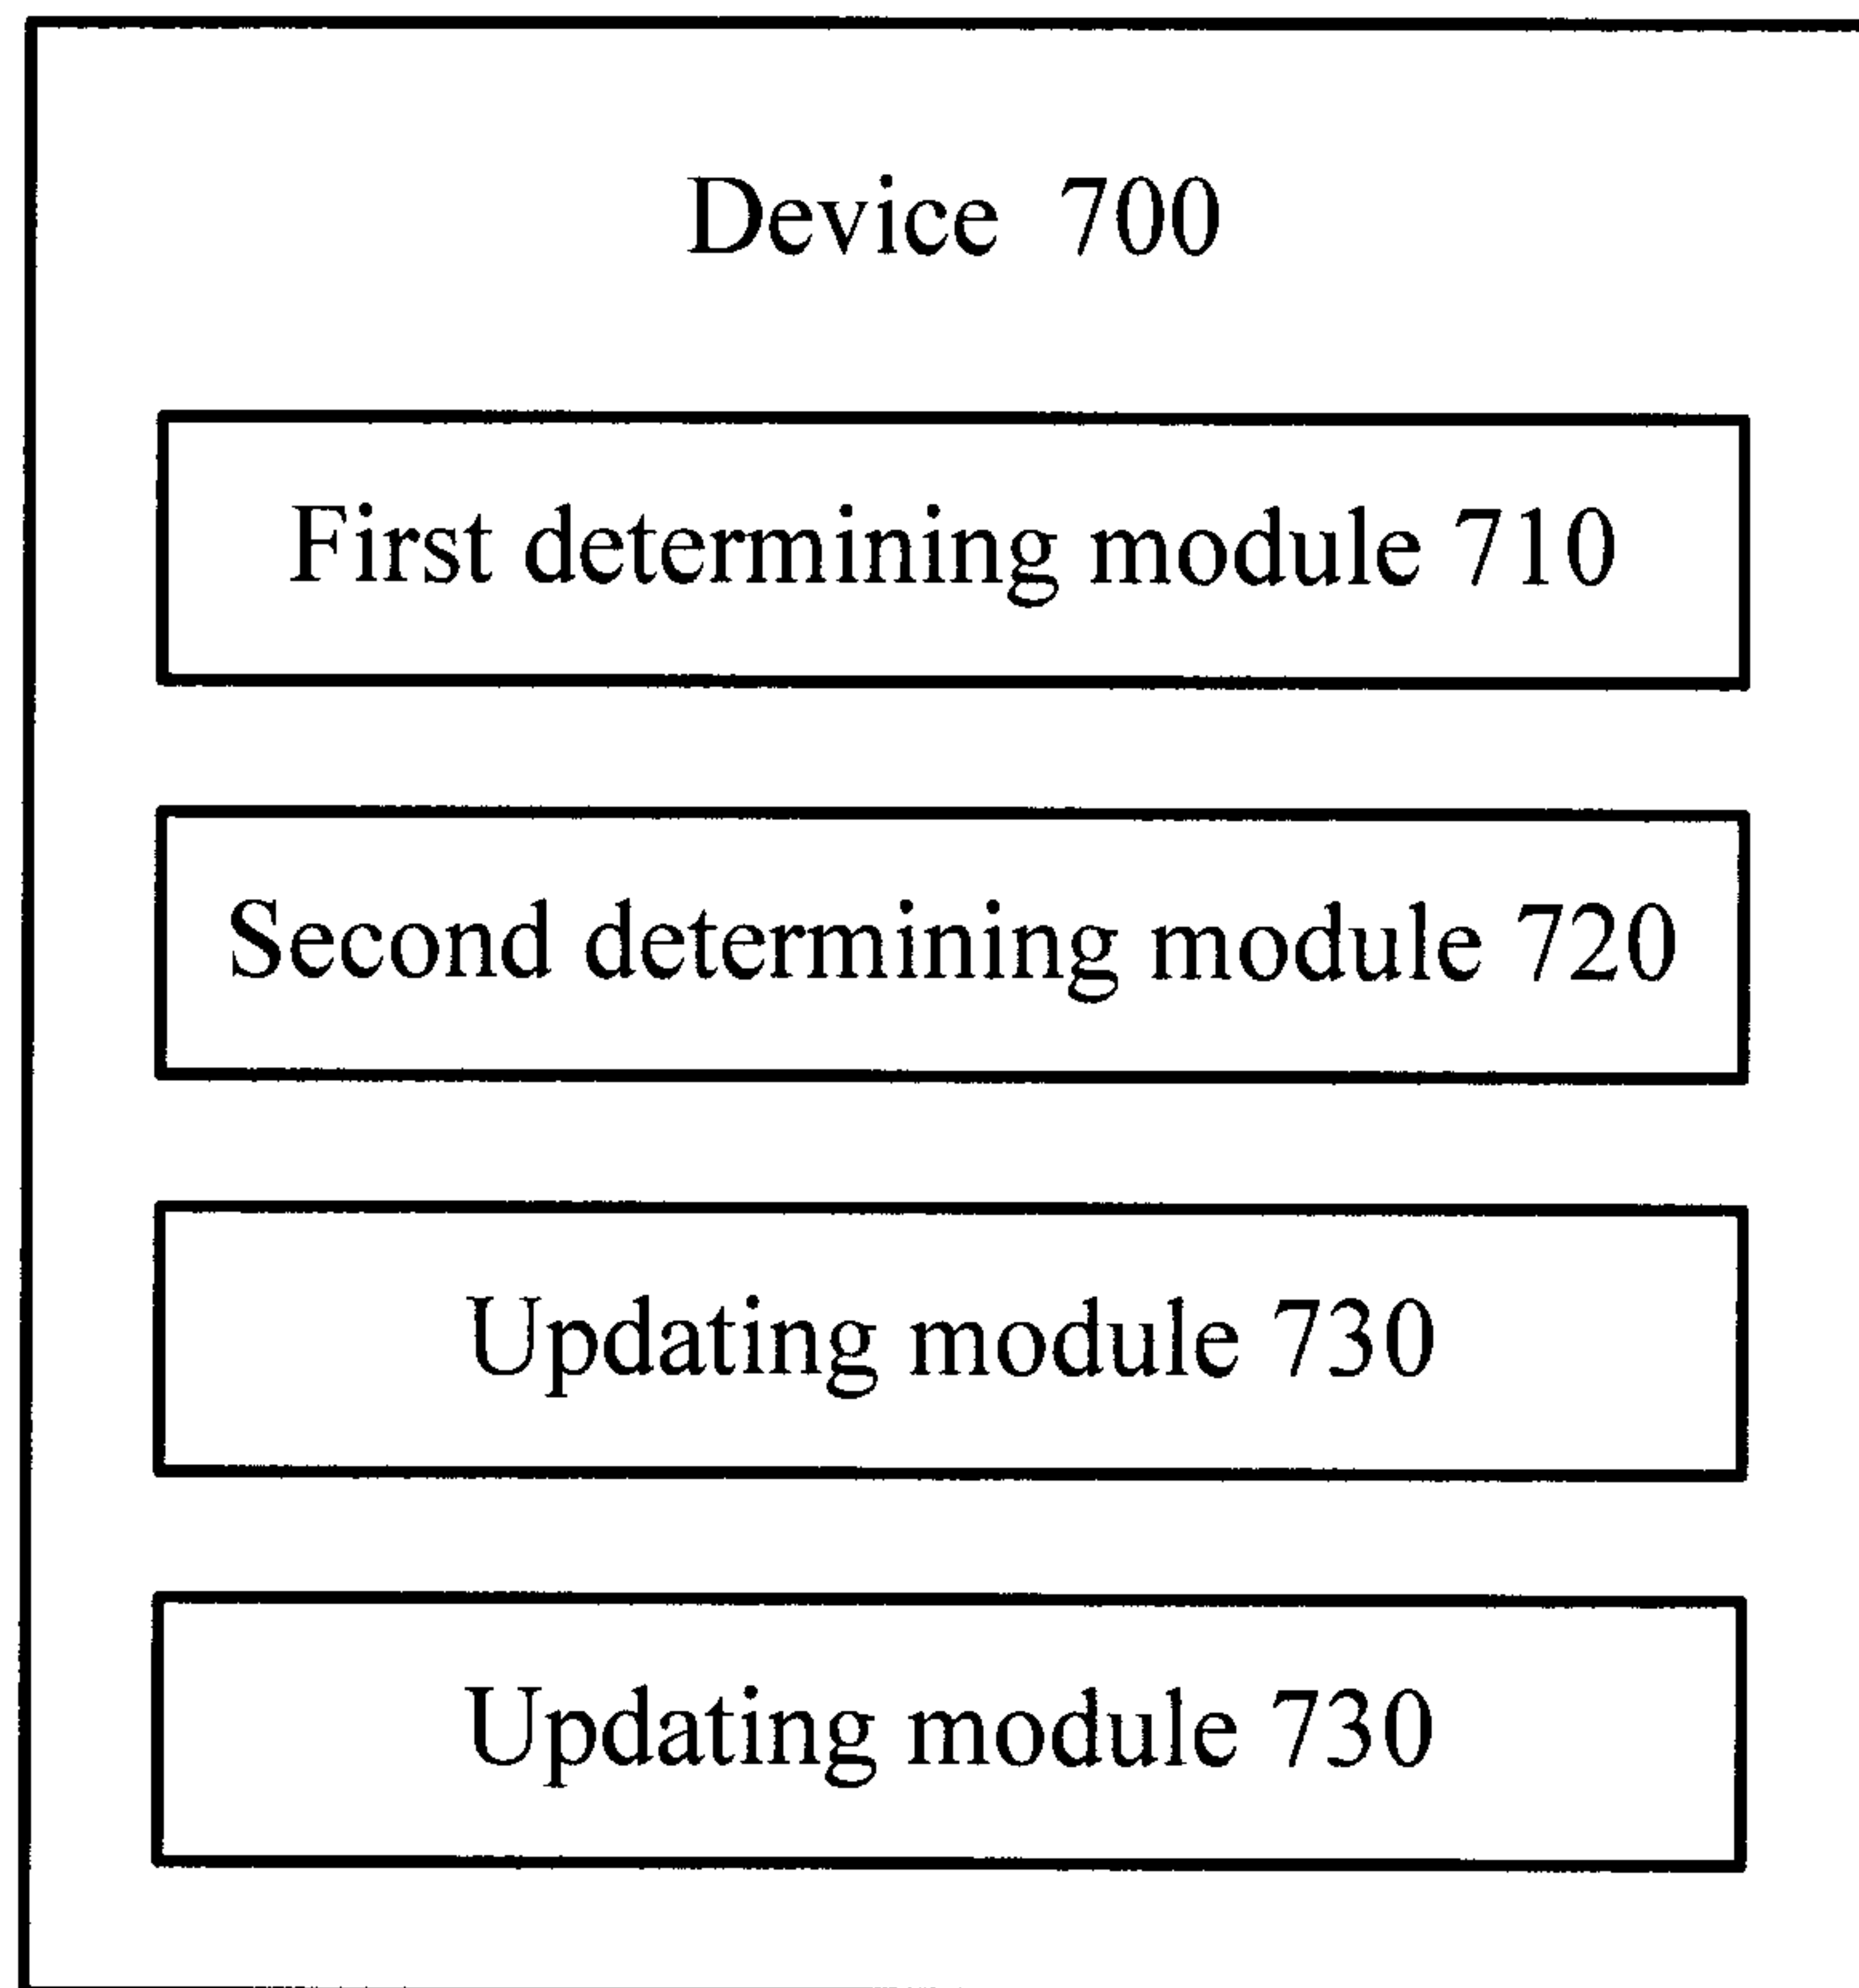


FIG. 9

8/9

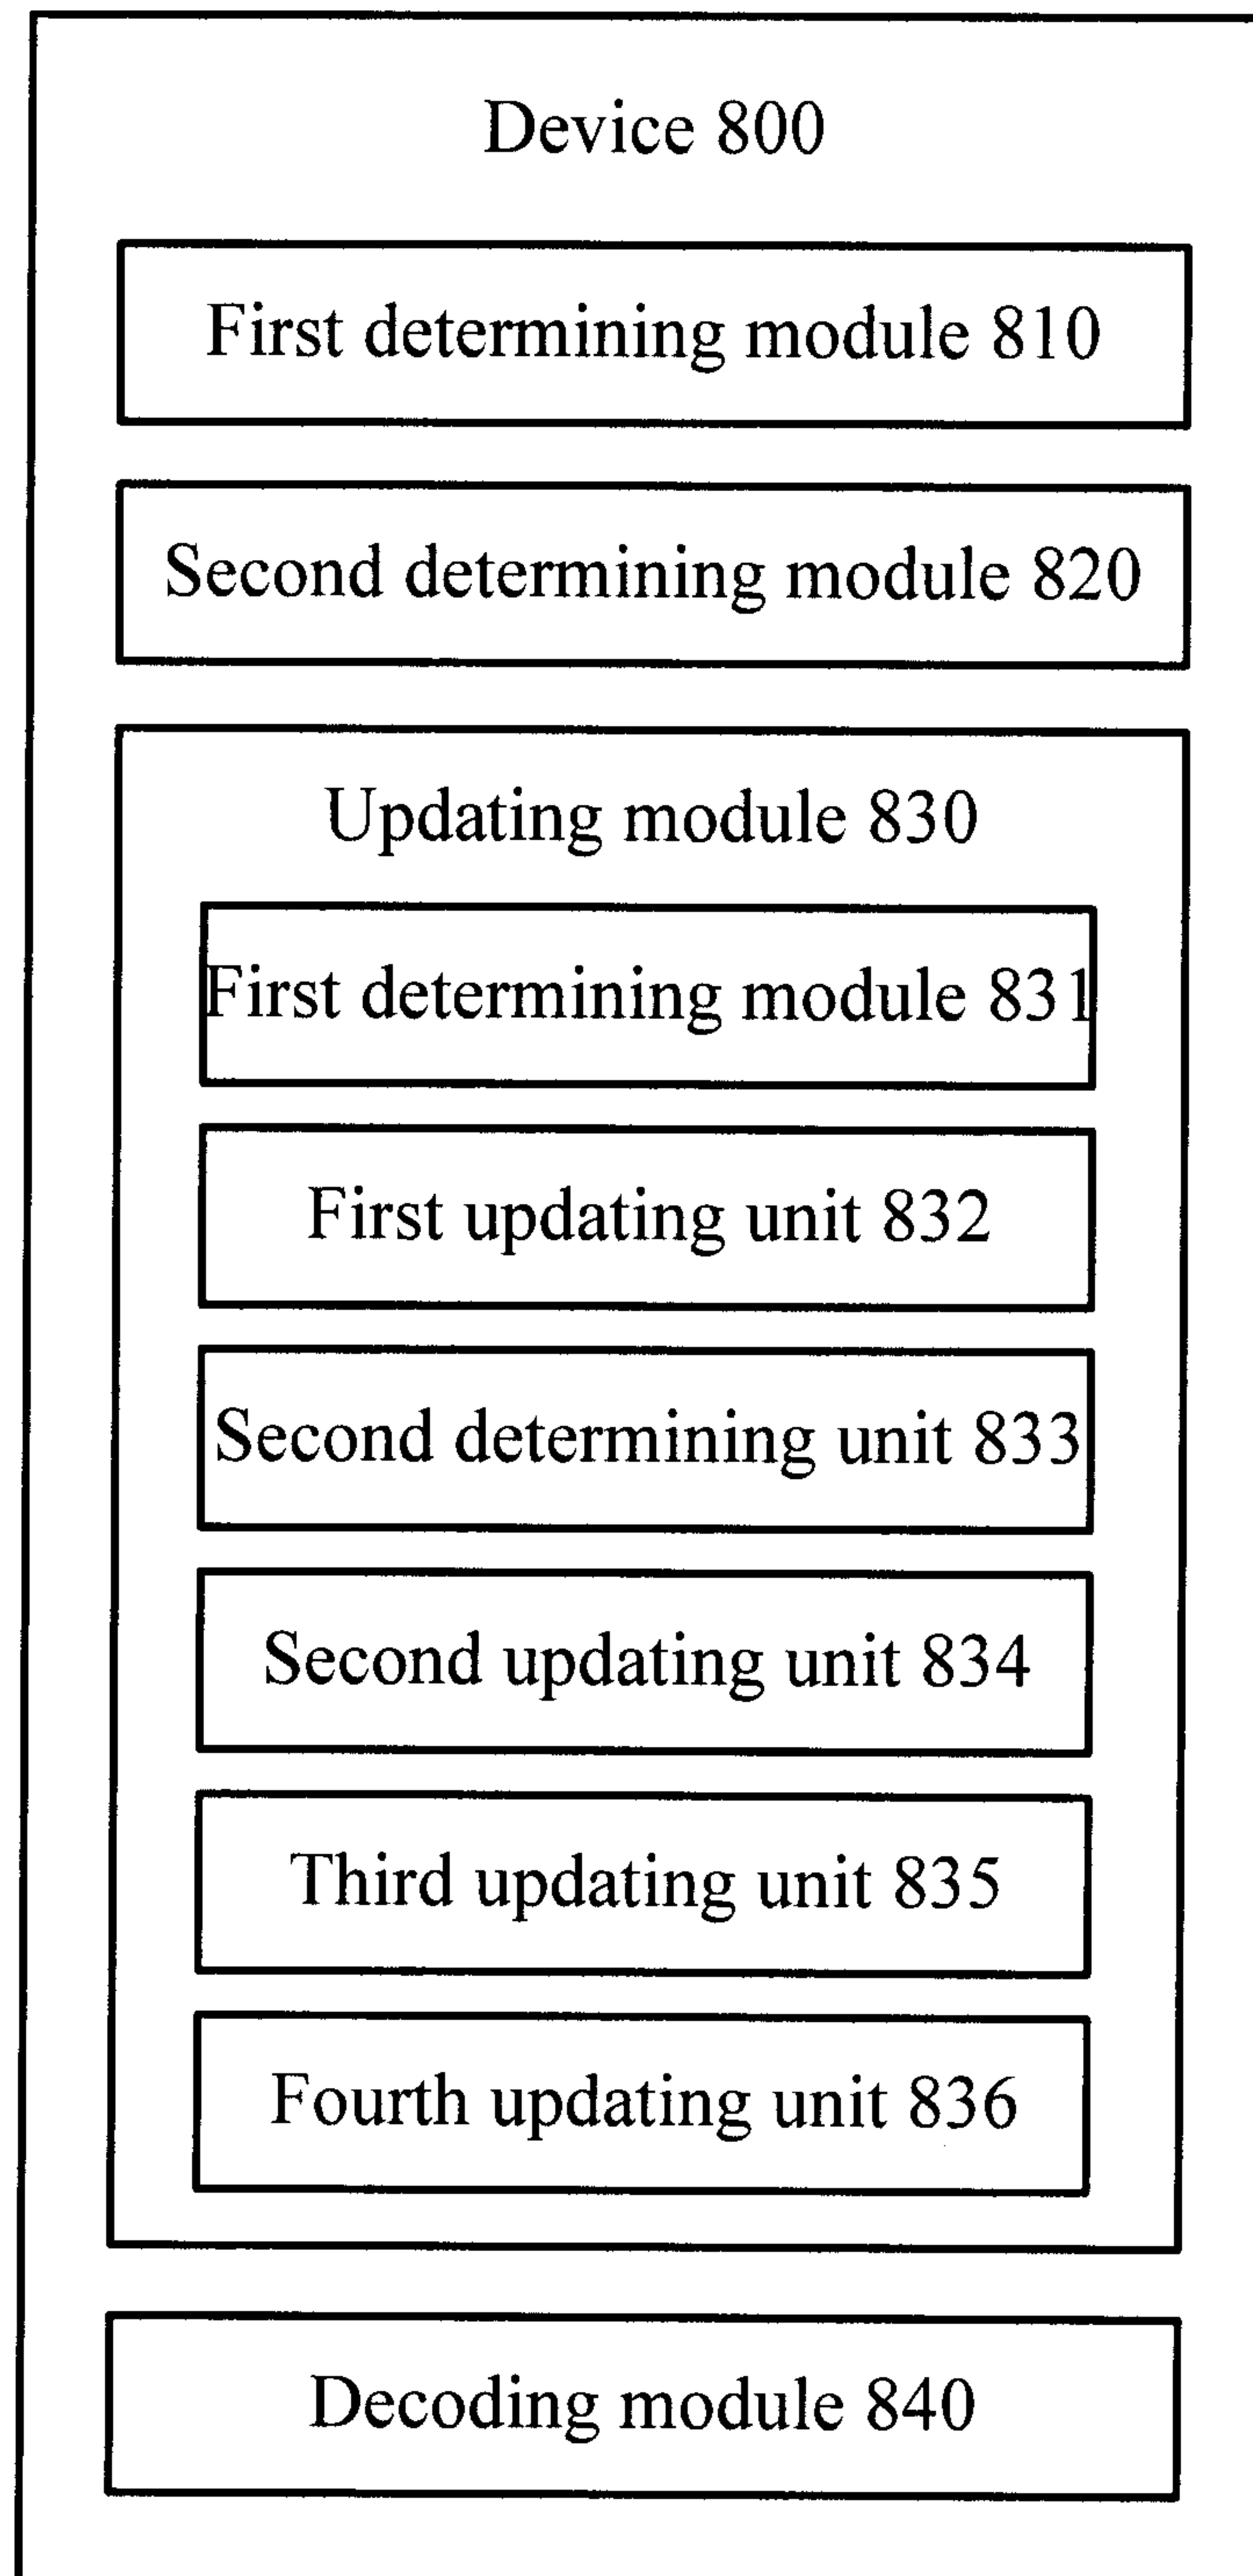


FIG. 10

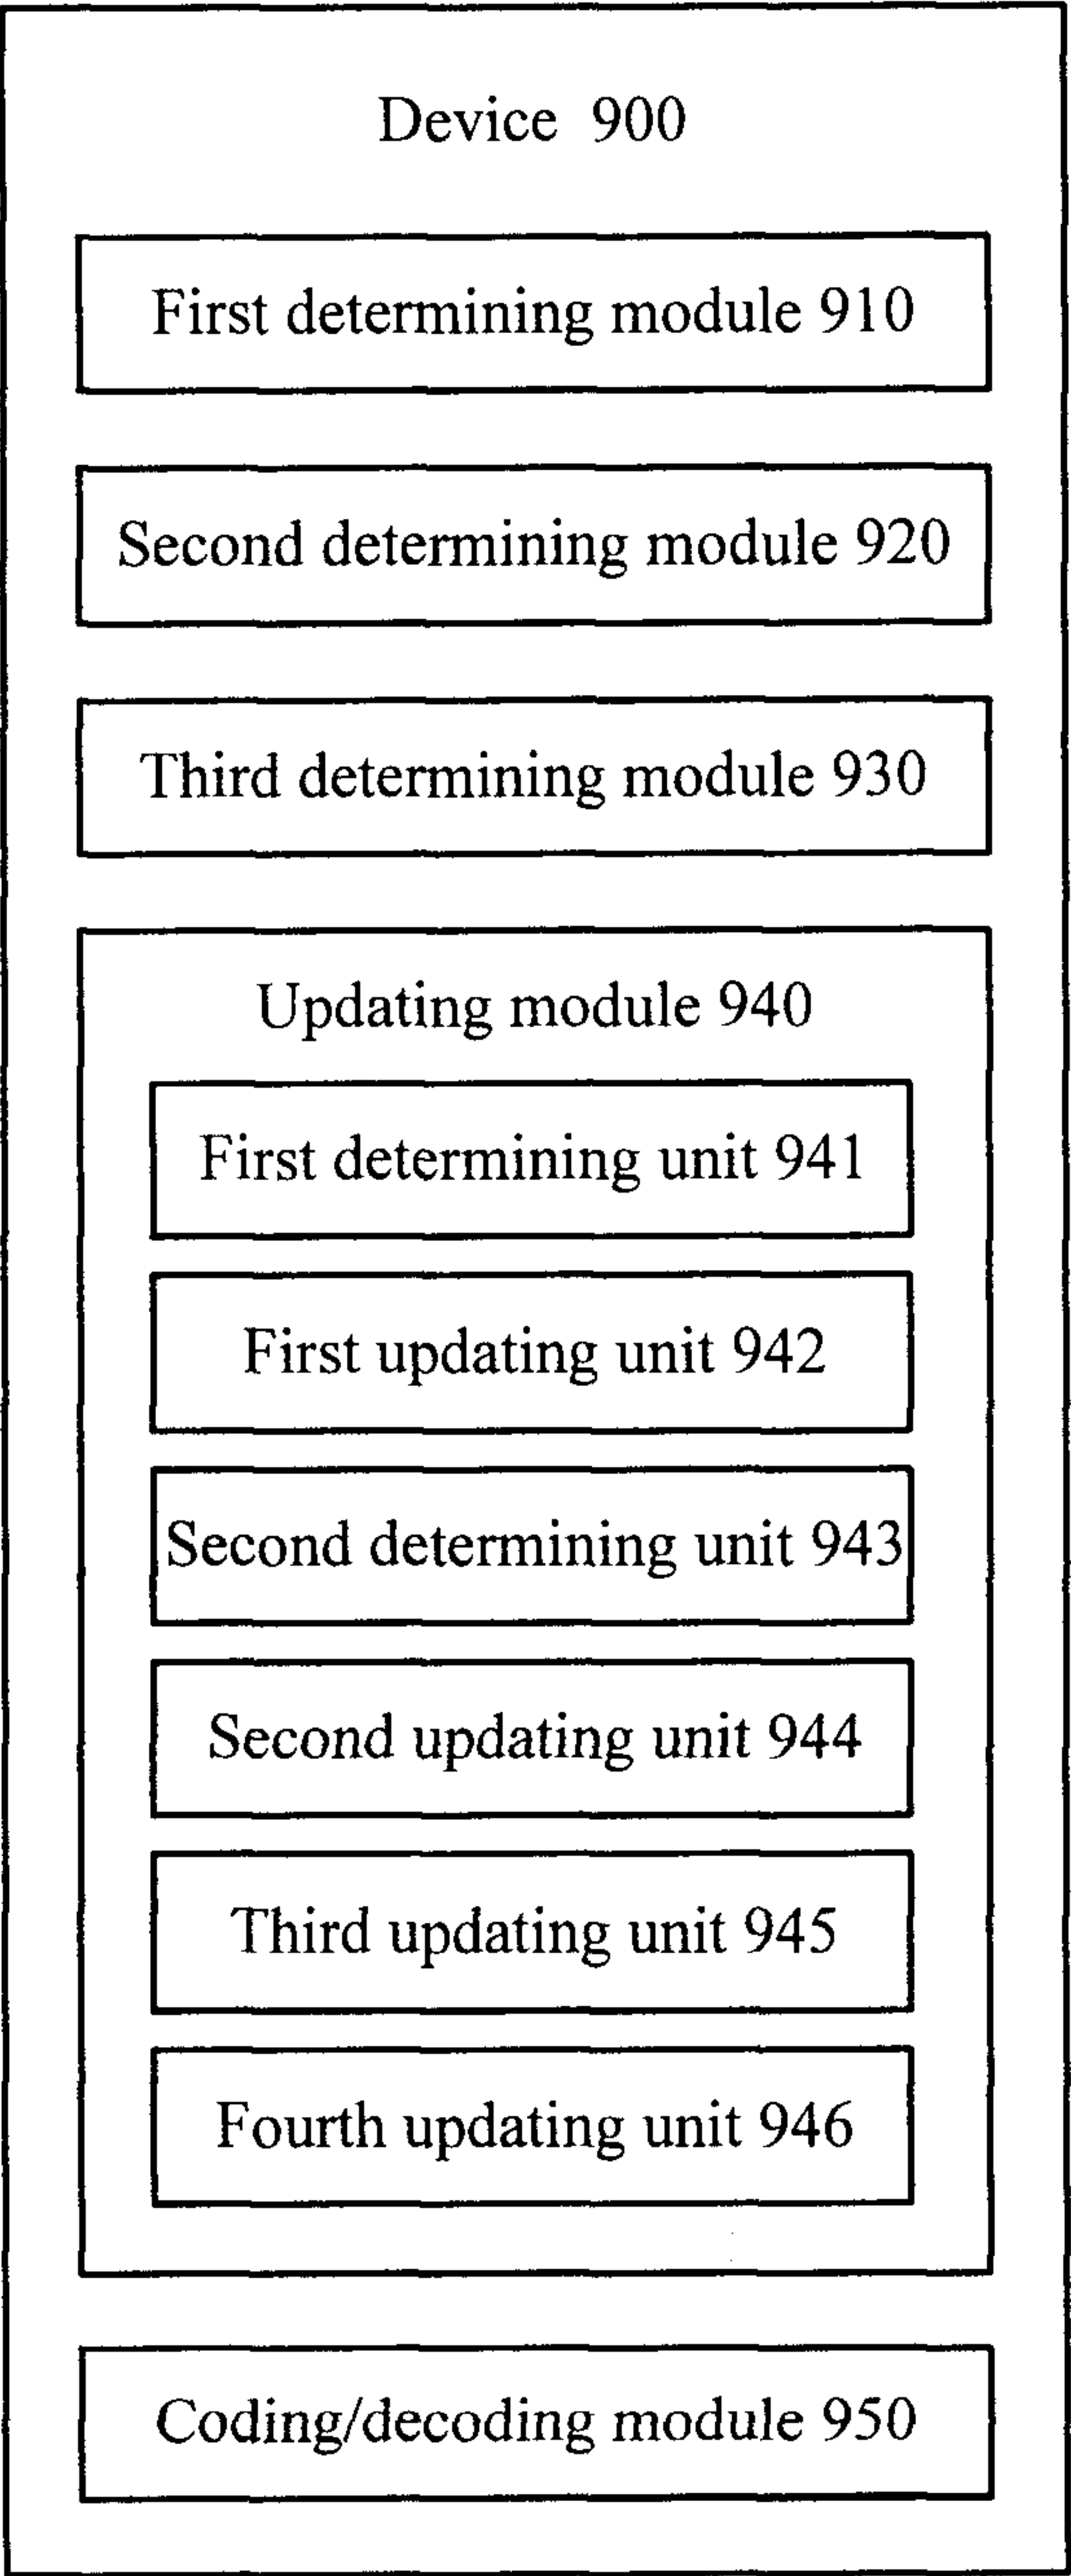


FIG. 11

Determine a current intra coding block that uses a constrained intra prediction method among current inter coded frames

S110



Determine that neighboring coding blocks that are adjacent to the current intra coding block include a neighboring inter coding block

S120



Update image data in the neighboring inter coding block based on an invariable value or image data in a neighboring intra coding block included in the neighboring coding blocks.

S130



Code the current intra coding block based on the updated image data in the neighboring inter coding block

S140