



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2550787 C 2014/09/16

(11)(21) **2 550 787**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(22) Date de dépôt/Filing Date: 2006/06/22

(41) Mise à la disp. pub./Open to Public Insp.: 2006/12/30

(45) Date de délivrance/Issue Date: 2014/09/16

(30) Priorité/Priority: 2005/06/30 (US11/169,695)

(51) Cl.Int./Int.Cl. *B23K 26/24* (2014.01),
B23K 26/323 (2014.01)

(72) Inventeurs/Inventors:

NOWAK, DANIEL ANTHONY, US;
FENG, GANJIANG, US;
SPIEGEL, LYLE B., US

(73) Propriétaire/Owner:


GENERAL ELECTRIC COMPANY, US

(74) Agent: CRAIG WILSON AND COMPANY

(54) Titre : SOUDAGE A CALAGE PAR FAISCEAU LASER D'ASSEMBLAGE DE SUPERALLIAGES POUR
APPLICATIONS DE TURBINES A GAZ

(54) Title: SHIMMED LASER BEAM WELDING PROCESS FOR JOINING SUPERALLOYS FOR GAS TURBINE
APPLICATIONS

Laser Shim Weldment

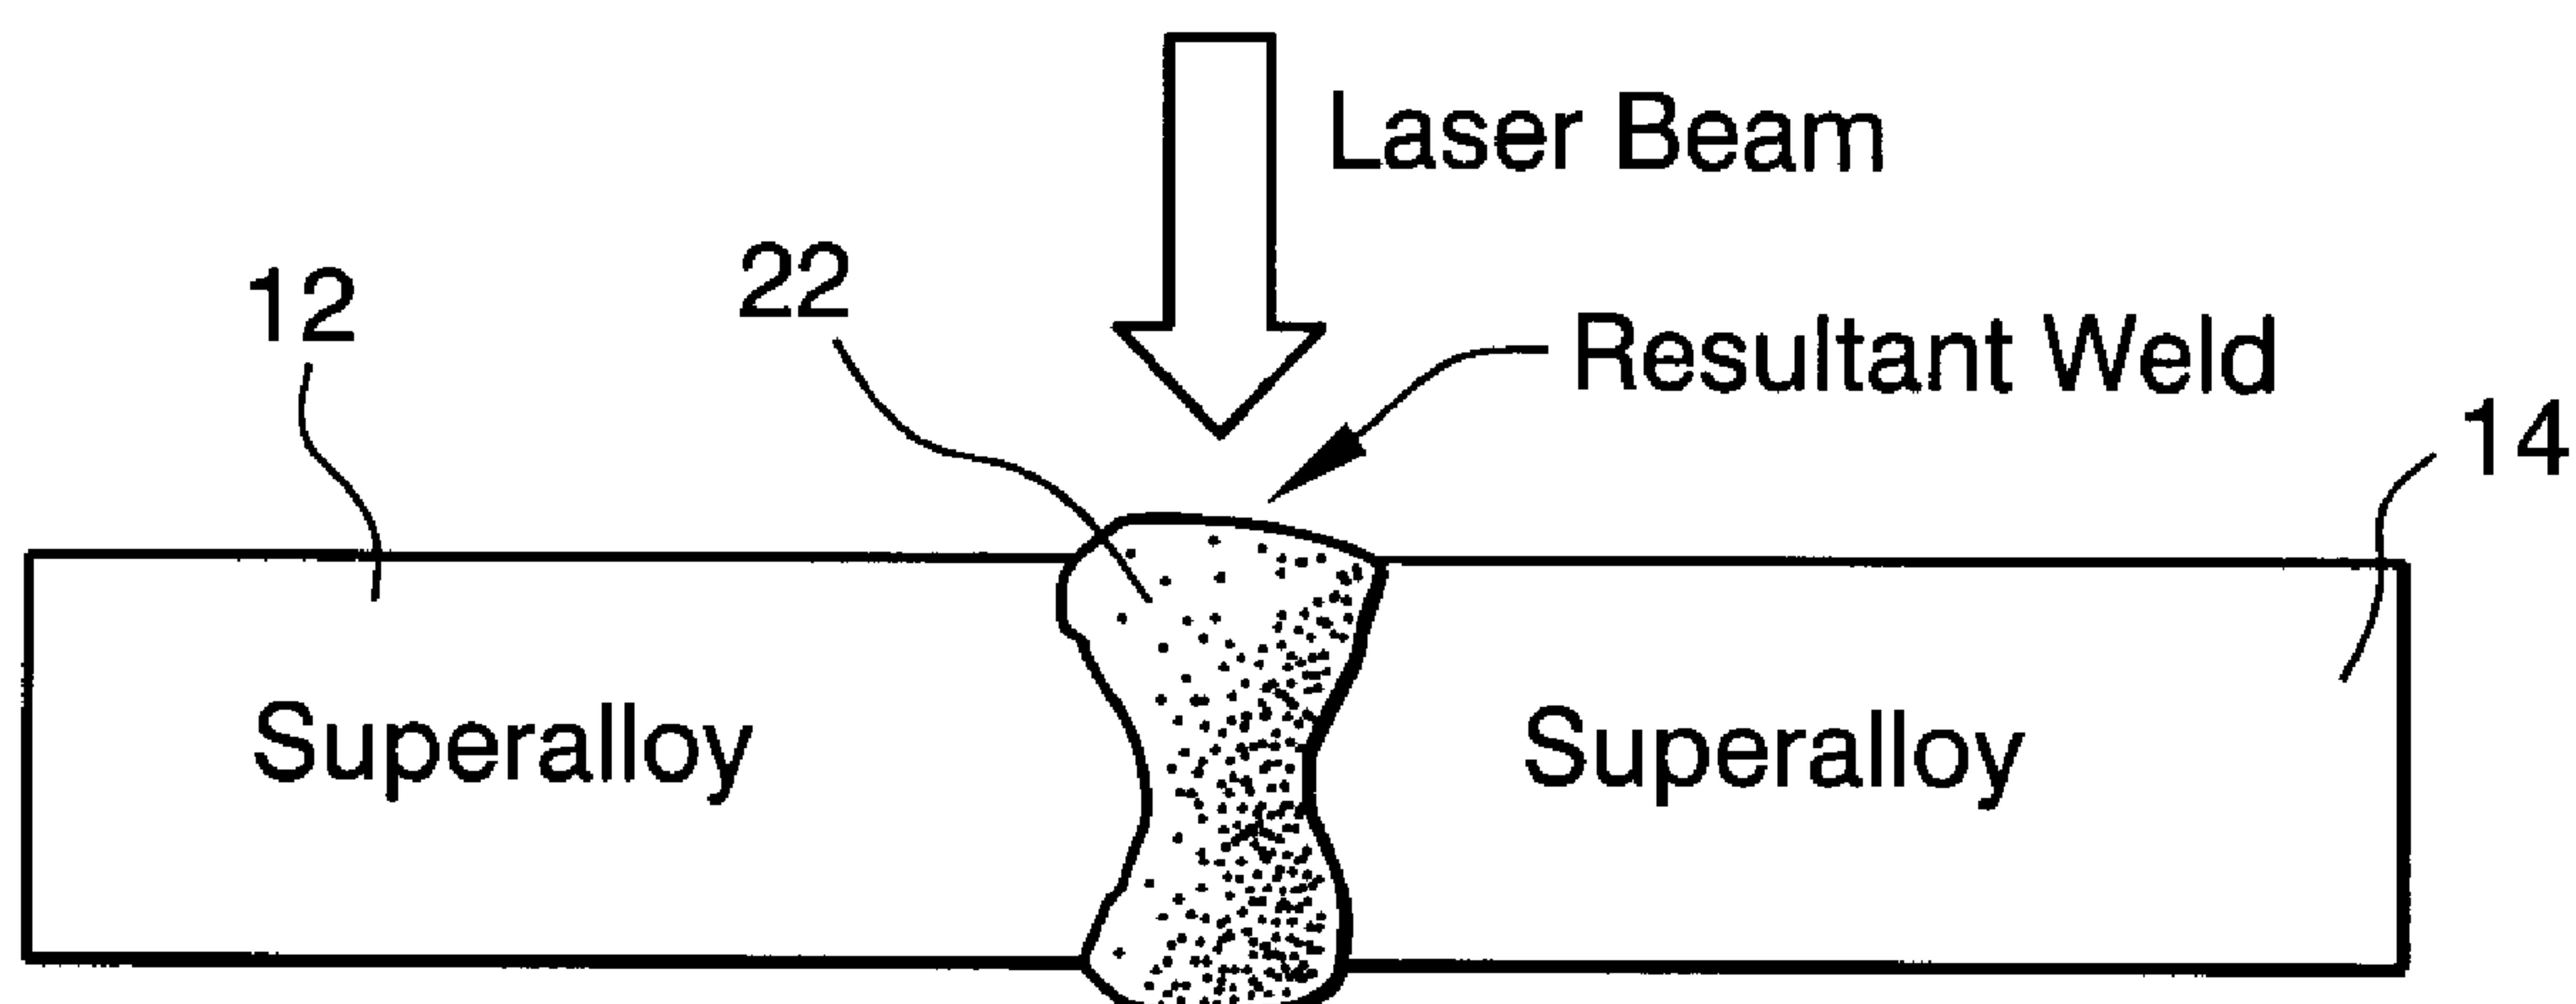

(57) Abrégé/Abstract:

A method of laser beam welding at least two adjacent superalloy components (12, 14) includes (a) aligning the components along a pair of faying surfaces (18, 20) but without a backing plate; (b) placing a superalloy shim (16) between the faying surfaces; (c) welding the components together using a laser beam causing portions of the superalloy components along the faying surfaces to mix with the superalloy shim; and cooling the components to yield a butt weld (22) between the components.

**SHIMMED LASER BEAM WELDING PROCESS FOR JOINING
SUPERALLOYS FOR GAS TURBINE APPLICATIONS**

ABSTRACT OF THE DISCLOSURE

A method of laser beam welding at least two adjacent superalloy components (12, 14) includes (a) aligning the components along a pair of faying surfaces (18, 20) but without a backing plate; (b) placing a superalloy shim (16) between the faying surfaces; (c) welding the components together using a laser beam causing portions of the superalloy components along the faying surfaces to mix with the superalloy shim; and cooling the components to yield a butt weld (22) between the components.

SHIMMED LASER BEAM WELDING PROCESS FOR JOINING SUPERALLOYS FOR GAS TURBINE APPLICATIONS

BACKGROUND OF THE INVENTION

This invention relates to gas turbine technology generally, and specifically, to a laser beam welding process for joining nickel, cobalt and iron-based superalloys.

Nickel-based superalloys like Rene N5, typically contain greater than 10% refractory elements and are generally viewed as unweldable. The use of a low heat input welding process, however, such as laser or electronic beam, has produced crack-free weld joints over a very narrow range of welding conditions. One drawback to these beam processes is the directional grain growth in the fusion zone which forms a distinct dendritic boundary in the center of the weld zone. This type of grain structure makes the joint vulnerable to centerline cracking and results in very poor fatigue strength. For example, the fatigue life of an electron beam welded N5/GTD-222 joint at 1200°F. and 0.9% strain fails at about 100 cycles, which is five times lower than that of lower strength GTD-222 base metal. Weld property levels in this range can result in catastrophic failure of the weld joint during operation of a gas turbine.

To overcome the centerline cracking problems, several alternative processes have been developed for welding superalloys. Among them, the wire feed electron beam process (wire feed EB), preplaced shim electron beam process (shim EB) and the gas tungsten arc process (TIG) have proven to be the best performers in improving fatigue life of the joint. The wire feed EB process adds ductile superalloy filler metal, through an automatic wire feeder during electron beam welding. Because of the increase ductility of the weld metal, the fatigue life of a wire feed EB joint improved to 1000 cycles at 1200°F. and 0.9% strain. However, this process is limited by the joint thickness. Also, lack of penetration (LOP) defects often occur when the joint thickness is increased beyond 0.1 inch. The sharp LOP defect can knock the fatigue life down to less than 10 cycles. The shim EB process greatly increased the joint

thickness, however, an integral backer is required with the weld joint to stop the electron beam. This backer results in a stress riser at the root of the joint.

Another alternative process pursued was TIG welding with ductile superalloy filler metal. This multi-pass arc welding process completely changes the directional grain structure in the weld zone, introduces ductility into the weld metal, and eliminates the integral backer. As a result, the fatigue life of a TIG welded joint increased to 1300 cycles at 1200°F. and 0.9% strain. The high heat input associated with arc welding, however, can cause relatively large airfoil distortions and increase the risk of lack of fusion defects in the weld. Oftentimes, the amount of distortion prohibits the use of the TIG process as the primary welding process for complex airfoil structures.

BRIEF DESCRIPTION OF THE INVENTION

The present invention provides a modified laser beam welding process to facilitate development of a defect-free superalloy weld joint which will improve low cycle fatigue life at high temperature and high strain range. The process is also designed to achieve a full penetration weld up to 0.5 inch deep, eliminate the need for an integral backer, reduce the propensity for lack of penetration defects, and decrease the risk for lack of fusion defects. The process also reduces part distortion and allows fit-up gap variations in the production joints of complex airfoil structures.

More specifically, and in one exemplary embodiment, a 0.010 – 0.040 inch thick nickel-based or cobalt-based shim is pre-placed and inserted between coupons of nickel-based, cobalt-based and iron-based superalloys (for example, GTD-222, GTD-111, A286, FSX-414 and Rene N5). The height of the shim extends about 0.010 inch – 0.150 inch over that of the joint depth. In other words, the shim projects outwardly 0.010 – 0.150 inch above the joint surfaces. The base materials are welded to themselves and to each of the other candidate superalloys, without the use of a backer plate.

Accordingly, in one aspect, the invention relates to a method of laser beam welding at least two adjacent superalloy components comprising: (a) aligning the components along a pair of faying surfaces but without a backing plate; (b) placing a superalloy

shim between the faying surfaces; (c) welding the components together using a laser beam causing portions of the superalloy components along the faying surfaces to mix with the superalloy shim; and cooling the components to yield a butt weld between the components.

In another aspect, the invention relates to method of laser beam welding at least two superalloy components comprising aligning the components along a pair of faying surfaces but without a backing plate; placing a superalloy shim between the faying surfaces; welding the components together using a laser beam causing portions of the superalloy components along the faying surfaces to mix with the superalloy shim; and cooling the components to yield a butt weld between the components; wherein the shim projects about 0.010 to 0.150° above the adjacent components; and wherein parameters for the laser welding include:

Wattage: 1000-3500

Speed: 8 to 30 ipm (inches per minute)

Focal Length: 7 1/2 inches

Shim Thickness: 0.010 to 0.040 inch

Gap: 0 to 0.010 inch between shim and faying

surfaces.

The invention will now be described in detail in connection with the drawings identified below.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a schematic diagram of a laser shim welding setup prior to welding; and

FIGURE 2 is a schematic diagram of a finished laser shim weldment.

167113 (17MY)

DETAILED DESCRIPTION OF THE INVENTION

With reference to Figure 1, a laser shim welding setup 10 includes a pair of coupons 12, 14 of a nickel-based superalloy (for example, GTD-222), with a shim 16 inserted between opposed faying surfaces 18, 20 located on either side of the nickel-based or cobalt-based shim 16. In the disclosed example, the shim 16 is between 0.010 and 0.040 inch thick, and note that the height of the shim extends about 0.10 to 0.150 inch over that of the joint depth, i.e., over the height or thickness of the coupons 12 and 14. The weld joint mock-ups are fit-up with weld joint gaps from 0 to 0.010 inch (between the shim 16 and faying surfaces 18, 20), and tack welded using a lower power setting with a laser beam. Spot tacks may be made every one half inch along the length of the joint.

In the disclosed example, the welding parameters used for the laser shim welding process may be as follows:

Wattage: 1000-3500

Speed: 8 to 30 ipm (inches per minute)

Focal Length: 7 1/2 inches

Shim Thickness: 0.010 to 0.040 inch

Gap: 0 to 0.010 inch.

Note that in laser beam welding, the beam itself moves along the weld joint whether it be planar or circular.

Figure 2 illustrates the resultant butt weld 22, after cooling, bonding the superalloy coupons 12 and 14 together with the faying surfaces 18, 20 mixing with the material of the shim 16. Note that even without the backing plate, the weld material projects only slightly below the lower surfaces of the respective coupons 12, 14 and can be machined flush if desired. Similarly, the upper irregular surface of the weld may also be machined flush with the coupons.

It will be appreciated that the above-described laser shim welding process is also suitable for use with cobalt-based and iron-based superalloys, for example, GTD-111, A286, FSX-414, and Rene N5.

The modified laser beam welding process yields full penetration welds of up to 0.5 inch deep, eliminates the need for the integral backer plate, reduces the propensity for a lack of penetration defects, and decreases the risk for lack of fusion defects.

While described in terms of components or coupons, it will be appreciated that the welded components may be any of a variety of turbine parts, for example, steam exit chimneys to nozzle joints; bucket to bucket tip caps, etc.

While there have been described herein what are considered to be preferred and exemplary embodiments of the present invention, other modifications of these embodiments falling within the invention described herein shall be apparent to those skilled in the art.

WHAT IS CLAIMED IS:

1. A method of laser beam welding at least two adjacent superalloy components (12, 14) comprising:

(a) aligning the components along a pair of faying surfaces (18, 20) but without a backing plate;

(b) placing a superalloy shim (16) between the faying surfaces;

(c) welding the components together using a laser beam causing portions of the superalloy components along the faying surfaces to mix with the superalloy shim; and cooling the components to yield a butt weld (22) between the components,

wherein parameters for carrying out step (c) include:

Wattage: 1000-3500

Speed: 8 to 30 ipm

Focal Length: 7 ½ inches

Shim Thickness: 0.010 to 0.040 inch

Gap: 0 to 0.010 inch.

2. The method of claim 1 wherein the superalloy components (12, 14) are nickel-based, cobalt-based or iron-based superalloys.

3. The method of claim 1 wherein said shim (16) is a nickel-based or cobalt-based superalloy.

4. The method of claim 1 wherein the shim (16) projects above the adjacent components.

5. The method of claim 4 wherein the shim (16) projects about 0.010 to 0.150 inch above the adjacent components.

6. The method of claim 1 wherein the shim (16) extends above the adjacent faying surfaces.

7. The method of claim 1 wherein the shim (16) has a thickness of 0.010 to 0.040 inch.

8. A method of laser beam welding at least two superalloy components (12, 14) comprising:

aligning the components along a pair of faying surfaces (18, 20) but without a backing plate;

placing a superalloy shim (16) between the faying surfaces;

welding the components together using a laser beam causing portions of the superalloy components along the faying surfaces to mix with the superalloy shim; and cooling the components to yield a butt weld (22) between the components;

wherein the shim (16) projects about 0.010 to 0.150 inch above the adjacent components (12, 14); and

wherein parameters for the laser welding include:

Wattage: 1000-3500

Speed: 8 to 30 ipm

Focal Length: 7 1/2 inches

Shim Thickness: 0.010 to 0.040 inch

Gap: 0 to 0.010 inch.

9. A method of laser beam welding at least two adjacent superalloy components (12, 14) comprising:

(a) aligning the components along a pair of faying surfaces (18, 20) but without a backing plate;

(b) placing a superalloy shim (16) between the faying surfaces;

(c) welding the components together using a laser beam causing portions of the superalloy components along the faying surfaces to mix with the superalloy shim; and cooling the components to yield a butt weld (22) between the components;

characterized in that:

spot tacks are made every 12.7 mm (one half inch) along the length of the joint; and wherein the parameters for carrying out step (c) include:

Wattage: 1000-3500 W

Speed: 20 to 76 cmpm (8 to 30 ipm)

Focal Length: 190 mm (7 1/2 inches)

Shim Thickness: 0.25 to 1.01 mm (0.010 to 0.040 inch)

Gap: 0 to 0.25 mm (0 to 0.010 inch) between shim and faying surfaces so that this layer process yields full penetration welds of up to 12.7 mm (0.5 inch).

10. The method of claim 9 wherein the superalloy components (12, 14) are nickel-based, cobalt-based or iron-based superalloys.

11. The method of claim 9 or claim 10 wherein said shim (16) is a nickel-based or cobalt-based superalloy.

12. The method of any one of claims 9 to 11 wherein the shim (16) projects above the adjacent components.

13. The method of claim 12 wherein the shim (16) projects about 0.25 to 3.8 mm (0.010 to 0.150 inch) above the adjacent components.

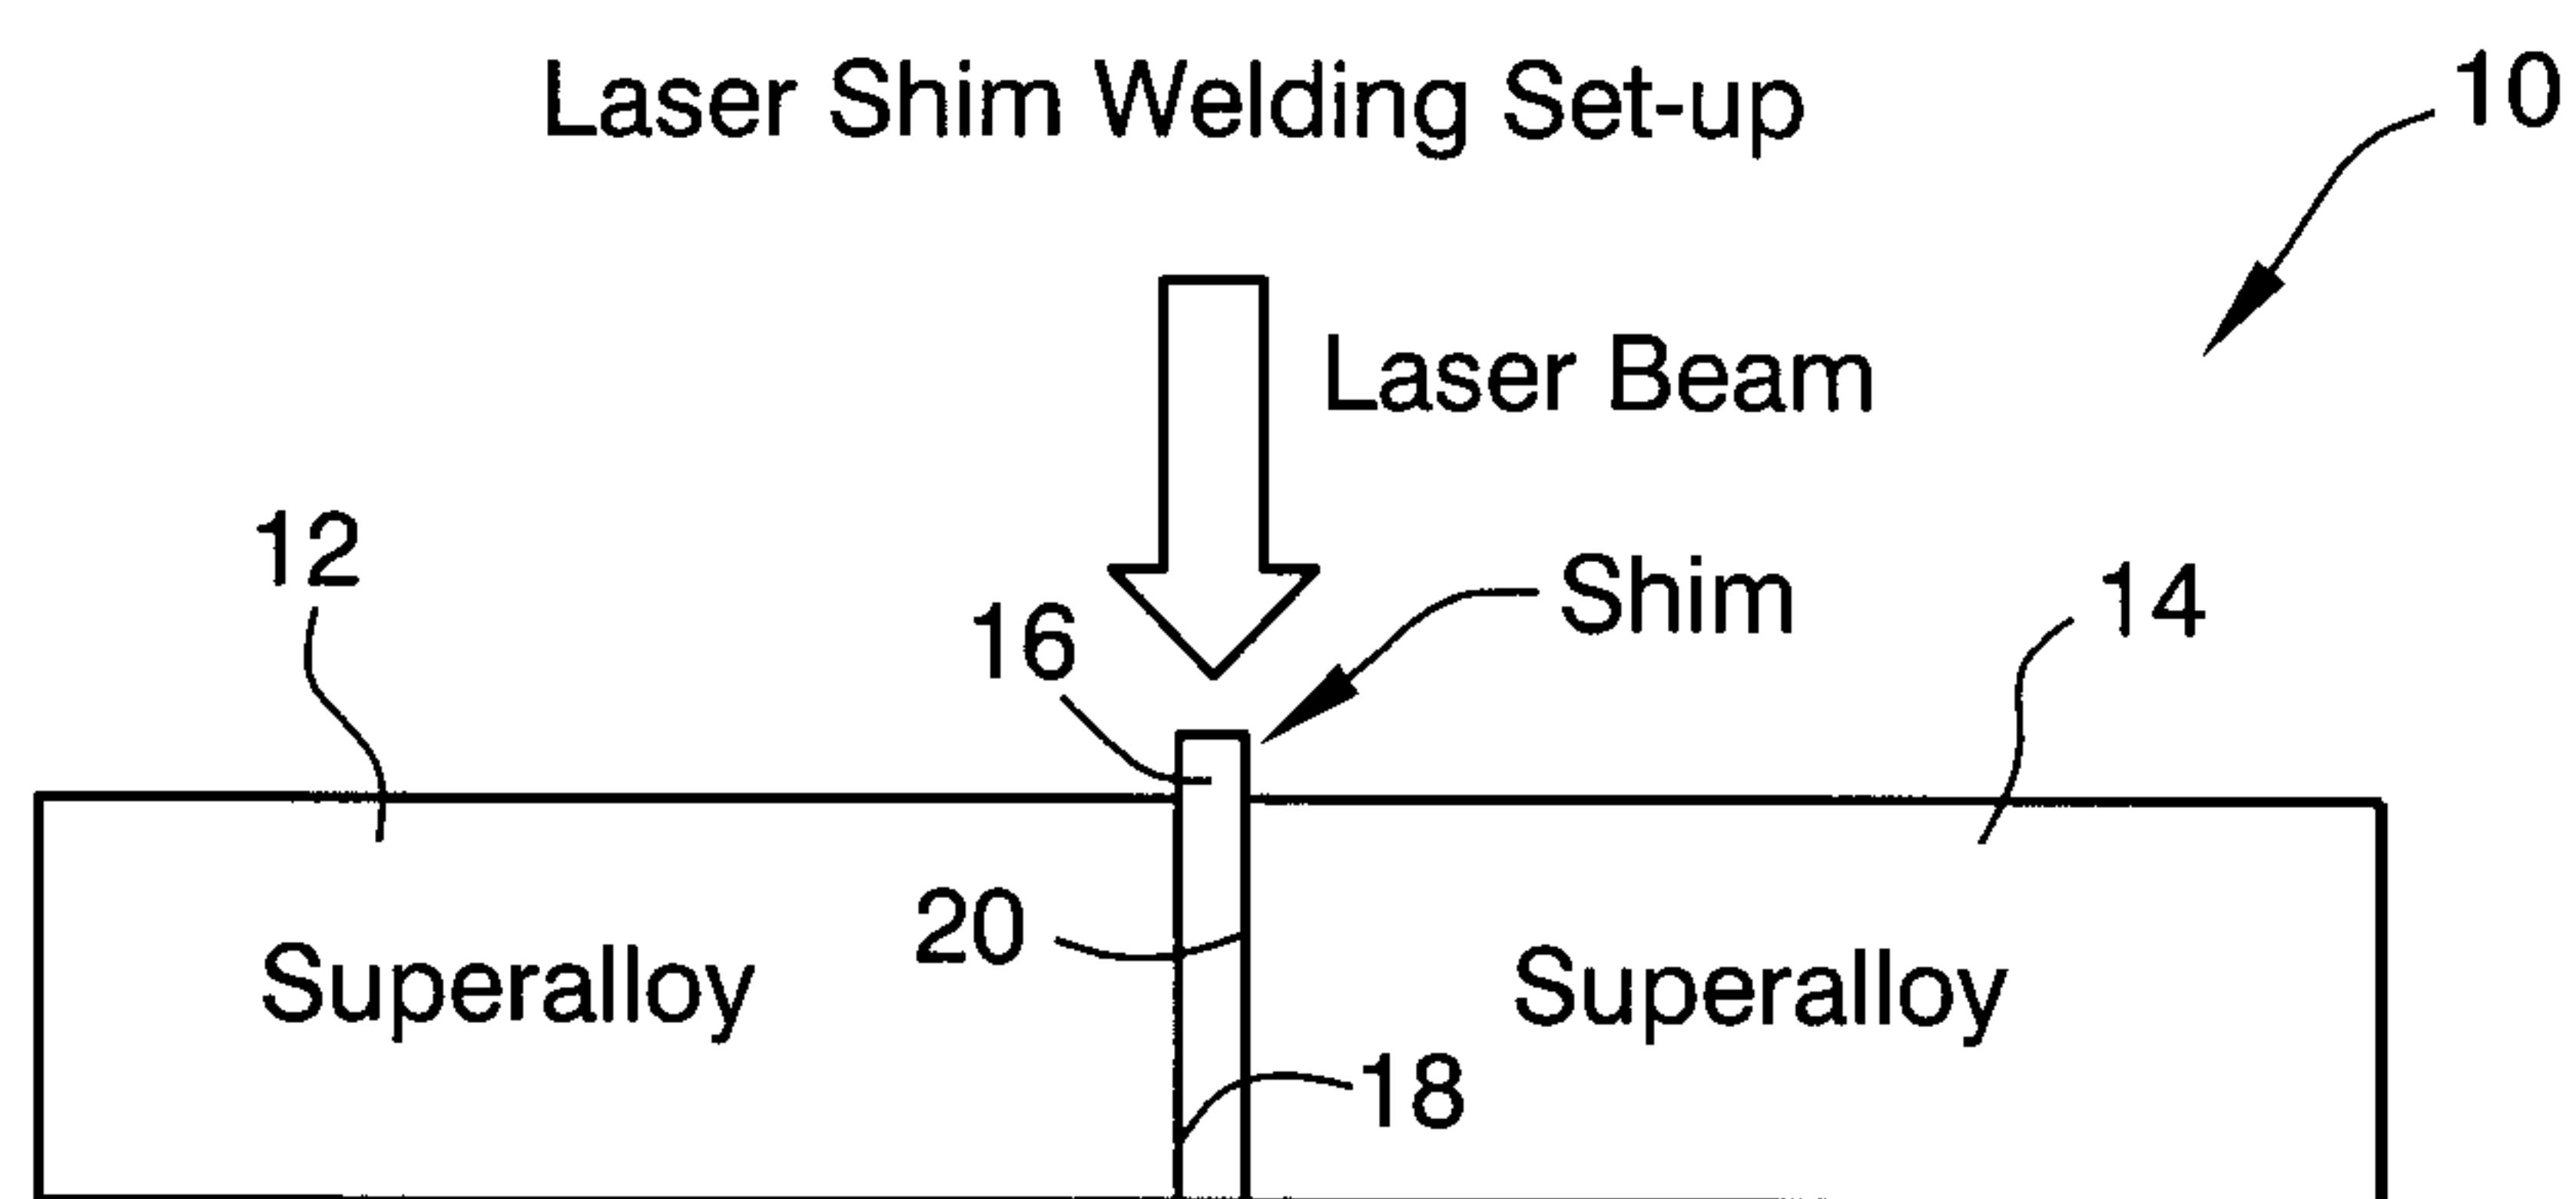


Fig. 1

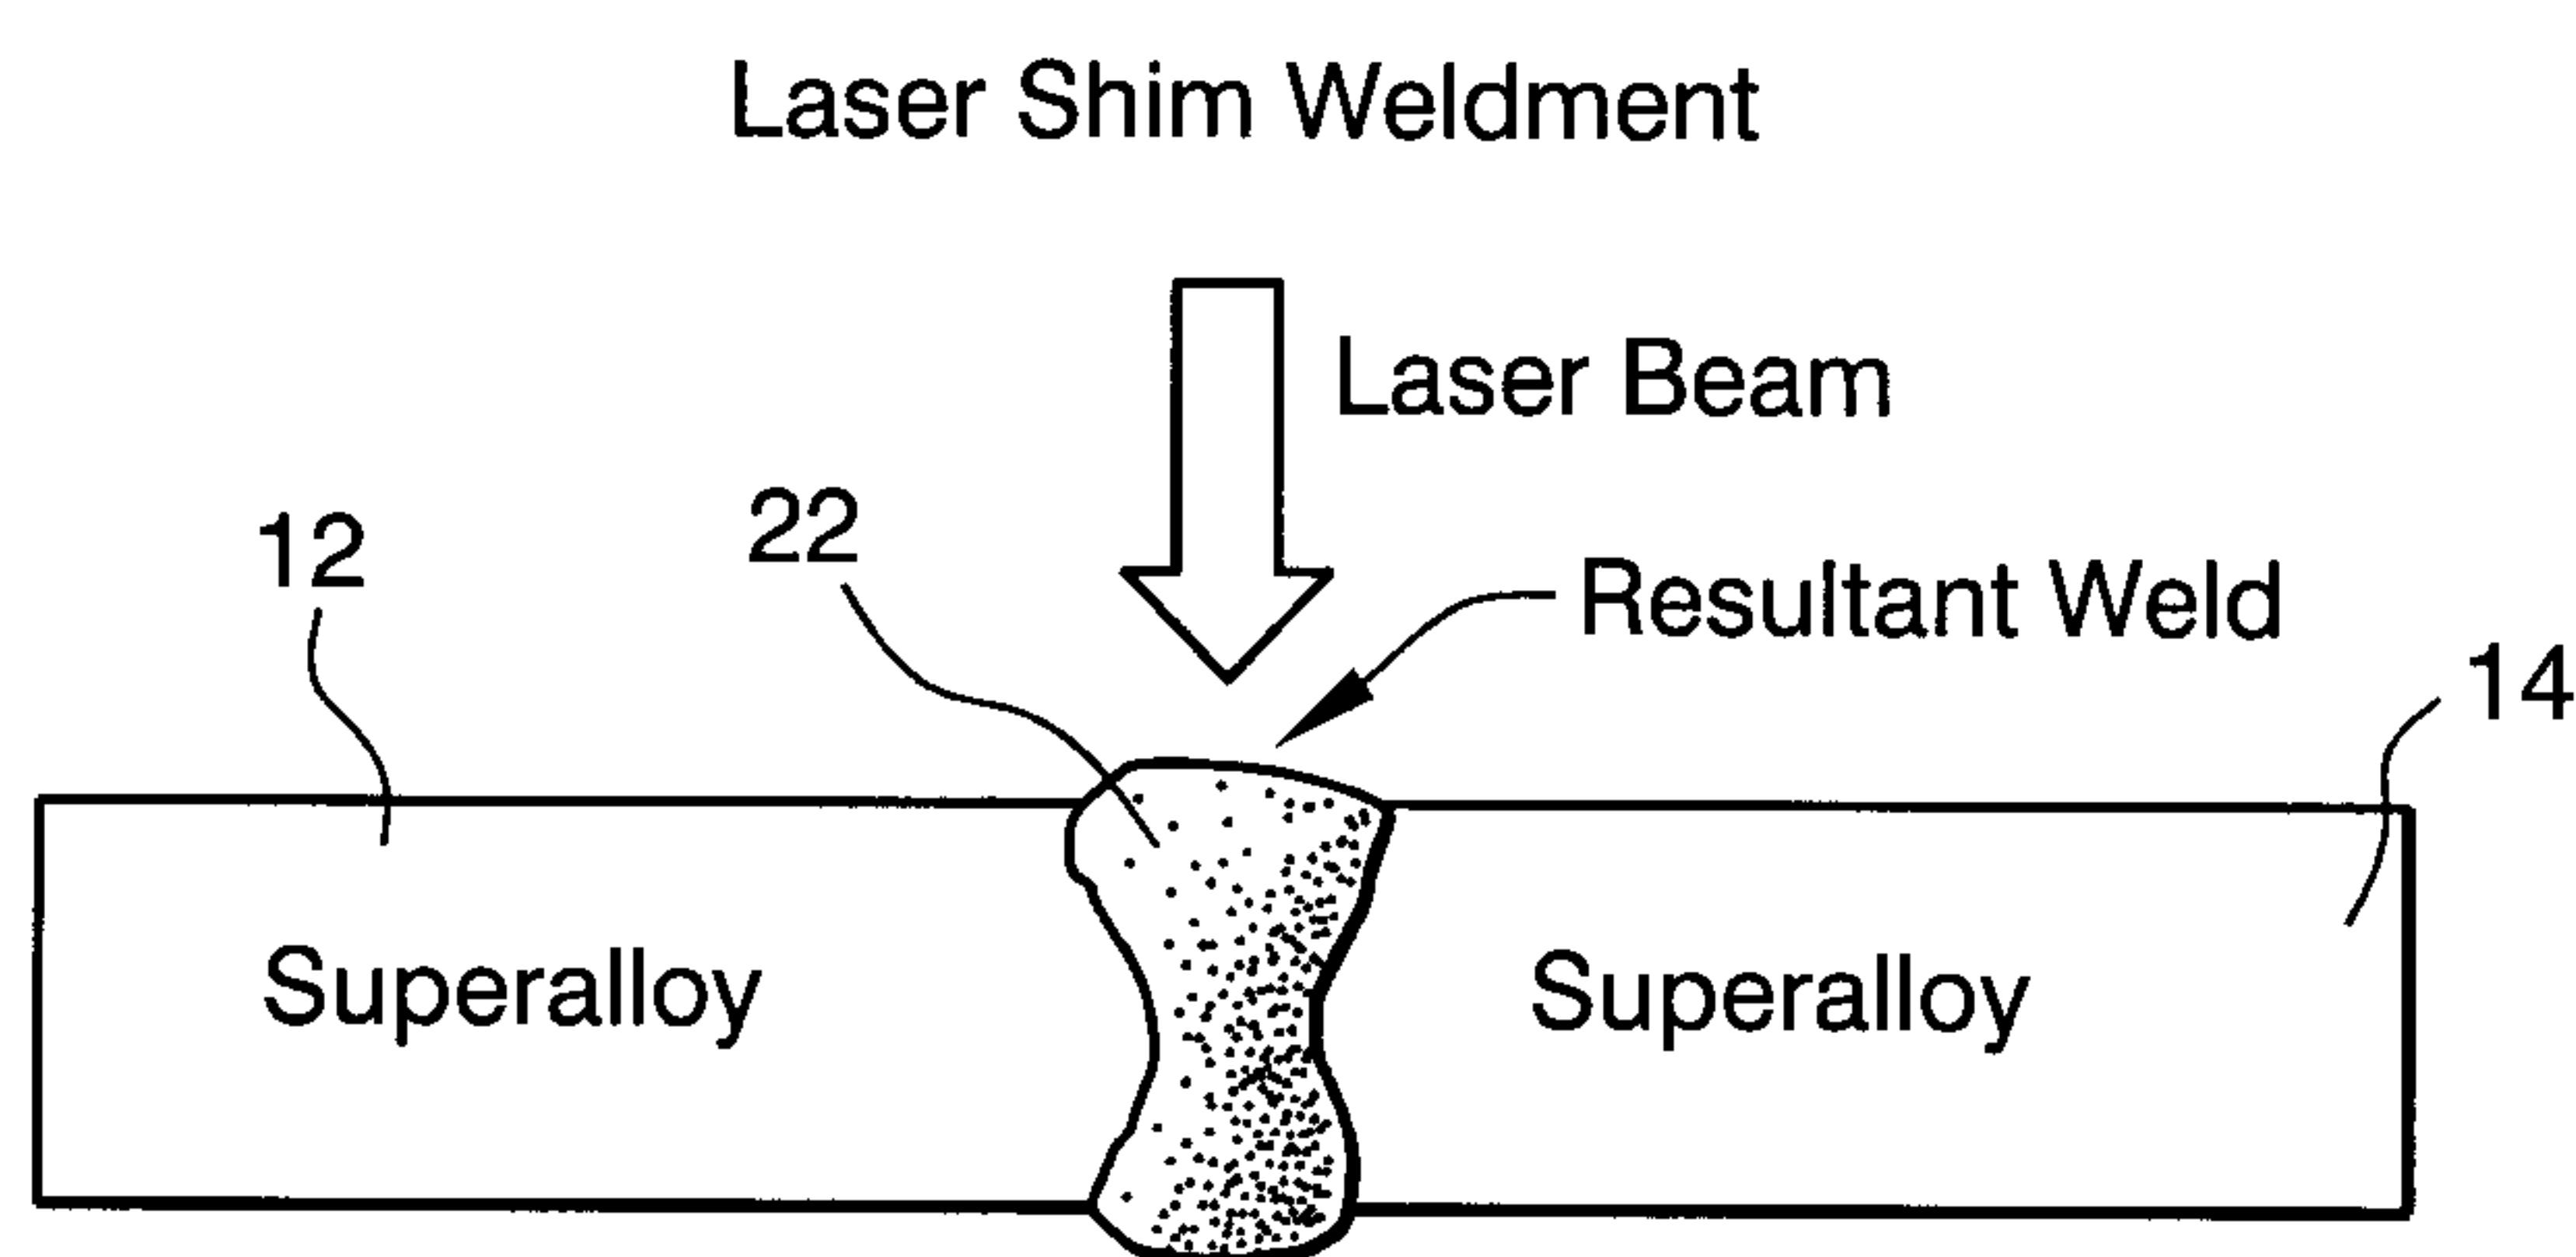


Fig. 2

Laser Shim Weldment

