




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>7</sup> : <b>B29C 45/32 // 45/27</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 00/67985</b> (43) International Publication Date: 16 November 2000 (16.11.00)</p>
<p>(21) International Application Number: PCT/CA00/00535 (22) International Filing Date: 9 May 2000 (09.05.00) (30) Priority Data: 2,271,407 10 May 1999 (10.05.99) CA (71) Applicant (for all designated States except US): MOLD-MASTERS LIMITED [CA/CA]; 233 Armstrong Avenue, Georgetown, Ontario L7G 4X5 (CA). (72) Inventors; and (75) Inventors/Applicants (for US only): OLARU, George [CA/CA]; 2470 Bayview Avenue, Toronto, Ontario M2L 1A7 (CA). DEWAR, Neil [CA/CA]; RR #3, Georgetown, Ontario L7G 4S6 (CA). BABIN, Denis [CA/CA]; 39 Early Street, Georgetown, Ontario L7G 5W8 (CA). MATYSEK, Paul, R. [CA/CA]; 365 Beresford Avenue, Toronto, Ontario M6S 3B6 (CA). (74) Agent: BERESKIN &amp; PARR; 40 King Street West, 40th floor, Toronto, Ontario M5H 3Y2 (CA).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i></p>

(54) Title: METHOD AND APPARATUS FOR DISTRIBUTING MELT IN A MULTI-LEVEL STACK MOLD

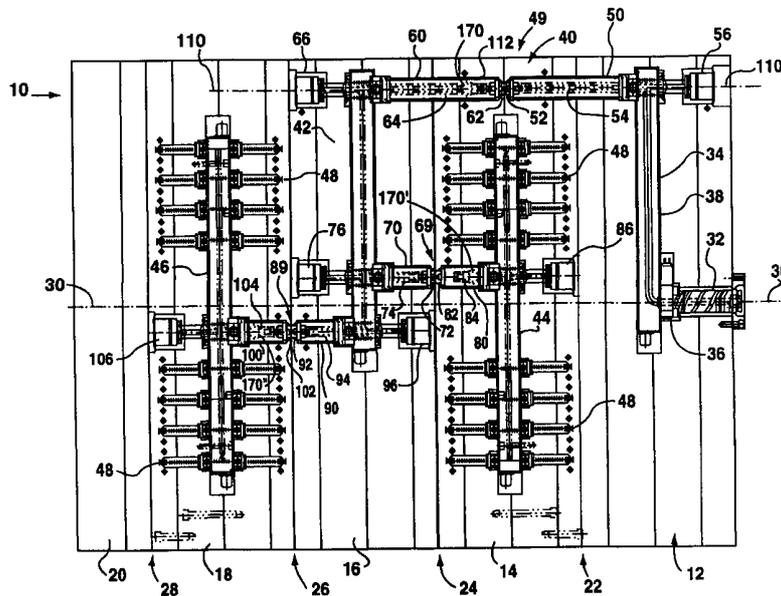

(57) Abstract

An improved melt distribution system and method is provided for a multi-level stack mold having three or more moving platens. The injection machine communicates with a bifurcated sprue bar (40) for providing pressurized melt through the first moving platen (14) to a central distribution manifold (42) in the second moving platen (16). From the central distribution manifold (42), the flow of pressurized melt is distributed to the first (14) and third platens (18) for transfer to a plurality of mold cavities.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**Title:           METHOD AND APPARATUS FOR DISTRIBUTING MELT  
IN A MULTI-LEVEL STACK MOLD**

**Field Of The Invention**

5           This invention relates to injection molding and, in particular, to the distribution of melt through a multi-level stack mold.

**Background Of The Invention**

10           Stack molding advantageously permits molding machine output to be multiplied without appreciably increasing the overall size of the machine. However, stack molding has the disadvantage that a more extensive melt runner system is required to extend through the moving platens to reach the cavities.

15           It is well known that the configuration of a melt distribution path through an injection stack mold critically affects the overall part quality. Failure to provide a melt flow under equal pressure to each mold cavity will result in differential filling of the cavities and will not produce consistent parts from cavity to cavity. Typically, even pressures from cavity to cavity are ensured by providing equal length runner passages with an identical number of bends of identical radius and arc. This is usually achieved by locating the main distribution manifold centrally within the stack mold, usually within one of the moving platens.

20           To transfer pressurized melt to the moving platen (ie. across the first parting line between the stationary platen and the moving platen), typical applications have provided a sprue bar extending through the stationary platen from the machine nozzle across to the moving platen, as shown in U.S. Patent No. 5,011,646 to Berteschi. This structure has the disadvantages that the sprue bar is in the way when the mold is open and damages falling parts. Furthermore, the sprue bar interferes with any robotic arm which may be provided to assist with part ejection, mold face preparation or the like.

30           The extensive runner system makes the use of a sprue bar

system even more unsatisfactory in multi-level stack molds. For example, U.S. Patent No. 5,370,523 to Kushnir and European Patent Application No. EP-911139 disclose a centrally located sprue bar arrangement for feeding pressurized melt to the various moving platens of a multi-level stack mold. The presence of the central sprue bar, however, limits the ability of mold larger parts, due to the interference of the sprue bar location and the mold cavity placement.

U.S. Patent No. 5,846,472 to Rozema et al. teaches a more complex eccentric sprue bar arrangement for use in three- and four-level stack molds. The numerous sprue bars, however, only compound the problems noted above. Furthermore, the presence of multiple sprue bars can limit the size of parts that can be molded.

Another problem associated with multi-level stack molds is that the maximum height of parts to be molded is limited by the distance that the molding machine can move between its open and closed positions and the amount of space required for each mold level. For example, the telescoping configuration of the sprue bars of EP-911139 must be made more extensive if wider platen separation is desired. Rozema et al. teach providing a bifurcated sprue bar to permit greater separation of platens upon mold parting, however, the limitations of Rozema et al. have been noted above.

Accordingly, there is a need for a melt distribution arrangement for multi-level stack molds which has generally equal length melt paths for each mold level. Furthermore, there is a need for a melt distribution arrangement for a multi-level stack mold which does not require a centrally-located sprue bar, thereby allowing single parts to be molded which extend across the central mold axis. There is yet a further need for a melt distribution arrangement for a multi-level stack mold which utilizes a minimal number of sprue bars to minimize interference with the molding process. There is also a need for an improved drool control apparatus for use in multi-level stack molds.

### Summary Of The Invention

In one aspect the present invention provides a multi-level stack mold comprising a stationary platen, a first, second and third moving platens, the moving platens being moveable between an "open" and "closed" position in a longitudinal direction generally parallel to a generally centrally disposed mold axis, a plurality of mold cavities defined between the stationary and moving platens, a first mold cavity manifold disposed in the first moving platen in communication with at least one of said mold cavities, a second mold cavity manifold disposed in the third moving platen in communication with at least one of said mold cavities and a sprue bar assembly extending through the first platen for selectively providing a flow of pressurized melt from the stationary platen to the second platen for distribution to the first and second mold cavity manifolds.

In a second aspect, the present invention provides a multi-level stack mold comprising a stationary platen, a first, second and third moving platens, the moving platens being moveable between an "open" and "closed" position in a longitudinal direction generally parallel to a generally centrally disposed mold axis, a plurality of mold cavities defined between the stationary and moving platens, a first mold cavity manifold disposed in the first moving platen in communication with at least one of said mold cavities, a second mold cavity manifold disposed in the third moving platen in communication with at least one of said mold cavities, a bifurcated sprue bar assembly extending through the first platen for selectively providing a flow of pressurized melt from the stationary platen to the second platen, the sprue bar assembly having a first portion and a second portion in flow communication, the second portion separably matable with the first portion, the sprue bar assembly being disposed eccentrically from the central mold axis and a distribution manifold disposed in the second platen in flow communication with the sprue bar assembly for selectively providing the flow of pressurized melt to the first and second mold cavity manifolds, whereby when the mold is in its closed

position, the first and second portions of the sprue bar assembly are in communication with each other and the distribution manifold is in communication with the first and second mold cavity manifolds.

In a third aspect, the present invention provides a multi-level stack mold, the stack mold comprising a stationary platen, a first, second and third moving platens, the moving platens being moveable between an "open" and "closed" position in a longitudinal direction generally parallel to a generally centrally disposed mold axis, a plurality of mold cavities defined between the stationary and moving platens, a first mold cavity manifold disposed in the first moving platen in communication with at least one of said mold cavities, a second mold cavity manifold disposed in the third moving platen in communication with at least one of said mold cavities, a distribution manifold in one of said moving platens and a bifurcated sprue bar assembly connected to, and in communication with, the distribution manifold for providing a flow of pressurized melt to the distribution manifold, the sprue bar assembly being disposed eccentrically from the central mold axis, whereby the sprue bar assembly and the distribution manifold are arranged to be non-coaxial.

In a fourth aspect, the present invention provides a method of distributing pressurized melt in a multi-level stack mold having a stationary platen, a first, second and third moving platens, the moving platens being moveable between an "open" and "closed" position in a longitudinal direction generally parallel to a generally centrally disposed mold axis, a plurality of mold cavities defined between the stationary and moving platens, a first mold cavity manifold disposed in the first moving platen in communication with at least one of said mold cavities, and a second mold cavity manifold disposed in the third moving platen in communication with at least one of said mold cavities, the method comprising the steps of transferring the pressurized melt from the stationary platen to a distribution manifold in the second moving platen and distributing the pressurized melt to the first and third moving platens via the first and second mold cavity manifolds for delivery to a plurality of

mold cavities.

### **Brief Description Of The Drawings**

For a better understanding of the present invention, and to show more clearly how it may be carried into effect, reference will now be made by way of example to the accompanying drawings.

The drawings show the preferred embodiments of the present invention, in which:

Figure 1 is a sectional view of a four-level stack mold apparatus according to a first embodiment of the invention, shown in the closed position;

Figure 2 is a sectional view of the apparatus of Figure 1, shown in the open position;

Figure 3 is a sectional view of a three-level stack mold apparatus according to a second embodiment of the invention, shown in the closed position;

Figure 4 is a sectional view of the apparatus of Figure 3, shown in the open position;

Figure 5 is a sectional of view of a melt control valve for use in the present invention, shown in a open position,

Figure 6 is a sectional view of a melt control valve of Figure 5, shown in a closed position,

Figure 7 is a not-to-scale sectional view of a drool control apparatus for use in the present invention, shown in a first position;

Figure 8 is a not-to-scale sectional view of the drool control apparatus of Figure 7, shown in a second position;

Figure 9 is a not-to-scale sectional view of the drool control apparatus of Figure 7, shown in the third position;

Figure 10 is a not-to-scale sectional view of the drool control apparatus of Figure 7, shown in a fourth position;

Figure 11 is a not-to-scale sectional view of the drool control apparatus of Figure 7, shown in a fifth position;

Figure 12 is a sectional view of the drool control apparatus of Figure 8, taken along the line 12-12.

### **Detailed Description Of The Preferred Embodiment**

Referring now to Figure 1, a stack mold embodying an improved melt distribution system in accordance with the present invention is shown generally at 10.

Stack mold 10 comprises a stationary platen or back plate 12, a first moving platen 14, a second moving platen 16, a third moving platen 18 and a fourth moving platen 20. Platens 12, 14, 16, 18 and 20 are selectively matable at a first parting line 22, a second parting line 24, a third parting line 26 and a fourth parting line 28, respectively. Stack mold 10 has an mold injection axis 30 defining longitudinal opening and closing directions for the moving platens.

An injection molding machine (not shown) has an injection nozzle 32 which communicates with a heated runner system 34 via a sprue bushing 36. Heated runner system 34 comprises a back plate runner passage 38, a sprue bar assembly 40, a central distribution manifold 42, a first platen manifold 44 and a third platen manifold 46. First platen manifold 44 and third platen manifold 46 communicate with a plurality of mold cavities (not shown), defined between the platens at the parting lines, via a plurality of mold cavity gates 48.

Sprue bar assembly 40 comprises a first portion 40' and a second portion 40" selectively joined by a first melt flow control valve assembly 49. Inside sprue bar assembly 40, a first runner passage 50 communicates with a second runner passage 60, via control valve 49. First flow control valve assembly 49 comprises a first runner gate 52, selectively closeable by a first valve pin 54 actuated by a first actuator 56, and a second runner gate 62, selectively closeable by a second valve pin 64 actuated by a second actuator 66. First flow control valve assembly 49 is preferably of the construction more particularly described in United States Patent No. 4,212,626 to Gellert, and further described below.

Central distribution manifold 42 communicates with first platen manifold 44 via a second flow control valve assembly 69. Second flow control valve assembly 69 is preferably constructed identically to first flow control valve assembly 49, and comprises a third runner passage 70, having a third runner gate 72, a third valve pin 74 and a third actuator 76, communicating with a fourth runner passage 80, having a fourth runner gate 82, a fourth valve pin 84 and a fourth actuator 86.

Central distribution manifold 42 also communicates with third platen manifold via a third flow control valve assembly 89. Third flow control valve assembly 89 is preferably constructed identically to the first and second flow control valve assemblies, and comprises a fifth runner passage 90, having a fifth runner gate 92, a fifth valve pin 94 and a fifth actuator 96, communicating with a sixth runner passage 100, having a sixth runner gate 102, a sixth valve pin 104 and a sixth actuator 106.

Sprue bar assembly 40 is disposed substantially parallel to injection axis 30, along a sprue bar axis 110. Sprue bar assembly 40 passes through first moving platen 14 via a first platen through-pass 112 (see Figure 5). First platen through-pass 112 permits sprue bar assembly 40 to deliver pressurized melt directly to central distribution manifold 42 disposed in second platen 16. Central distribution manifold 42 communicates at an angle (preferably 90°, although almost any angle less than 180° is possible) with sprue bar 40 to transfer pressurized melt to a central portion of second platen 16. Melt is transferred to first platen manifold 44 and third platen manifold 46 for delivery to the mold cavities, as described above. The angle between distribution manifold 42 and sprue bar assembly 40 is required to permit actuator 66 to avoid interference with the flow of pressurized melt in runner system 34. Likewise, angle connections are required between the various portions of runner system 34 at each actuator location, (ie actuators 56, 66, 76, 86, 96 and 106).

As stated, the flow control valve assemblies are preferably designed in accordance with U.S. Patent No. 4,212,626. Referring to Figures 5 and 6, first flow control valve assembly 49 preferably comprises first

runner gate 52 sealable by a tip 58 of first valve pin 54. In its "open" position (Figure 5), first valve pin 54 is withdrawn from gate 52, by first actuator 56 (see Figure 1), to permit a flow of pressurized melt to exit first runner passage 50 via gate 52. Second valve pin 64 operates in a similar fashion, and cooperates with first valve pin 54 to allow the flow of pressurized melt to enter gate 62 when tip 68 is withdrawn therefrom. Referring to Figure 6, prior to (or contemporaneously with) the parting of the mold, pins 54 and 64 are moved by their respective actuators such that tips 58 and 68 seal gates 52 and 62, respectively. With the runner gates sealed in this manner, the platens of the mold may then be parted (as shown in Figure 2) without fear of melt drooling from gates 52 or 62.

Thus, first flow control valve assembly 49 has "open" (Figure 5) and "closed" (Figures 6) positions. As will be understood by one skilled in the art, the actuation of the valve pins is timed and synchronized such that the flow control valve assembly is "open" when the platens of the mold are closed, and the valve pins of the control valve assembly are moved to their "closed" position upon, or prior to, the opening of stack mold 10.

The reference marker "P/L" in the Figures represents the nominal parting line upon which the flow control valve assembly is parted. For first flow control valve assembly 49, it will be understood, with reference to Figures 1 and 2, that control valve assembly 49 does not part along one of the mold parting lines 22, 24, 26 or 28, but rather its own individual "parting line" within first platen 14.

Second flow control valve assembly 69 and third flow control valve assembly 89 are preferably constructed and operated in a manner similar to as first flow control assembly 49. Second and third flow control valve assemblies will have a parting line ("P/L") which coincides with parting lines 24 and 26, respectively.

The flow control valve assemblies may also optionally provide a cavity anti-drool means shown at 170, 170' and 170", as will be described in more detail below.

When stack mold 10 is closed, the flow control valve assemblies are in their respective "open" positions, as described above. The molding machine may then be actuated to force a flow of pressurized melt via nozzle 32 into back plate runner passage 38. The pressurized melt is transferred, via heated runner system 34, to the plurality of mold cavities in stack mold 10. After the injection phase and packing phase, as is known in the art, the valve pins of the flow control valve units are actuated by their respective actuators to close the flow control valve units. Stack mold 10 may then be opened, as shown in Figure 2, to eject the molded parts from stack mold 10. Upon opening of mold 10, the bifurcated sprue bar assembly 40 separates into its first and second portions 40' and 40'', which are withdrawn from first platen through-pass 112 as the mold opens. Once the mold is open, the molded parts may be ejected from their respective cavities. The mold may then be closed, and the flow control valve assemblies opened in preparation for the next molding cycle.

First platen through-pass 112 advantageously permits sprue bar assembly 40 to directly communicate with central distribution manifold 42 in second platen 16. This configuration permits the more central distribution of pressurized melt to the first and third platen manifold, thereby facilitating a more balanced runner length design throughout the runner system. It will be understood, however, that through-pass 112 strictly need not be provided, but rather sprue bar 40 may pass around first platen 14 instead.

Referring to Figures 3 and 4, the bifurcated sprue bar assembly design according to the present invention may be equally applied to other multi-level stack mold configurations, such as a three-level stack mold 10'. Three-level stack mold 10' has platens 12, 14, 16 and 18, in a similar configuration as described above. Distribution manifold 42 communicates with first and third manifolds 44 and 46, respectively, as described above, although manifold 44 now has halves 44 and 44', to match the modified configuration of the 3-level mold, as will be understood by one skilled in the art.

Referring to Figures 7-12, a cavity anti-drool mechanism for use with the melt distribution system of the present invention will now be described. Note that, as will be apparent to one skilled in the art, Figures 7-11 are not shown on the same scale as Figures 1-4. In particular, the length of second runner passage 60, between, by-pass 174 and distribution manifold 42 has been shortened for convenience of illustration.

Figures 7-11 show the cavity anti-drool system combined with a flow control valve system of the type described above with reference to Figures 5 and 6. It will be apparent to one skilled in the art that the anti-drool mechanism described herein need not be limited to such combination, but may also be used alone, or in conjunction with another flow control valve configuration.

Referring to Figure 7, positioned within first platen 14 is drool control assembly 170 which comprises a piston 172 and a by-pass chamber 174, being an enlarged section of second runner passage 60. Piston 172 is integrally incorporated in the second valve pin 64 and positioned on the stem of valve 64 such that piston 172 is positionable, in a first position, in a restricted section 176 of second runner passage 60 and, in a second position, in by-pass chamber 174.

For reasons which will become apparent below, piston 172, restricted section 176 and by-pass chamber 174 are shaped and sized to substantially block second runner passage 60 in its first position but permit melt flow therearound when piston 172 is in its second position in by-pass chamber 174, as described below.

The operation of drool control assembly 170 is synchronized with mold injection as will now be described. Referring to Figure 8, in preparation of the molding phase, actuator 66 moves second valve pin 64 to its "open" position, as shown in Figure 8. In this position, piston 172 is position in by-pass chamber 174. At the same time, tip 68 of second valve pin 64 withdrawn from second gate 62 and tip 58 of first valve pin 54 withdrawn from first gate 52 to permit flow through flow control valve assembly 49, although as discussed above, these flow control valve

assembly components do not necessarily form part of the anti-drool control apparatus.

When positioned as shown in Figure 8, melt is permitted to flow from the molding machine through first runner passage 50 and into  
5 second runner passage 60, around piston 172 through by-pass chamber 174 and into distribution manifold 42, for delivery to the mold cavities. Once the mold cavities are filled, the molding pressure is maintained to apply a packing pressure, as is known in the art.

Referring to Figure 9, upon completion of the packing phase,  
10 actuator 66 move second valve pin 64 and piston 172 "upstream" (ie. away, fluidly speaking, from the mold cavities), thereby causing piston 172 to enter restricted section 176. Upon the movement of piston 172 into restricted section 176, the melt material in second melt passage 60 on the upstream side of piston 172 is forced back into restricted section 176, along  
15 second melt passage 60 in the upstream direction.

Referring to Figure 10, as piston 172 travels upstream through restricted section 176, a pressure drop is created in the melt material immediately behind (ie "downstream" from) piston 172, which pressure drop is correspondingly transmitted to distribution manifold 42 and,  
20 ultimately, to gates 72 and 92. (Simultaneously, as second valve pin 64 moves to its full-stroke or "closed" position, the flow control valve assembly 49 partially closes by tip 58 of second valve pin 64 seating in gate 62 to close the downstream half of flow control valve assembly 49.) It will be understood that the stroke length of piston 172 is chosen to obtain the  
25 desired pressure drop in the runner system of first moving platen 14 to achieve the intended anti-drool performance.

Referring to Figure 11, once second valve pin 64 is in its "closed" position, the first valve pin 54 is closed, with tip 58 fully seated in gate 52. Flow control valve assembly 49 is now fully closed. Mold 10 may  
30 now be opened, along first parting line 22, (see Figure 2 or 4) to permit the molded parts to be ejected from mold 10. By means of the pressure drop imparted by the drool control assembly 170, the decompressed melt in

distribution manifold 42 advantageously reduces the tendency of the melt to drool from the gates 72 and 92.

Once the molded parts have been ejected from the mold, the mold may be closed and the molding machine readied for the next  
5 molding cycle.

Referring to Figure 12, in the preferred embodiment, piston 172 has a substantially identical, but slightly smaller, cross-section to second melt passage 60, but also has a longitudinal cutout 180 through its thickness. Cutout 180 permits some melt to flow past piston 172 as it is  
10 stroked upstream during its decompression cycle, thereby reducing the resistance pressure the upstream melt exerts on piston 172. Thus, cutout 180 advantageously allows the size of piston 62 to be reduced. The size and shape of cutout 180 can be tuned to a particular molding application to optimize decompression performance in the stack mold manifold, as will  
15 be apparent to one skilled in the art.

The construction of anti-drool assembly 170, as described above, is preferably substantially the same as is used for anti-drool control assemblies 170' and 170". Anti-drool assemblies 170' and 170" may be used  
20 advantageously in fourth and sixth runner passages 80 and 100 to inhibit drool at gates 48 in thermally gated molding applications.

The term "piston" as described in reference to body 172 need not be a piston in the conventional sense, but may be any body capable of moving melt upstream in the runner system to effect a decompression  
downstream of the body.

25 Although it is desirable to actuate drool control assembly 170 prior to parting the mold, so that the melt material displaced upstream of piston 172 by the actuation of assembly 170 may return into first runner passage 22, it will also be understood that drool control assembly 170 may also be configured to actuate contemporaneously with the parting of the  
30 mold, provided that a suitable bleed arrangement, as will be understood by one skilled in the art, is made for the upstream melt displaced by the stroke of piston 172 in second runner passage 60.

While the above description constitutes the preferred embodiment, it will be appreciated that the present invention is susceptible to modification and change without parting from the fair meaning of the proper scope of the accompanying claims.

We Claim:

1. A multi-level stack mold comprising:
  - a stationary platen;
  - a first, second and third moving platens, the moving platens  
5 being moveable between an "open" and "closed" position in a longitudinal direction generally parallel to a generally centrally disposed mold axis;
  - a plurality of mold cavities defined between the stationary and moving platens;
  - 10 a first mold cavity manifold disposed in the first moving platen in communication with at least one of said mold cavities;
  - a second mold cavity manifold disposed in the third moving platen in communication with at least one of said mold cavities; and
  - 15 a sprue bar assembly extending through the first platen for selectively providing a flow of pressurized melt from the stationary platen to the second platen for distribution to the first and second mold cavity manifolds.
  
2. A multi-level stack mold comprising:
  - a stationary platen;
  - 20 a first, second and third moving platens, the moving platens being moveable between an "open" and "closed" position in a longitudinal direction generally parallel to a generally centrally disposed mold axis;
  - a plurality of mold cavities defined between the stationary  
25 and moving platens;
  - a first mold cavity manifold disposed in the first moving platen in communication with at least one of said mold cavities;
  - a second mold cavity manifold disposed in the third moving platen in communication with at least one of said mold cavities;
  - 30 a bifurcated sprue bar assembly extending through the first

platen for selectively providing a flow of pressurized melt from the stationary platen to the second platen, the sprue bar assembly having a first portion and a second portion in flow communication, the second portion separably matable with the first portion, the sprue bar assembly being  
5 disposed eccentrically from the central mold axis; and

a distribution manifold disposed in the second platen in flow communication with the sprue bar assembly for selectively providing the flow of pressurized melt to the first and second mold cavity manifolds,

whereby when the mold is in its closed position, the first and  
10 second portions of the sprue bar assembly are in communication with each other and the distribution manifold is in communication with the first and second mold cavity manifolds.

3. A multi-level stack mold, the stack mold comprising:

a stationary platen;

15 a first, second and third moving platens, the moving platens being moveable between an "open" and "closed" position in a longitudinal direction generally parallel to a generally centrally disposed mold axis;

a plurality of mold cavities defined between the stationary  
20 and moving platens;

a first mold cavity manifold disposed in the first moving platen in communication with at least one of said mold cavities;

a second mold cavity manifold disposed in the third moving platen in communication with at least one of said mold cavities;

25 a distribution manifold in one of said moving platens; and


a bifurcated sprue bar assembly connected to, and in communication with, the distribution manifold for providing a flow of pressurized melt to the distribution manifold, the sprue bar assembly being disposed eccentrically from the central mold axis,

30 whereby the sprue bar assembly and the distribution manifold are arranged to be non-coaxial.

4. A method of distributing pressurized melt to a melt in a multi-level stack mold having a stationary platen, a first, second and third moving platens, the moving platens being moveable between an "open" and "closed" position in a longitudinal direction generally parallel to a generally centrally disposed mold axis, a plurality of mold cavities defined between the stationary and moving platens, a first mold cavity manifold disposed in the first moving platen in communication with at least one of said mold cavities, and a second mold cavity manifold disposed in the third moving platen in communication with at least one of said mold cavities, the method comprising the steps of:

- (a) transferring the pressurized melt from the stationary platen to a distribution manifold in the second moving platen
- (b) distributing the pressurized melt to the first and third moving platens via the first and second mold cavity manifolds for delivery to a plurality of mold cavities.

5. The apparatus and method as described and shown in this application.

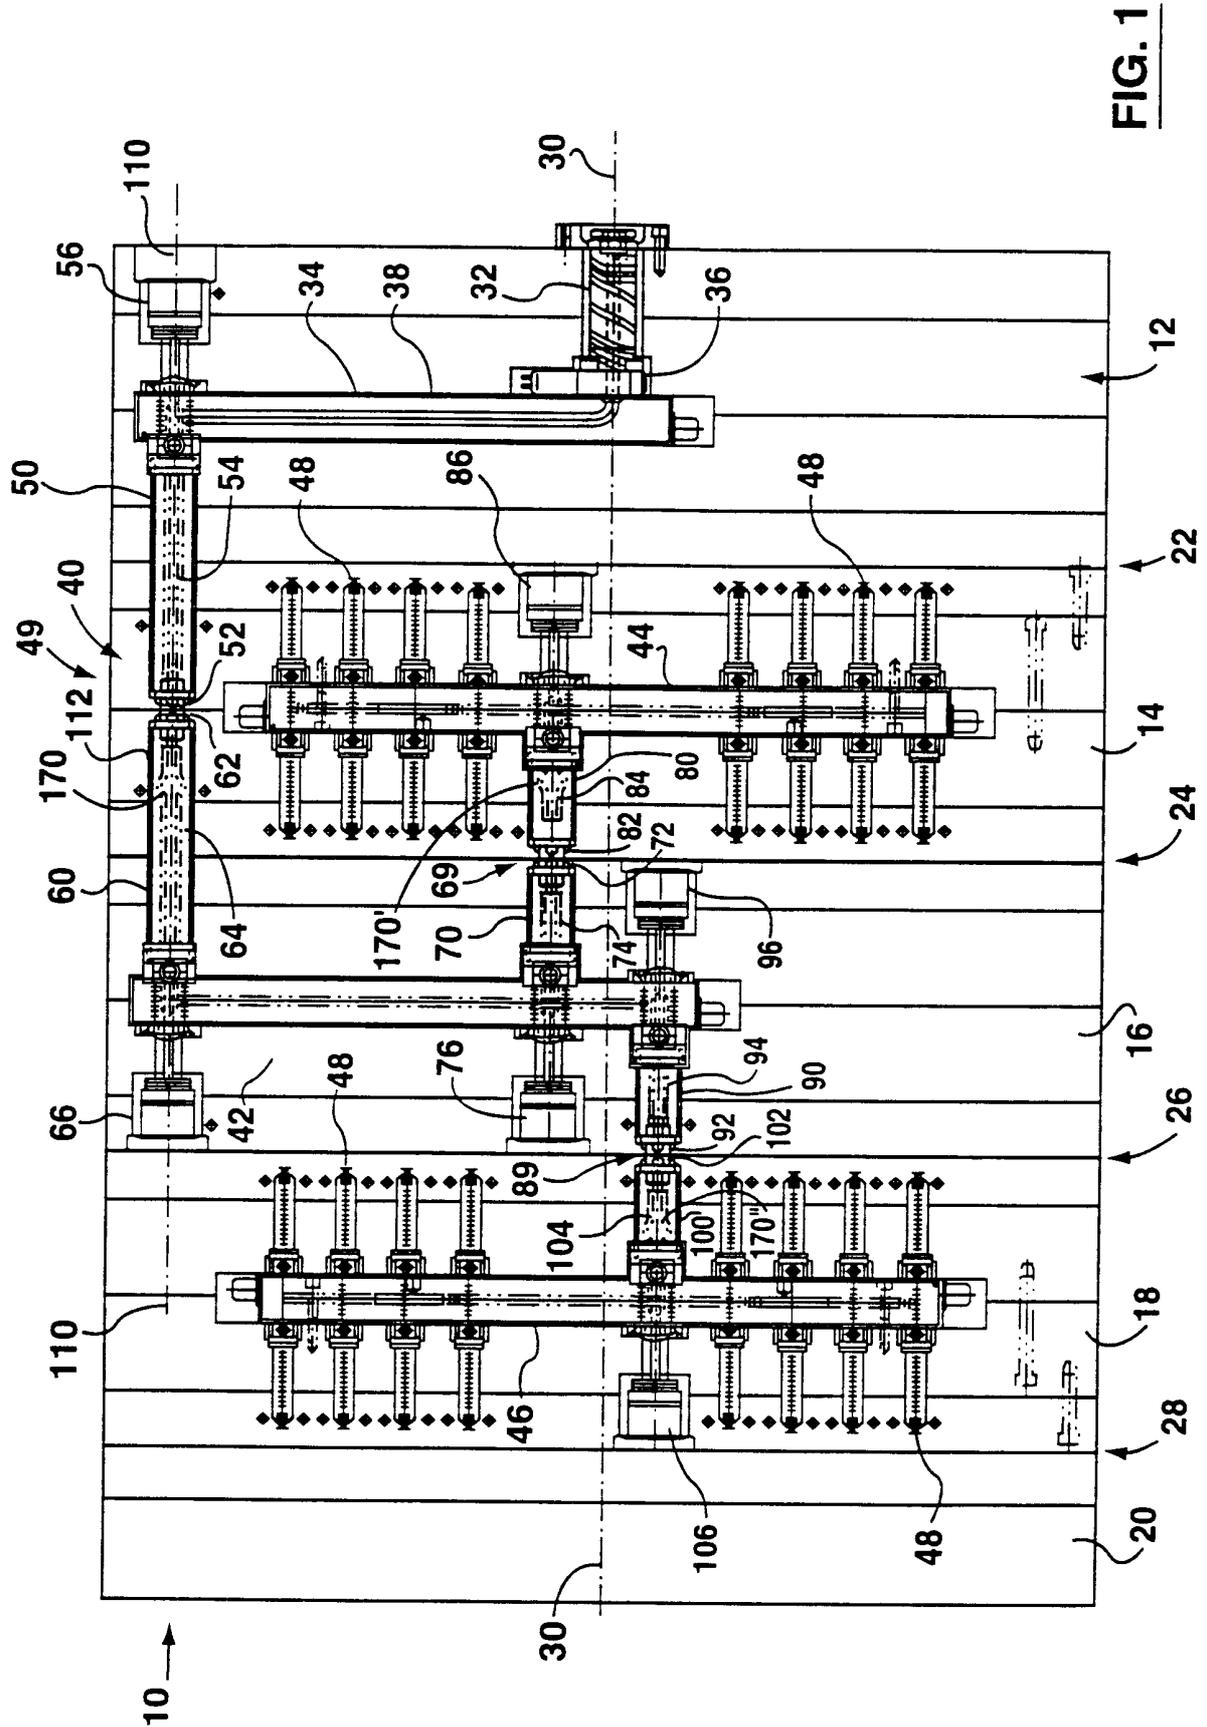

**FIG. 1**

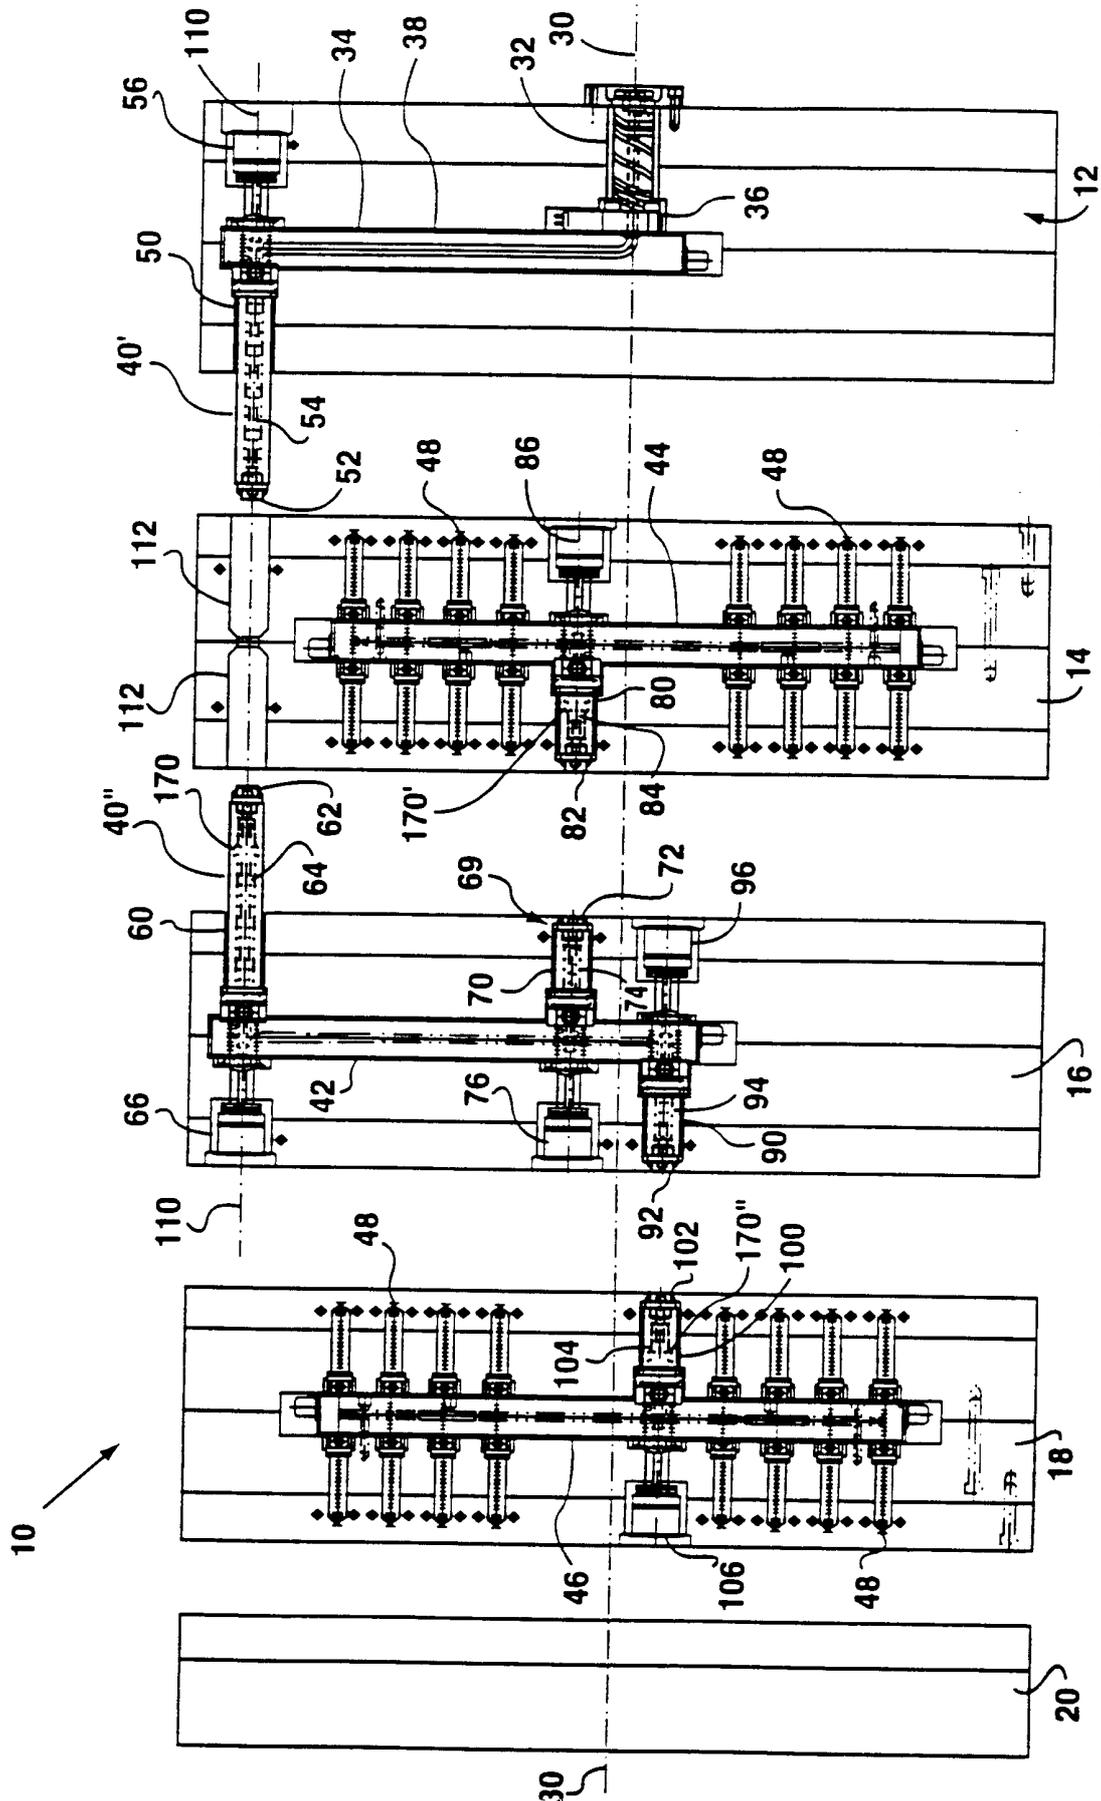


FIG. 2

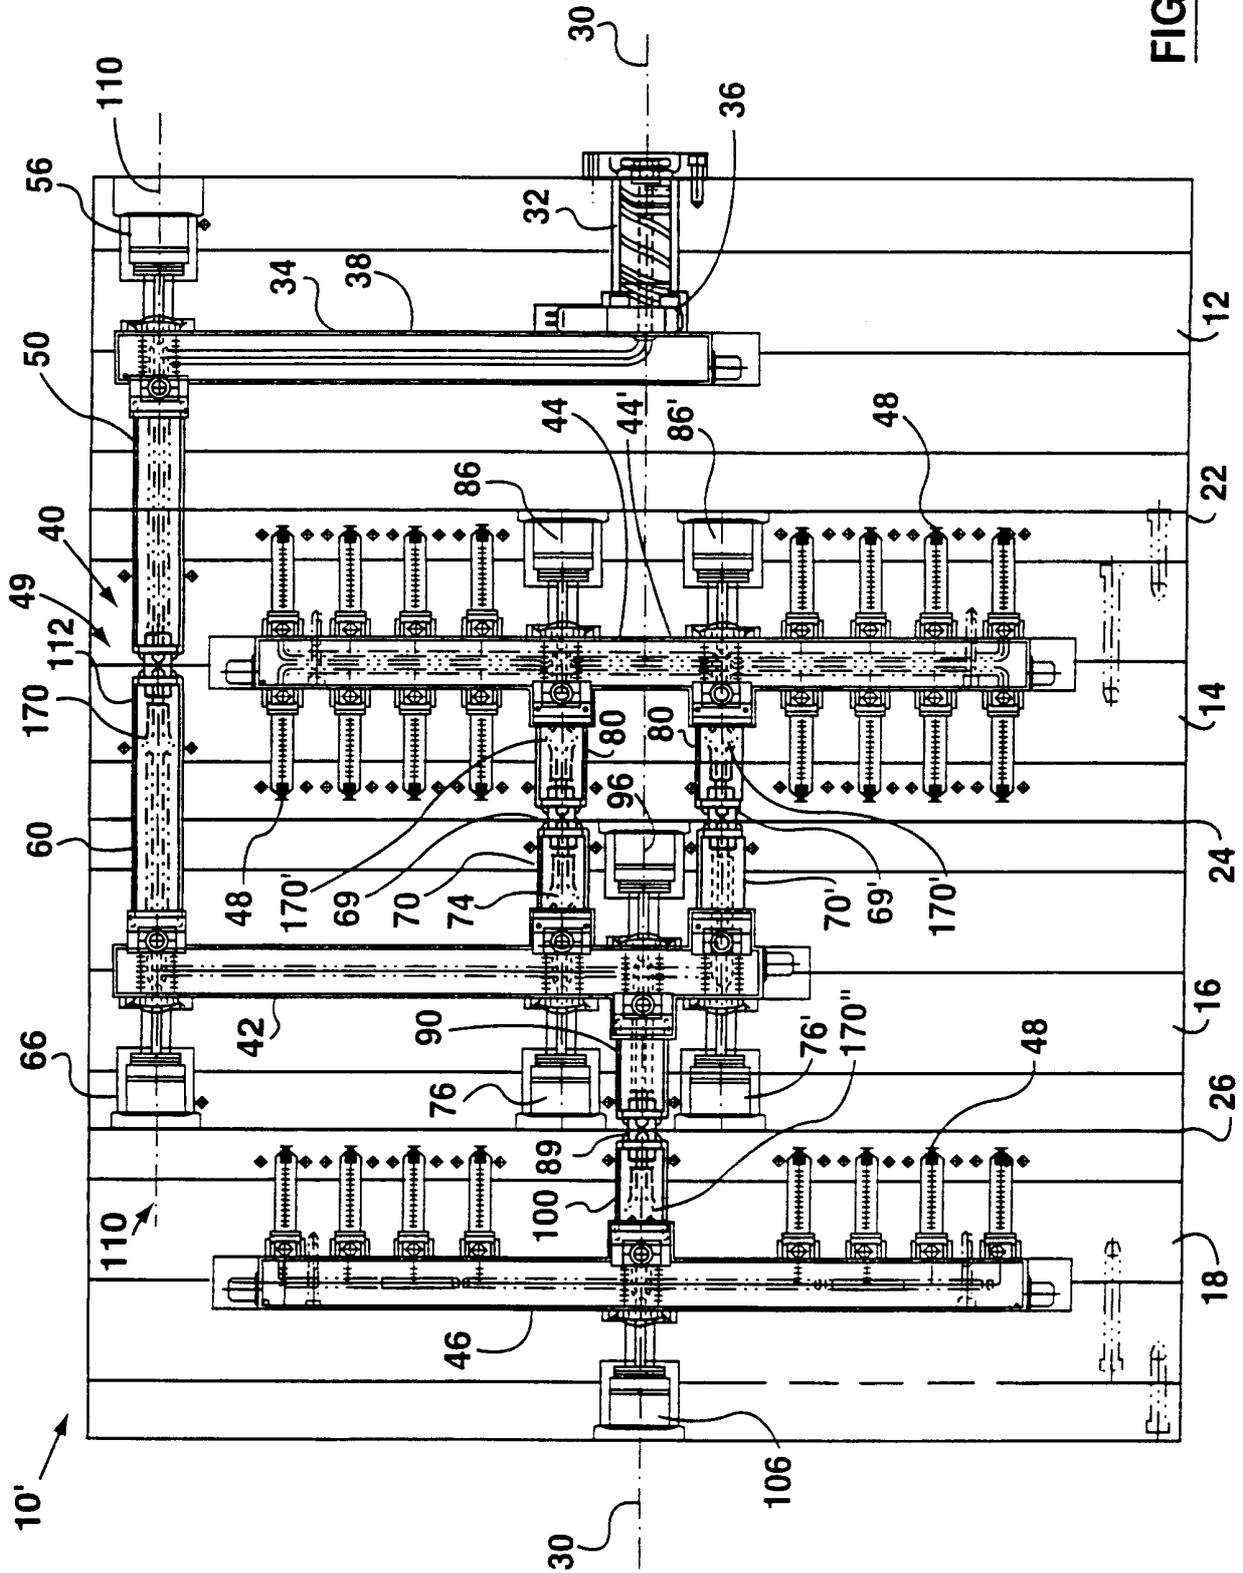


FIG. 3




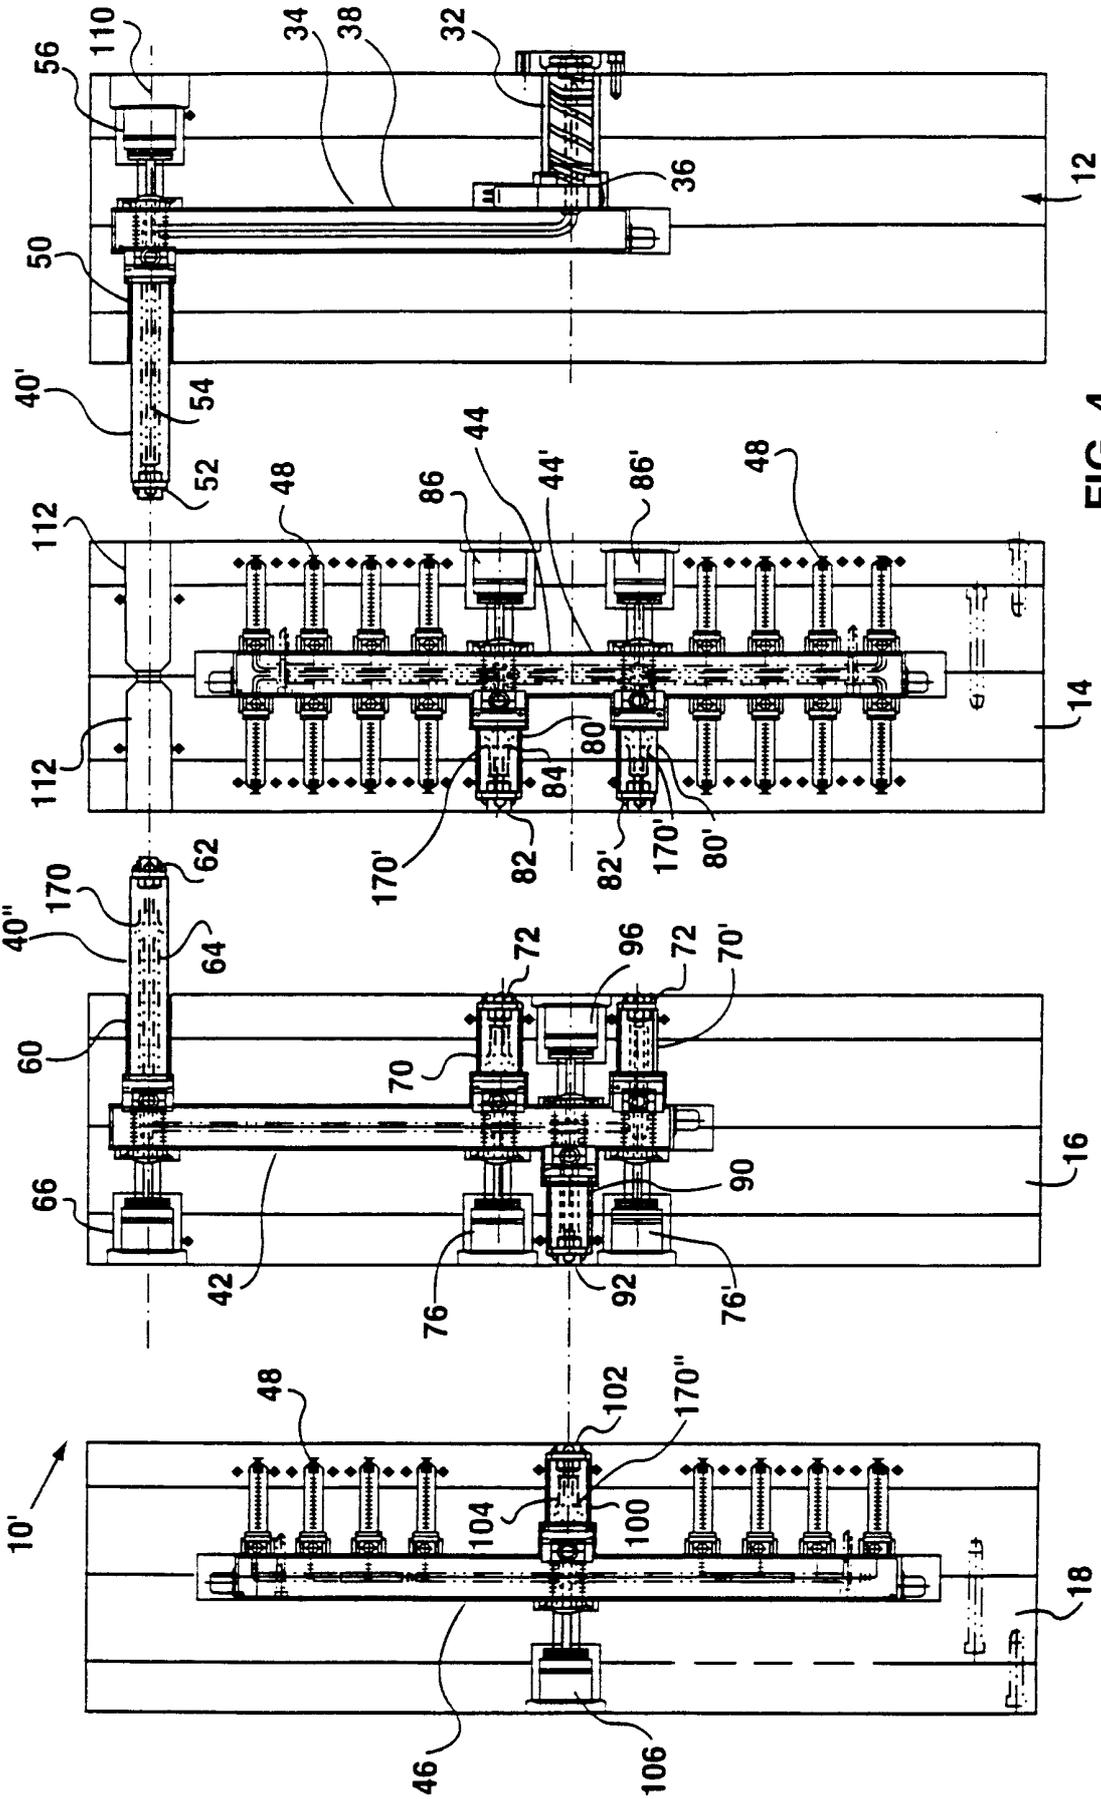


FIG. 4

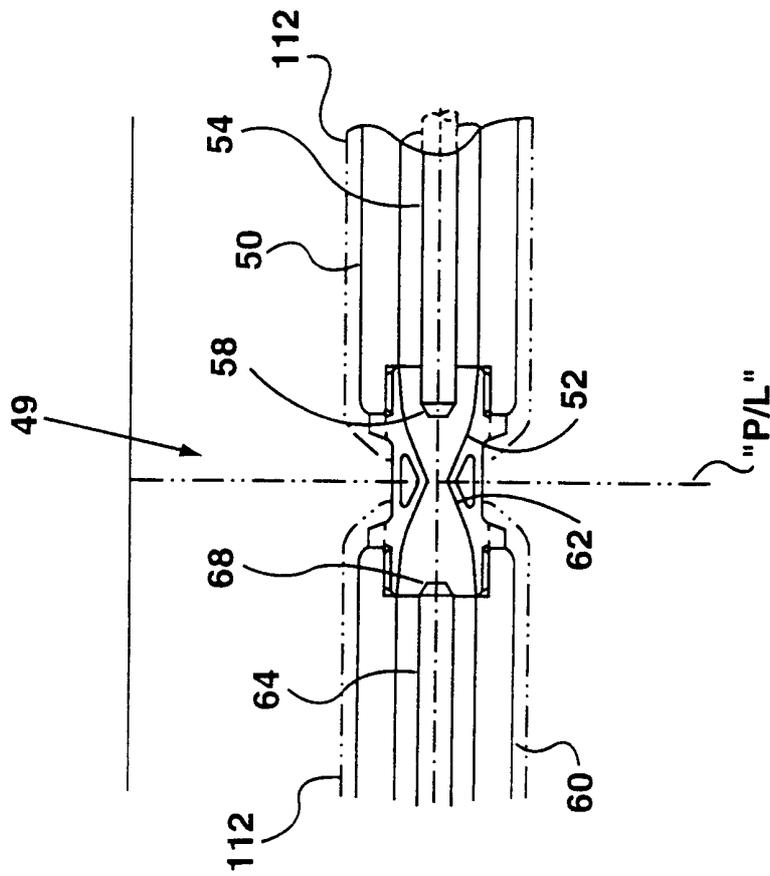


**FIG. 5**

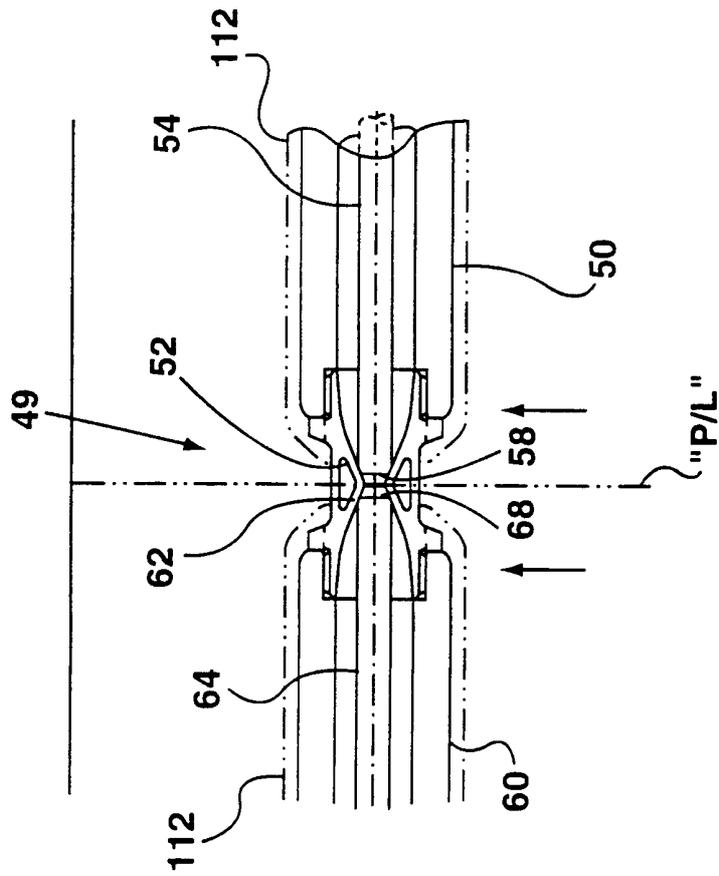


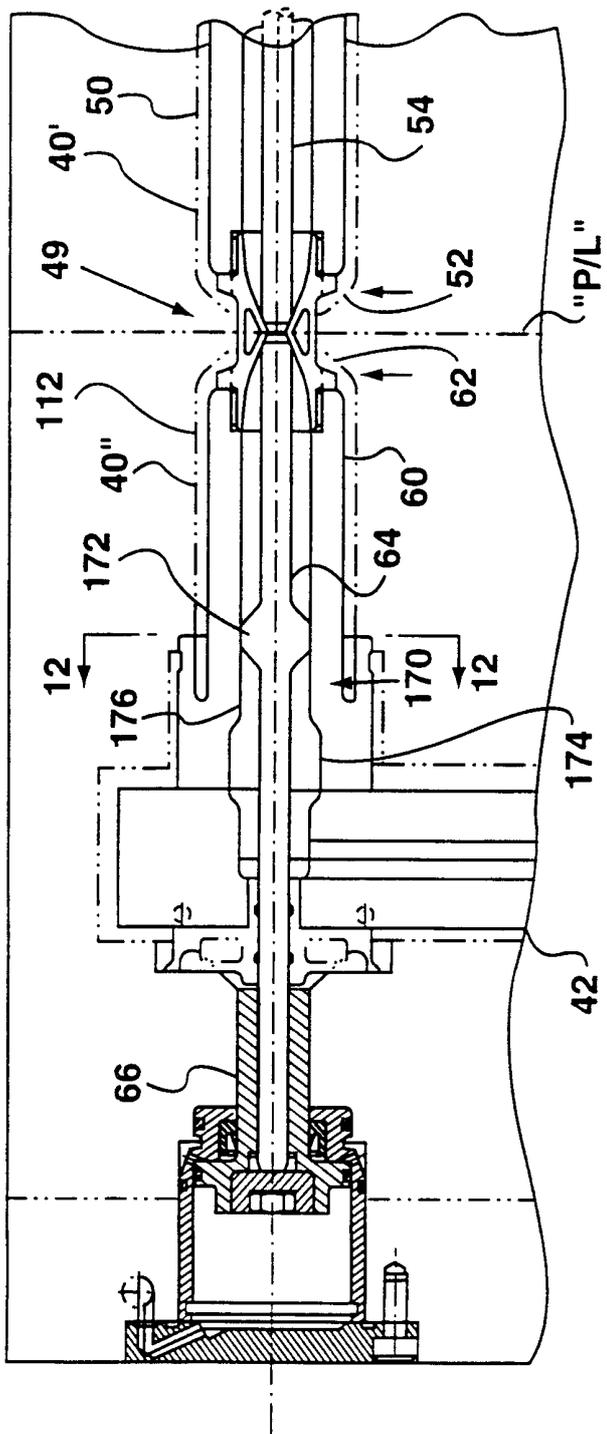


**FIG. 7**

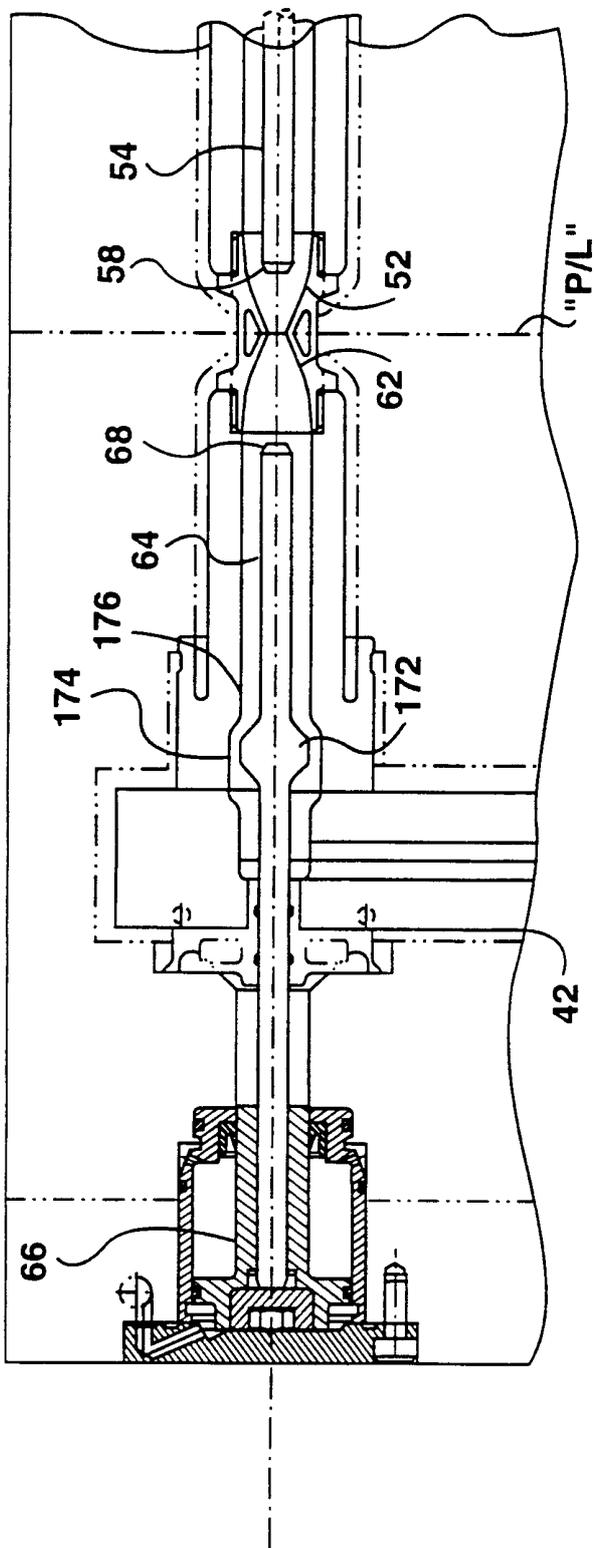


**FIG. 8**

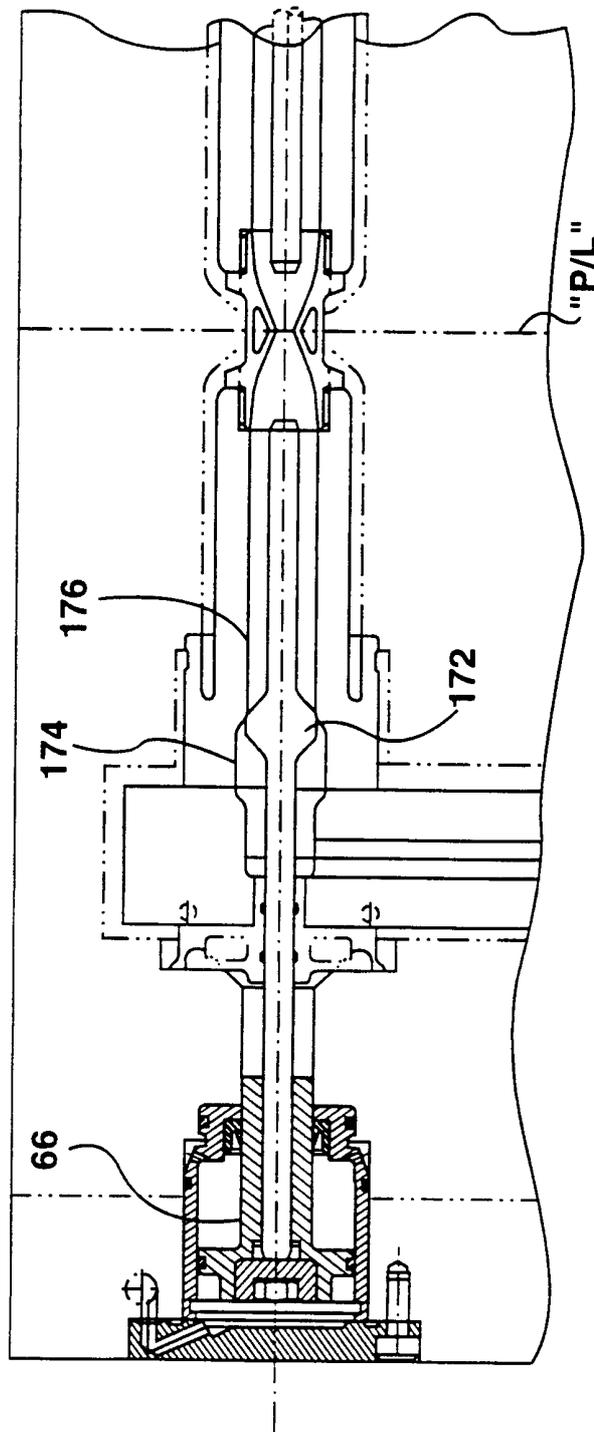


**FIG. 9**

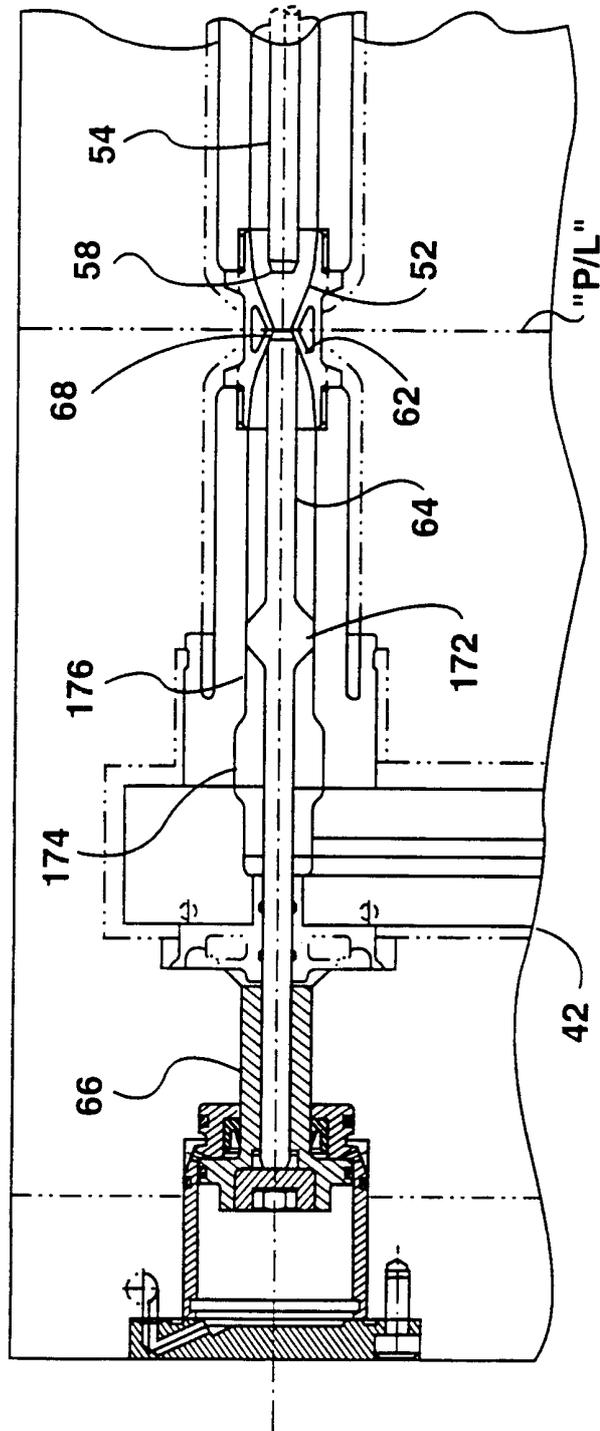

**FIG. 10**

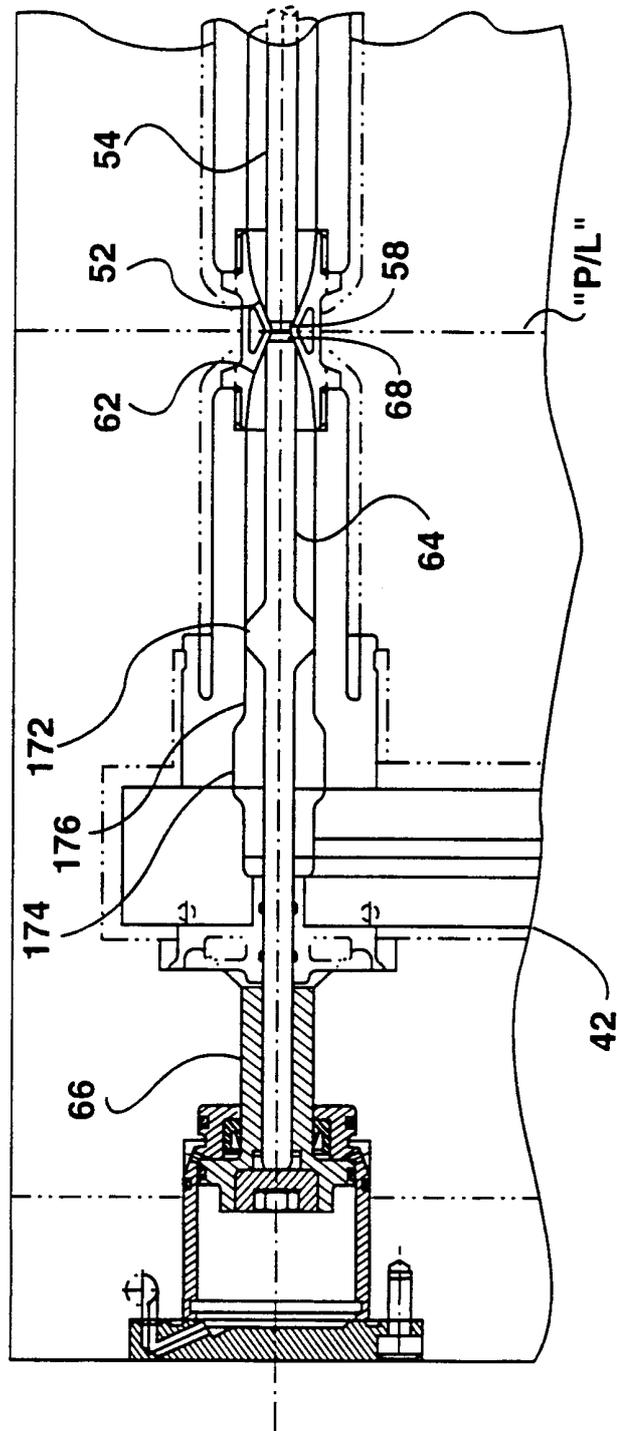

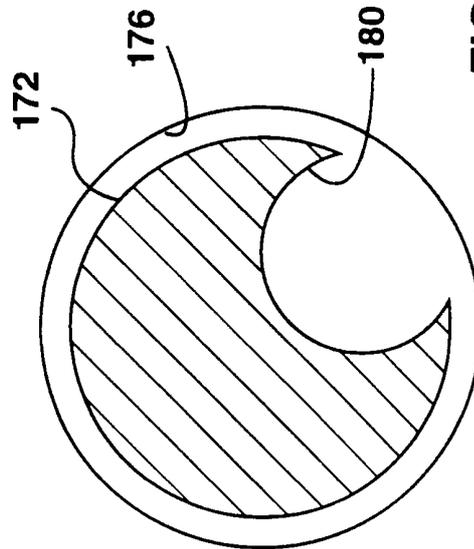

**FIG. 12**

# INTERNATIONAL SEARCH REPORT

Internat. Application No <b>PCT/CA 00/00535</b>
--

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 7 B29C45/32 //B29C45/27

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
 IPC 7 B29C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)  
 EPO-Internal, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 370 523 A (KUSHNIR YOSIF) 6 December 1994 (1994-12-06) cited in the application figure 1 column 3, line 34 - line 51 column 4, line 31 - line 36 ---	1-5
A	US 5 846 472 A (KLANFAR JOSEPH ROBERT ET AL) 8 December 1998 (1998-12-08) cited in the application figure 1 column 3, line 15 -column 4, line 9 --- -/--	1-5

Further documents are listed in the continuation of box C.       Patent family members are listed in annex.

° Special categories of cited documents :

*A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family
---	---

Date of the actual completion of the international search <b>15 August 2000</b>	Date of mailing of the international search report <b>22/08/2000</b>
--	---

Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer  <p style="text-align: center;"><b>Alink, M</b></p>
--	--

INTERNATIONAL SEARCH REPORT

International Application No  
PCT/CA 00/00535

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>BAGUSCHE G: "HINTERSPRITZEN UND BALANCIEREN EINES ETAGEN-WERKZEUGS" KUNSTSTOFFE,DE,CARL HANSER VERLAG. MUNCHEN, vol. 85, no. 2, 1 February 1995 (1995-02-01), page 176 XP000487985 ISSN: 0023-5563 figure 2 column 3, paragraph 3</p> <p>----</p>	1-5
A	<p>GAULER K: "HEISSKANALTECHNIK FUR ETAGEN-SPRITZGIESSWERKZEUGE HOT-RUNNER TECHNOLOGY FOR MULTI-PLATEN INJECTION MOULDS" KUNSTSTOFFE,DE,CARL HANSER VERLAG. MUNCHEN, vol. 85, no. 2, 1 February 1995 (1995-02-01), pages 173-175, XP000487984 ISSN: 0023-5563 figure 3 page 174, column 3, paragraph 2 -page 175, column 3, paragraph 1</p> <p>----</p>	1-5
A	<p>US 5 229 145 A (BROWN DAVID ET AL) 20 July 1993 (1993-07-20) column 4, line 44 -column 5, line 6 figure 2</p> <p>-----</p>	1-5

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No  
PCT/CA 00/00535

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5370523 A	06-12-1994	US 5484275 A	16-01-1996
US 5846472 A	08-12-1998	NONE	
US 5229145 A	20-07-1993	CA 2022060 A	28-12-1991
		US 5458843 A	17-10-1995
		US 5464579 A	07-11-1995